

Wayfinding and Signage Standards

Revision 12
14 December 2023

Chapter G.2 (Sections 09 - 12)

For sections 01 - 08, refer to chapter G.1
For sections 13 - 17, refer to chapter G.3
For sections 18 - 23, refer to chapter G.4



UNSW
SYDNEY

Contents

09: Sign Type Library – Page 128

- Sign Types: Hierarchy & Codes
- Sign Type Summary: Identification
- Sign Type Summary: Directional
- Sign Type Summary: Car Park
- Sign Type Summary: Operational
- Sign Type Summary: Statutory
- Sign Type Summary: Temporary & Displays
- Sign Type Summary: Specialty

10: Identification Series – Page 163

- ID.01 External: Gate Primary Vehicular Totem
- ID.02 External: Gate Secondary Vehicular Totem Family
- ID.03 External: Gate Pedestrian Totem Family
- ID.04 External: Building Facade Sign Family
- ID.05 External: Street Sign
- ID.06 External: Building Entrance Totem
- ID.07 External: Building Entrance Wall Mounted
- ID.08 External: Facility Entrance Wall Mounted
- ID.09 External: Digital Directory Totem
- ID.10 External: Sponsor Plate
- ID.11 Internal: Tenant Directory (Small)
- ID.12 Internal: Tenant Directory (Large)
- ID.13 Internal: Secondary Tenant
- ID.14 Internal: Reception ID
- ID.15 Internal: Lift Directory (Digital)
- ID.16 Internal: Lift Directory (Static)
- ID.17 Internal: Stair Level ID
- ID.18 Internal: Lift Level ID
- ID.19 Internal: Escalator Level ID
- ID.20 Room ID Family
- ID.21 Amenity Blade Family
- ID.22 External: Gate ID Wall Mounted
- ID.23 External: Campus ID Facade Mounted
- ID.24 External: Park ID

11: Directional Series – Page 233

- DR.01 External: Vehicular Totem 2400
- DR.02 External: Pedestrian Totem 2400mm
- DR.03 External: Pedestrian Totem 2000mm
- DR.04 External: Access Bollard
- DR.05 Suspended Directional Family
- DR.06 External: Primary Wall Mounted (Large)
- DR.07 External: Primary Wall Mounted (Small)
- DR.08 Internal: Primary Wall Mounted (Large)
- DR.09 Internal: Primary Wall Mounted (Small)
- DR.10 Secondary Wall Mounted (Landscape)
- DR.11 Secondary Wall Mounted (Portrait)
- DR.12 Secondary Wall Mounted (Flag)

12: Car Park Series – Page 270

- CP.01 Entry ID: Vehicular Wall Mounted
- CP.02 Entry ID: Pedestrian Wall Mounted
- CP.03 Entry ID: Bulk Head
- CP.04 Lift ID
- CP.05 Car Park Rules & Pay Meter
- CP.06 Suspended Directional Family
- CP.07 Loading Dock ID
- CP.08 Column: Level ID
- CP.09 Column: Zone ID
- CP.10 Column: Reserved ID
- CP.11 Column: Directional
- CP.12 Pole: Lot ID
- CP.13 Pole: Directional
- CP.14 Floor Graphics
- CP.15 Reserved Parking ID

Section

9.0

Sign Type Library

This section provides a general overview of every single sign type within the UNSW wayfinding family.

Sign Types: Hierarchy & Codes
Sign Type Summary: Identification
Sign Type Summary: Directional
Sign Type Summary: Car Park
Sign Type Summary: Operational
Sign Type Summary: Statutory
Sign Type Summary: Temporary & Display
Sign Type Summary: Specialty

Sign Types: Hierarchy & Codes

Sign Type Code

ID.01

Sign type Sign number

DR.10a

Sign type Sign number Sub sign type

Sign Number Allocation

DR.04

Directional Series Sign, Access Bollard

ID.19b

Identification Series Sign, Room ID Family, Class Room ID

The UNSW sign coding system has been developed to assist in using the UNSW Signage Manual. Signs have been categorised based on their location and the type of message they convey.

Sign type

The sign type is the first two letters of the sign code and illustrates the primary function of the sign.

ID = Identification signs

DR = Directional signs

CP = Car park signs

OP = Operational signs

ST = Statutory signs

TD = Temporary & Display signs

EG = Environmental graphics

CH/SW/AP/MB/FB = Specialty signs

Different sign types are used in different situations based on factors such as purpose, physical context or significance.


Sign number

A numerical sequence is assigned to each of the sign types, further delineated by these numbers into External and Internal signs. Note: not all sign numbers have been utilised, refer Sign Summary for full listing of numbers.


Sub sign type

An additional letter is added to the code when a sign type has multiple variations.

Sign Type Summary: Identification

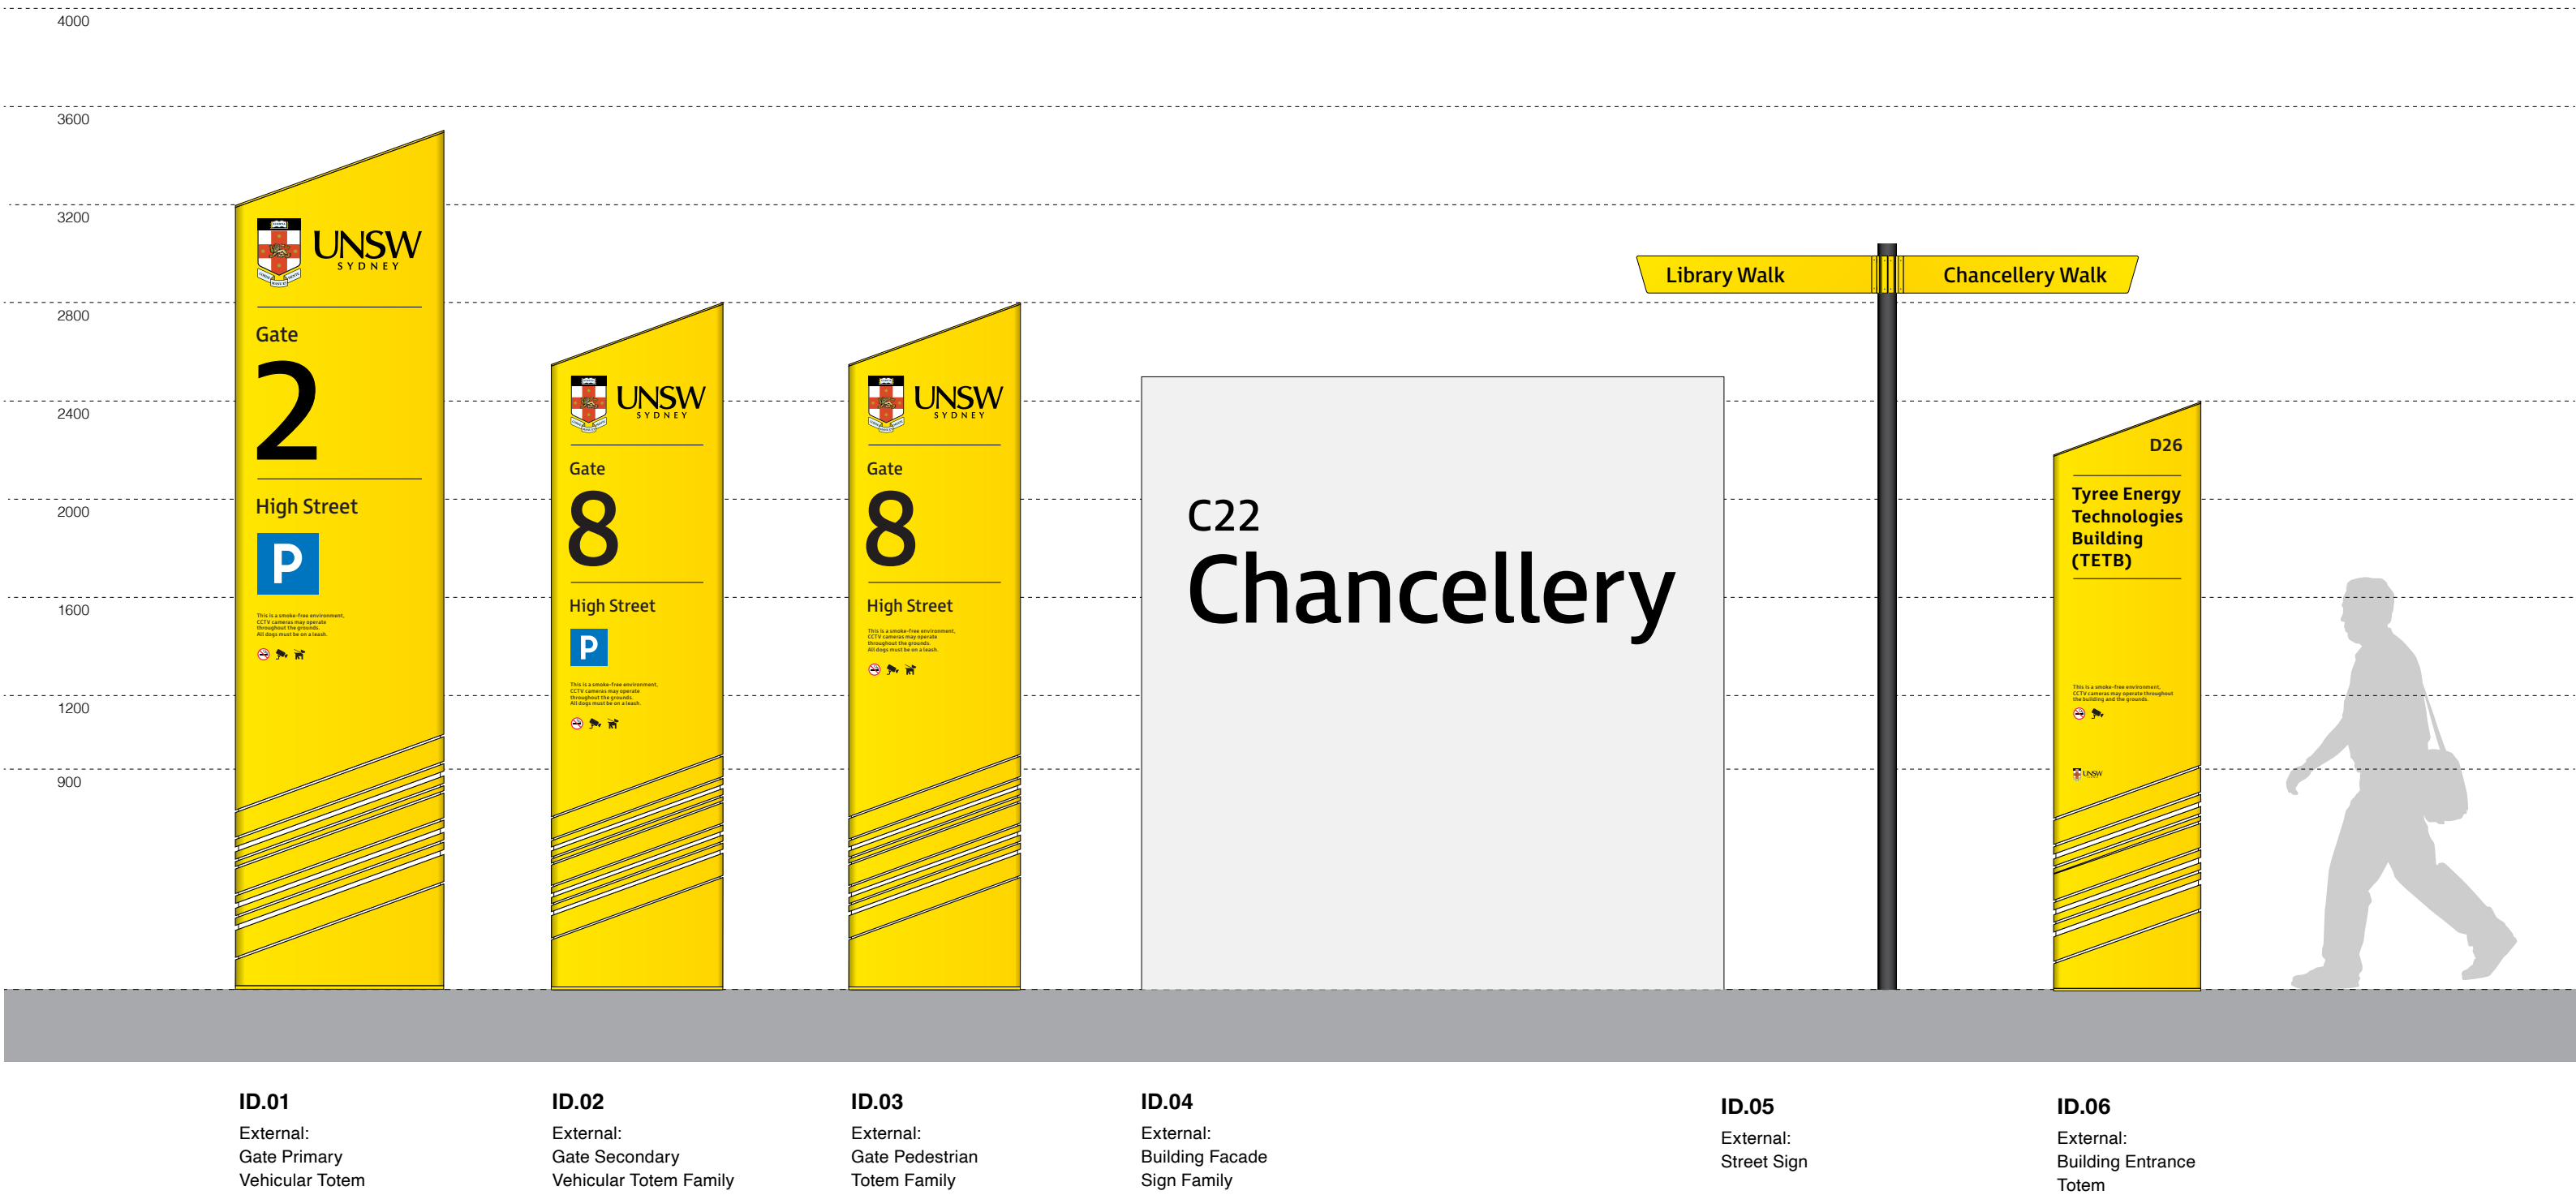

Sign Type Summary: Identification

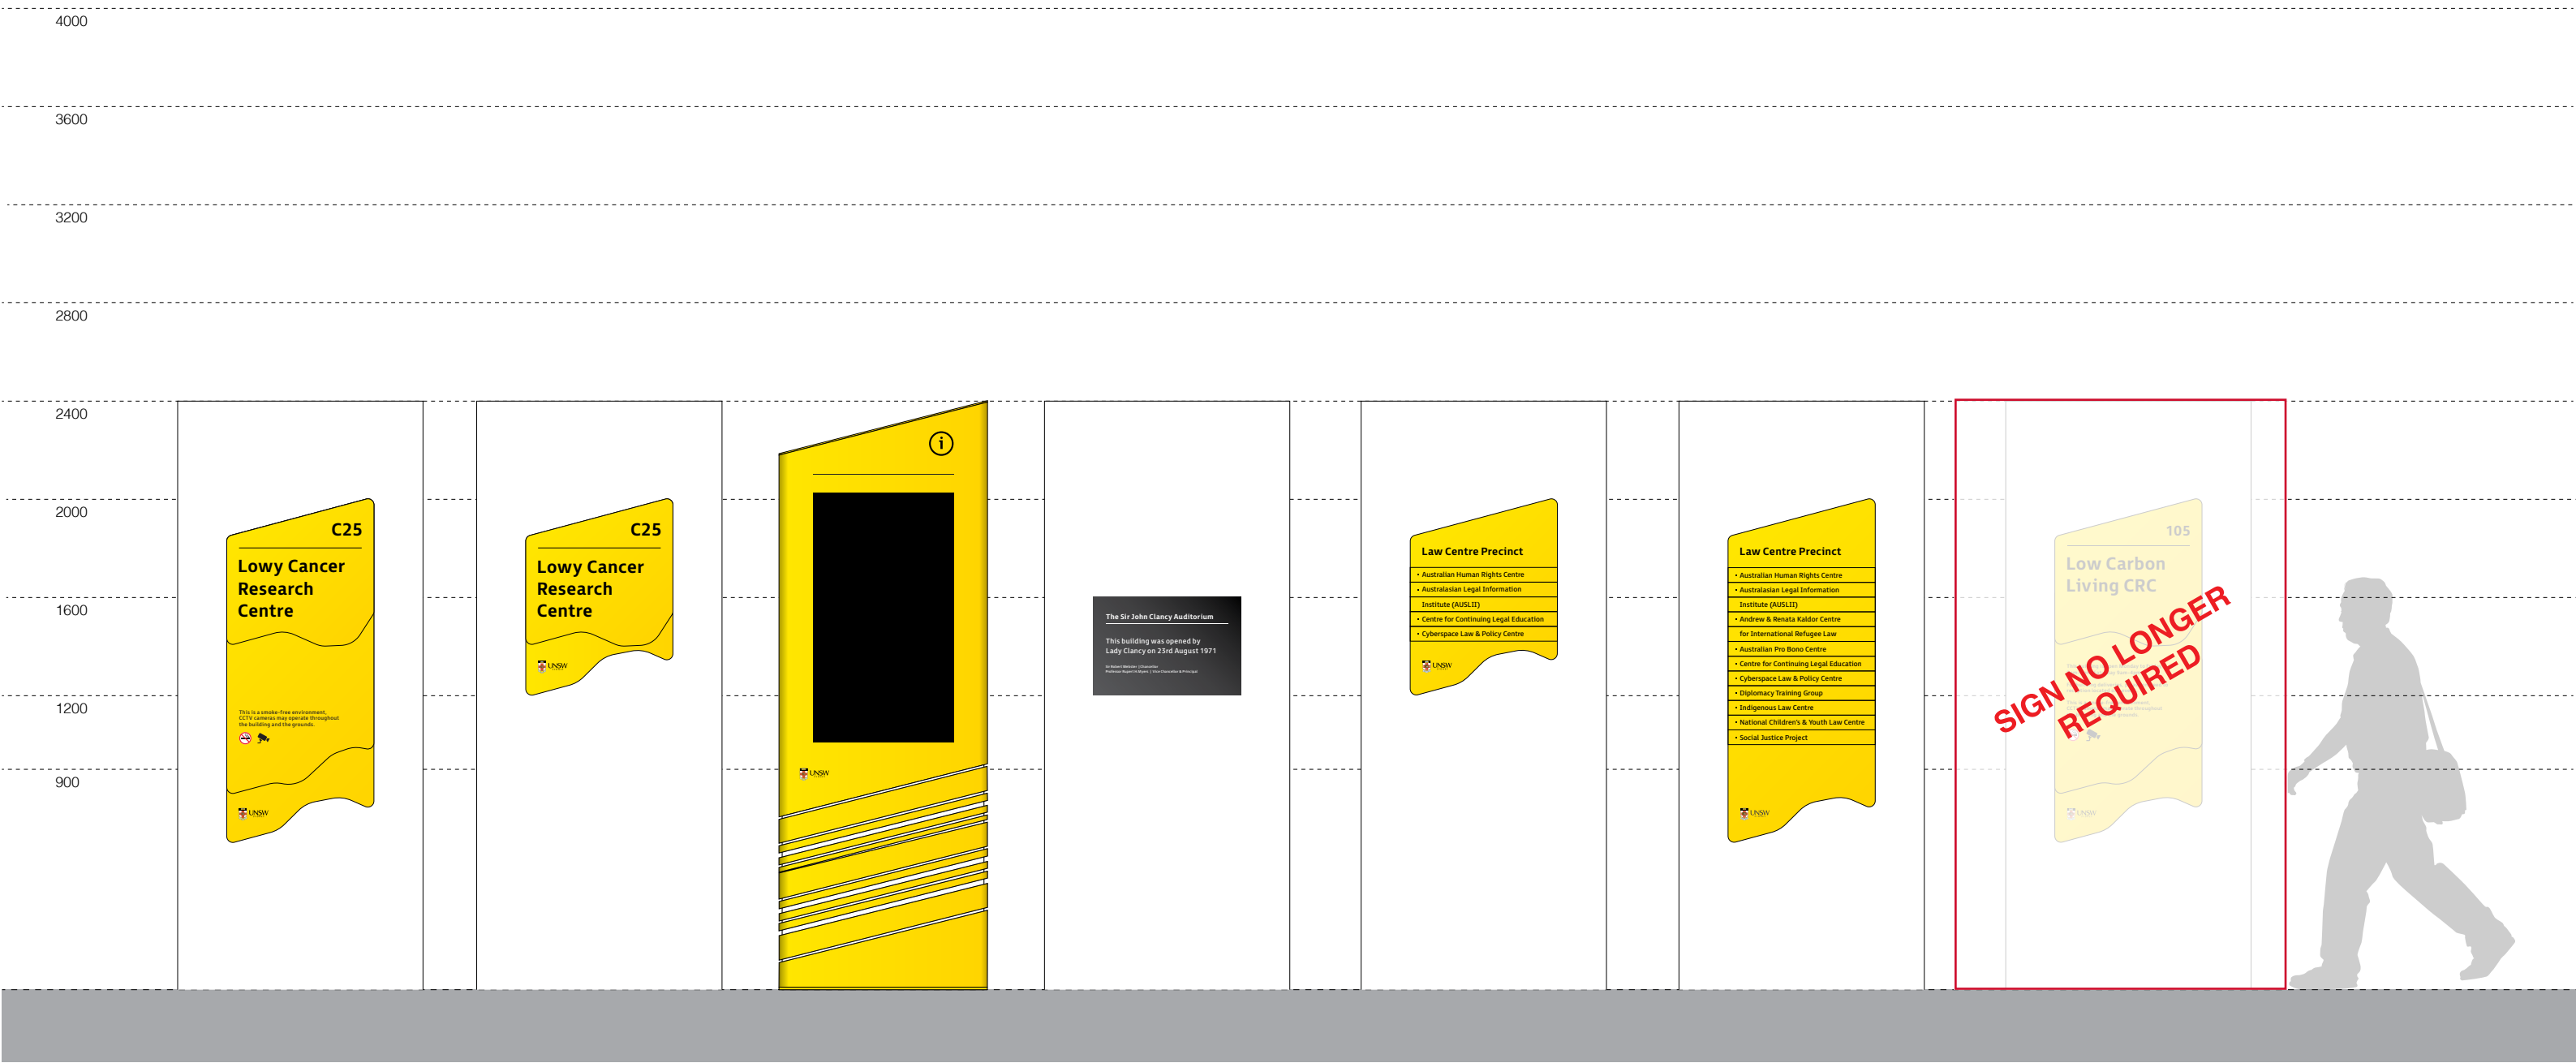

ID.07
External:
Building Entrance
Wall Mounted

ID.08
External:
Facility Entrance
Wall Mounted

ID.09
External:
Digital Directory
Totem


ID.10
External:
Sponsor Plate

ID.11
Internal:
Tenant Directory
(Small)

ID.12
Internal:
Tenant Directory
(Large)

ID.13
Internal:
Secondary Tenant

Sign Type Summary: Identification

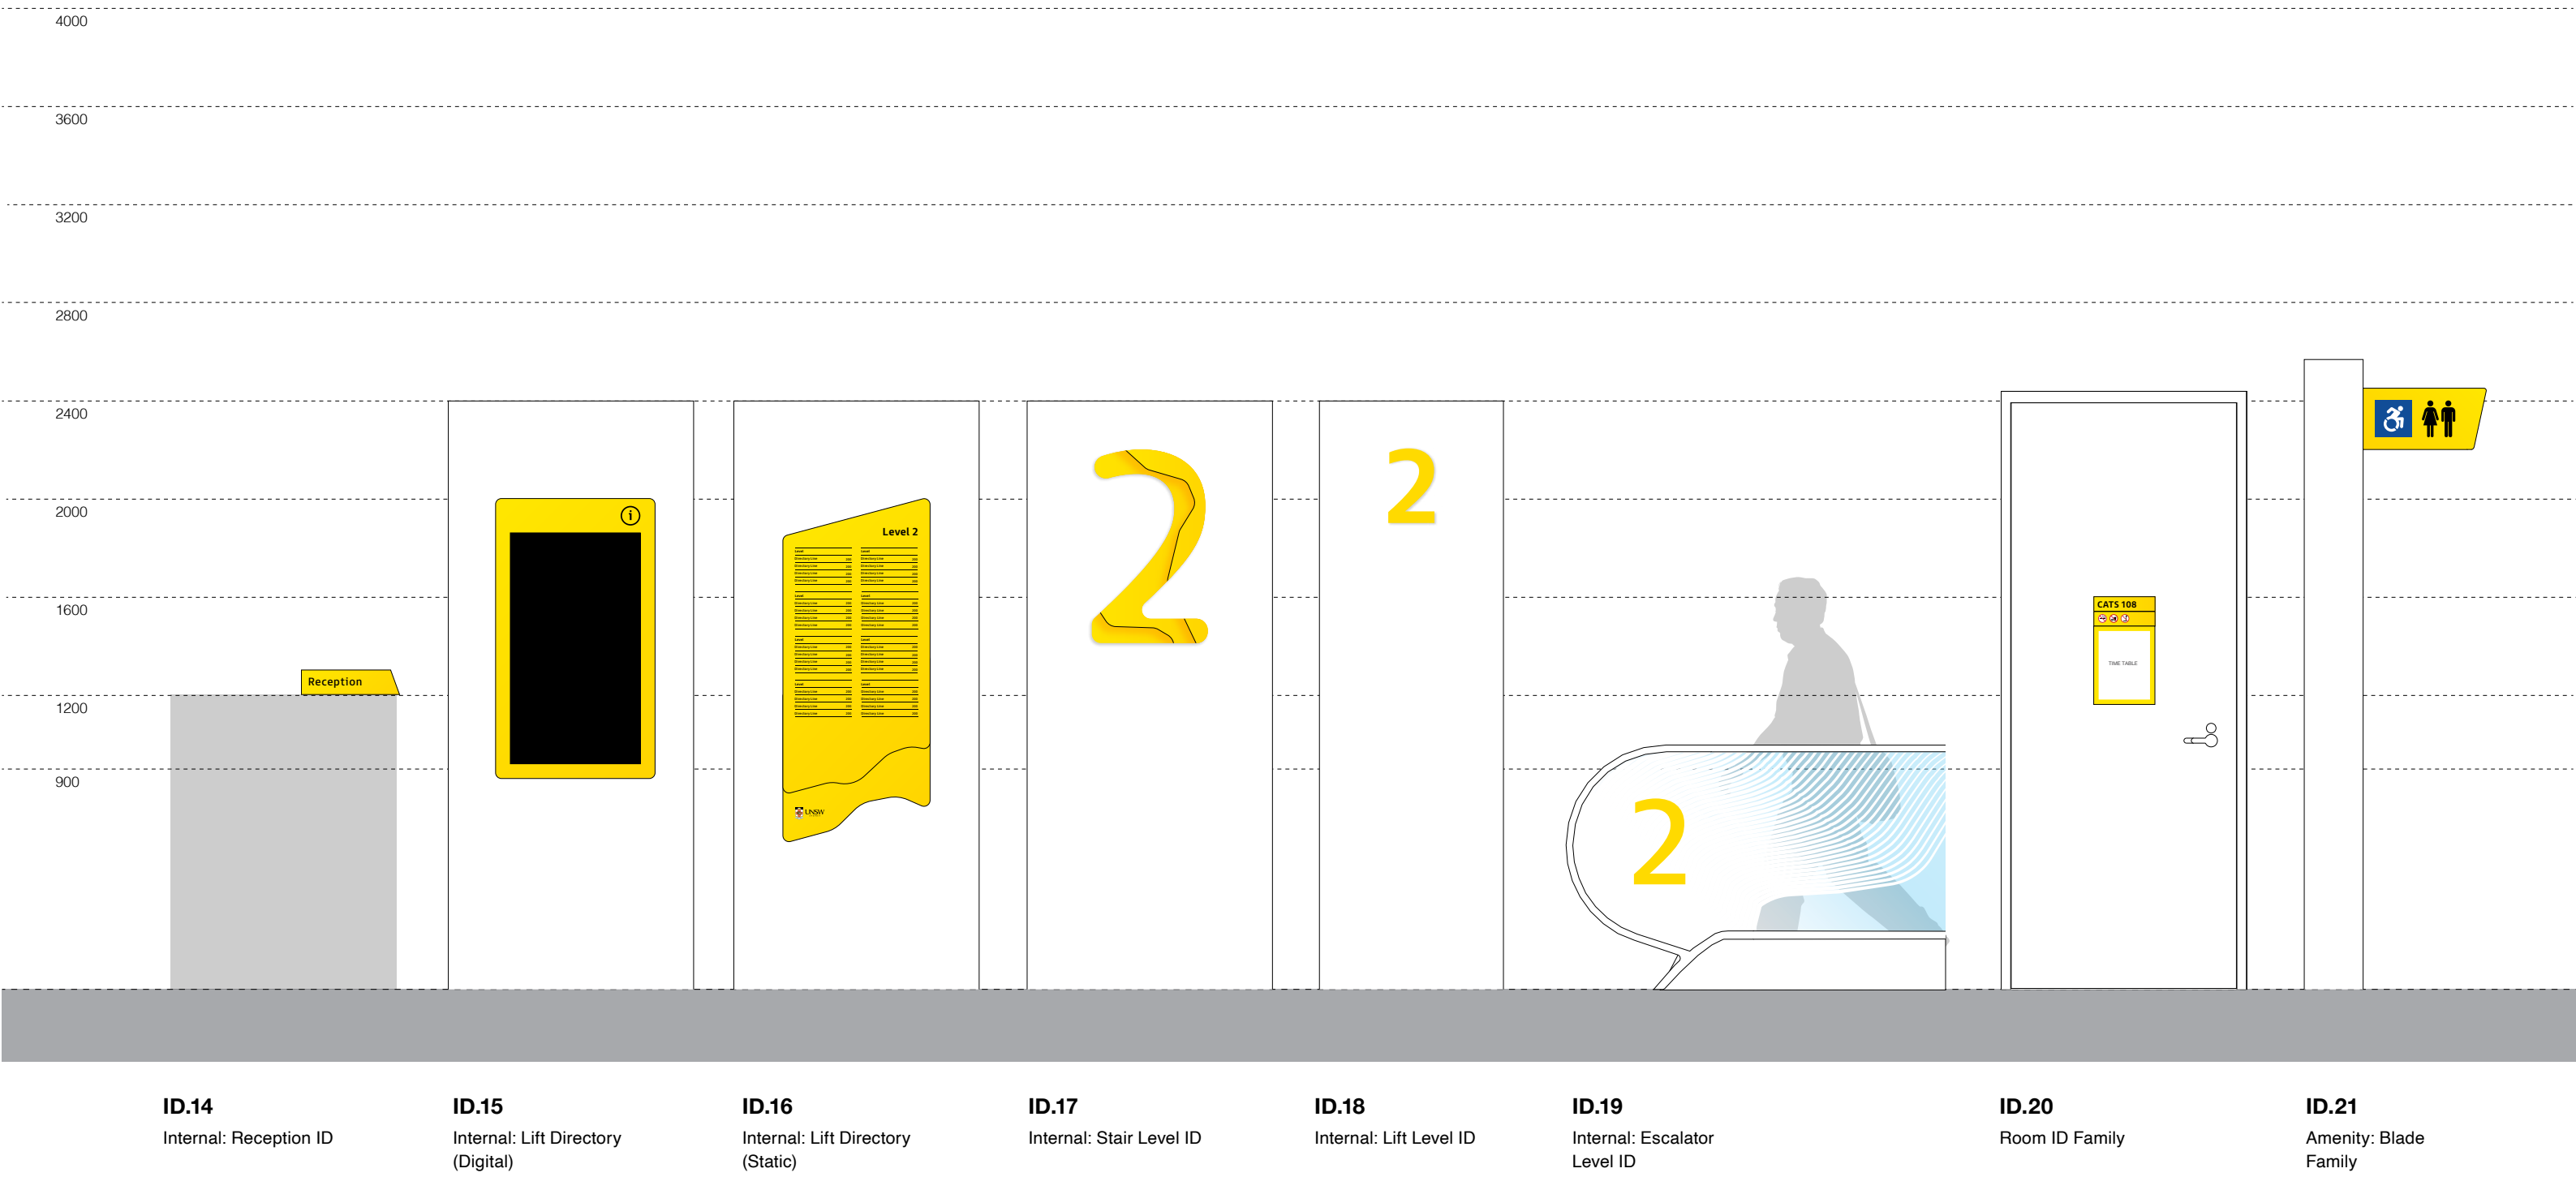

Sign Type Summary: Identification








ID.22
External: Gate ID Wall Mounted






ID.23
External: Campus ID Facade Mounted

ID.24
External: Park ID






Sign Type Summary: Identification

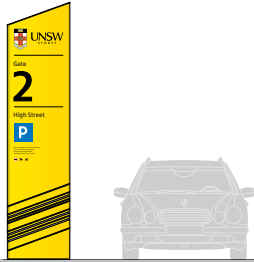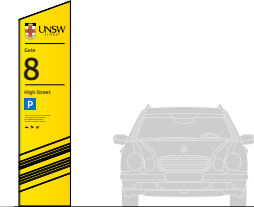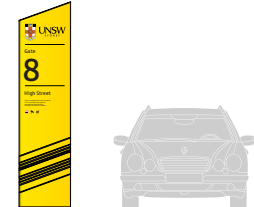Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div><div>ID.01</div><div></div></div>	External: Gate Primary Vehicular Totem	<ul style="list-style-type: none">Identifies major public vehicular entries into the UNSW site	<ul style="list-style-type: none">UNSW logoGate number & street nameParking pictogram (if required)Operational messaging	<ul style="list-style-type: none">Primary gate entries at perimeter of site
<div><div>ID.02</div><div></div></div>	External: Gate Secondary Vehicular Totem Family	<ul style="list-style-type: none">Identifies secondary vehicular entries into private or residential car parks and loading docks	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate number & street nameParking pictogramOperational messaging	<ul style="list-style-type: none">Secondary vehicular gate entries at perimeter of site
<div><div>ID.03</div><div></div></div>	External: Gate Pedestrian Totem Family	<ul style="list-style-type: none">Identifies secondary pedestrian entries into the UNSW site for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate number & street nameAccessible path messaging (if required)Operational messaging	<ul style="list-style-type: none">Secondary pedestrian entries at perimeter of site
<div><div>ID.04</div><div></div></div>	External: Building Facade Sign Family	<ul style="list-style-type: none">Identifies major buildings from street level	<ul style="list-style-type: none">Building NameMap code	<ul style="list-style-type: none">Above main entry of major building or at designated facade signage location viewable from major pedestrian circulation routes
<div><div>ID.05</div><div></div></div>	External: Street Sign	<ul style="list-style-type: none">Identifies major street names and external courtyards or parks within UNSW site	<ul style="list-style-type: none">Street name	<ul style="list-style-type: none">At intersections between major UNSW streets





Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div><div>ID.06</div><div></div></div>	External: Building Entrance Totem	<ul style="list-style-type: none">Identifies entry point or site boundaries of major buildings	<ul style="list-style-type: none">Map codeBuilding nameOperational messaging (open hours etc.)UNSW logo	<ul style="list-style-type: none">Freestanding at intersection of pathway leading into main entry when entrance is not immediately visible.
<div><div>ID.07</div><div></div></div>	External: Building Entrance Wall Mounted	<ul style="list-style-type: none">Identifies entry point or site boundaries of major buildings	<ul style="list-style-type: none">Map codeBuilding nameOperational messaging (open hours etc.)UNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to buildingSolid Wall Mount
<div><div>ID.08</div><div></div></div>	External: Facility Entrance Wall Mounted	<ul style="list-style-type: none">Identifies entry point or site boundaries of internal departments or facilities.	<ul style="list-style-type: none">Map codeFacility nameUNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to departments or facilitiesSolid Wall Mount
<div><div>ID.09</div><div></div></div>	External: Digital Directory Totem	<ul style="list-style-type: none">Directs to main building destinations through the use of a digital map	<ul style="list-style-type: none">Information pictogramDigital screenUNSW logo	<ul style="list-style-type: none">Freestanding at decision points on major external circulation paths, particularly near primary site entry points
<div><div>ID.10</div><div></div></div>	External: Sponsor Plate	<ul style="list-style-type: none">Displays key sponsors of main building	<ul style="list-style-type: none">Building nameKey sponsors	<ul style="list-style-type: none">Located within building thresholds or adjacent to entry points.



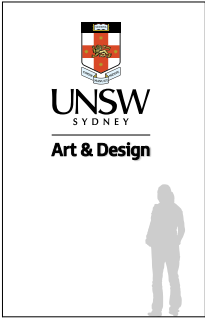

Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ID.11</div> <div></div>	Internal: Tenant Directory (Small)	<ul style="list-style-type: none">Identifies main tenants within building	<ul style="list-style-type: none">Sign nameTenant names (maximum 5)UNSW logo	<ul style="list-style-type: none">On solid wall at corridor or entry to tenant zone within building
<div>ID.12</div> <div></div>	Internal: Tenant Directory (Large)	<ul style="list-style-type: none">Identifies main tenants within building	<ul style="list-style-type: none">Sign nameTenant names (maximum 12)UNSW logo	<ul style="list-style-type: none">On solid wall at corridor or entry to tenant zone within building
<div>ID.13</div> <div></div>	Internal: Secondary Tenant	<ul style="list-style-type: none">Identifies main tenant within building, along with opening times and operational information	<div>SIGN NO LONGER REQUIRED</div> <ul style="list-style-type: none">Room NumberTenant nameOperational messagingUNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to buildingSolid Wall Mount
<div>ID.14</div> <div></div>	Internal: Reception ID	<ul style="list-style-type: none">Identifies reception desk	<ul style="list-style-type: none">Reception name	<ul style="list-style-type: none">Freestanding on table top of reception desk
<div>ID.15</div> <div></div>	Internal: Lift Directory (Digital)	<ul style="list-style-type: none">Directs to main level destinationsIdentifies on floor plan facilities/circulation devices and room numbers for all FOH destinations on that level	<ul style="list-style-type: none">Information pictogramDigital screen	<ul style="list-style-type: none">Applied to solid walls in lift lobby

Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ID.16</div> <div></div>	Internal: Lift Directory (Static)	<ul style="list-style-type: none">• Directs to main level destinations internally	<ul style="list-style-type: none">• Level number• Destination names & room numbers• Optional map• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls in lift lobby
<div>ID.17</div> <div></div>	Internal: Stair Level ID	<ul style="list-style-type: none">• Identifies building level at stair landings	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to solid walls adjacent to stair landing when sufficient space is available
<div>ID.18</div> <div></div>	Internal: Lift Level ID	<ul style="list-style-type: none">• Identifies building level at lift entry points	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to solid walls between or directly opposite lifts.
<div>ID.19</div> <div></div>	Internal: Escalator Level ID	<ul style="list-style-type: none">• Identifies building level at escalator landings	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to glazing of escalator landing
<div>ID.20</div> <div></div>	Room ID Family	<ul style="list-style-type: none">• Identifies room number and name• May also identify:<ul style="list-style-type: none">– Statutory messaging– Assigned time table– Personnel contact details	<ul style="list-style-type: none">• Room number and name• Time table• Statutory/hazard pictograms• Personnel contact list• Braille	<ul style="list-style-type: none">• Applied to outside face of solid doors or walls adjacent to door entries

Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div><div>ID.21</div><div></div></div>	Amenity Blade Family	<ul style="list-style-type: none">Identifies entry point for typical amenities	<ul style="list-style-type: none">Amenity pictogram	<ul style="list-style-type: none">Cantilevered from solid walls in path of travel at confirmation or decision points leading to amenity entry point
<div><div>ID.22</div><div></div></div>	External: Gate ID Wall Mounted	<ul style="list-style-type: none">Identifies entries into the UNSW site for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate number & street nameParking pictogram (if required)Operational messaging (if required)	<ul style="list-style-type: none">Primary gate entries at perimeter of site where a totem is unable to be placed
<div><div>ID.23</div><div></div></div>	External: Campus ID Facade Mounted	<ul style="list-style-type: none">Identifies campus site boundaries for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)	<ul style="list-style-type: none">Mounted on site boundary walls
<div><div>ID.24</div><div></div></div>	External: Park ID	<ul style="list-style-type: none">Identifies parks, lawns and other open spaces on the UNSW campus.	<ul style="list-style-type: none">Park nameRules of useUNSW logo	<ul style="list-style-type: none">Freestanding on edge or corner of park or lawn area, adjacent to main entry.

Sign Type Summary: Directional



Sign Type Summary: Directional



DR.10

Secondary
Wall Mounted
(Landscape)







DR.11

Secondary
Wall Mounted
(Portrait)






DR.12

Secondary
Wall Mounted
(Flag)



Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.01</div> <div></div>	External: Vehicular Totem 2400mm	<ul style="list-style-type: none">• Directs vehicular traffic to major site destinations, particularly parking stations	<ul style="list-style-type: none">• Arrows• Messaging & pictograms• UNSW logo	<ul style="list-style-type: none">• Located at decision points on major external vehicular circulation paths
<div>DR.02</div> <div></div>	External: Pedestrian Totem 2400mm	<ul style="list-style-type: none">• Directs pedestrian traffic to major site destinations	<ul style="list-style-type: none">• Arrows• Destination names & pictograms• Optional map and/or building name• UNSW logo	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths
<div>DR.03</div> <div></div>	External: Pedestrian Totem 2000mm	<ul style="list-style-type: none">• Directs pedestrian traffic to major site destinations	<div>SIGN NO LONGER REQUIRED</div> <ul style="list-style-type: none">• Arrows• Destination names (5 max.)• Pictograms• UNSW logo• Double-sided	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths
<div>DR.04</div> <div></div>	External: Access Bollard	<ul style="list-style-type: none">• Directs pedestrians to accessibility routes	<ul style="list-style-type: none">• Arrows• Accessibility messaging & pictograms• UNSW logo	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths indicating accessible travel paths and circulation
<div>DR.05</div> <div> </div>	Suspended Directional Family	<ul style="list-style-type: none">• Directs to main destinations at an external and internal level	<ul style="list-style-type: none">• Arrows• Destination names & pictograms• UNSW logo	<ul style="list-style-type: none">• Suspended along circulation corridors at confirmation and decision points.


Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.06</div> <div></div>	External: Primary Directional Wall Mounted (Large)	<ul style="list-style-type: none">• Directs pedestrians to main destinations from an external area via multiple directions	<ul style="list-style-type: none">• Arrows• Destination names & pictograms• Optional map and/or building name• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.07</div> <div></div>	External: Primary Directional Wall Mounted (Small)	<ul style="list-style-type: none">• Directs pedestrians to main destinations at an external level via a single direction	<ul style="list-style-type: none">• Arrows• Destination names & pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.08</div> <div></div>	Internal: Primary Directional Wall Mounted (Large)	<ul style="list-style-type: none">• Directs to main destinations at an internal level via multiple directions	<ul style="list-style-type: none">• Level name and/or number• Arrows• Destination names & pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.09</div> <div></div>	Internal: Primary Directional Wall Mounted (Small)	<ul style="list-style-type: none">• Directs to main destinations at an internal level via a single direction	<ul style="list-style-type: none">• Arrows• Destination names & pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.10</div> <div></div>	Secondary Wall Mounted (Landscape)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Arrows• Destination names & pictograms	<ul style="list-style-type: none">• Applied to solid walls along circulation route when confirmation is required due to length/complexity of route


Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.11</div> <div></div>	Secondary Wall Mounted (Portrait)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Arrows• Destination names & pictograms	<ul style="list-style-type: none">• Applied to solid walls or columns along circulation route when confirmation is required due to length/complexity of route
<div>DR.12</div> <div></div>	Secondary Wall Mounted (Flag)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Arrows• Destination names & pictograms	<ul style="list-style-type: none">• Mounted on solid walls or columns along circulation route when confirmation is required due to length/complexity of route


Sign Type Summary: Car Park

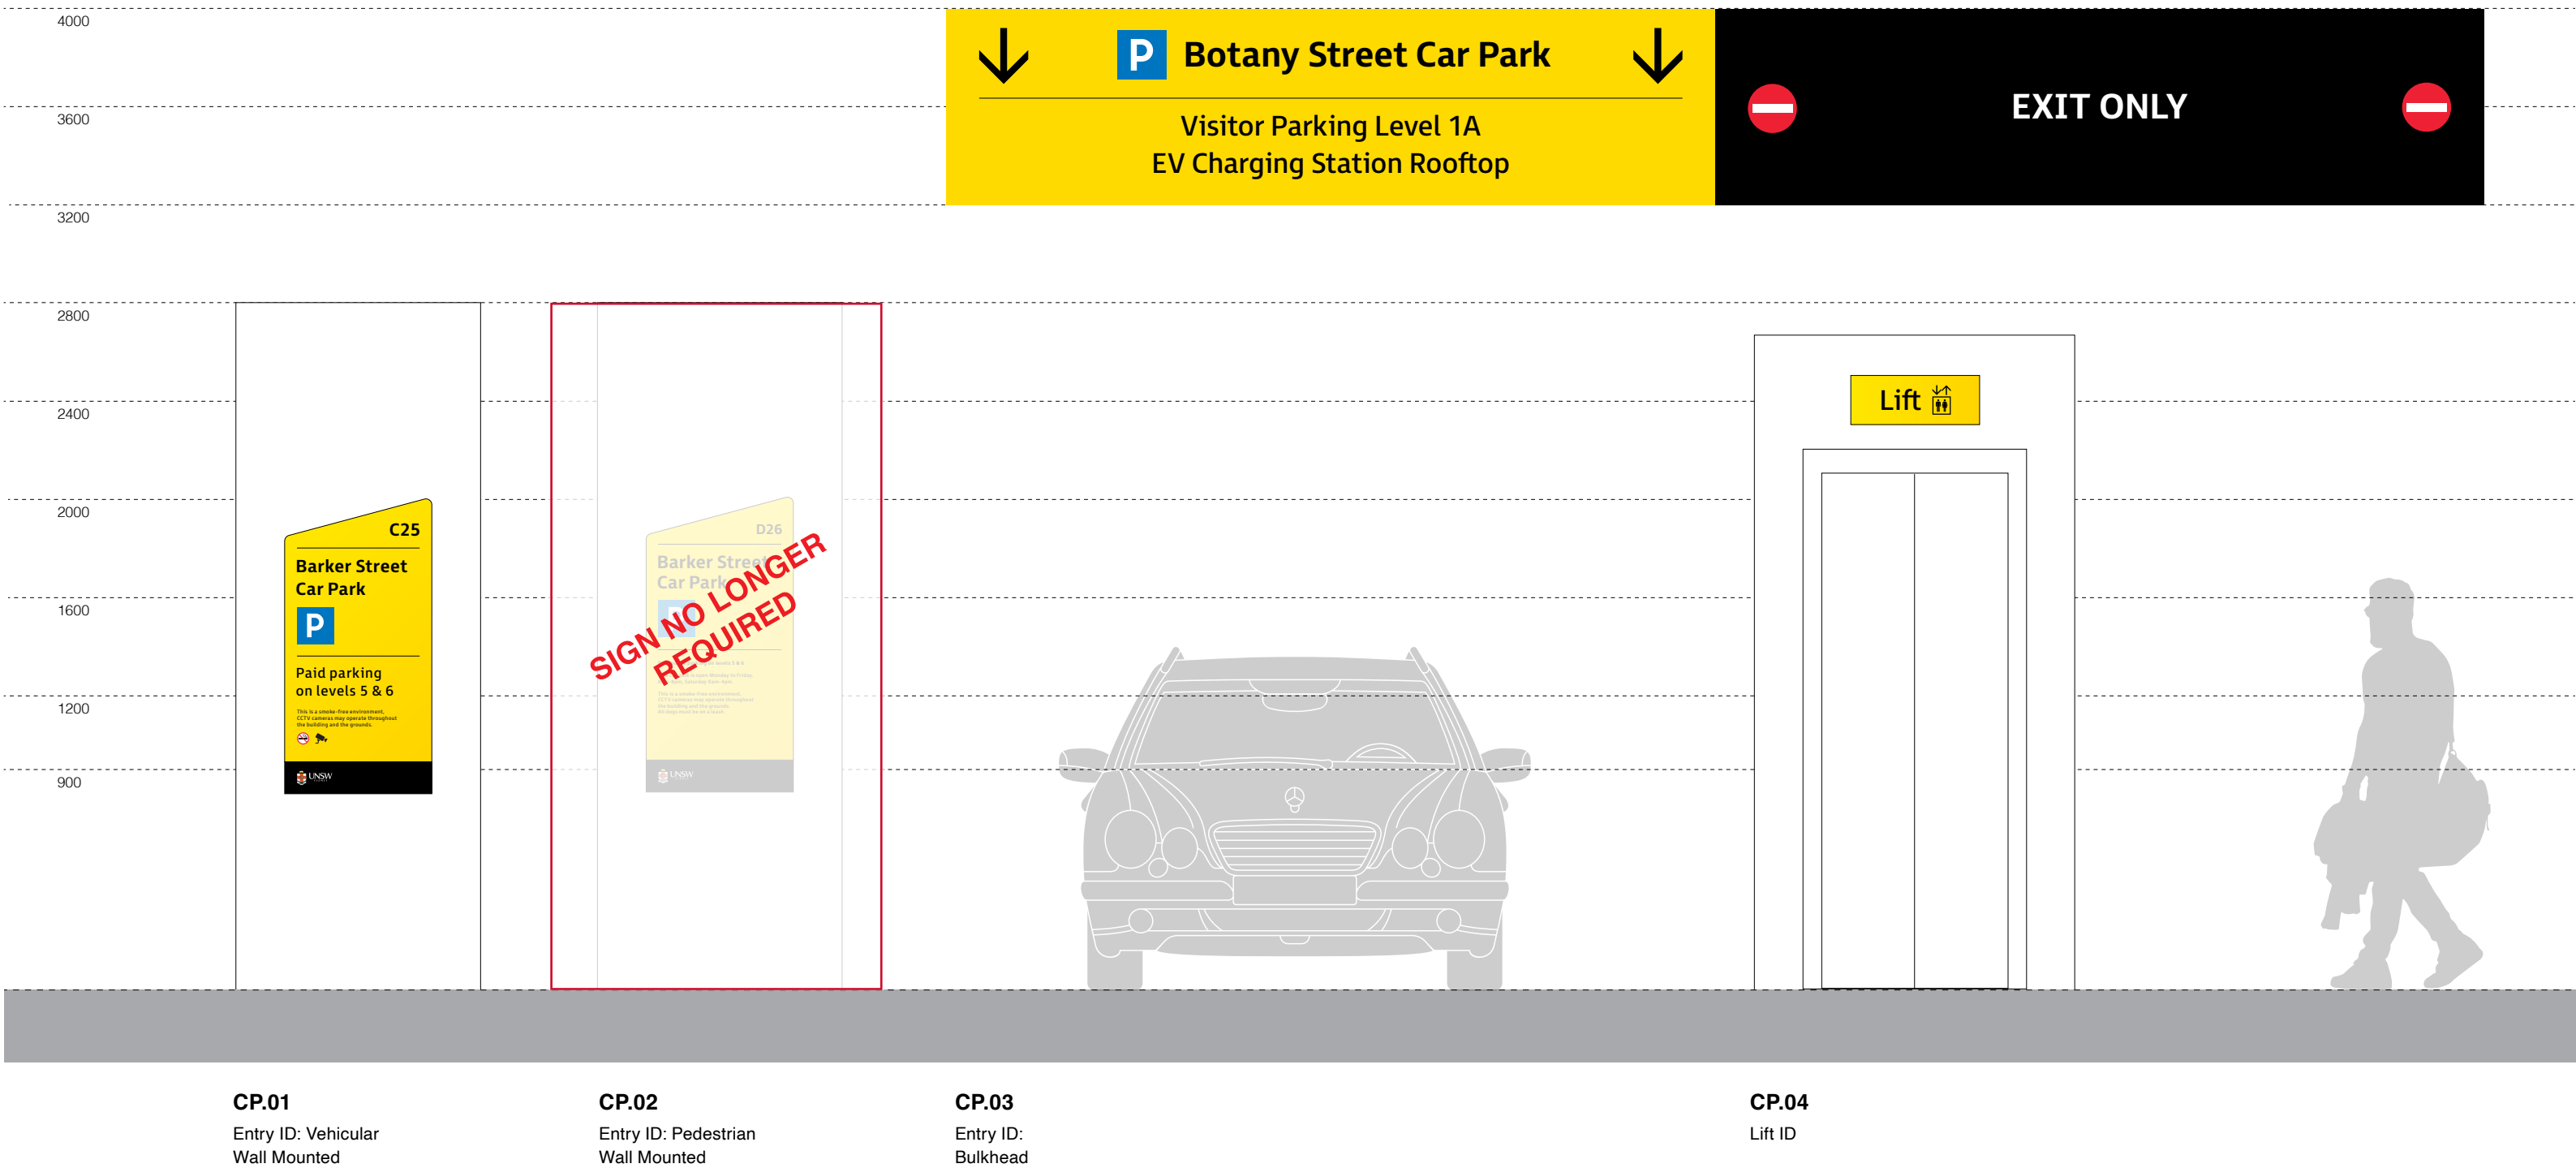






Sign Type Summary: Car Park

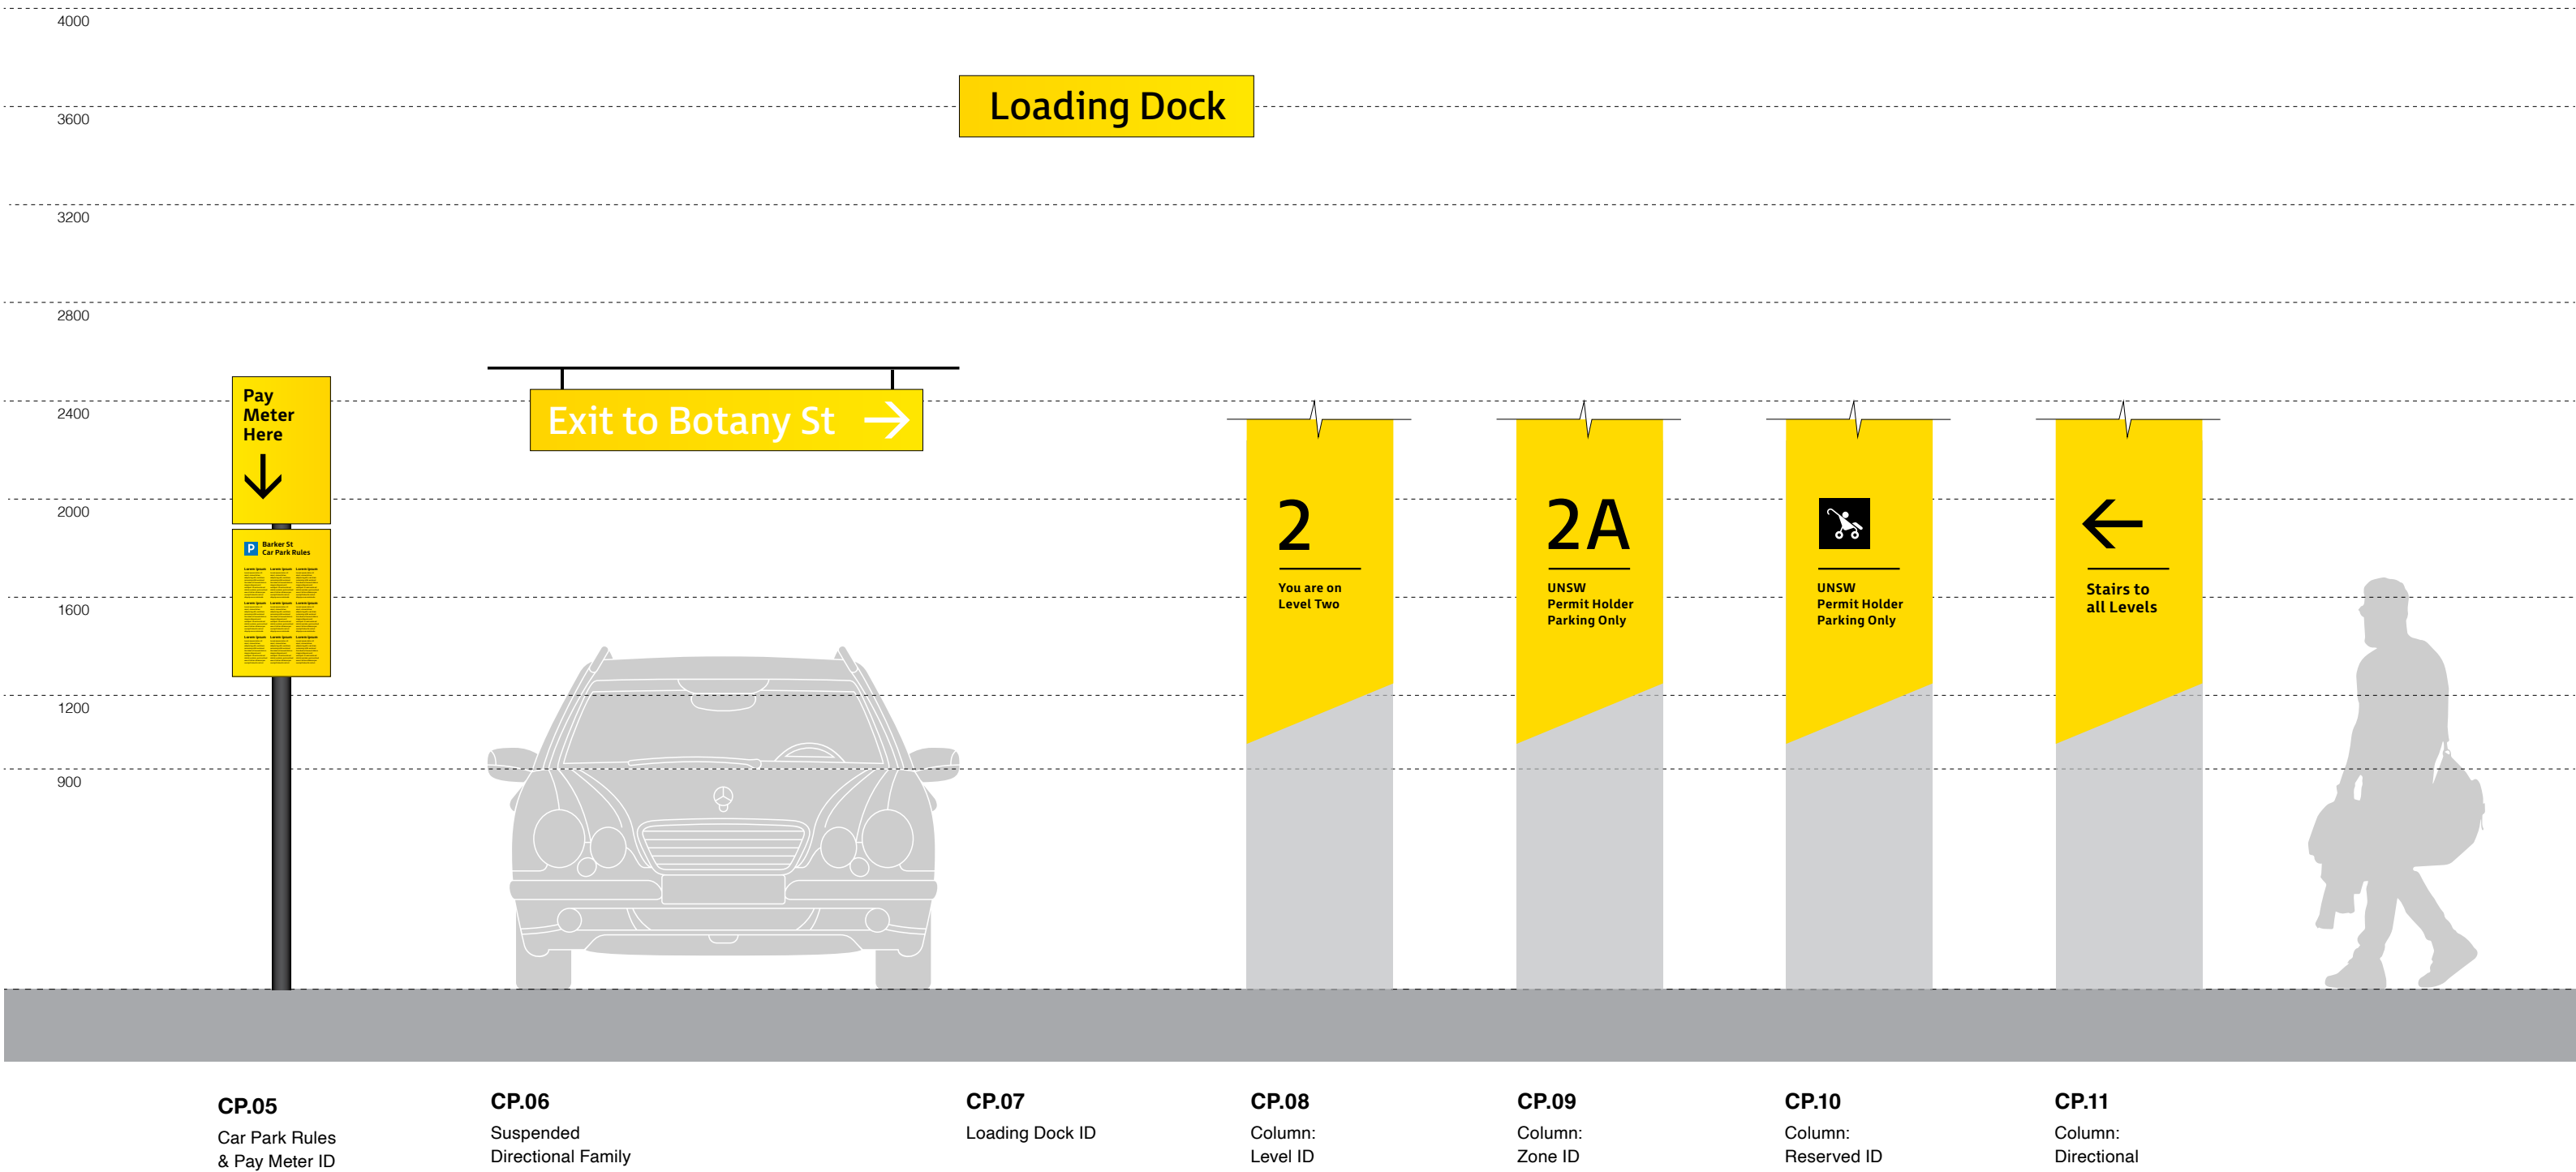






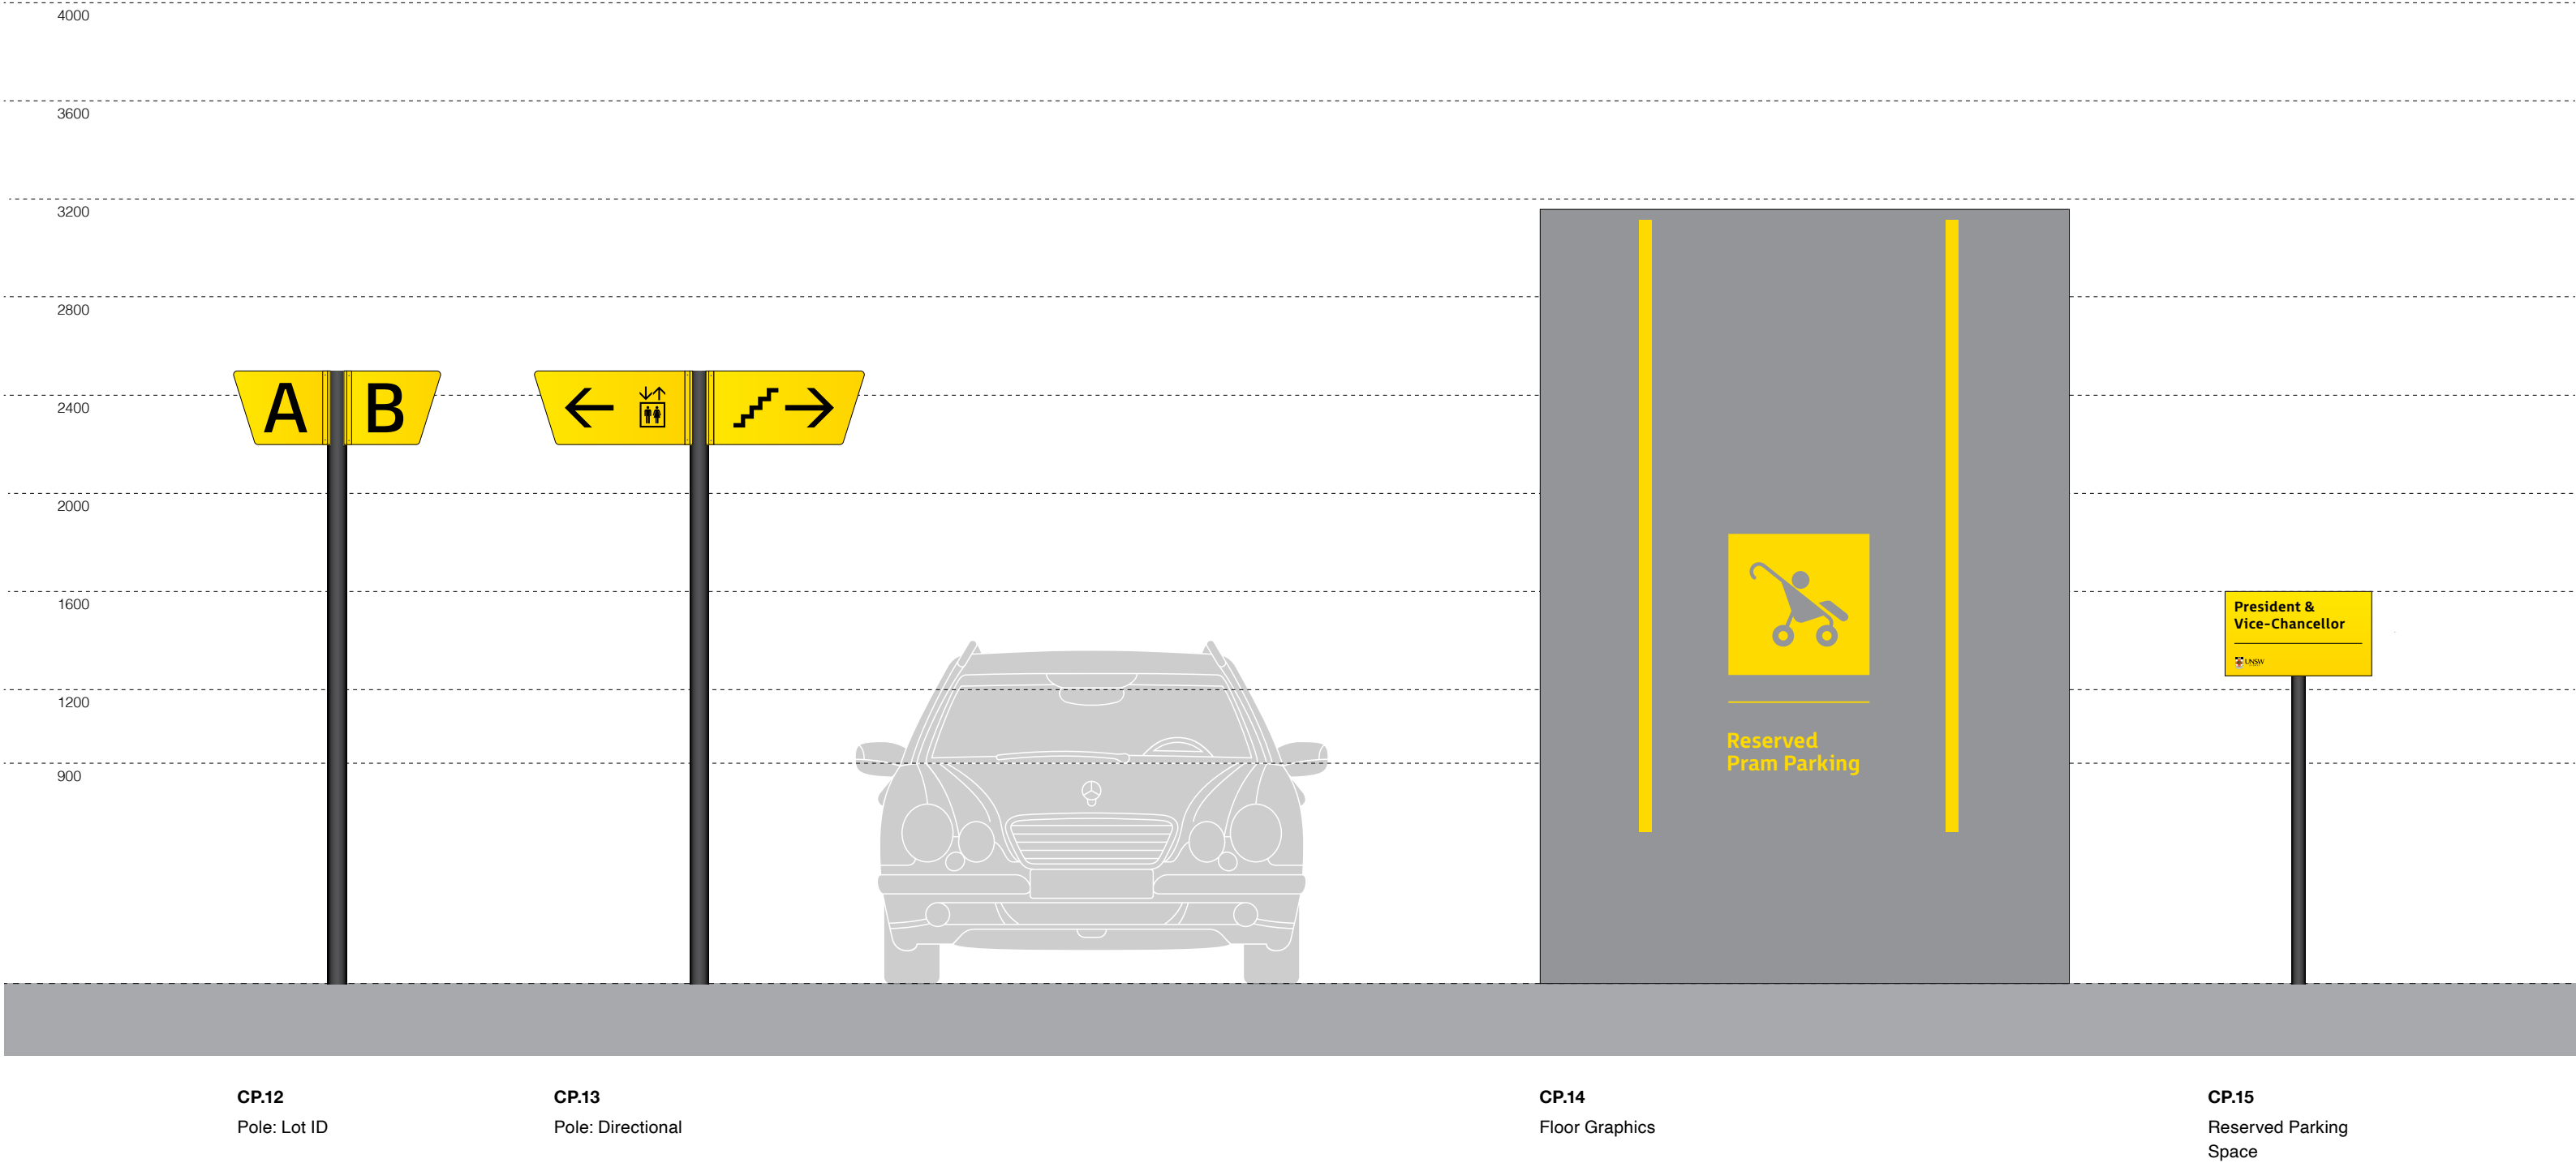Sign Type Summary: Car Park








Sign Type Summary: Car Park

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.01</div> <div></div>	Entry ID: Vehicular Wall Mounted	<ul style="list-style-type: none">• Confirms car park entry point for vehicular traffic from a viewing distance of at least 20m	<ul style="list-style-type: none">• Car park name• Parking pictogram• Operational messaging• UNSW logo	<ul style="list-style-type: none">• Located at vehicular entry points at car parks
<div>CP.02</div> <div></div>	Entry ID: Pedestrian	<ul style="list-style-type: none">• Confirms car park entry point for pedestrian traffic	<div>SIGN NO LONGER REQUIRED</div> <ul style="list-style-type: none">• Car park name• Parking pictogram• Messaging• UNSW logo	<ul style="list-style-type: none">• Located at pedestrian entry points at car parks
<div>CP.03</div> <div></div>	Entry ID: Bulk Head	<ul style="list-style-type: none">• Confirms car park entry point for vehicular traffic from a viewing distance of at least 160m	<ul style="list-style-type: none">• Destination names & pictogram• Entry/exit messaging• UNSW logo	<ul style="list-style-type: none">• Mounted at bulk head of major car park entries
<div>CP.04</div> <div></div>	Lift ID	<ul style="list-style-type: none">• Identifies lifts for pedestrian traffic within car parks	<ul style="list-style-type: none">• Lift identification	<ul style="list-style-type: none">• Mounted above lift entries
<div>CP.05</div> <div></div>	Car Park Rules & Pay Meter	<ul style="list-style-type: none">• Identifies pay meter and rules of parking space	<ul style="list-style-type: none">• Pay meter identification• Car park rules	<ul style="list-style-type: none">• Mounted above pay meter


Sign Type Summary: Car Park

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.06</div> <div></div>	Suspended Directional Family	<ul style="list-style-type: none">Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level	<ul style="list-style-type: none">ArrowMessaging	<ul style="list-style-type: none">Suspended at major vehicular decision points
<div>CP.07</div> <div></div>	Loading Dock ID	<ul style="list-style-type: none">Identifies Loading Dock area for vehicular traffic	<ul style="list-style-type: none">Loading Dock ID	<ul style="list-style-type: none">Applied above loading dock entry at bulk head
<div>CP.08</div> <div></div>	Column: Level ID	<ul style="list-style-type: none">Identifies car park level for vehicular and pedestrian traffic	<ul style="list-style-type: none">Car park level number and name	<ul style="list-style-type: none">Applied on surface of designated columns facing circulation paths
<div>CP.09</div> <div></div>	Column: Zone ID	<ul style="list-style-type: none">Identifies parking zone ID for vehicular and pedestrian traffic	<ul style="list-style-type: none">Zone codeZone name	<ul style="list-style-type: none">Applied on surface of designated columns facing circulation paths
<div>CP.10</div> <div></div>	Column: Reserved ID	<ul style="list-style-type: none">Identifies reserved parking zone for vehicular and pedestrian traffic, specific to accessibility and parent parking	<ul style="list-style-type: none">Pram / Accessibility PictogramMessage	<ul style="list-style-type: none">Applied on surface of designated columns facing circulation paths






Sign Type Summary: Car Park

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.11</div> <div></div>	Column: Directional	<ul style="list-style-type: none">• Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level	<ul style="list-style-type: none">• Arrow• Destination name	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths
<div>CP.12</div> <div></div>	Pole: Lot ID	<ul style="list-style-type: none">• Identifies parking zone ID's on rooftop levels that do not have car park columns	<ul style="list-style-type: none">• Zone code	<ul style="list-style-type: none">• Located at allocated confirmation points
<div>CP.13</div> <div></div>	Pole: Directional	<ul style="list-style-type: none">• Directs pedestrian traffic at rooftop levels	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths	<ul style="list-style-type: none">• Located at major pedestrian decision points at rooftop level
<div>CP.14</div> <div></div>	Floor Graphics	<ul style="list-style-type: none">• Identifies parking zones for vehicular traffic	<ul style="list-style-type: none">• Pram/ Accessibility Pictogram• Message	<ul style="list-style-type: none">• Located at designated parking bays
<div>CP.15</div> <div></div>	Reserved Parking ID	<ul style="list-style-type: none">• Identifies exclusive parking zones within the campus for authorised use	<ul style="list-style-type: none">• Title of Authorised User	<ul style="list-style-type: none">• Located at designated parking bays

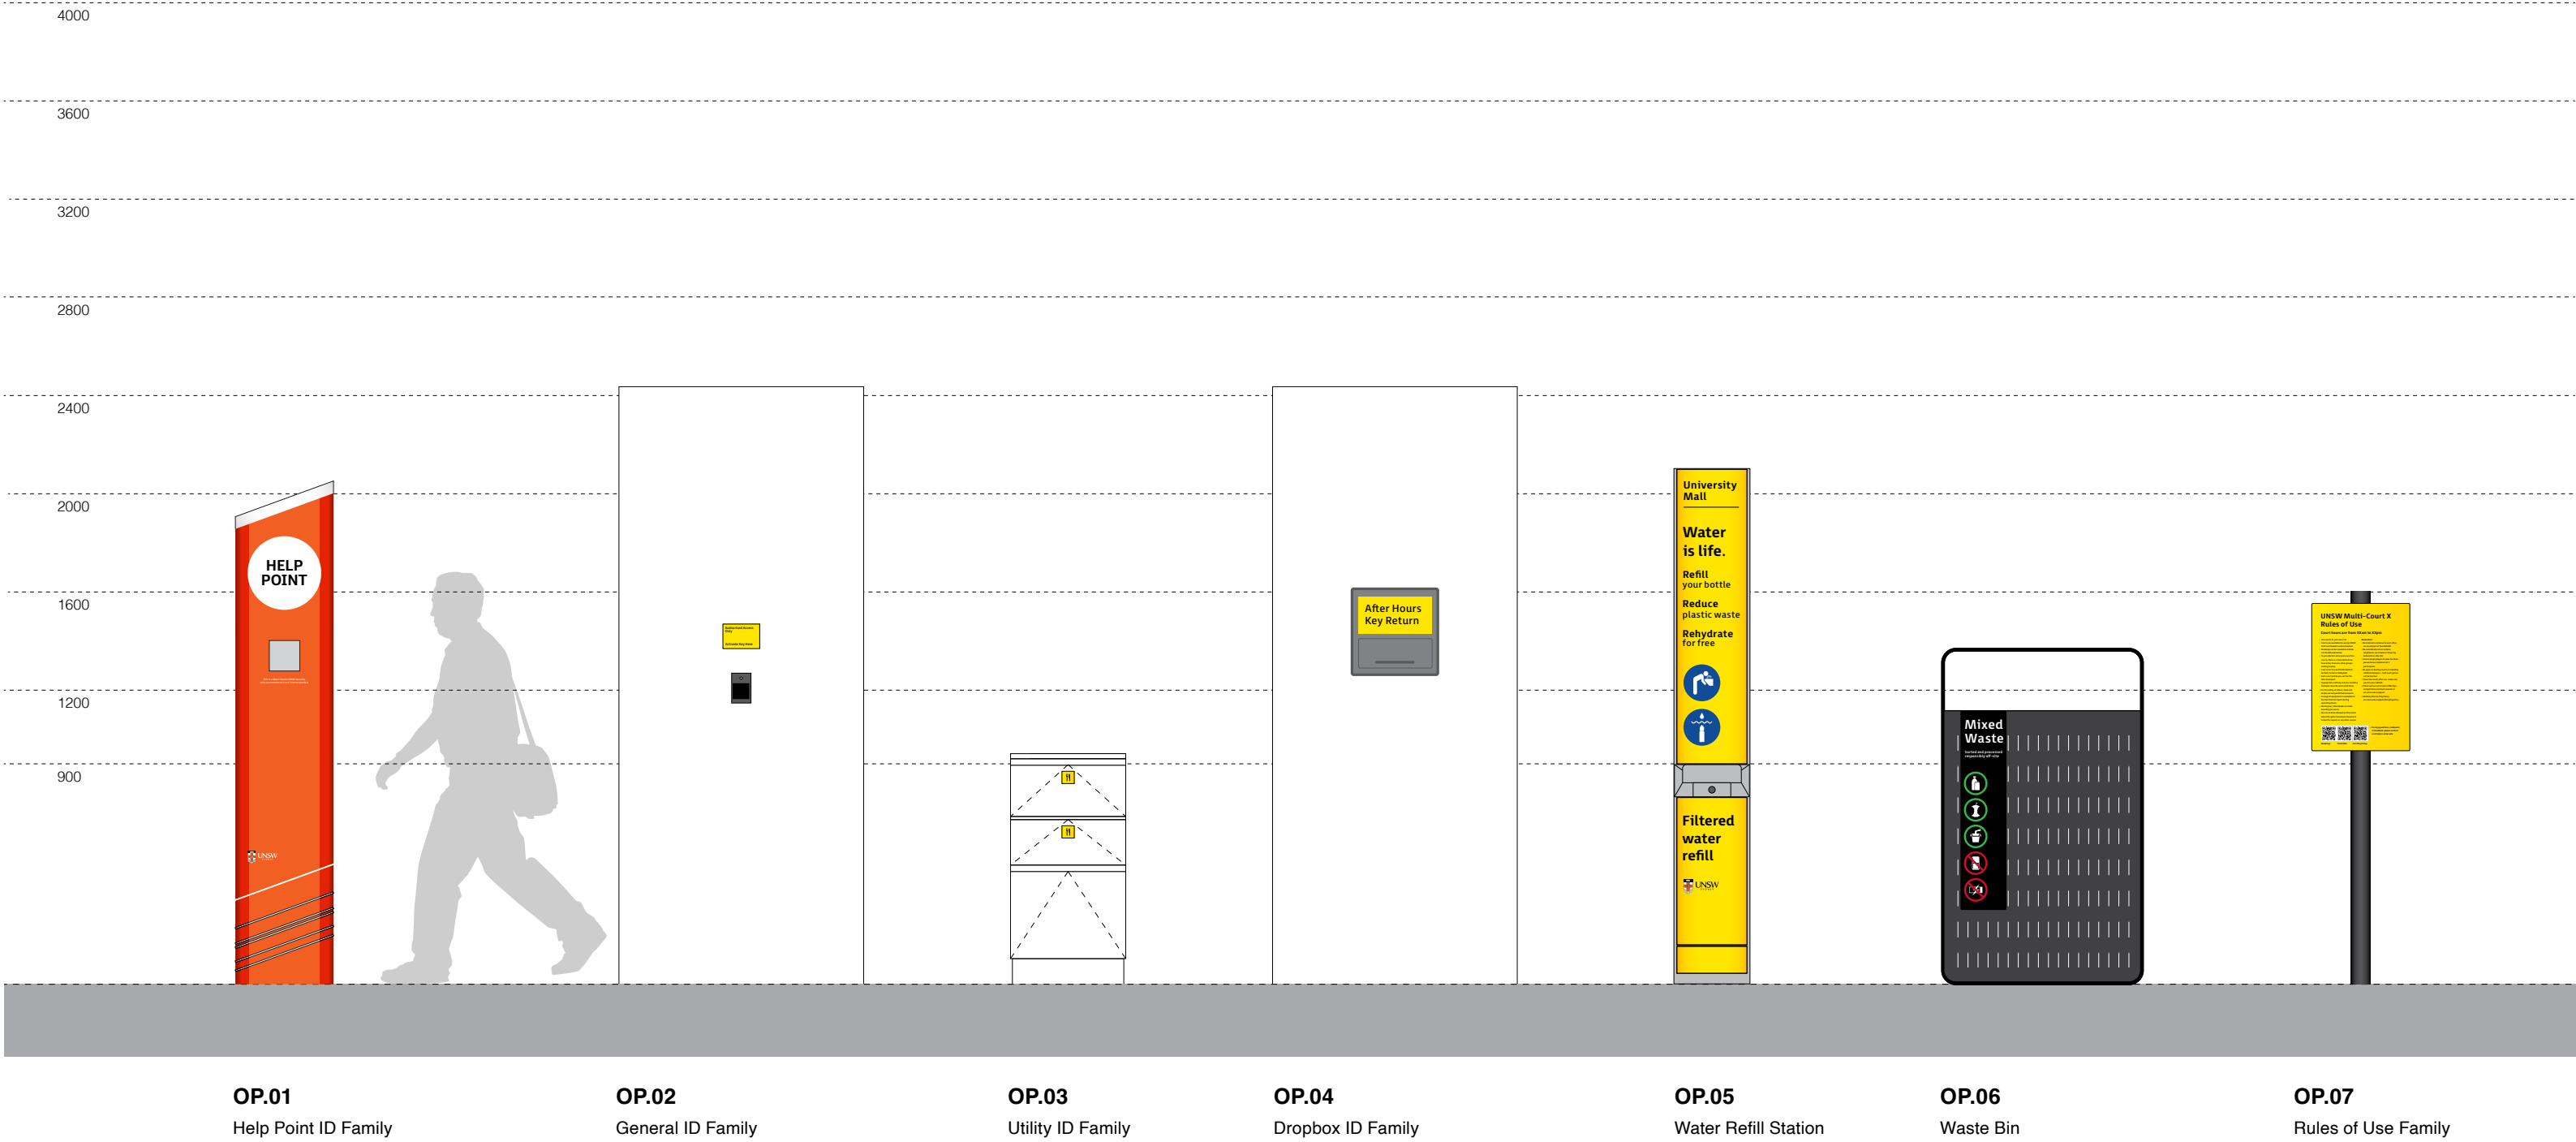

Sign Type Summary: Operational




Sign Type Summary: Operational

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>OP.01</div> <div></div>	Help Point ID Family	<ul style="list-style-type: none">Identifies help point locations	<ul style="list-style-type: none">Help Point pictogramTextDirectional arrow	<ul style="list-style-type: none">Located above designated Help Point intercoms
<div>OP.02</div> <div></div>	General ID Family	<ul style="list-style-type: none">Provide operational/ regulatory information	<ul style="list-style-type: none">TextRegulatory Information	<ul style="list-style-type: none">Applied on solid wall where appropriate
<div>OP.03</div> <div></div>	Utility ID Family	<ul style="list-style-type: none">Identifies staff/ students utilities at kitchenettes, stationery rooms and print areas	<ul style="list-style-type: none">PictogramsText	<ul style="list-style-type: none">Applied on solid wall, glazing, cupboard leaf or drawer front where appropriate
<div>OP.04</div> <div></div>	Dropbox ID Family	<ul style="list-style-type: none">Identifies student drop boxes	<ul style="list-style-type: none">Text	<ul style="list-style-type: none">Applied to drop box openings
<div>OP.05</div> <div></div>	Water Refill	<ul style="list-style-type: none">Identifies water refill station	<ul style="list-style-type: none">TextIllustration	<ul style="list-style-type: none">Integrated with water refill station





Sign Type Summary: Operational

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
OP.06	Waste Bin	<ul style="list-style-type: none">Identifies waste bin unit and what types of waste are suitable and unsuitable to be disposed of	<ul style="list-style-type: none">TextPictograms	<ul style="list-style-type: none">Applied on front face of campus waste bins
				
OP.07	Rules of Use Family	<ul style="list-style-type: none">Provides rules of use and other relevant information for outdoor sporting facilities	<ul style="list-style-type: none">TextQR codes (if required)	<ul style="list-style-type: none">Mounted to fences or poles adjacent to sporting facility areas
				

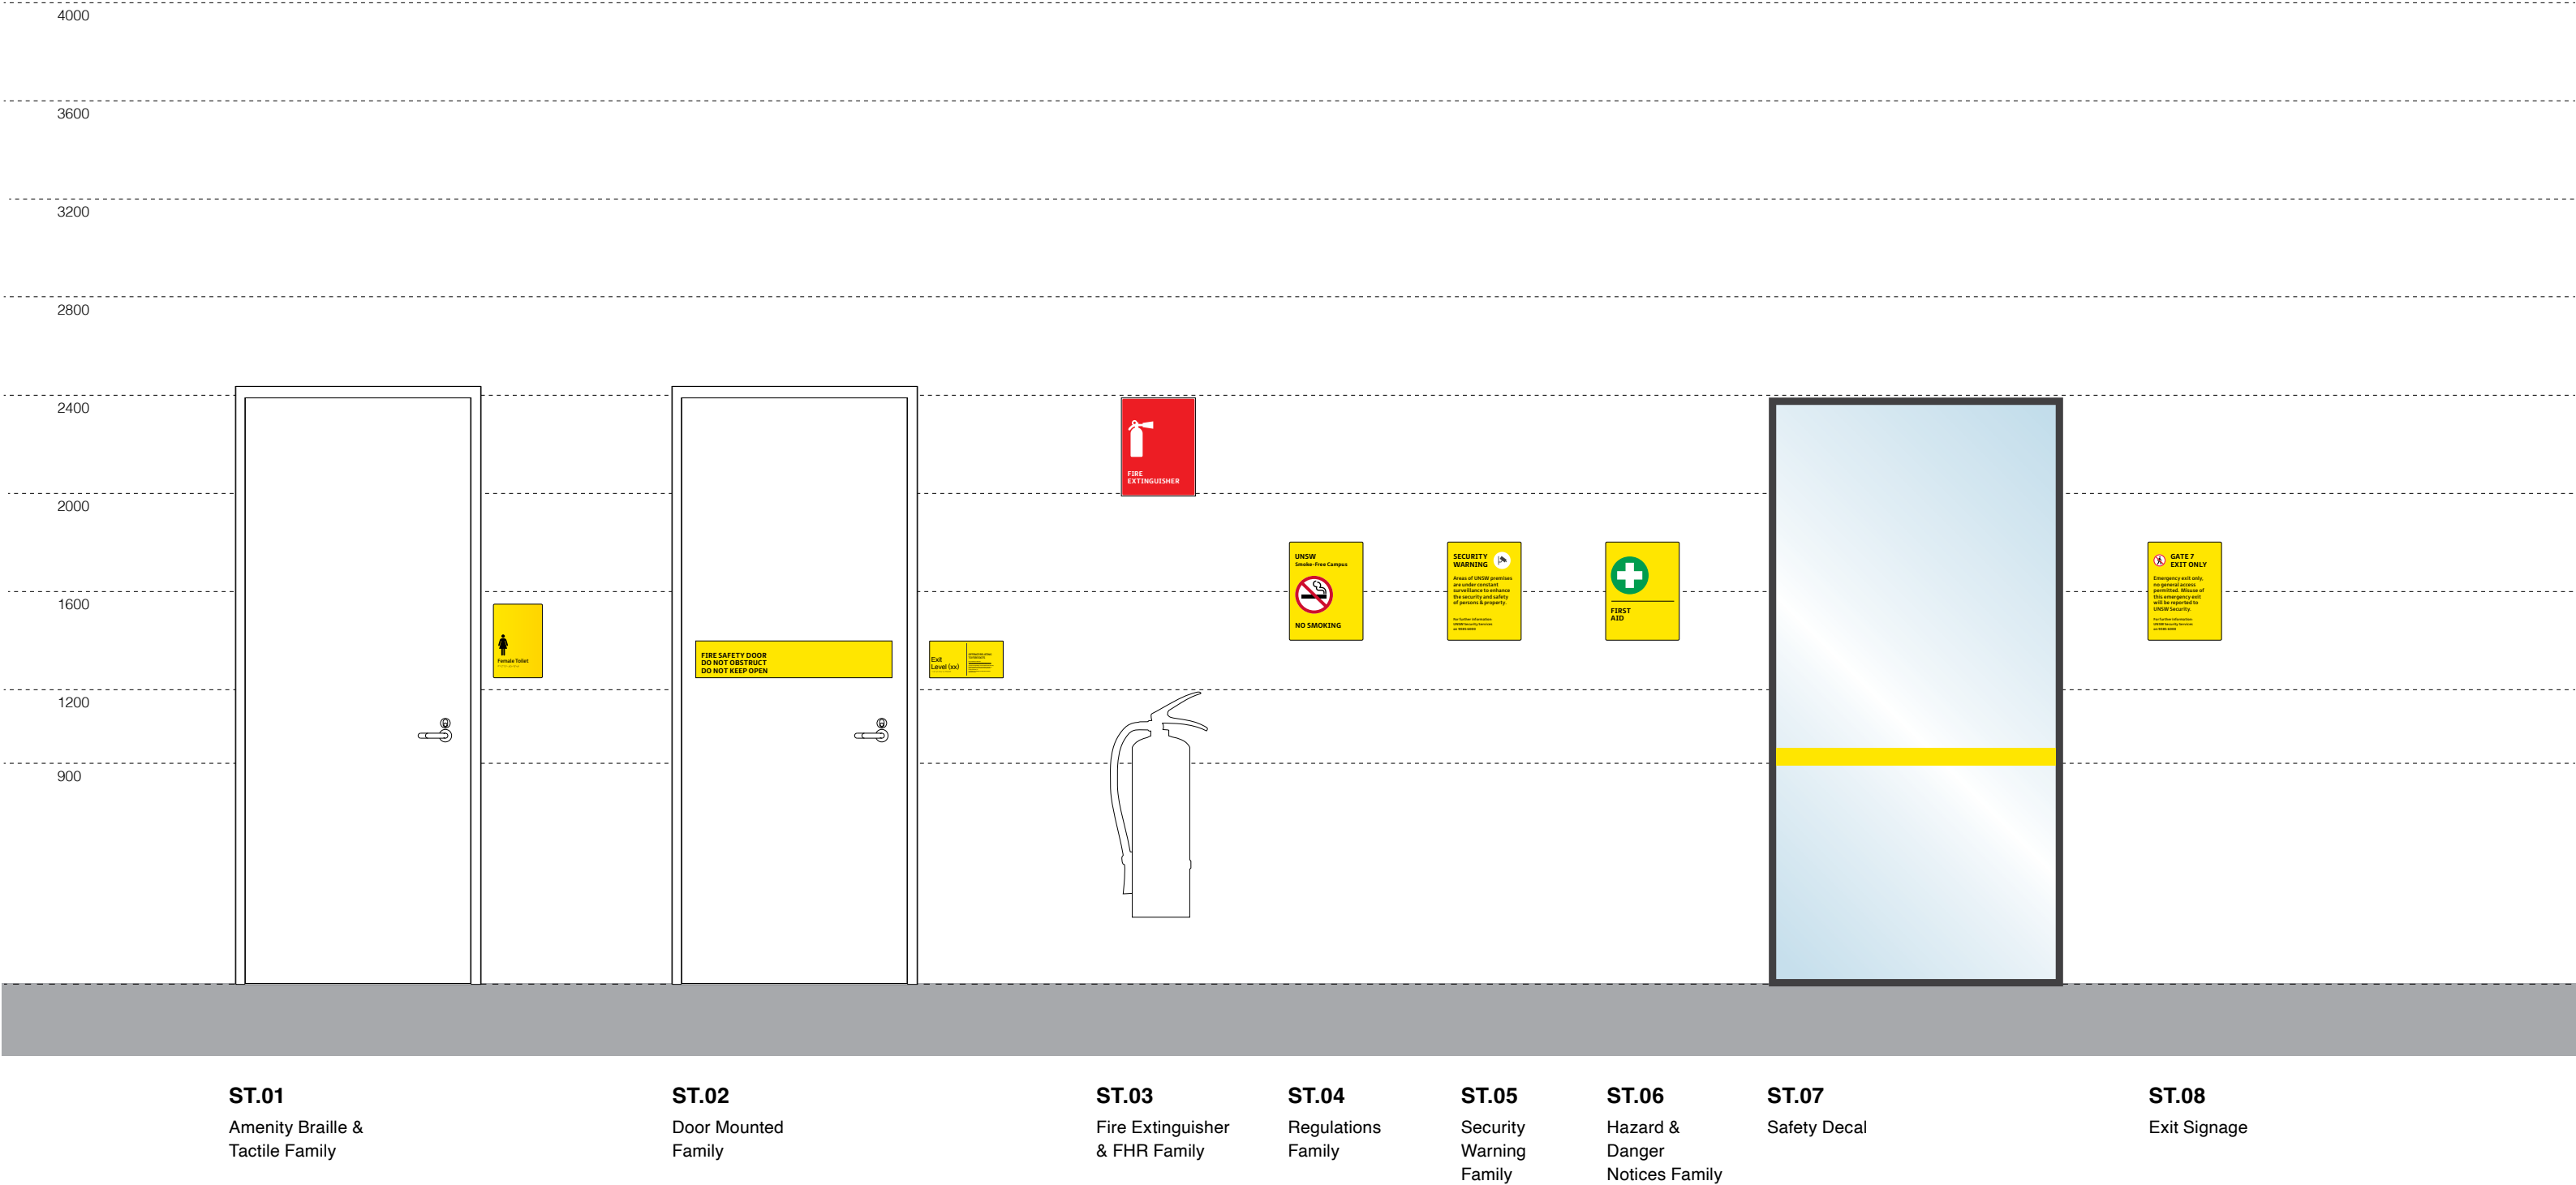



Sign Type Summary: Statutory



Sign Type Summary: Statutory

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ST.01</div> <div></div>	Amenity Braille & Tactile Family	<ul style="list-style-type: none">• To identify a toilet facility• Provide accessibility into amenities for vision impaired students/staff/visitors	<ul style="list-style-type: none">• Pictogram• Text• Braille	<ul style="list-style-type: none">• Applied to solid walls as per statutory requirements
<div>ST.02</div> <div></div>	Door Mounted Family	<ul style="list-style-type: none">• To identify room or cupboard functions for BOH destinations to meet statutory regulations.	<ul style="list-style-type: none">• Text	<ul style="list-style-type: none">• For statutory room and/or cupboard signs, to be applied to front of solid doors, on latch-side and/or both doors as required.• For Exit operational instructions (Offences Relating to Fire Exits) to be located as required by Clause 183 of NSW Environmental Planning & Assessment Regulation 2000. To be installed in a conspicuous position adjacent to a door way providing access to (but not within) a fire isolated stairway, passageway or ramp. Underside of panel to align with underside of adjacent room identification panel, set out as indicated adjacent.
<div>ST.03</div> <div> </div>	Fire Extinguisher & FHR Family	<ul style="list-style-type: none">• To identify key fire equipment, facilities and to meet statutory regulations.	<ul style="list-style-type: none">• Text• Pictogram	<ul style="list-style-type: none">• Above or adjacent to a fire hose reel, extinguisher in a recess, cavity or an obscure location. Signs shall be positioned so as to be clearly visible to persons approaching the fire hose reel location.
<div>ST.04</div> <div></div>	Regulations Family	<ul style="list-style-type: none">• Identifies or provides statutory/ regulatory information	<ul style="list-style-type: none">• Text• Pictograms	<ul style="list-style-type: none">• Applied to solid walls or glazing as per statutory requirements

Sign Type Summary: Statutory

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ST.05</div> <div></div>	Security Warning Family	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information specific to security	<ul style="list-style-type: none">TextPictogram	<ul style="list-style-type: none">Applied to solid walls or glazing where appropriate
<div>ST.06</div> <div></div>	Hazard and Danger Notices Family	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information for areas that contain hazardous substances or machinery that have immediate physical or chemical effects, such as fire, explosion, corrosion and poisoning, affecting property, the environment or people.	<ul style="list-style-type: none">TextPictogramsRegulation colour	<ul style="list-style-type: none">Applied to solid walls or glazing as per statutory requirements
<div>ST.07</div> <div></div>	Safety Decal	<ul style="list-style-type: none">Provide contrast for glazing as per statutory requirements	<ul style="list-style-type: none">UNSW logo	<ul style="list-style-type: none">On glazed areas walls and doors, as per statutory requirements
<div>ST.08</div> <div></div>	Exit Signage	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information specific to campus exit	<ul style="list-style-type: none">TextPictograms	<ul style="list-style-type: none">Applied to solid walls, glazing or mounted on gates where appropriate

Sign Type Summary: Temporary & Display

4000

3600

3200

2800




2400

2000

1600

1200

900

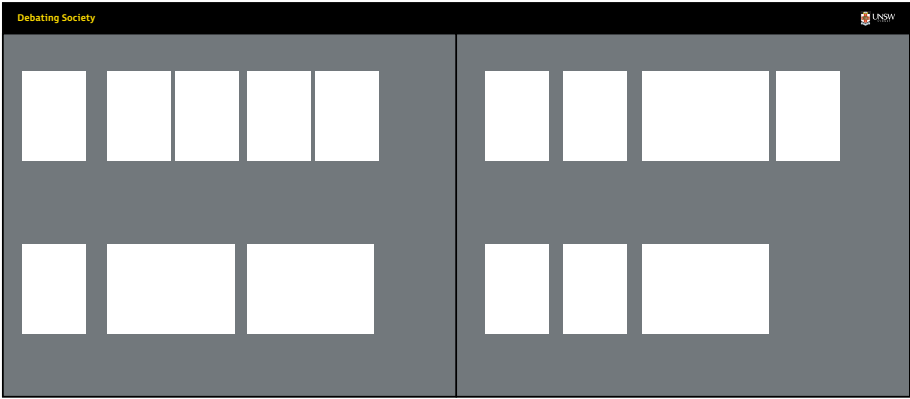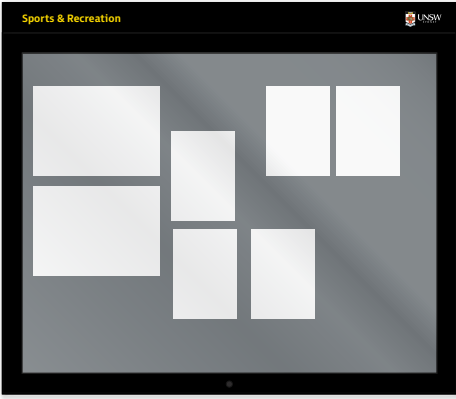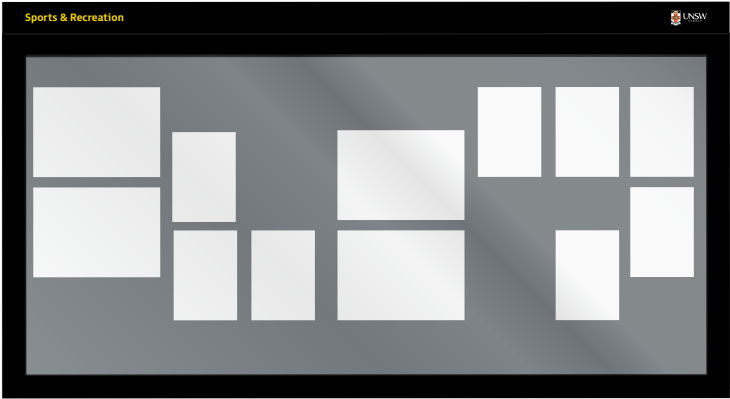

TD.01
Notice Boards:
External Large

TD.02
Notice Boards:
External Small

TD.03
Notice Boards:
Internal Large

Sign Type Summary: Temporary & Display

4000

3600

3200

2800


2400

2000

1600

1200


900

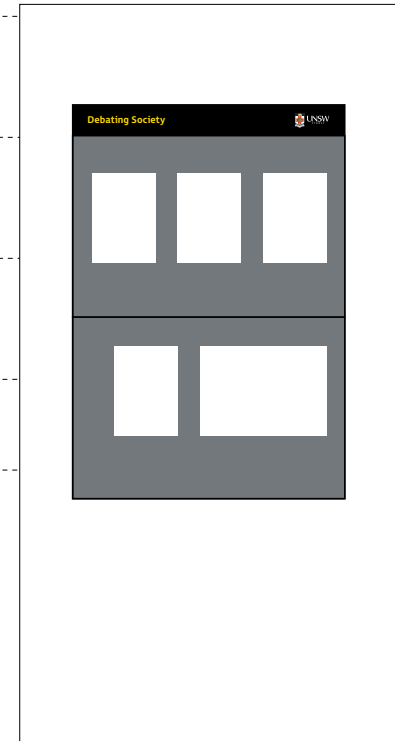


TD.04
Notice Boards:
Internal Small



TD.05
Notice Boards:
Digital



TD.06
A3 & A4 Display
Family



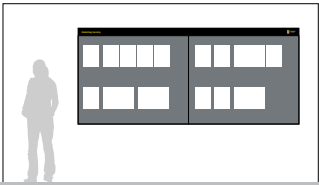




TD.07
Temporary Sign






TD.08
Construction
Hoarding

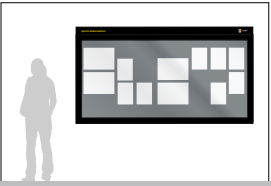
Sign Type Summary: Temporary & Display

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>TD.01</div> <div></div>	Notice Boards: External Large	<ul style="list-style-type: none">Provides system in an external environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.02</div> <div></div>	Notice Boards: External Small	<ul style="list-style-type: none">Provides system in an external environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.03</div> <div></div>	Notice Boards: Internal Large	<ul style="list-style-type: none">Provides system in an interior environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.04</div> <div></div>	Notice Boards: Internal Small	<ul style="list-style-type: none">Provides system in an interior environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.05</div> <div></div>	Notice Boards: Digital	<ul style="list-style-type: none">Provides digital system to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoDigital Screen	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed

Sign Type Summary: Temporary & Display

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>TD.06</div> <div></div>	A3 & A4 Display Family	<ul style="list-style-type: none">To display A3 and A4 print outs supplied by students and staff.	<ul style="list-style-type: none">A3 and A4 print outs supplied by students and staff	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as required
<div>TD.07</div> <div></div>	Temporary Sign	<ul style="list-style-type: none">To display A3 prints out supplied by students or staff for special events	<ul style="list-style-type: none">A3 and A4 print outs supplied by students and staffUNSW logo	<ul style="list-style-type: none">Freestanding outside buildings with events
<div>TD.08</div> <div></div>	Construction Hoarding	<ul style="list-style-type: none">To display temporary directional messaging and visual content	<ul style="list-style-type: none">ArrowsDirectional messagingBuilding renders or photographyGraphic patternUNSW logo	<ul style="list-style-type: none">Applied to hoarding walls at major decision points

Sign Type Summary: Environmental Graphics

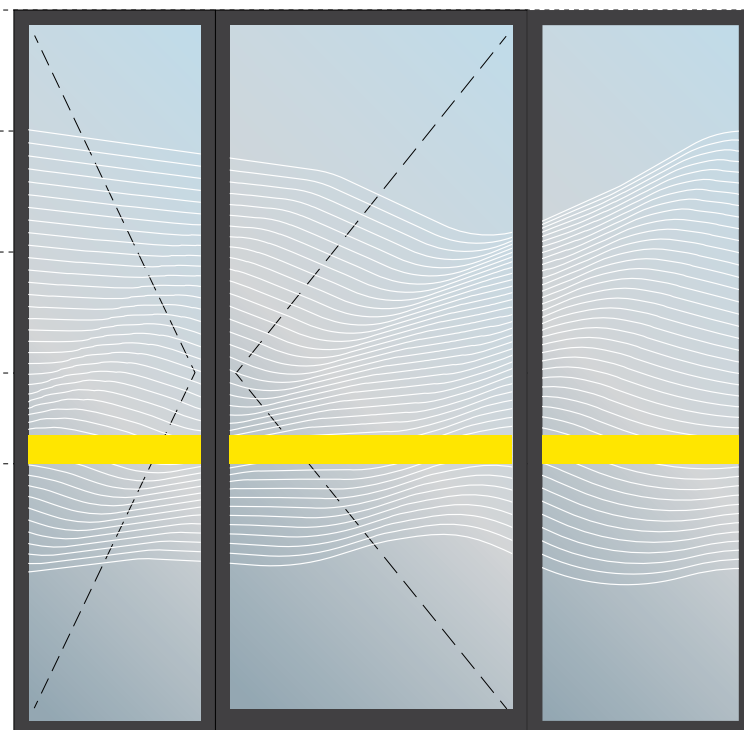

EG.01



Privacy Graphics:
Low Privacy



EG.03


Security Booth
Graphics

Sign Type Summary: Environmental Graphics

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>EG.01</div> <div></div>	Privacy Graphics	<ul style="list-style-type: none">Provides visual privacy from outside pedestrian traffic	<ul style="list-style-type: none">Graphic pattern	<ul style="list-style-type: none">Applied to internal face of glazing
<div>EG.03</div> <div></div>	Security Booth Graphics	<ul style="list-style-type: none">Provides high visual privacy from outside pedestrian traffic along with security booth operational information	<ul style="list-style-type: none">Graphic patternTextPictograms	<ul style="list-style-type: none">Applied to internal face of glazing at security booth.

Sign Type Summary: Specialty

The Chancellery – Room Identification (Panel)

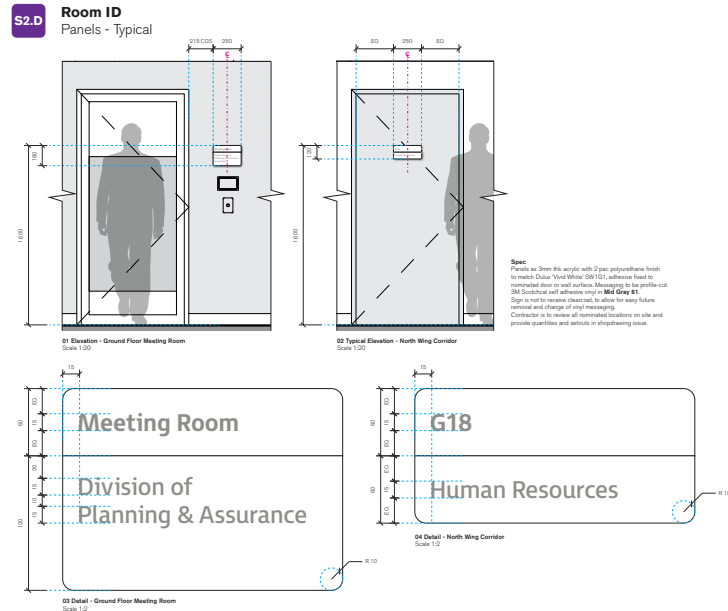


CH.02d

Note
Drawings are not to scale and are intended as design reference only.

PROPRIETARY AND CONFIDENTIAL INFORMATION © UNSW 2019 383

Celebrating Women – Biography Panel (Internal)

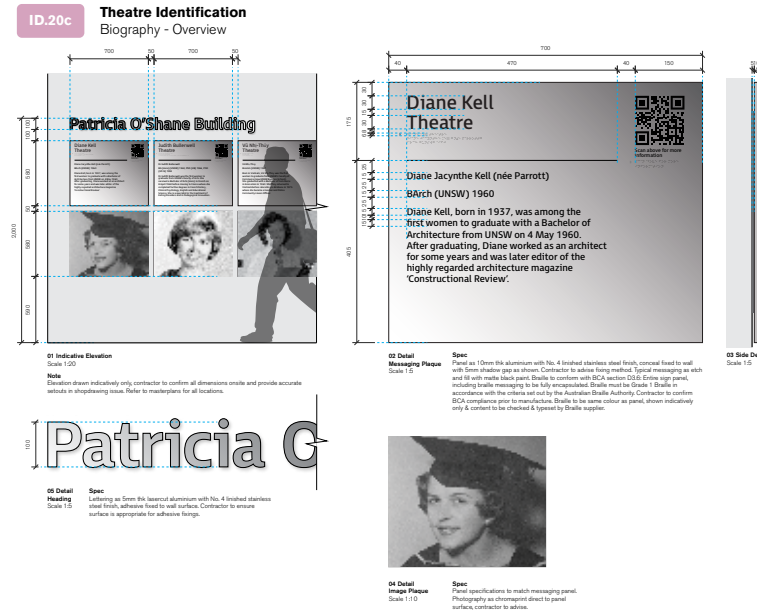


CW.02b

Note
Drawings are not to scale and are intended as design reference only.

PROPRIETARY AND CONFIDENTIAL INFORMATION © UNSW 2019 394

The Chancellery

Alumni Park Artwork – Plaque (Ground)

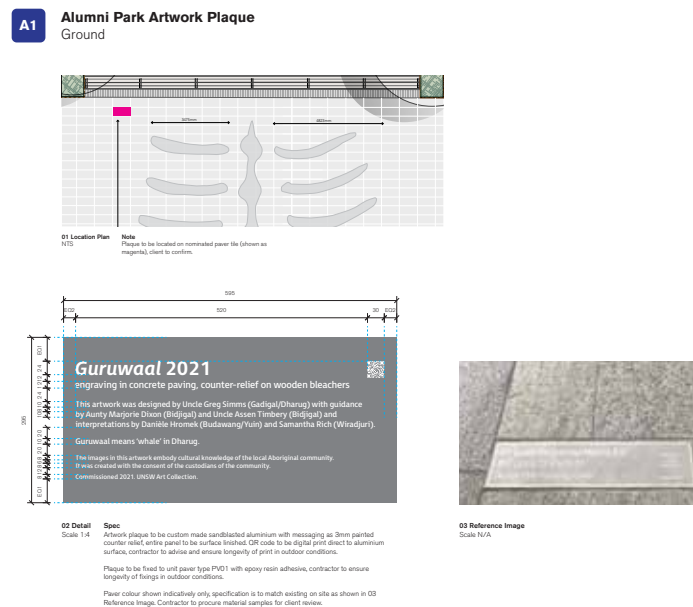

AP.01


Note
Drawings are not to scale and are intended as design reference only.

PROPRIETARY AND CONFIDENTIAL INFORMATION © UNSW 2019 402

Celebrating Women Project

Morven Brown Identity

Colour variation

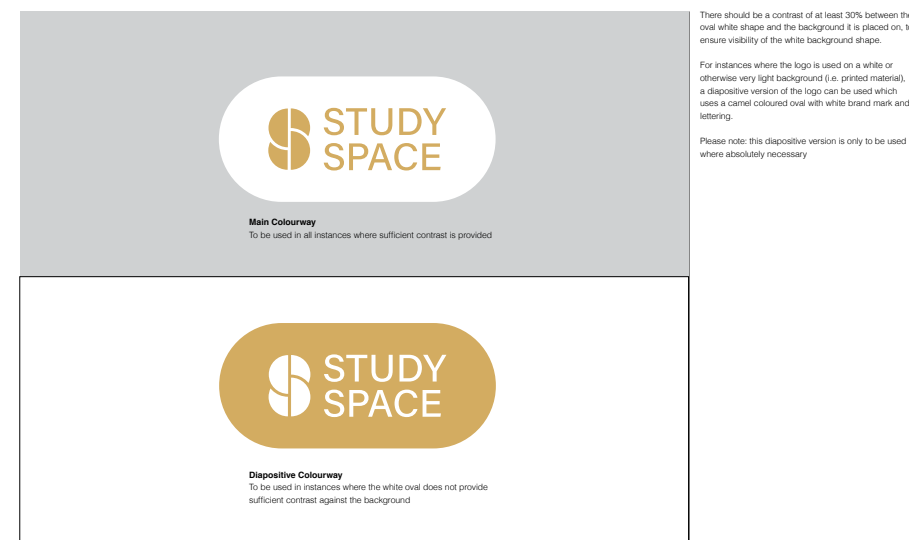

UNSW Signage and Wayfinding Guidelines

PROPRIETARY AND CONFIDENTIAL INFORMATION © UNSW 2019 403

Alumni Park Artwork

Morven Brown Identity

Section 10.0


Identification Series

This section documents all the identification signs of the system including specifications for both external and internal signs.

ID.01 External: Gate Primary Vehicular Totem
ID.02 External: Gate Secondary Vehicular Totem Family
ID.02 External: Gate Pedestrian Totem Family
ID.04 External: Building Facade Sign Family
ID.05 External: Street Sign
ID.06 External: Building Entrance Totem
ID.07 External: Building Entrance Wall Mounted
ID.08 External: Facility Entrance Wall Mounted
ID.09 External: Digital Directory Totem
ID.10 External: Sponsor Plate

ID.11 Internal: Tenant Directory (Small)
ID.12 Internal: Tenant Directory (Large)
ID.13 Internal: Secondary Tenant
ID.14 Internal: Reception ID
ID.15 Internal: Lift Directory (Digital)
ID.16 Internal: Lift Directory (Static)
ID.17 Internal: Stair Level ID
ID.18 Internal: Lift Level ID
ID.19 Internal: Escalator Level ID
ID.20 Room ID Family

ID.21 Amenity Blade Family
ID.22 External: Gate ID Wall Mounted
ID.23 External: Campus ID Facade Mounted
ID.24 External: Park ID

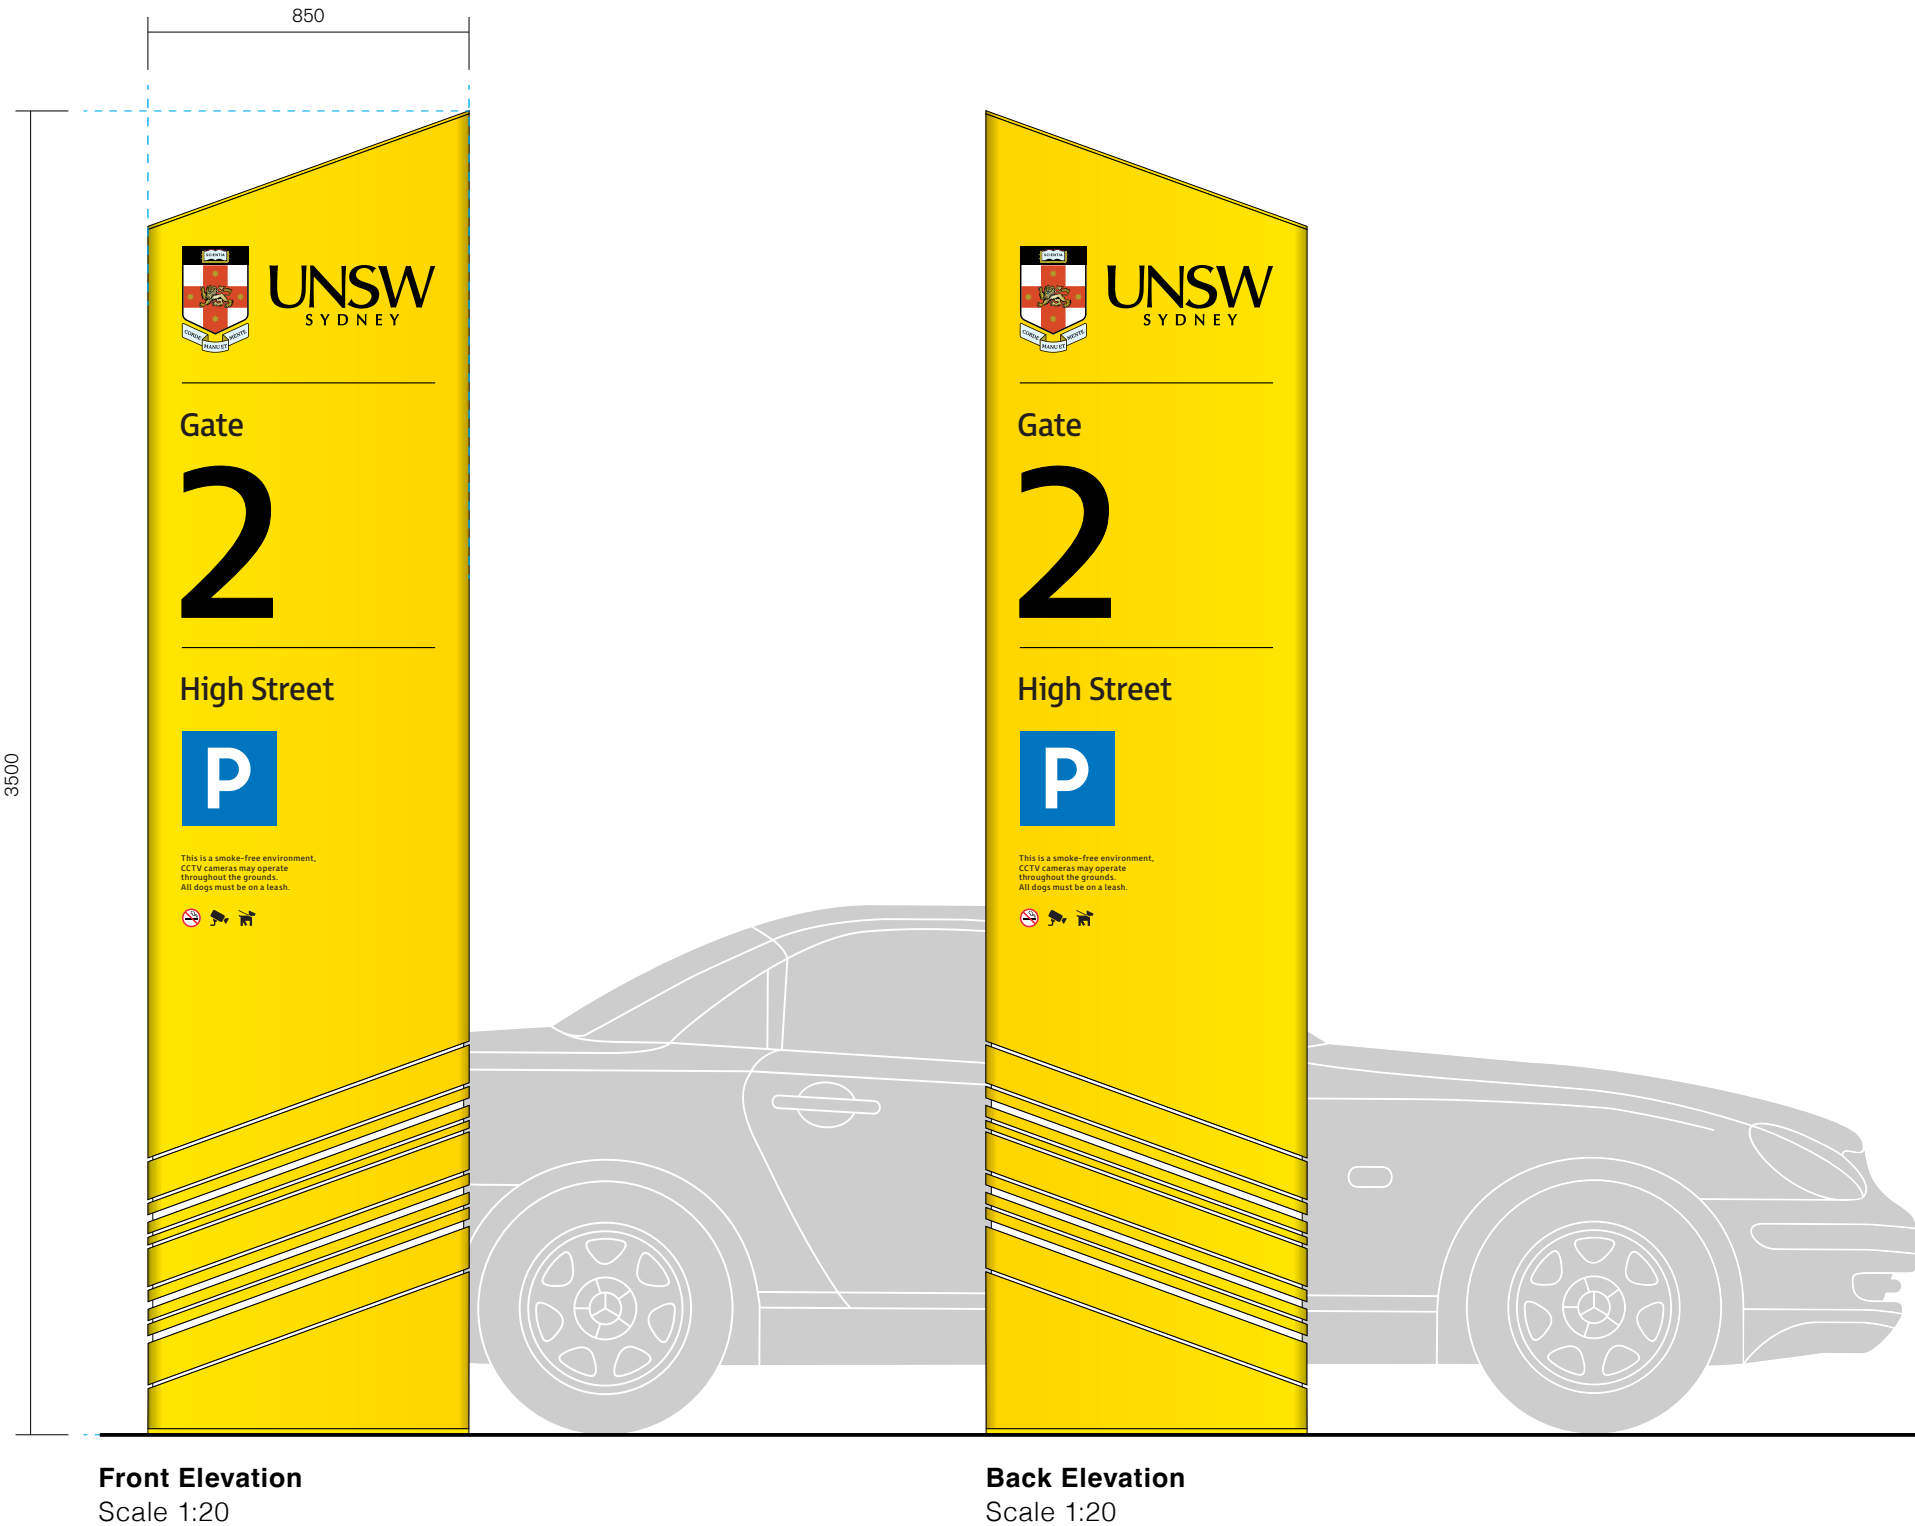


Sign Location

Purpose
Identifies major public vehicular entries into the UNSW site. Refer to Section 3, Terminology & Addressing, Category 2.

Location
Positioned at primary public gate entries at perimeter of site, integrated into landscaping or directly at curbs of vehicular intersection nodes. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for primary vehicular gate locations.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

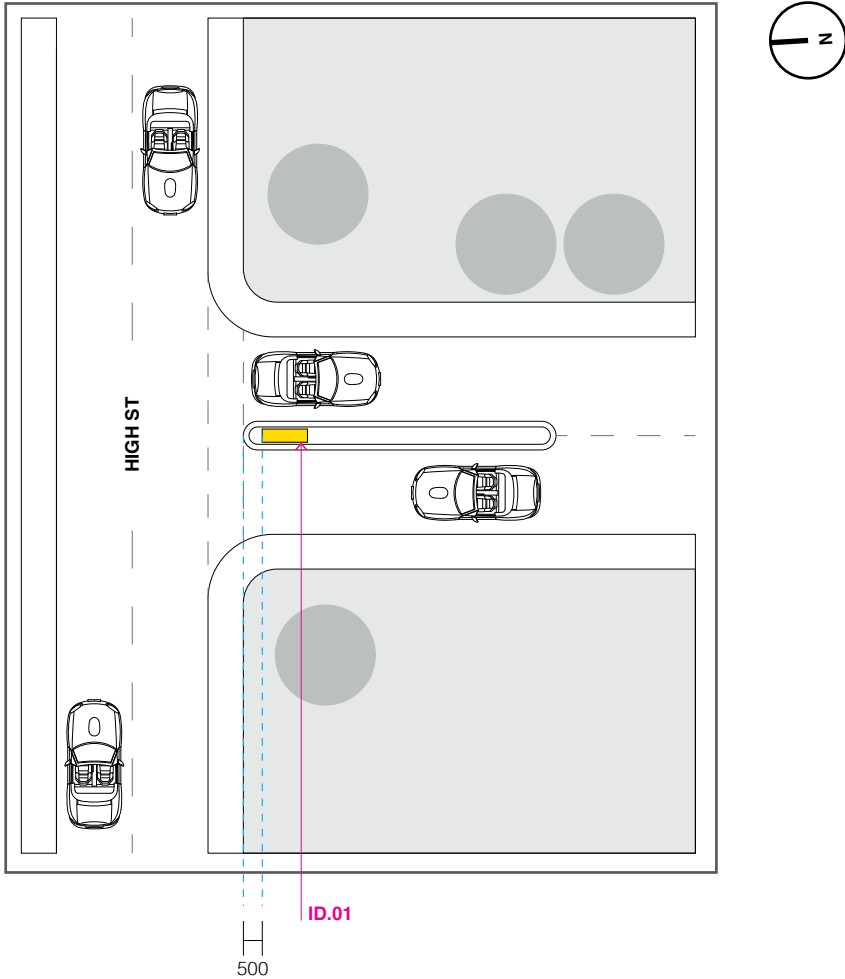

01 Public Vehicular Entry
Gate 2 High Street
Scale 1:200



Positioning

Positioning Guide
Primary vehicular totems are to be placed within traffic islands located at each primary entry gate. This provides equal visibility for vehicles approaching from both directions, as well as pedestrians in the vicinity.

Totems should be positioned at 500mm from edge of island with consideration to large vehicle turning distances.

Refer to plan 01 for insitu positioning at a primary vehicular entry.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

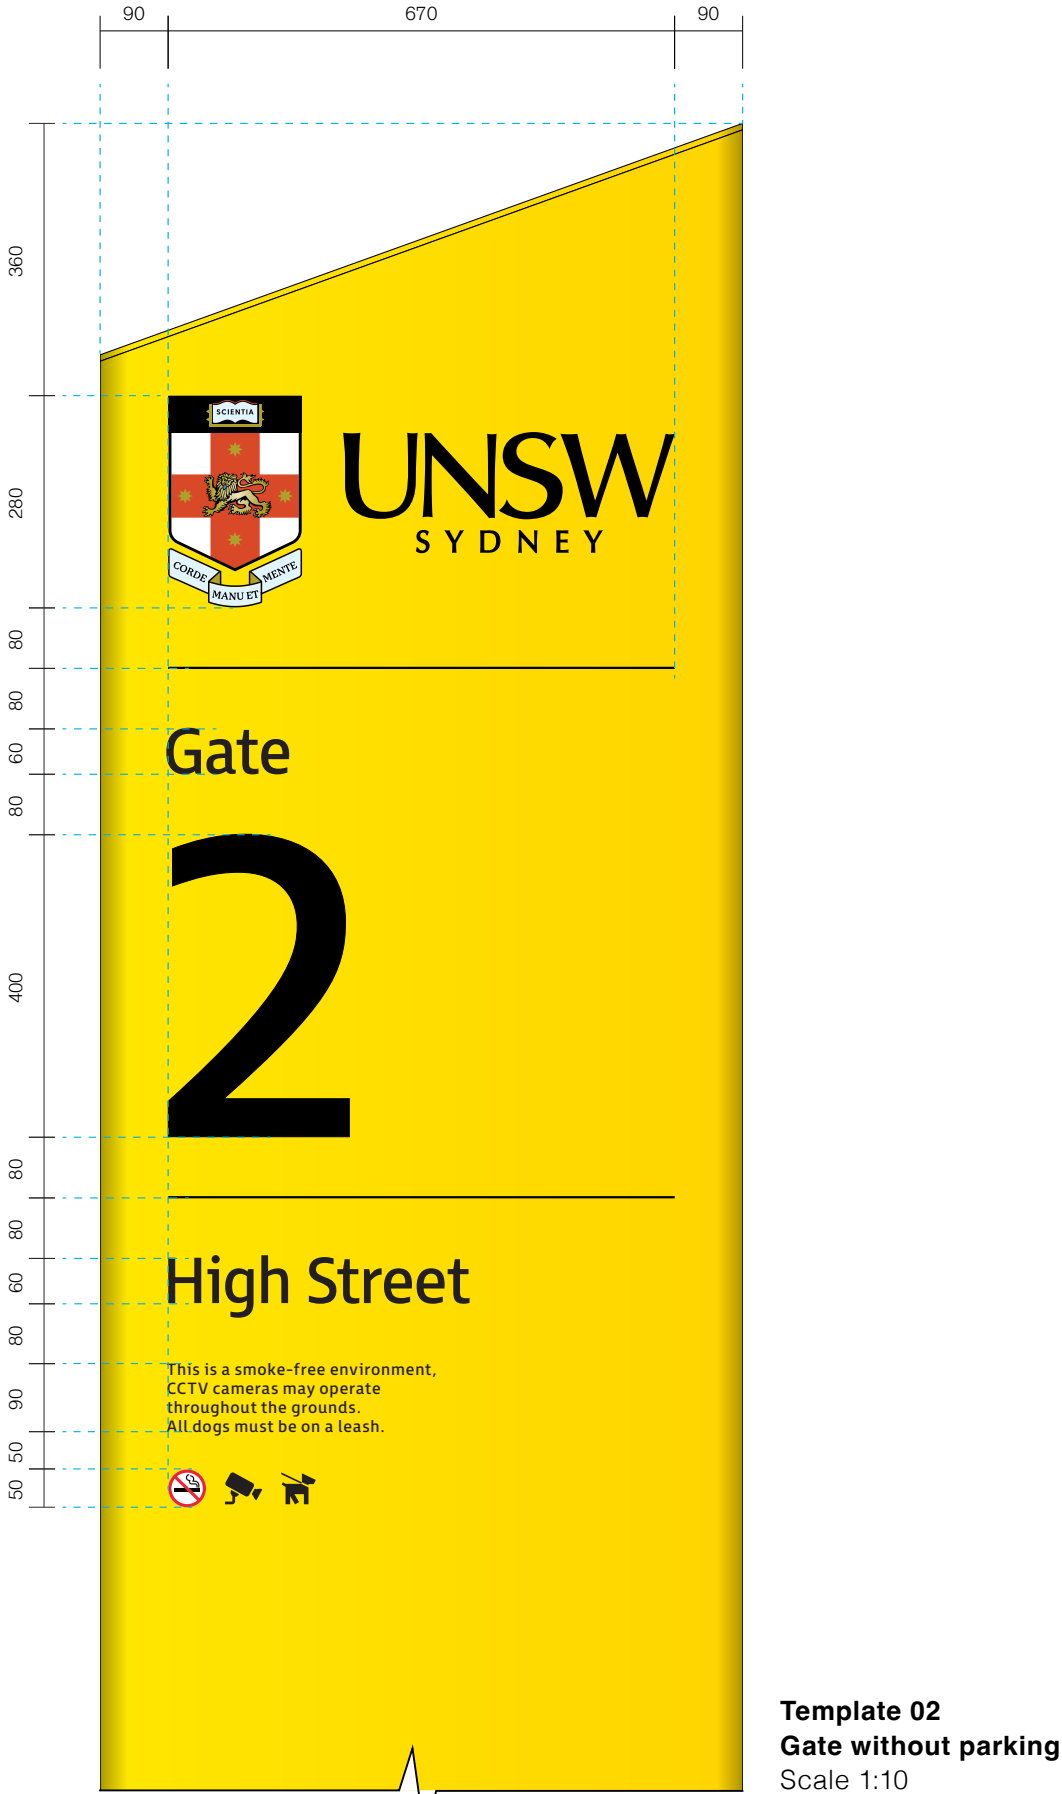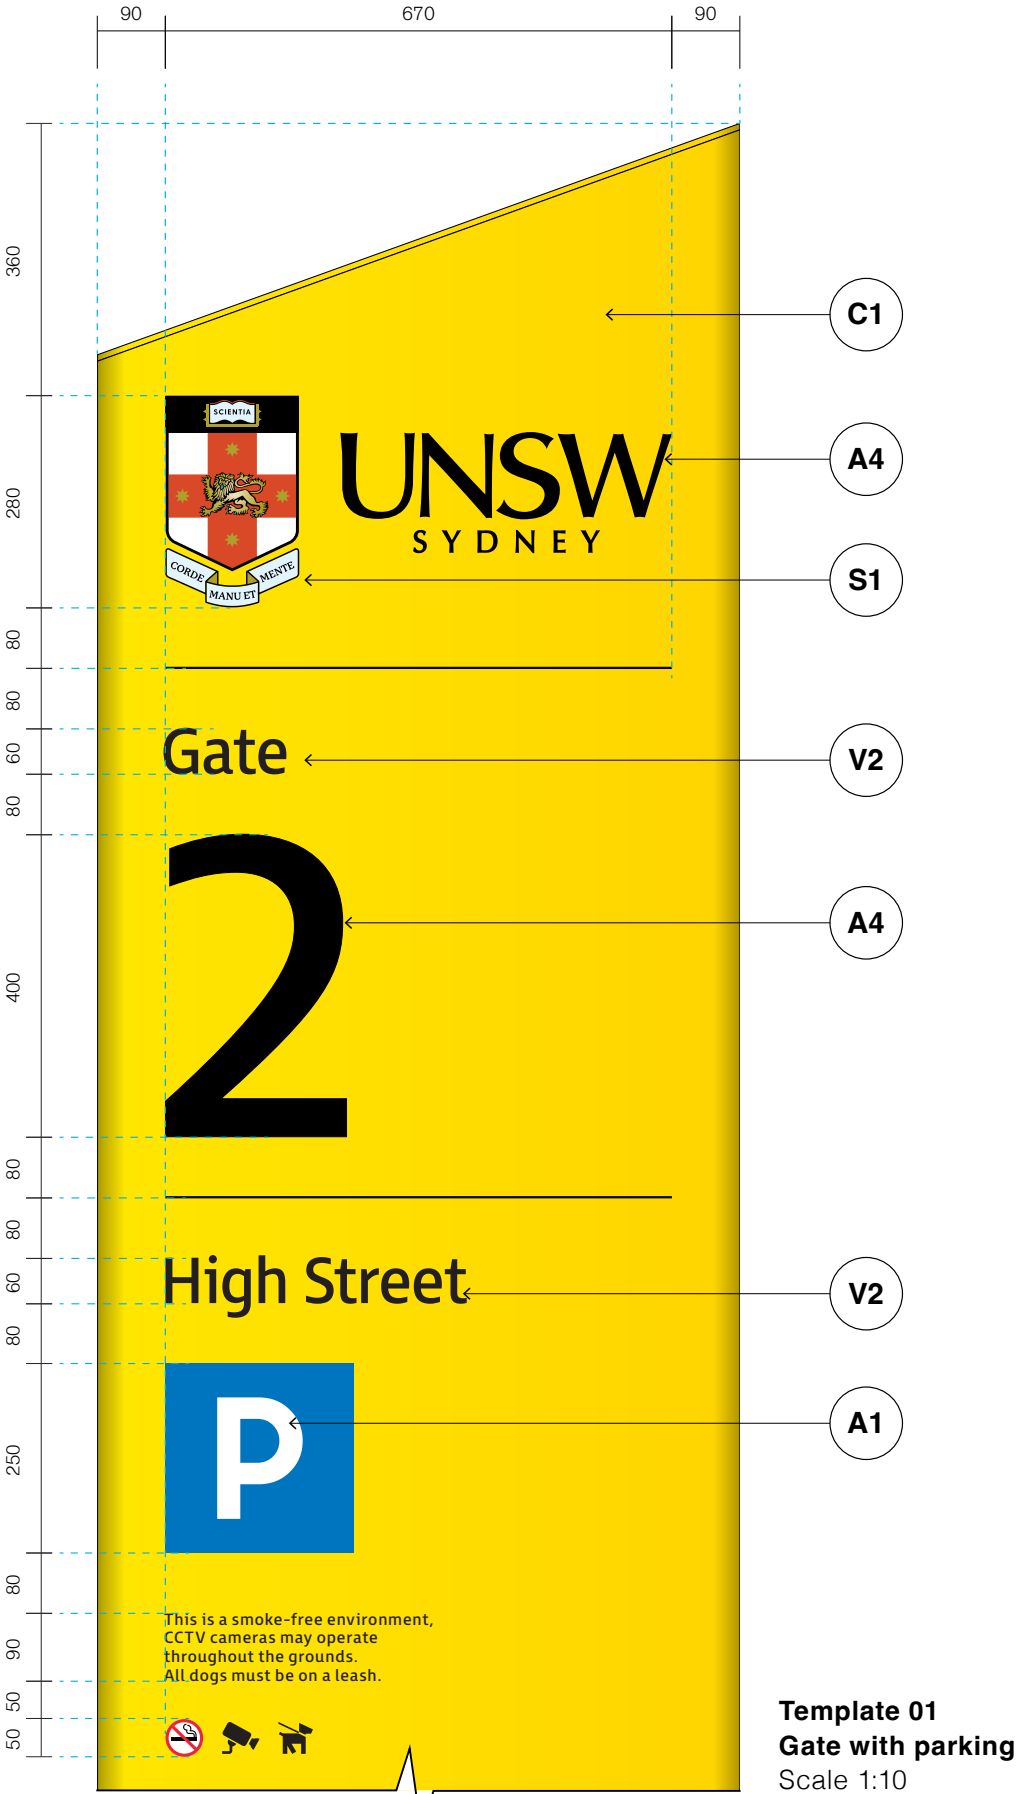

Graphic Layout

Messaging
Typeface: FS Millbank Regular
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 2mm

Regulatory Pictograms
Size: 50mm diameter

Back
Messaging to be double-sided.

Construction & Materials

Materiality Legend


- | | | |
|--|--|--|
| C1 <ul style="list-style-type: none">C1 finish on 3mm aluminium | A4 <ul style="list-style-type: none">A4 finish for illumination | S1 <ul style="list-style-type: none">S1 print to opal acrylic |
| V2 <ul style="list-style-type: none">V2 applied on top of aluminium | V3 <ul style="list-style-type: none">V3 print applied on top of aluminium | A1 <ul style="list-style-type: none">A1 finish for illumination |
| A4 <ul style="list-style-type: none">A4 finish for illumination | | |

Construction Details

- Refer to: Section 8, Construction Standards, Totem Signforms



01 Gate Primary Vehicular Totem (day time view)
Gate 11 Botany Street

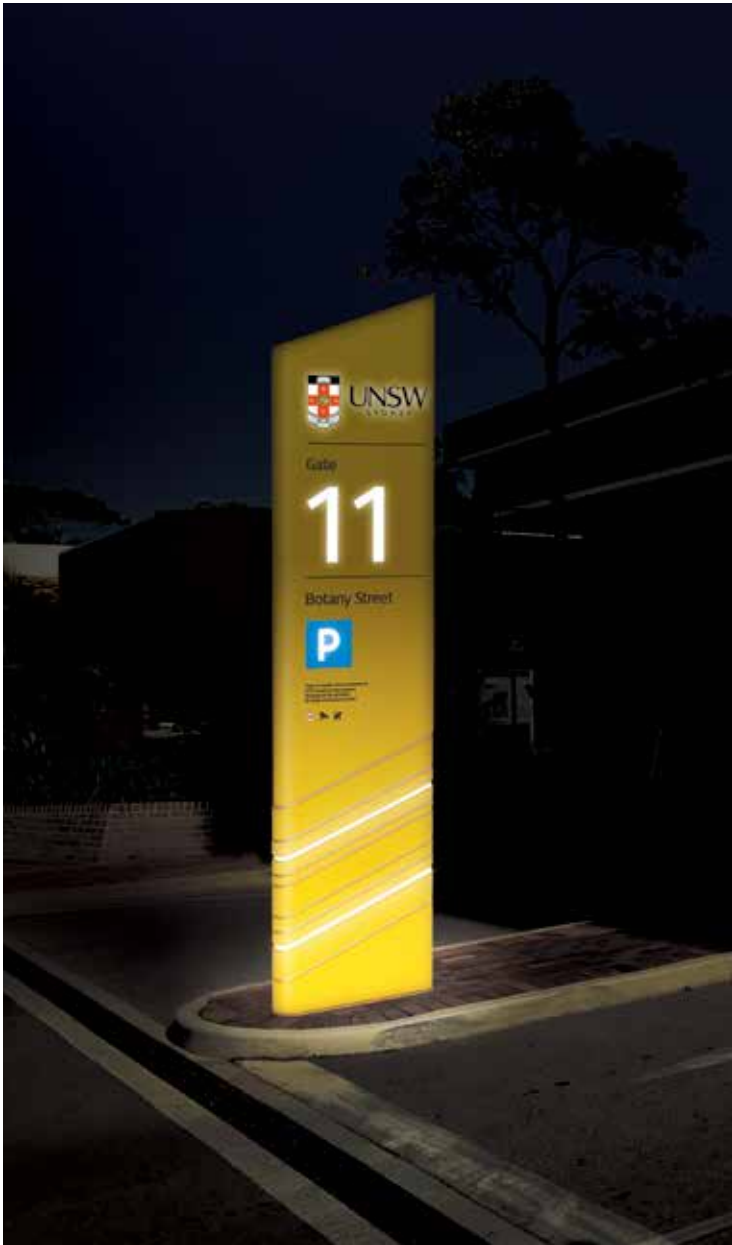


02 Gate Primary Vehicular Totem (night time view)
Gate 11 Botany Street



03 Existing Sign
Gate 11 Botany Street

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

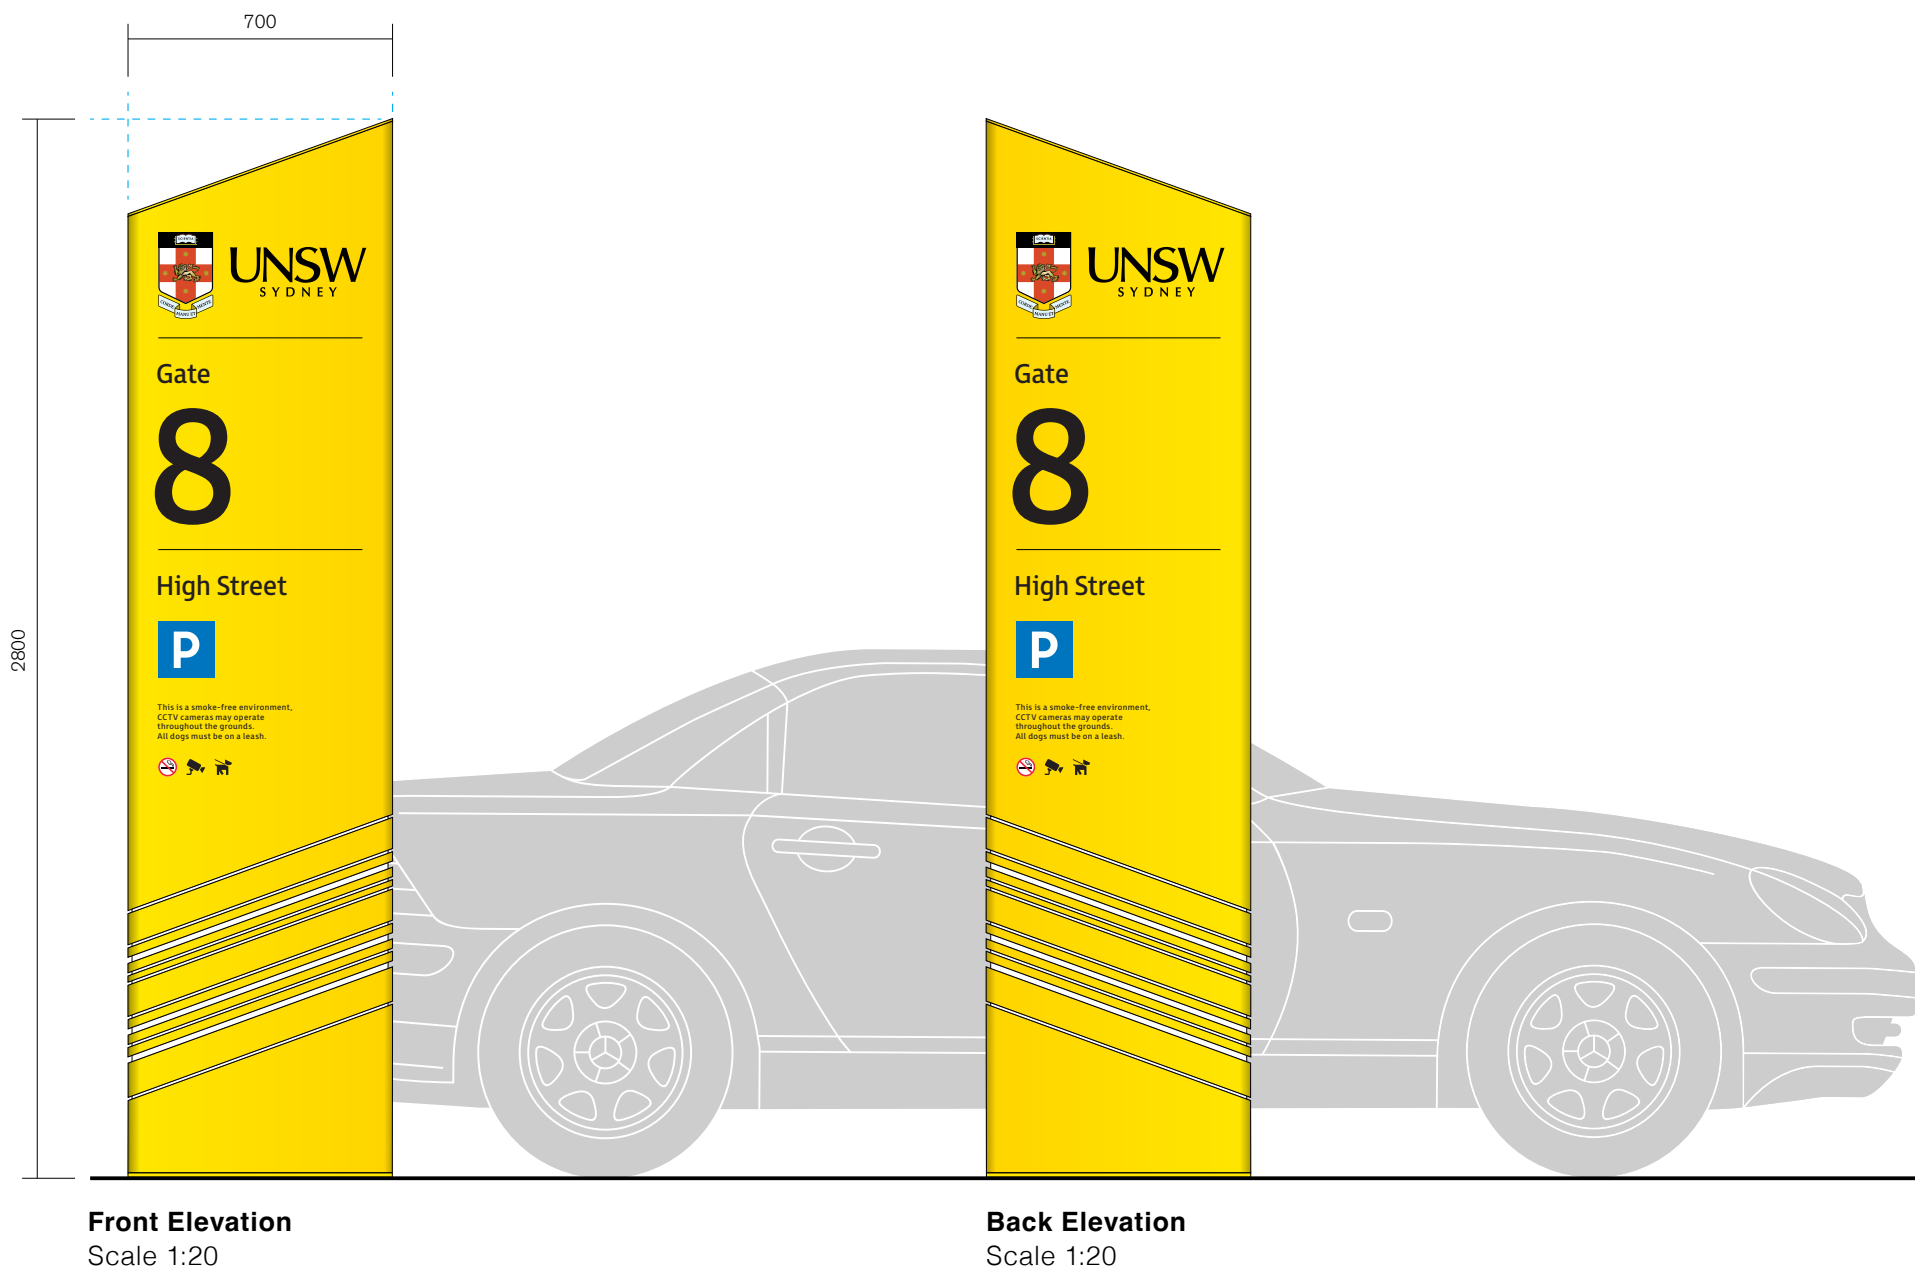


Sign Location


Purpose
Identifies secondary vehicular entries into the UNSW site. Refer to Section 3, Terminology & Addressing, Category 2.

Location
Positioned at secondary gate entries at perimeter of site, integrated into landscaping or directly at curbs of vehicular intersection nodes. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for secondary vehicular gate locations.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

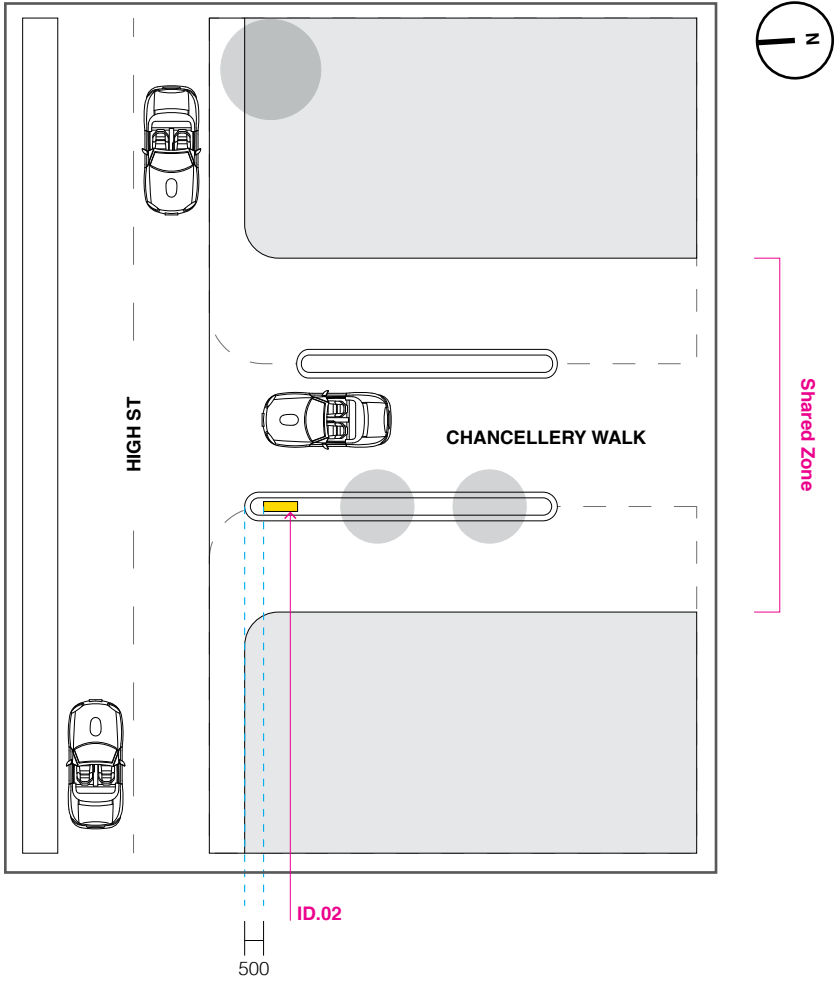

01 Secondary Vehicular Entry -
Gate 9 High Street
Scale 1:200

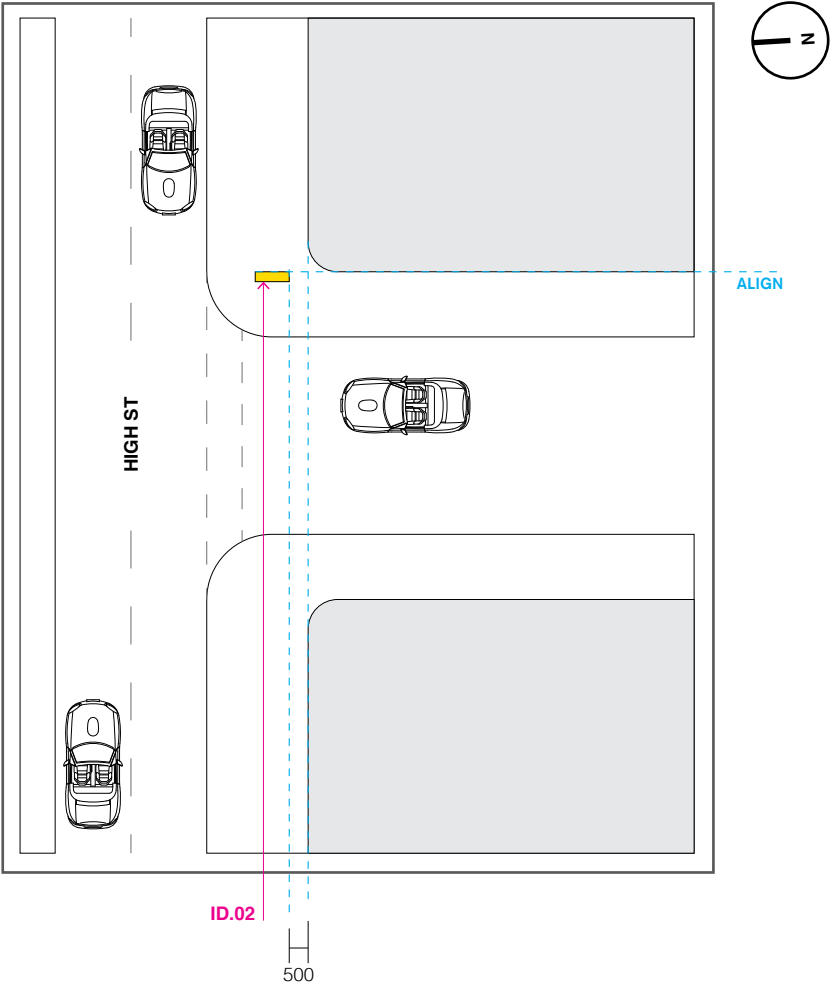

02 Secondary Vehicular Entry -
Gate 5 High Street
Scale 1:200

Positioning

Positioning Guide

Secondary vehicular totems are to be placed within traffic islands located at each secondary entry gate. This provides equal visibility for vehicles approaching from both directions, as well as pedestrians in the vicinity.


Totems should be positioned at 500mm from edge of island with consideration to large vehicle turning distances.

Refer to plan 01 for insitu positioning on a traffic island at a secondary vehicular entry.


Refer to plan 02 for insitu positioning on a curb at a secondary vehicular entry.

Note

- For wayfinding placement principles, refer to: Section 4, User Journeys

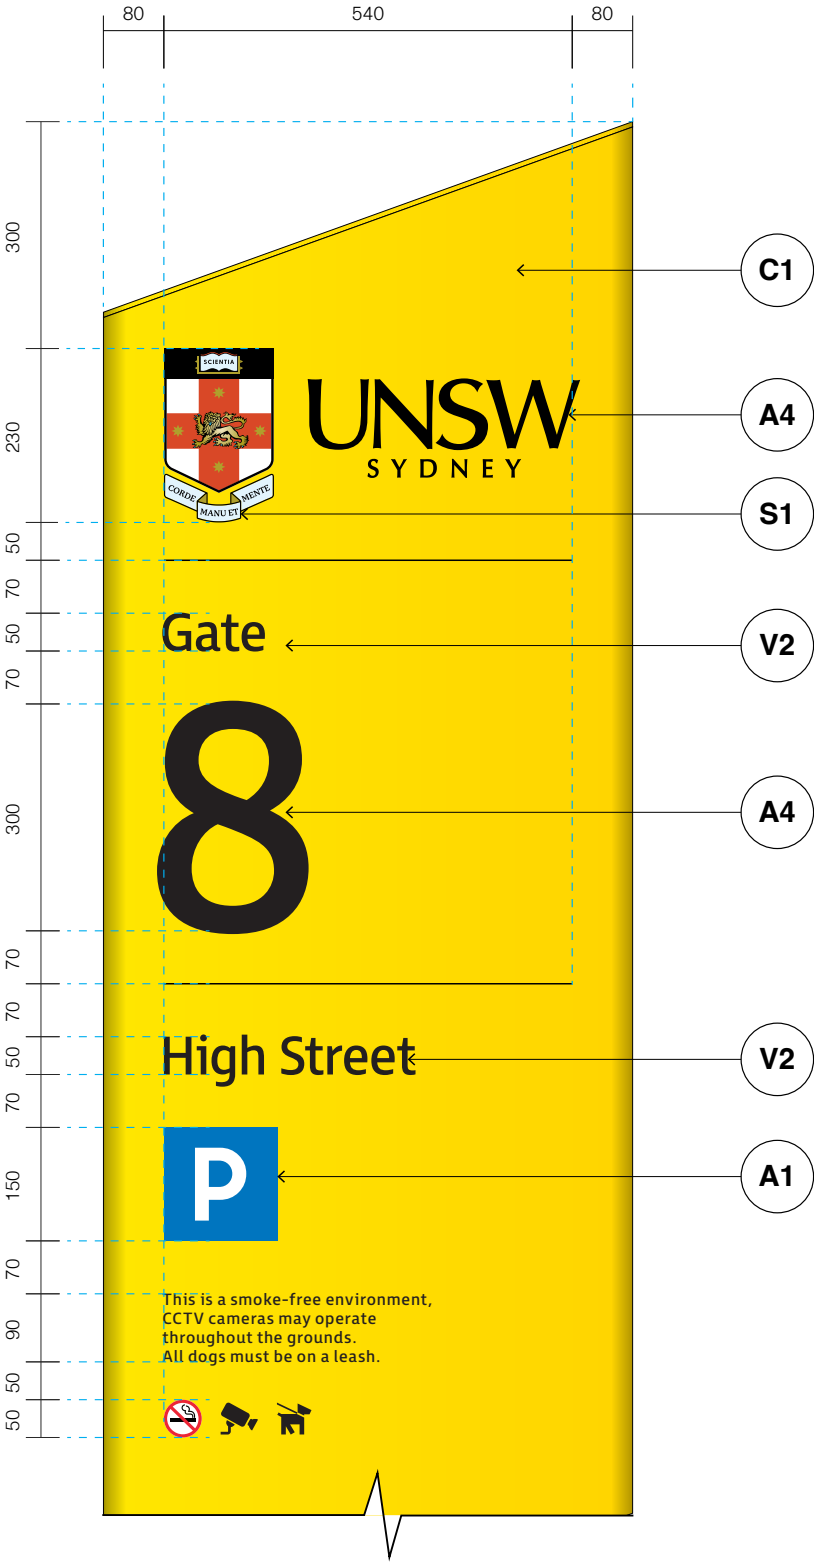

Detail
Typical Messaging
Scale 1:10

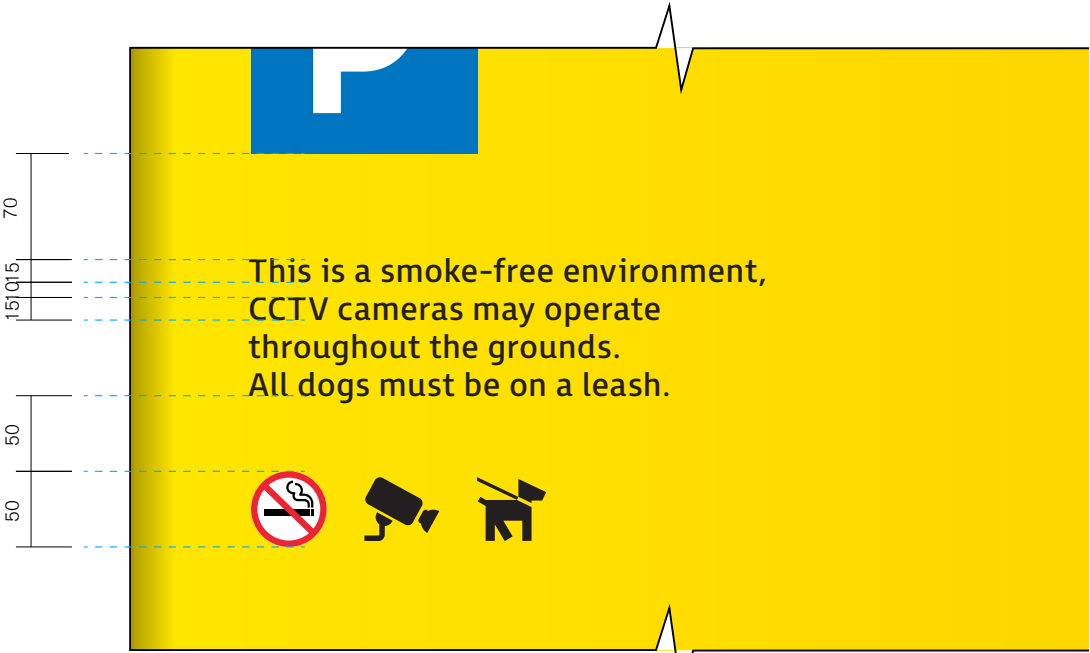

Detail
Regulatory messaging
Scale 1:5

Graphic Layout

Messaging
Typeface: FS Millbank Regular
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 2mm

Regulatory Pictograms
Size: 50mm diameter

Back
Messaging to be double-sided.

Construction & Materials

Materiality Legend

- | | | |
|--|--|--|
| C1 <ul style="list-style-type: none">C1 finish on 3mm aluminium | A4 <ul style="list-style-type: none">A4 finish for illumination | S1 <ul style="list-style-type: none">S1 print to opal acrylic |
| V2 <ul style="list-style-type: none">V2 applied on top of aluminium | V3 <ul style="list-style-type: none">V3 print applied on top of aluminium | A1 <ul style="list-style-type: none">A1 finish for illumination |
| A4 <ul style="list-style-type: none">A4 finish for illumination | | |

Construction Details

- Refer to: Section 8, Construction Standards, Totem Signforms



01 Gate Secondary Vehicular Totem (day time view)
Gate 5 High Street




02 Gate Secondary Vehicular Totem (night time view)
Gate 5 High Street



03 Existing Sign
Gate 5 High Street

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

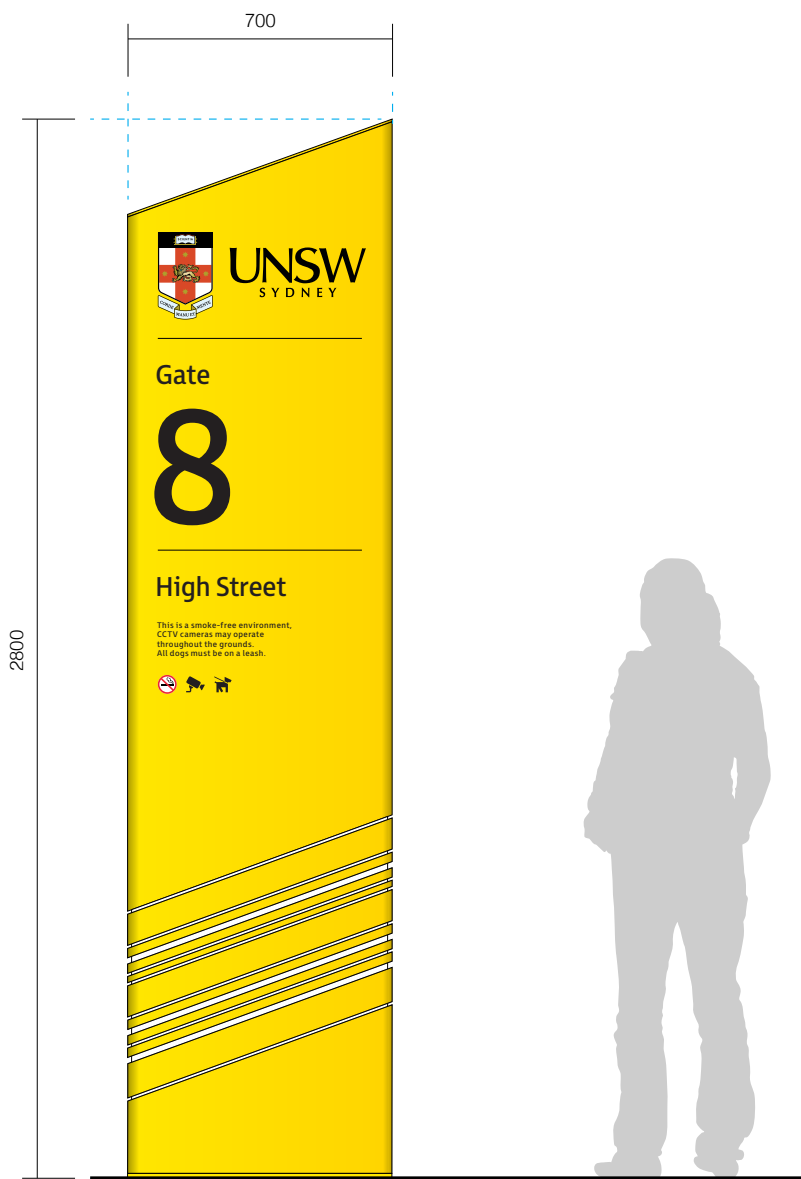

Front Elevation
Scale 1:20



Back Elevation
Scale 1:20

Sign Location

Purpose


Identifies pedestrian entries into the UNSW site. Refer to Section 3, Terminology & Addressing, Category 2

Location

Positioned at secondary pedestrian entries at perimeter of site, integrated into or aligned with landscaping at intersection nodes of internal and external pathways. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for pedestrian gate locations.

Note

- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

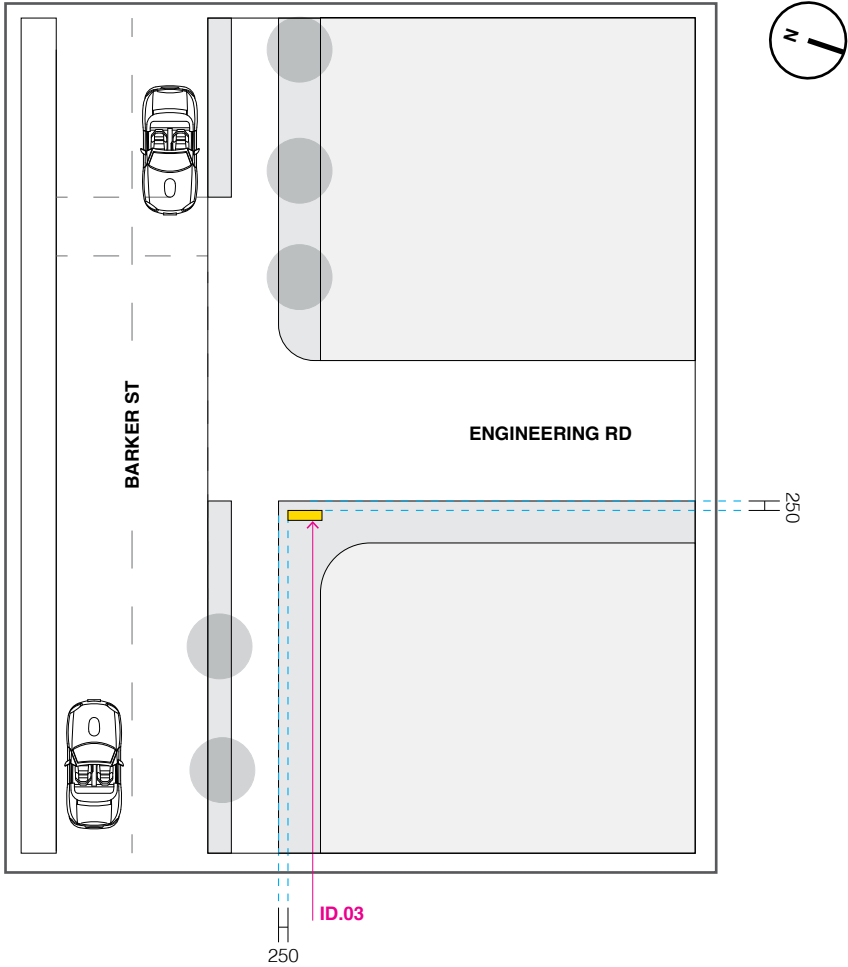

01 Pedestrian Entry
Gate 13 Barker Street
Scale 1:200

Positioning

Positioning Guide


Pedestrian entry totems are to be placed adjacent to or within landscape features at pedestrian entry gates. This provides equal visibility for pedestrians approaching from both directions, as well as vehicles in the vicinity.

Totems are to be placed 250mm from or aligned to landscape edges. In the case of those adjacent to landscape elements, totems should not impede foot traffic.

Refer to plan 01 for insitu positioning at a pedestrian entry.

Note

- For wayfinding placement principles, refer to: Section 4, User Journeys

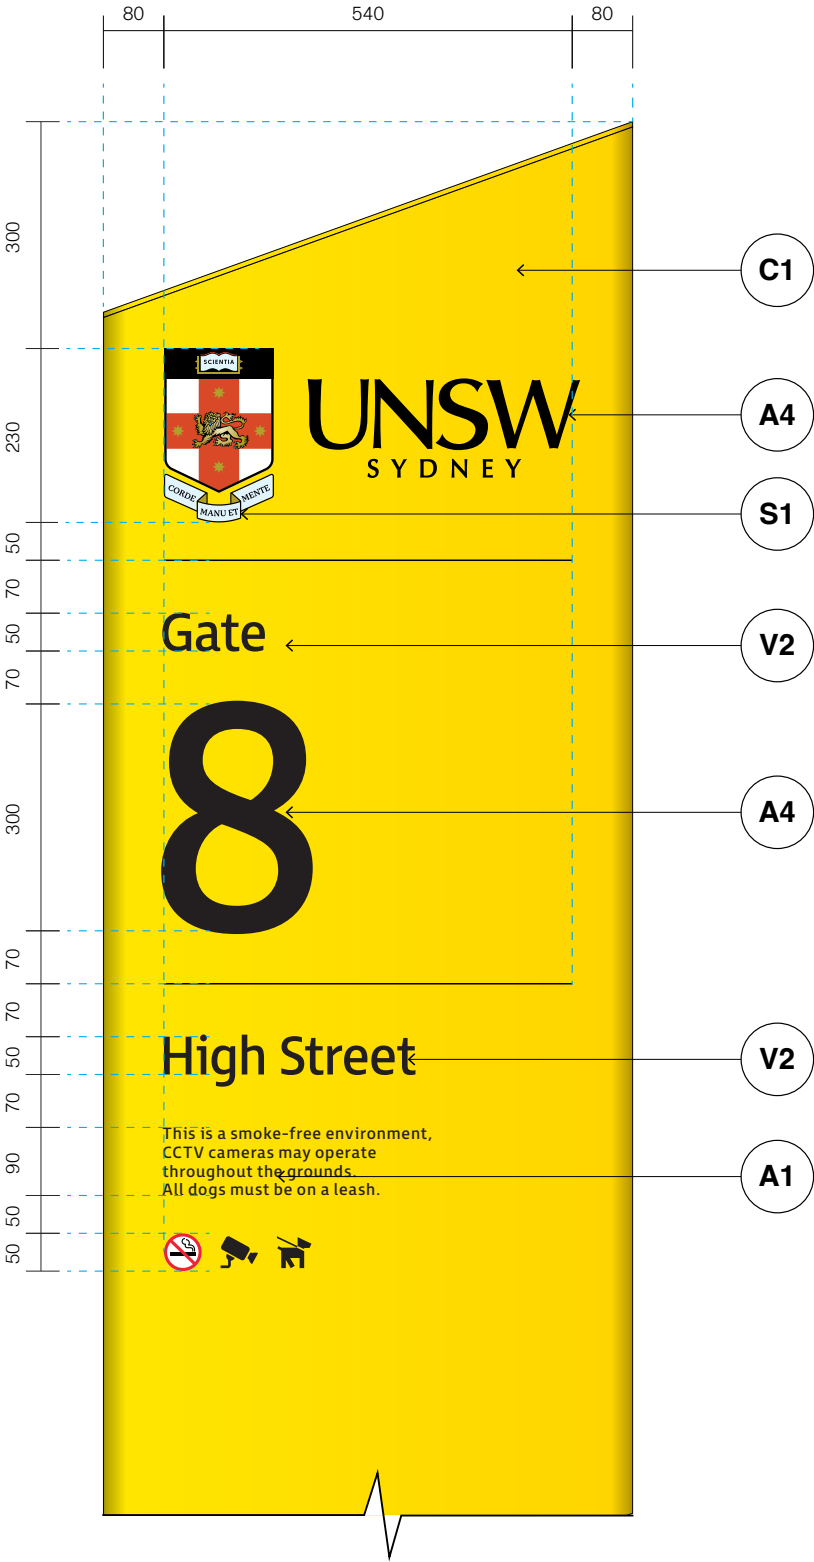

Template 01
Typical pedestrian gate
Scale 1:10



Typical Detail
Regulatory messaging
Scale 1:5

Graphic Layout

Messaging
Typeface: FS Millbank Regular
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Regulatory Pictograms
Size: 50mm diameter


Back
Messaging to be double-sided.

Construction & Materials


Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | A4
• A4 finish for illumination | S1
• S1 print to opal acrylic |
| V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium | A4
• A4 finish for illumination |

Construction Details
• Refer to: Section 8, Construction Standards, Totem Signforms

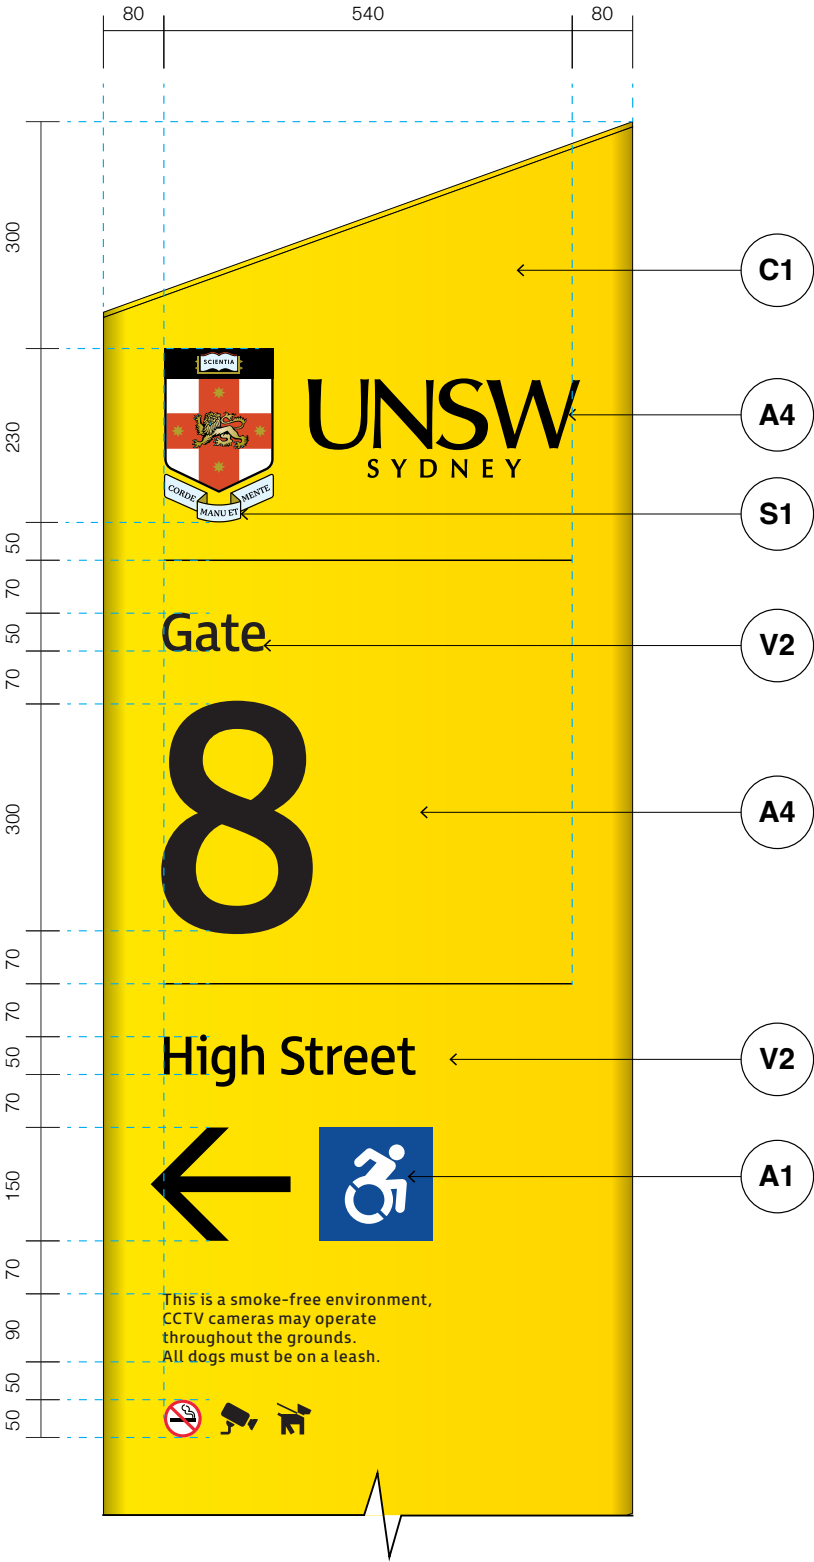

Template 02
Accessible pathway
Scale 1:10

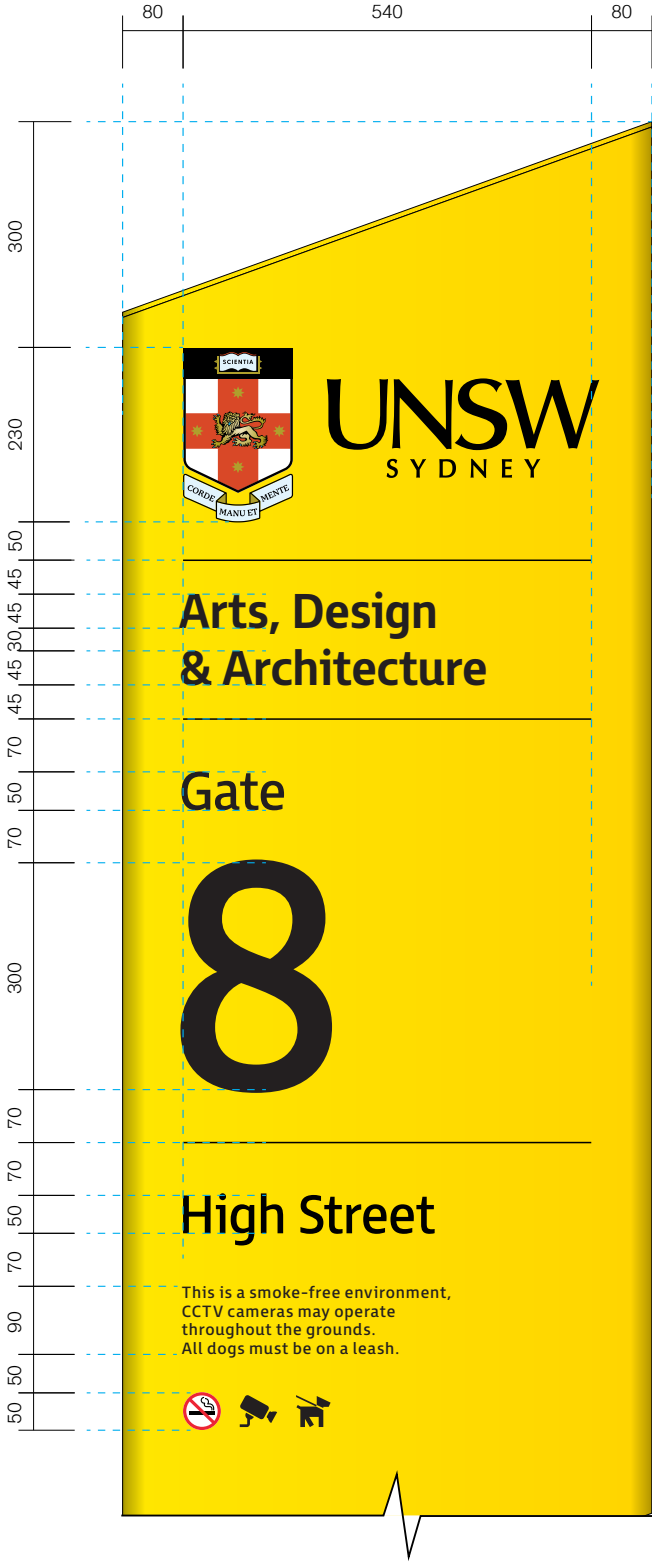

Template 03
Secondary campus
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Small Gate Totem layout. Refer to Section 7, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
Size: 50mm diameter

Back
Double sided messaging with exact same content.

Construction & Materials

Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | A4
• A4 finish for illumination | S1
• S1 print on 10mm aluminium |
| V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium | A4
• A4 finish for illumination |

Construction Details
• Refer to: Section 8, Construction Standards, Totem Signforms



01 Gate Pedestrian Totem (day time view)
Gate 13 Barker Street



02 Gate Pedestrian Totem (night time view)
Gate 13 Barker Street




03 Existing Sign
Gate 13 Barker Street


In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy..

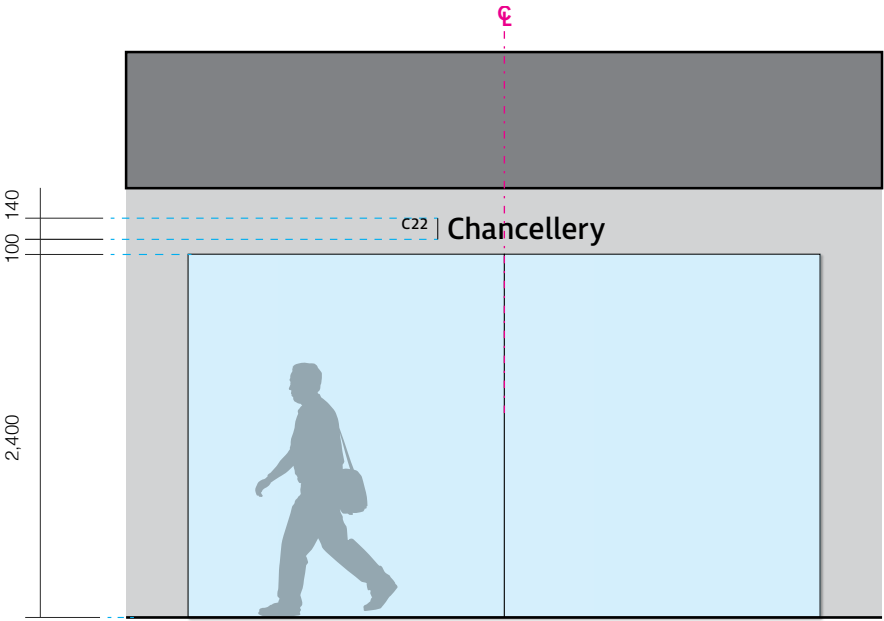


Location 01 - Horizontal small
Scale 1:50

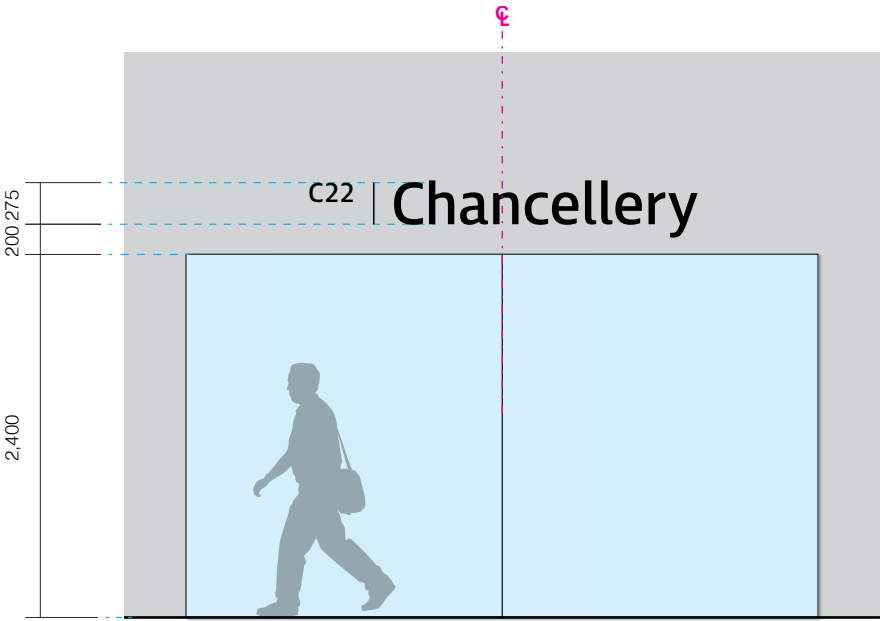

Location 02 - Horizontal large
Scale 1:50

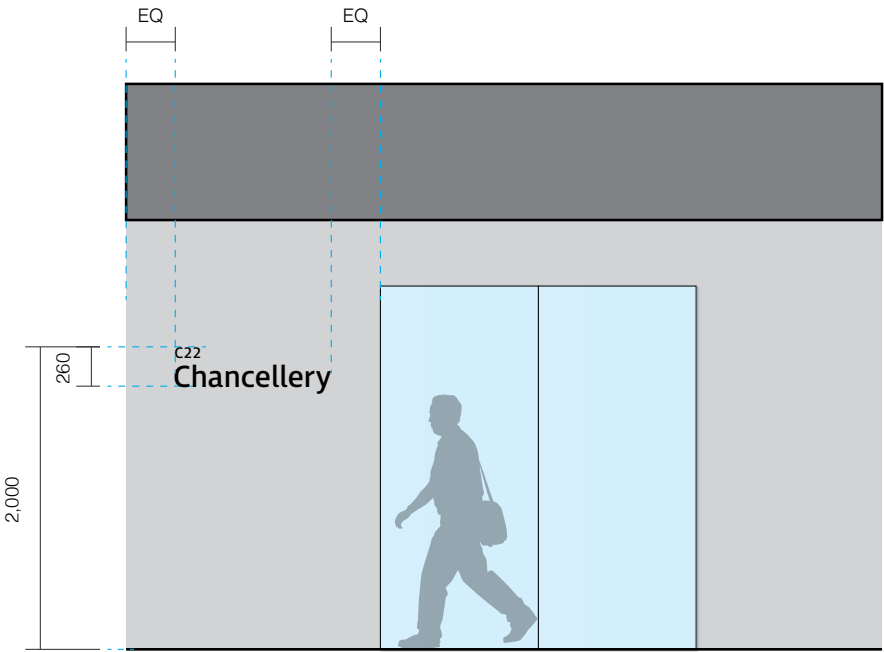

Location 03 - Vertical small
Scale 1:50

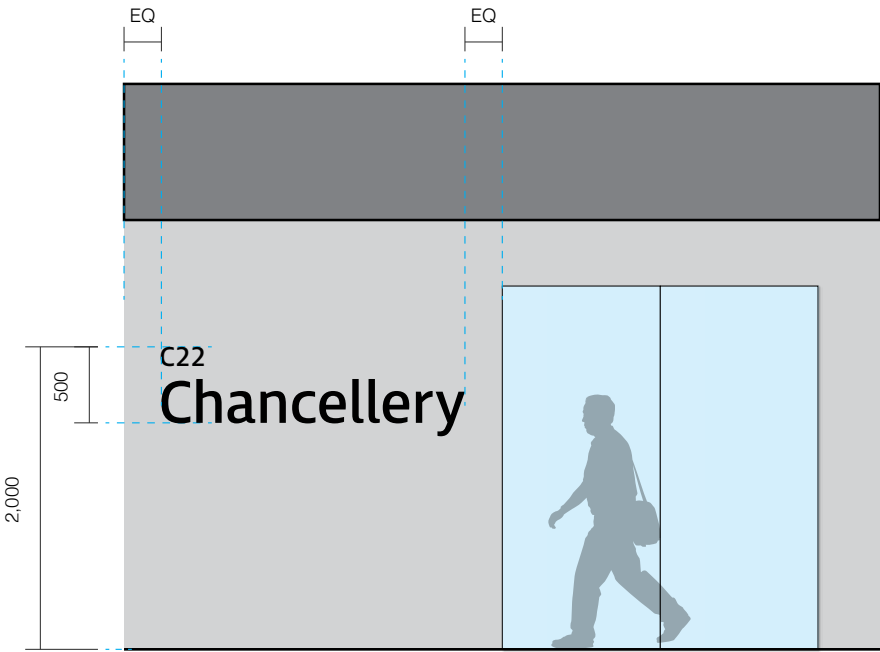

Location 04 - Vertical large
Scale 1:50

Sign Location

Purpose
Identifies major buildings entries from street level. Refer to Section 3, Terminology & Addressing, Category 5 & 6.

Location
Positioned above main entry of major building or at designated facade signage locations viewable from major pedestrian circulation routes.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance



Template 01 - Horizontal small
Scale 1:10



Template 02 - Horizontal large
Scale 1:10



Template 03 - Vertical small
Scale 1:10



Template 04 - Vertical large
Scale 1:10

Graphic Layout

Building Name
Building name always paired with its corresponding map code. Refer to Section 3, Terminology & Addressing, Category 5 and 6.

Alignment
Left Aligned

Tracking
10+, Optical

Construction & Materials

Materiality Legend



- C2 finish on 10mm aluminium

Note
• Materiality finish to be matte white or matte black depending on signform location, to ensure contrast against substrate.

Construction Details
• Refer to: Section 20, Shop Drawings



01 Building Facade Sign
Main Library




02 Existing Sign
Main Library

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Materiality finish to be matte white or matte black depending on signform location, to ensure contrast against substrate.

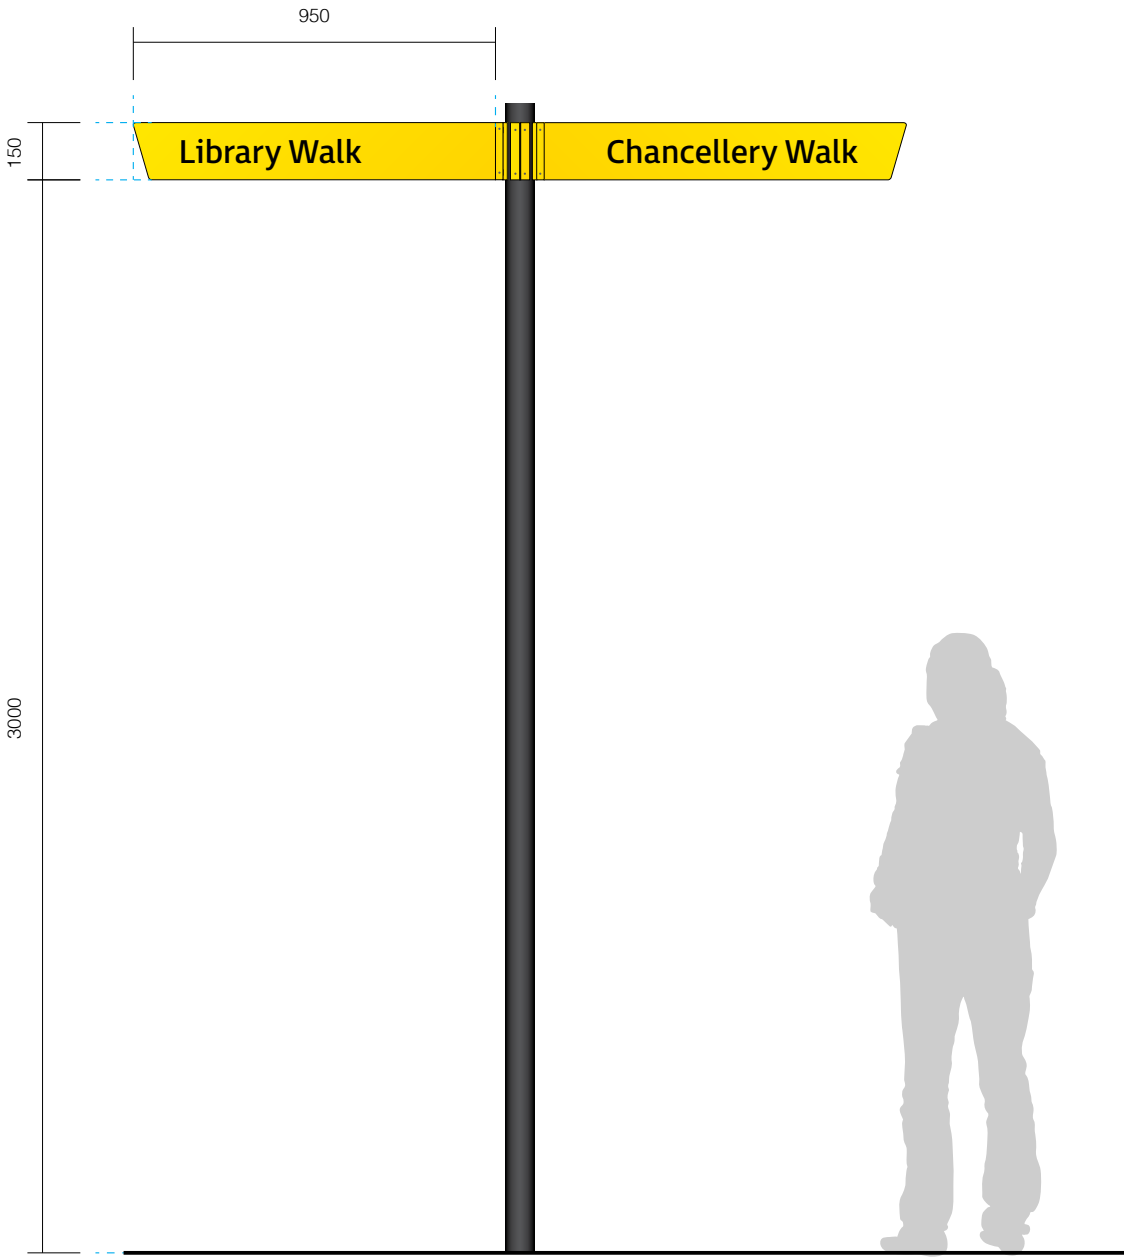


Elevation
Scale 1:20

Sign Location


Purpose
Confirms major named pedestrian pathways and directs pedestrians to external areas e.g. quadrangles or lawns. Refer to Section 3, Terminology & Addressing, Categories 3 and 5

Location
Positioned at intersections between major UNSW streets and walkways.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

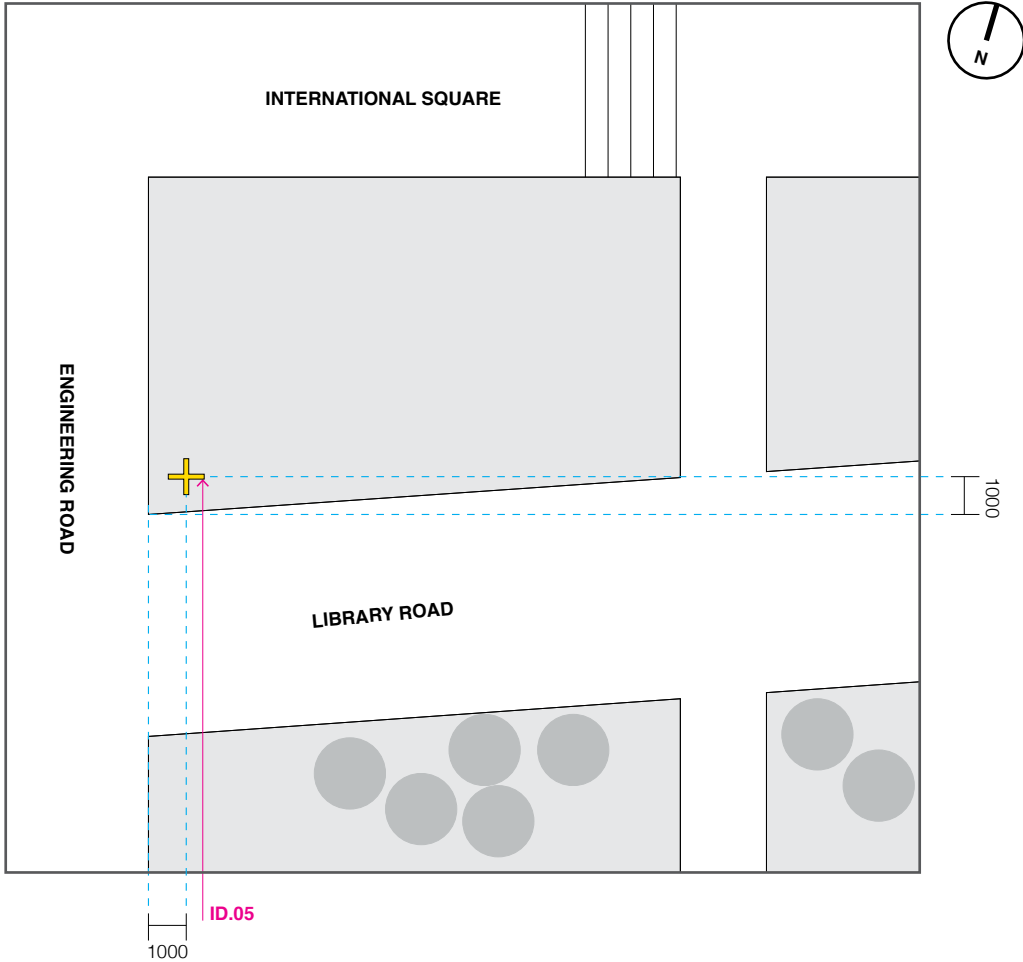

01 Intersection of streets
ANZAC Parade Entry
Scale 1:200

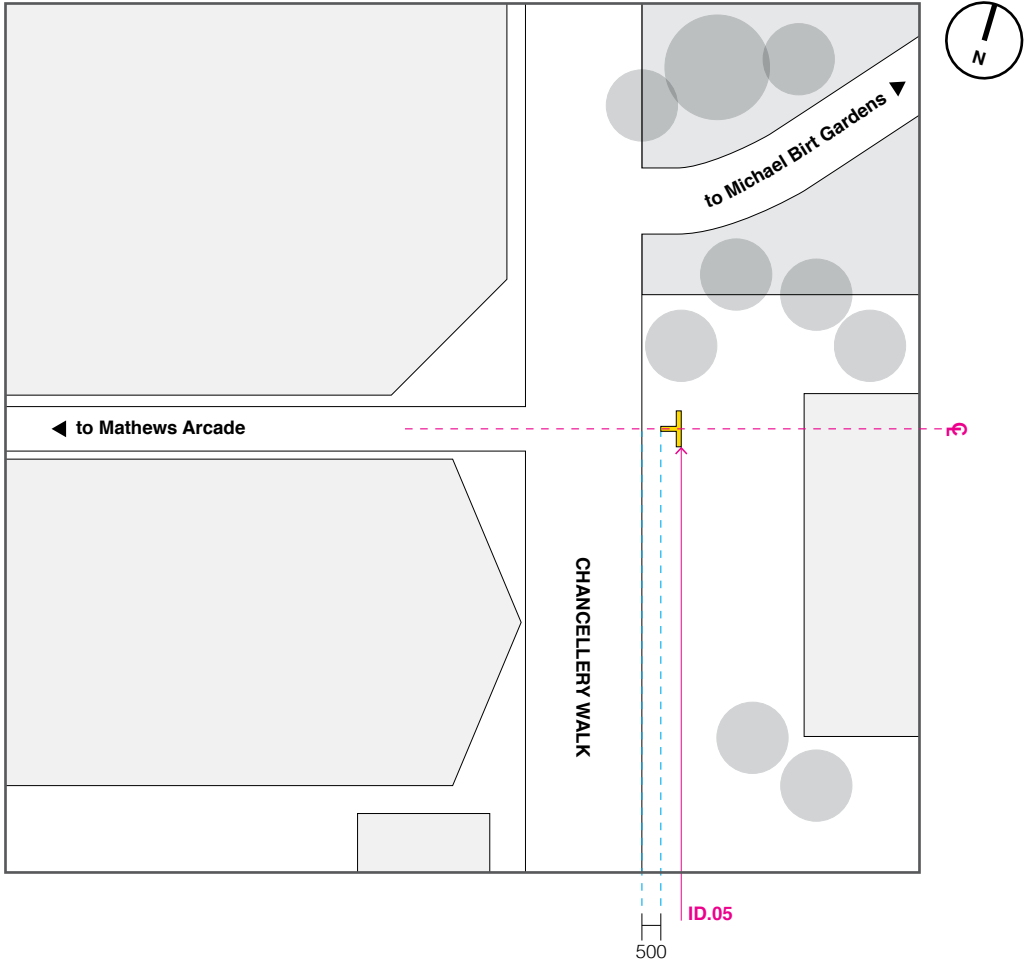

02 Intersection of streets and external locations
Gate 13 Barker Street
Scale 1:200


Positioning

Positioning Guide
Street signs are to be placed within landscape features adjacent to or parallel to circulation routes that lead to major walkways. They can be used to identify named streets, or to direct to external locations within campus e.g. the Quadrangle.


Street sign are to be positioned aligned to landscape edges. When at a corner, poles should be 1000mm from either edge. When parallel to a straight path, they should be 500mm from the pathway edge and centered to intersecting pathways.

Refer to plan 01 for insitu positioning at an intersection corner and plan 02 for insitu positioning at a parallel pathway. Plan 02 also identifies possible external locations that could be named on the sign.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

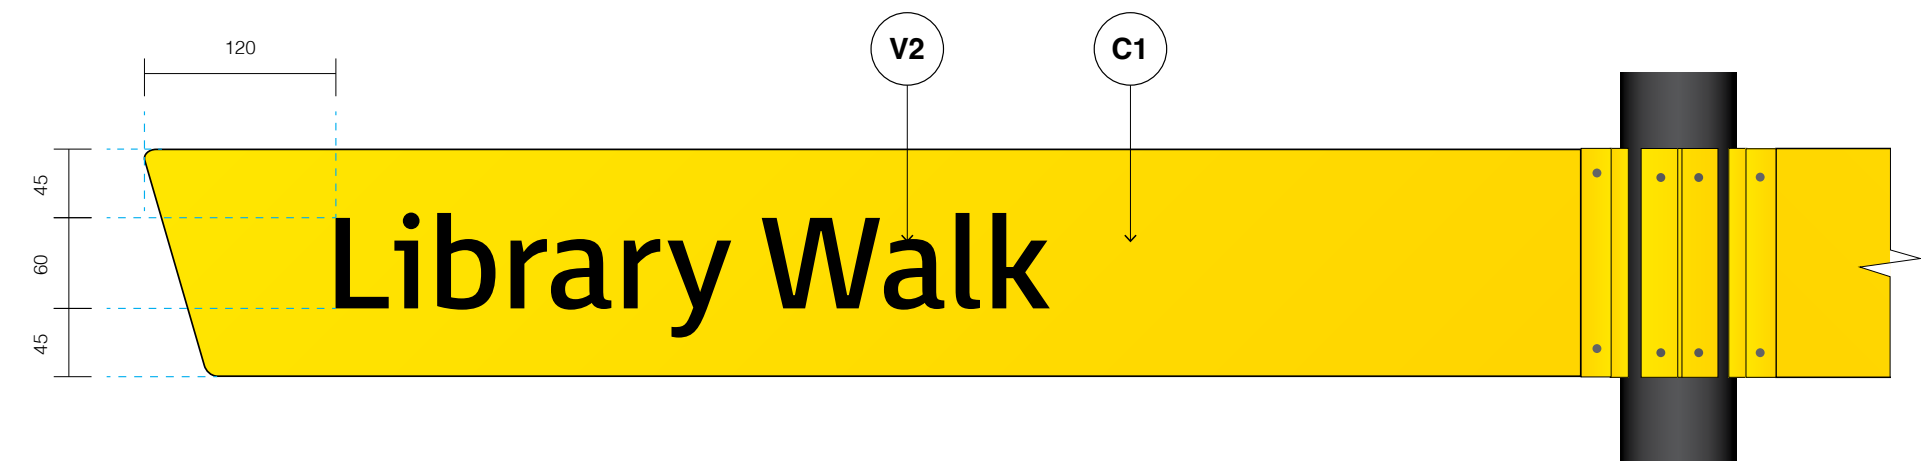

Template 01 - Left Panel
Scale 1:5

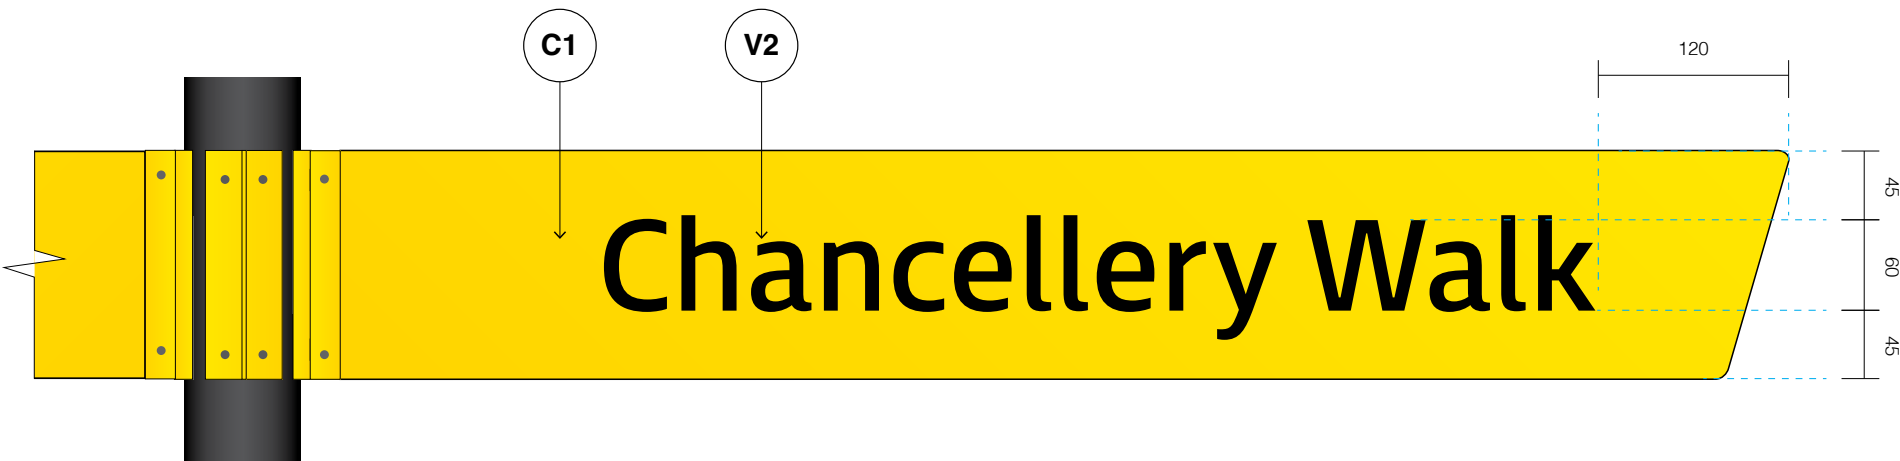

Template 02 - Right Panel
Scale 1:5

Graphic Layout

Street/ Walkway Name
FS Millbank Regular

Alignment
Alignment – Front face: Left, Rear face: Right

Size
60mm


Tracking
10+, Optical Kerning

Construction & Materials


Materiality Legend

- | | |
|------------------------------|---|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 finish applied on top of aluminium |

- Construction Details**
- Refer to: Section 8, Construction Standards, Cantilevered Signforms

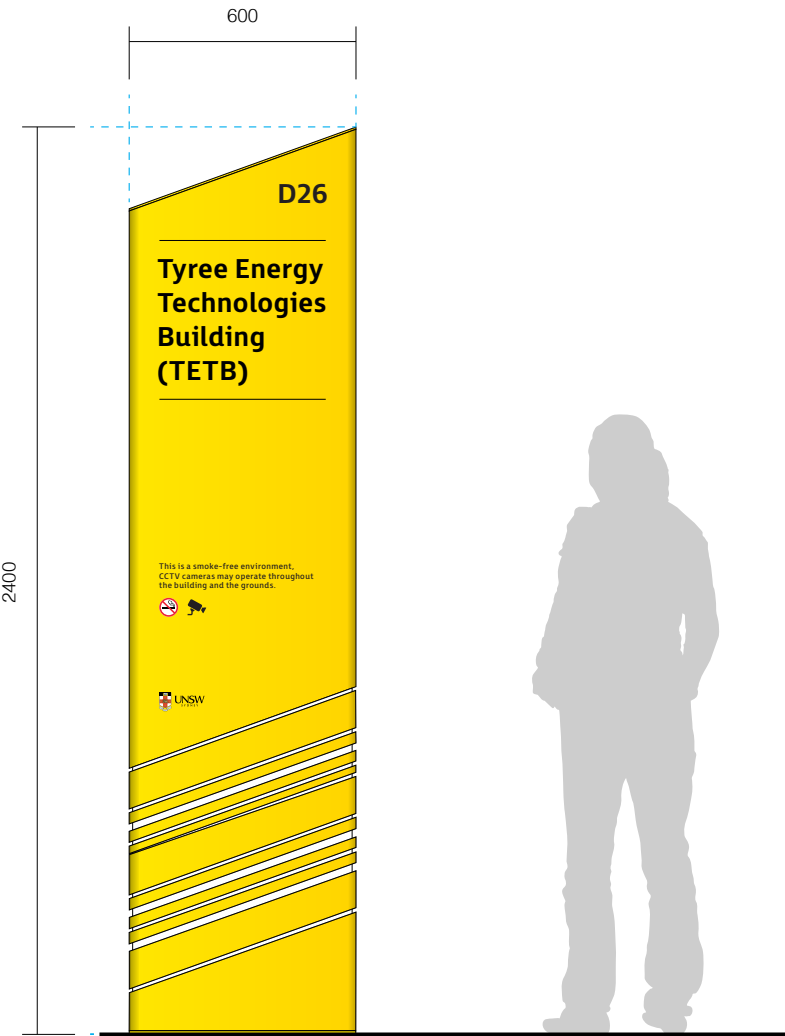

Front Elevation
Scale 1:20

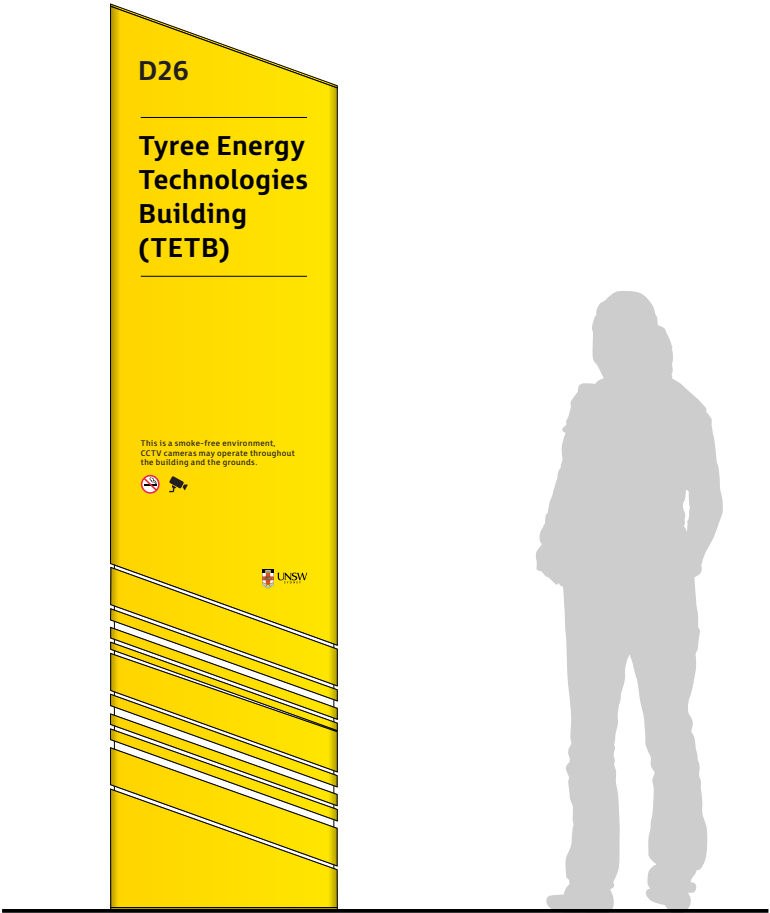

Back Elevation
Scale 1:20

Sign Location

Purpose


Identifies entry point or site boundaries of major buildings when they cannot be identified visually from primary circulation path. Refer to Section 3, Terminology & Addressing, Category 2.

Location


Freestanding at intersection of immediate pathway leading into main entry with main circulation route.

Note

- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

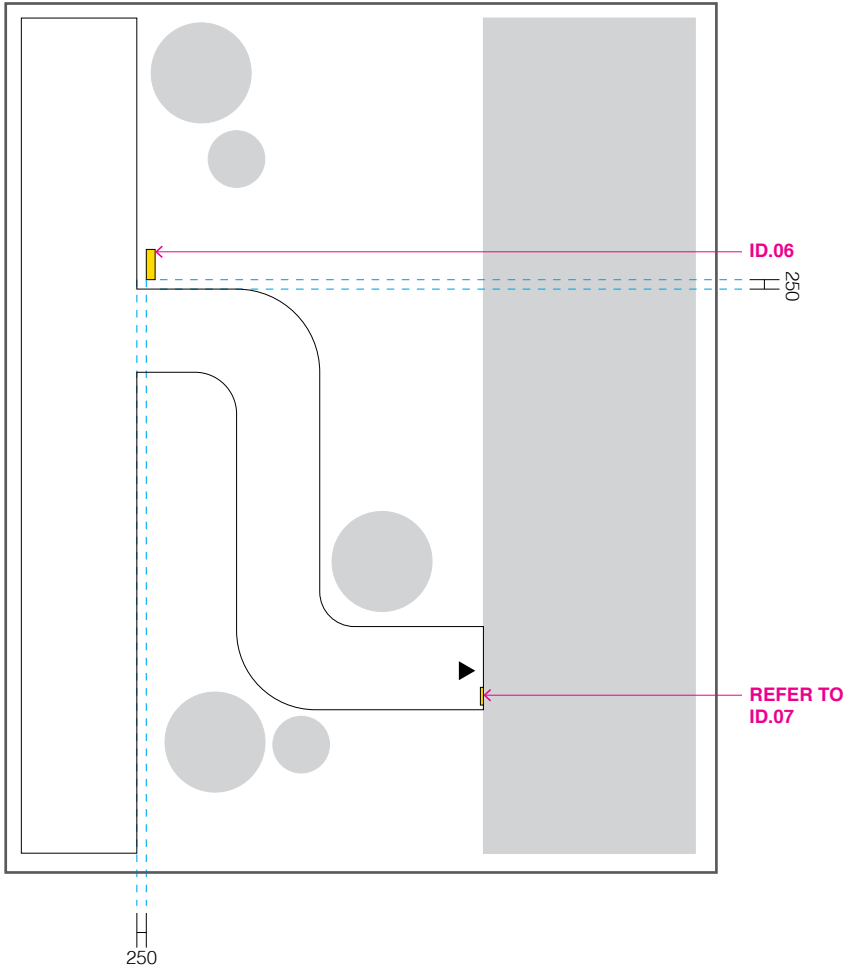

01 Building Entrance
Scale 1:200

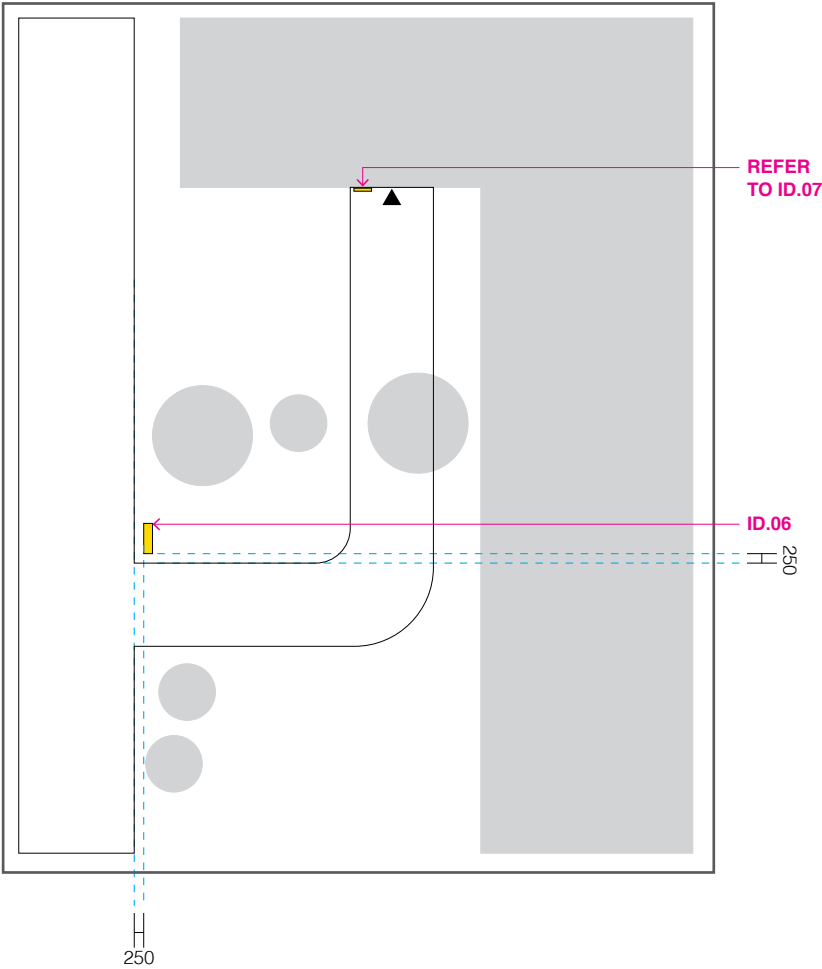

02 Building Entrance
Scale 1:200

Positioning

Positioning Guide

Building entrance totems are to be used when building entrances are not visually identifiable from pedestrian circulation routes. Consideration should be given to the number of totems along a circulation route, and wall-mounted signage should be chosen instead when possible.

Totems are to be aligned to pathways, 250mm from edges, at the site boundaries or entry paths to buildings.



Refer to plans 01 and 02 for insitu positioning for building entrance totems.

Note

- For wayfinding placement principles, refer to: Section 4, User Journeys

Section 10 – External: Building Entrance Totem

ID.06

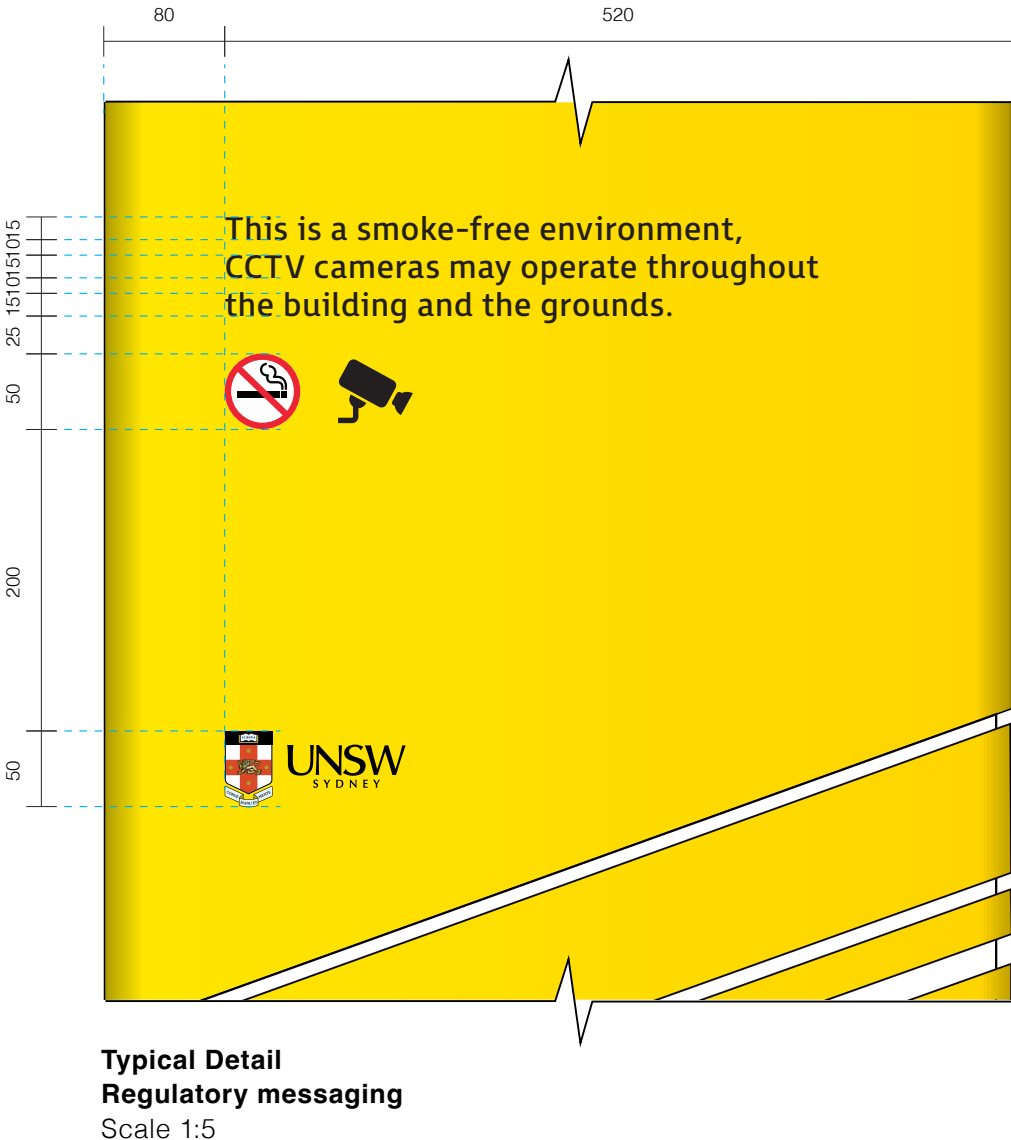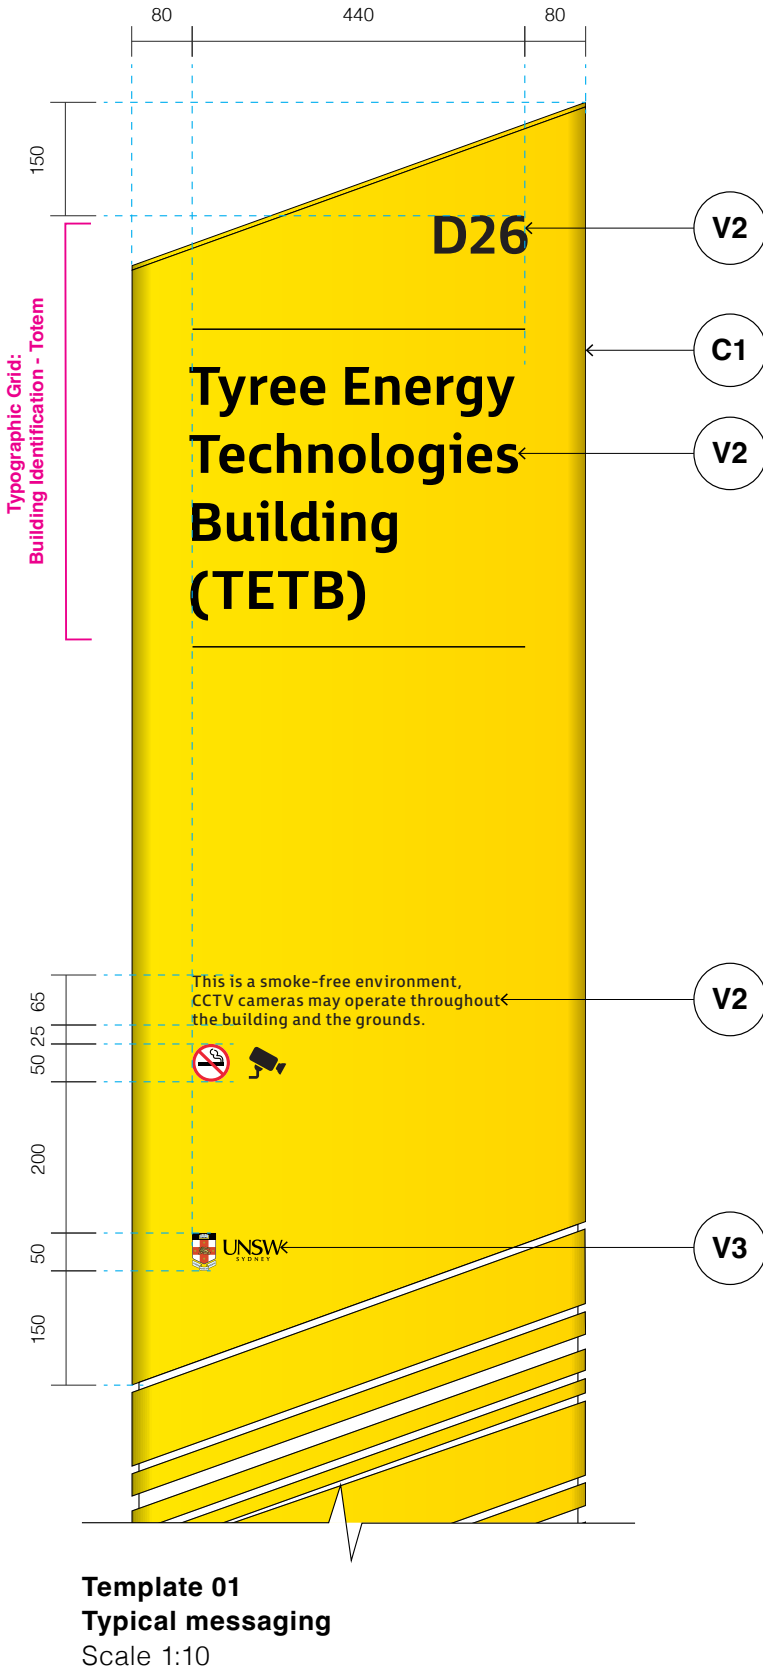

Graphic Layout

Typographic Grid – Identification

Building Identification Totem Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line

Line weight: 2mm

Statutory Content

Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Regulatory Pictograms

Size: 50mm diameter

UNSW logo


50mm height

Back

Double sided messaging where applicable
otherwise to be left blank.

Construction & Materials

Materiality Legend




Construction Details


- Refer to: Section 8, Construction Standards
Totem Signforms

Page 3 of 4

Units: mm

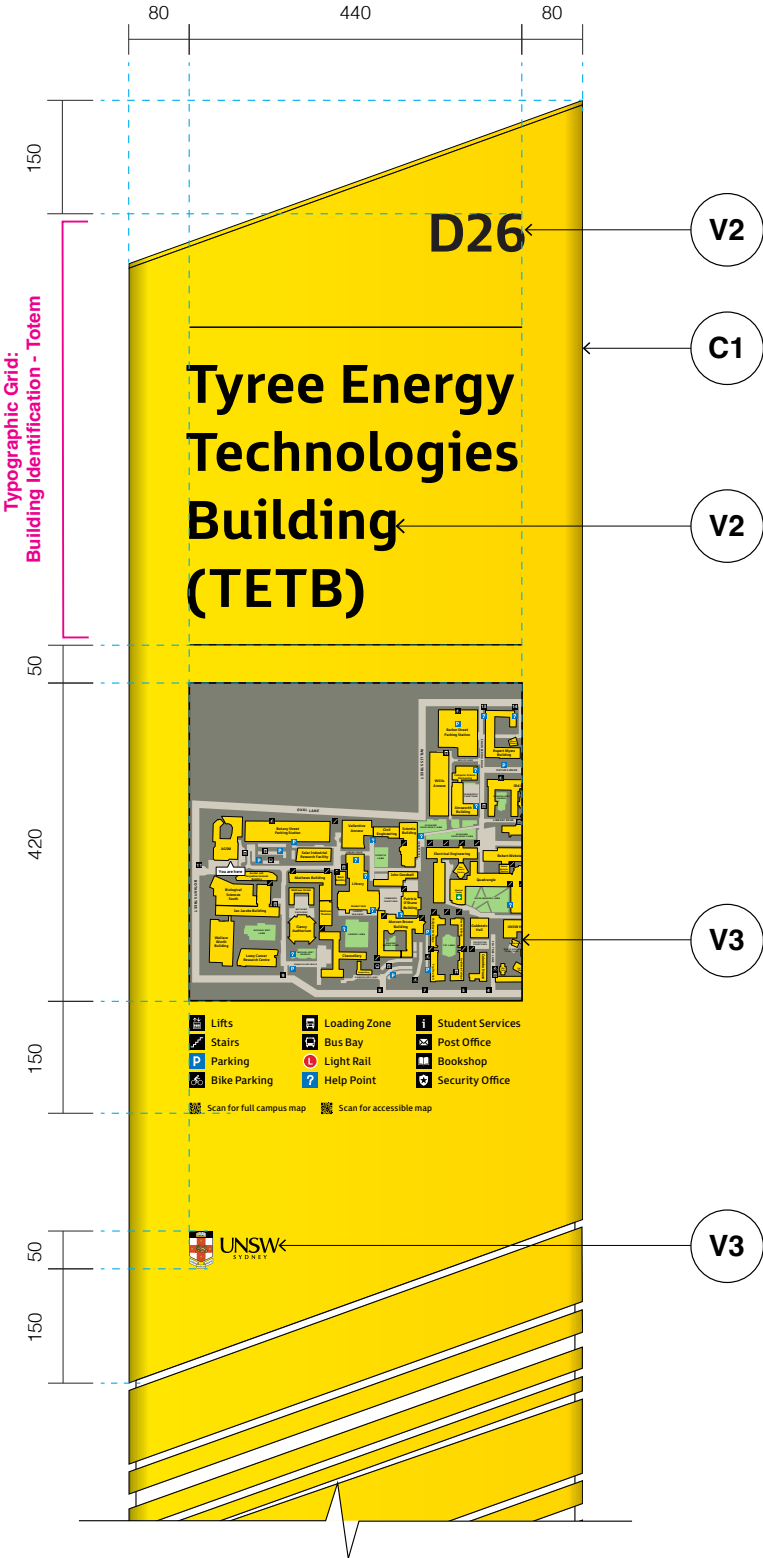

Template 02
Identification messaging & map
Scale 1:10

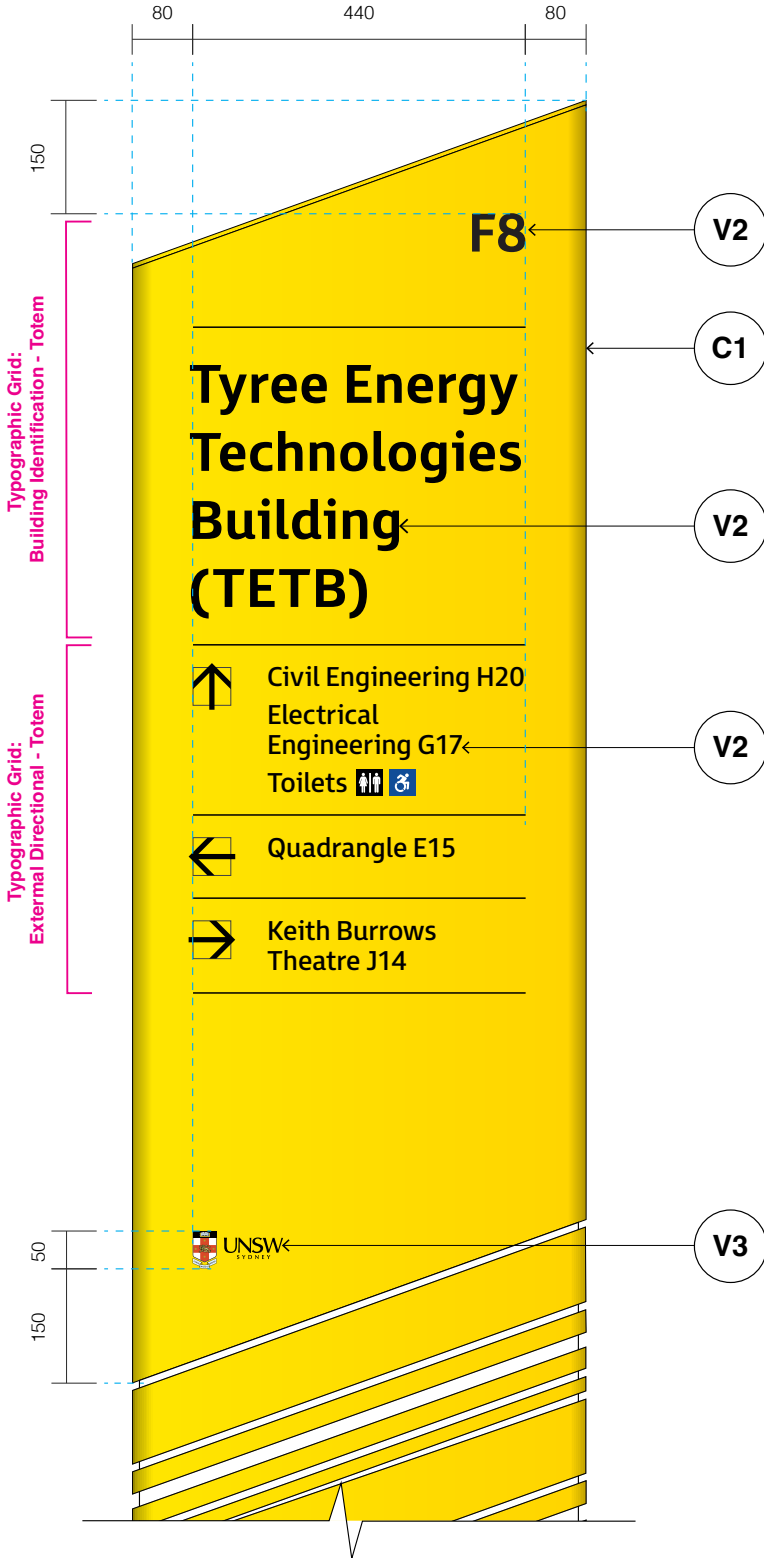

Template 03
Identification & directional messaging
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Building Identification Totem Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

Directional Messaging
Alignment: Left
Size/Leading: 30mm, 15mm
Tracking: 10+, Optical kerning

Directional Pictograms
Size: 45mm height

UNSW logo
50mm height

Back
Double sided messaging where applicable, otherwise to be left blank.

Construction & Materials

Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium
- V3**

 - V3 print applied on top of aluminium

Construction Details

- Refer to: Section 8, Construction Standards, Totem Signforms




01 Building Entrance Totem
Ainsworth Building




02 Existing Totem
Ainsworth Building

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

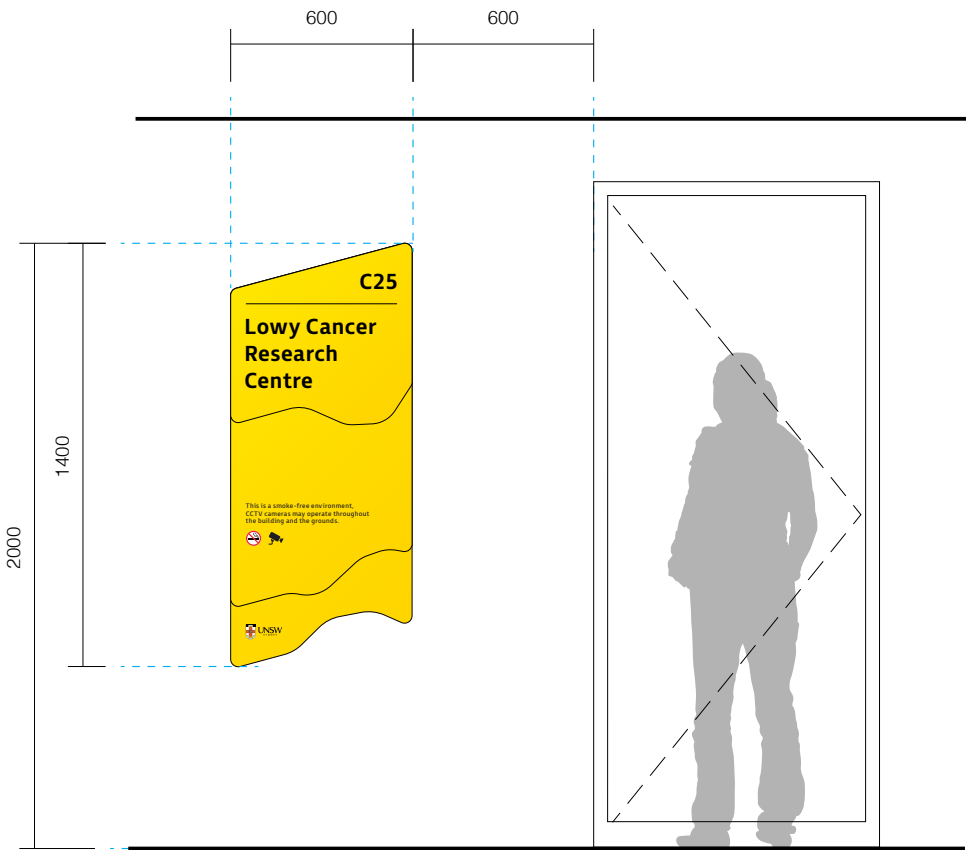

Elevation - Beside entrance
Scale 1:25

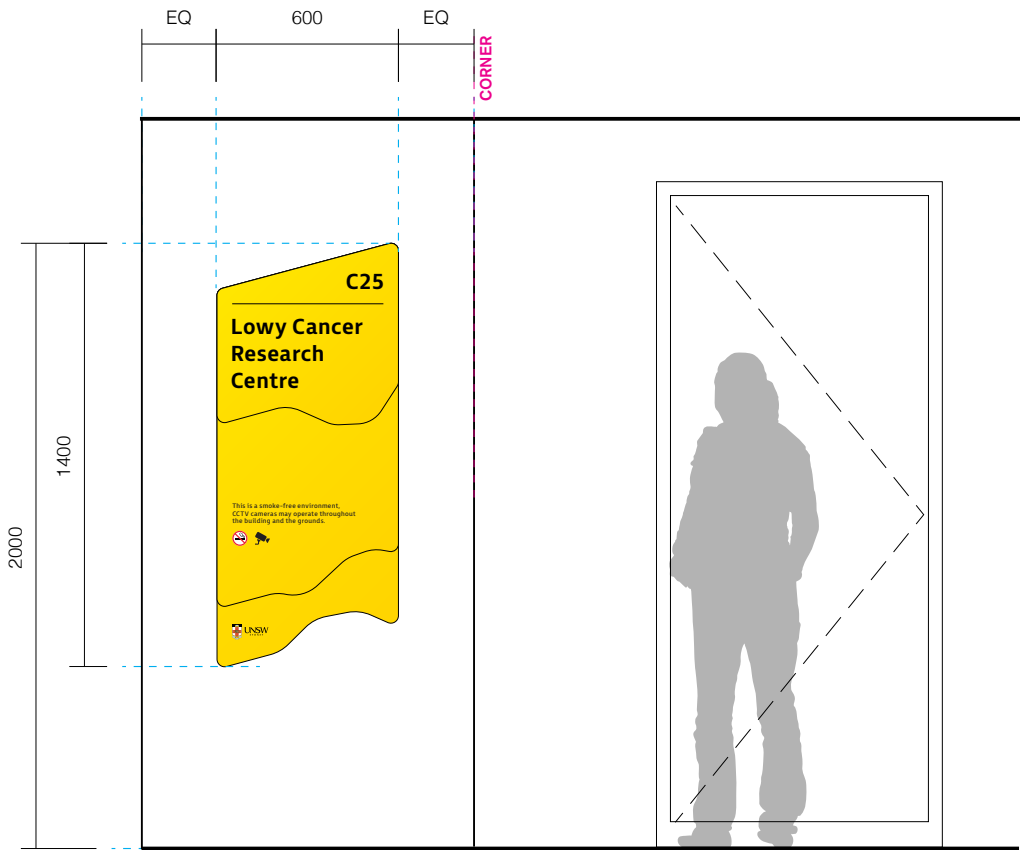


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location


Purpose
Identifies entry point or site boundaries of major buildings. Refer to Section 3, Terminology & Addressing, Category 2.

Location
Wall mounted at left or right of building entry point.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

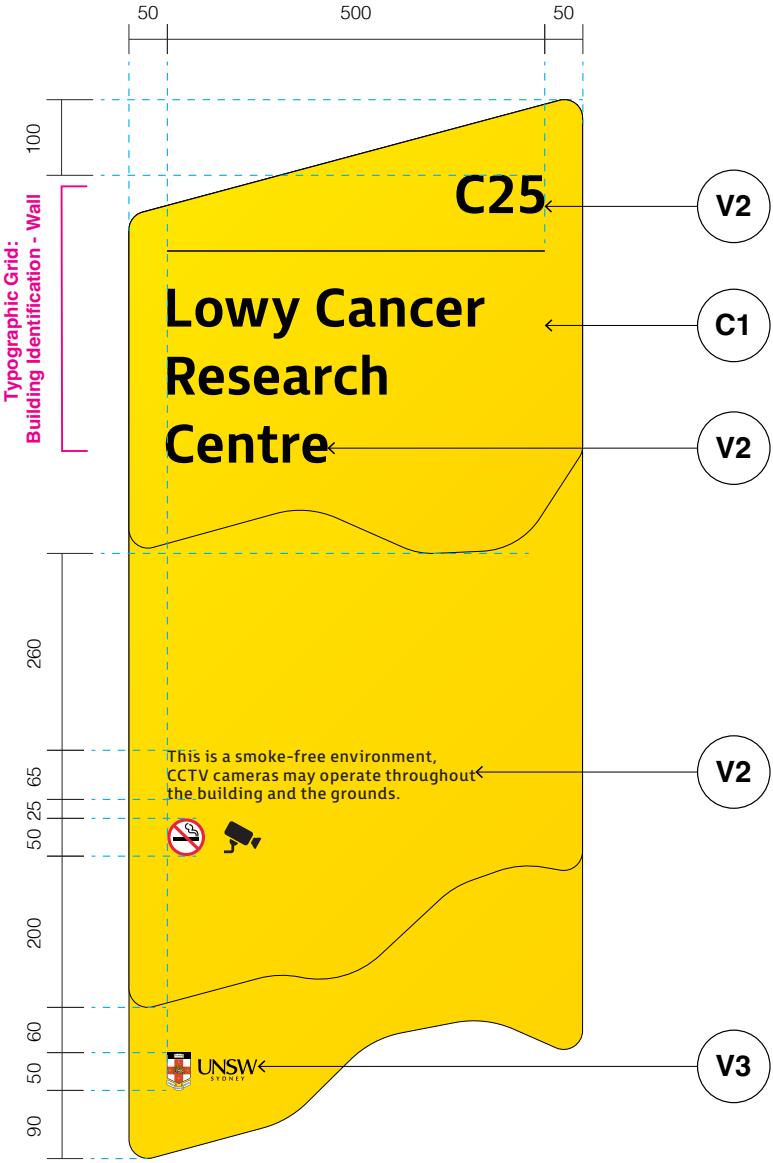

Template 01
Typical messaging
Scale 1:10

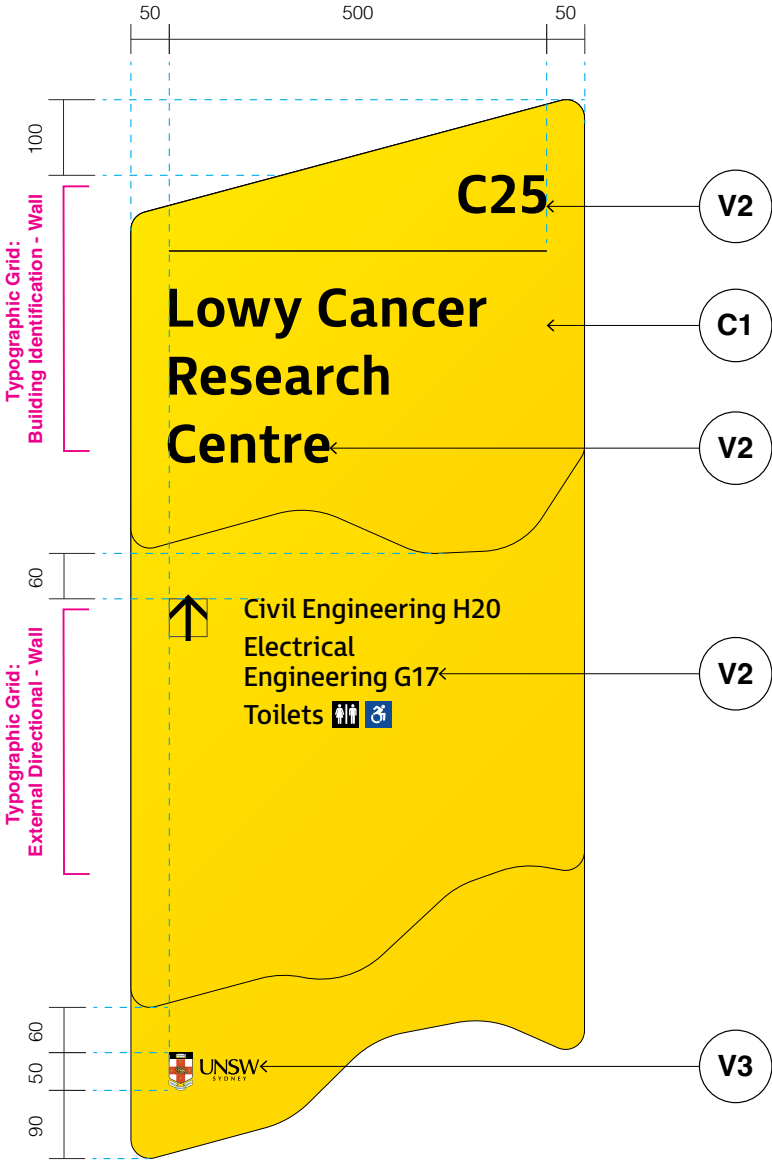

Template 02
Identification & directional messaging
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Regulatory Pictograms
Size: 50mm diameter


UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 8, Construction Standards, Layered Panel Signforms

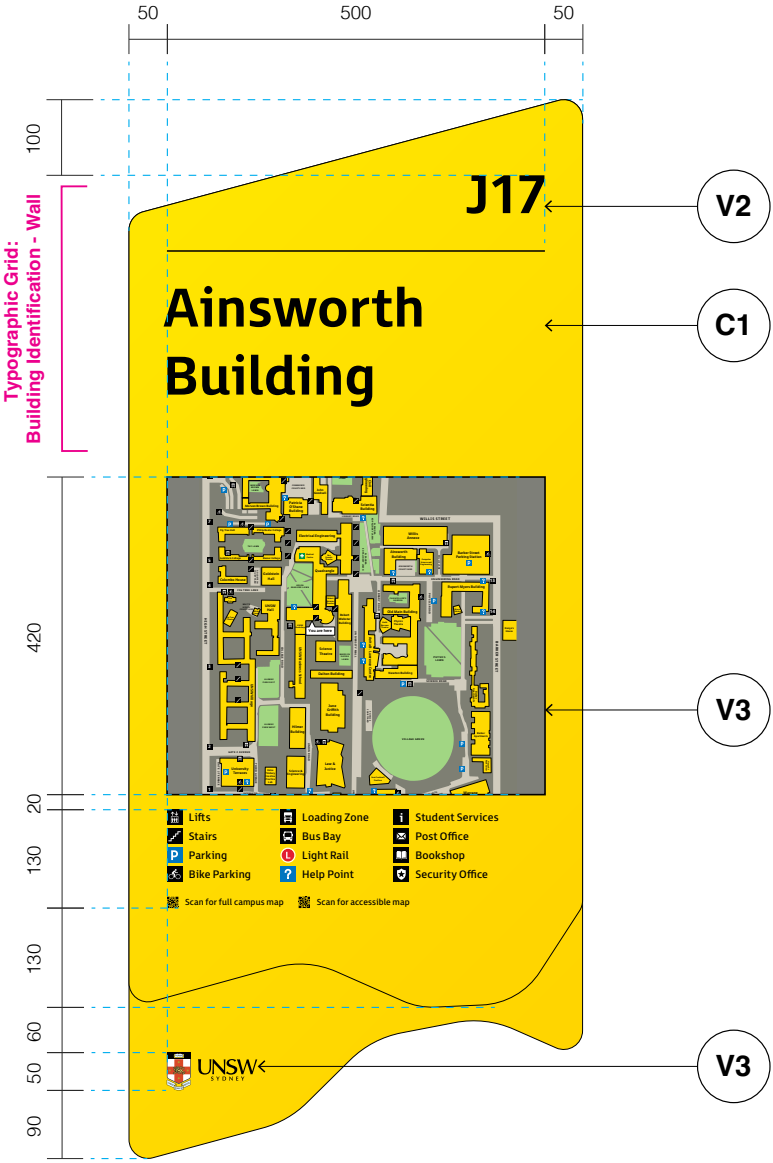

Template 03
Identification messaging & map
Scale 1:10

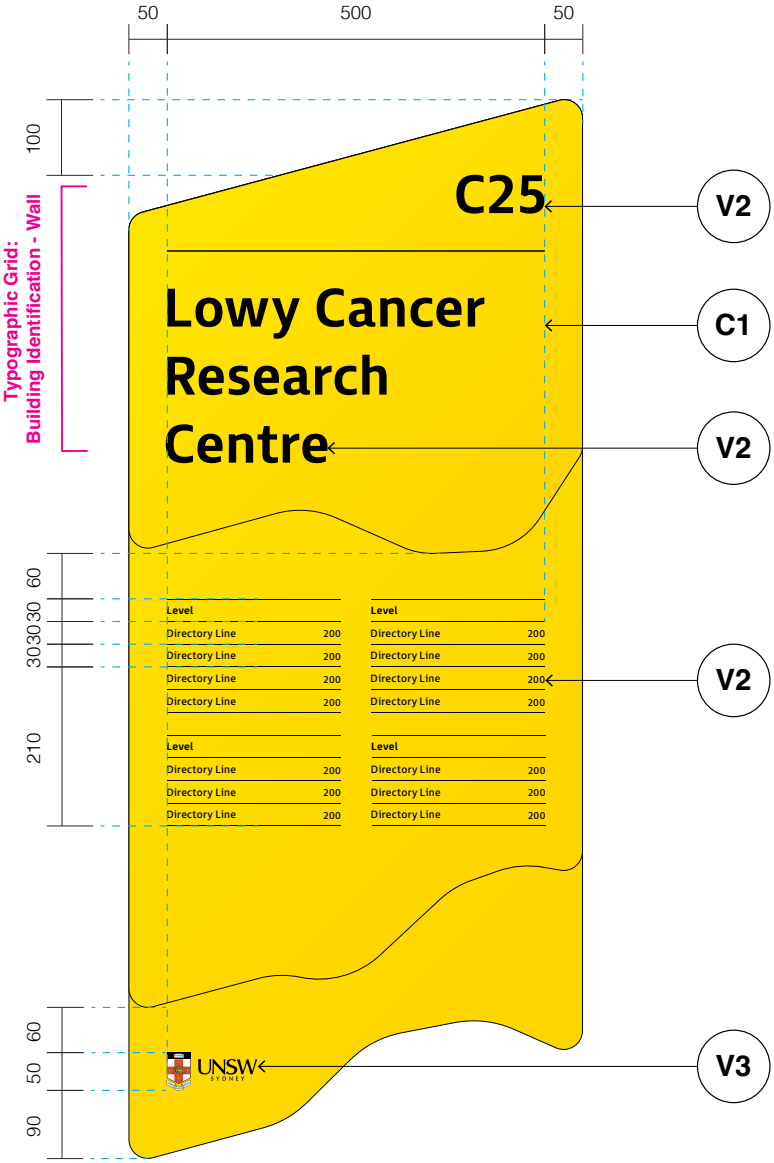

Template 04
Identification messaging & directory
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

Level Directory Content
FS Millbank Regular
Columns: Max 2
Alignment: Destination; Left, Room number; Right
Size/Leading: 10mm, 10mm
Tracking: 10+, Optical kerning
Dividing line weight: 1mm

UNSW logo
50mm height

Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium

Construction Details
• Refer to: Section 8, Construction Standards, Layered Panel Signforms




01 Building Entrance ID
Mathews Building




02 Existing Sign
Mathews Building

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

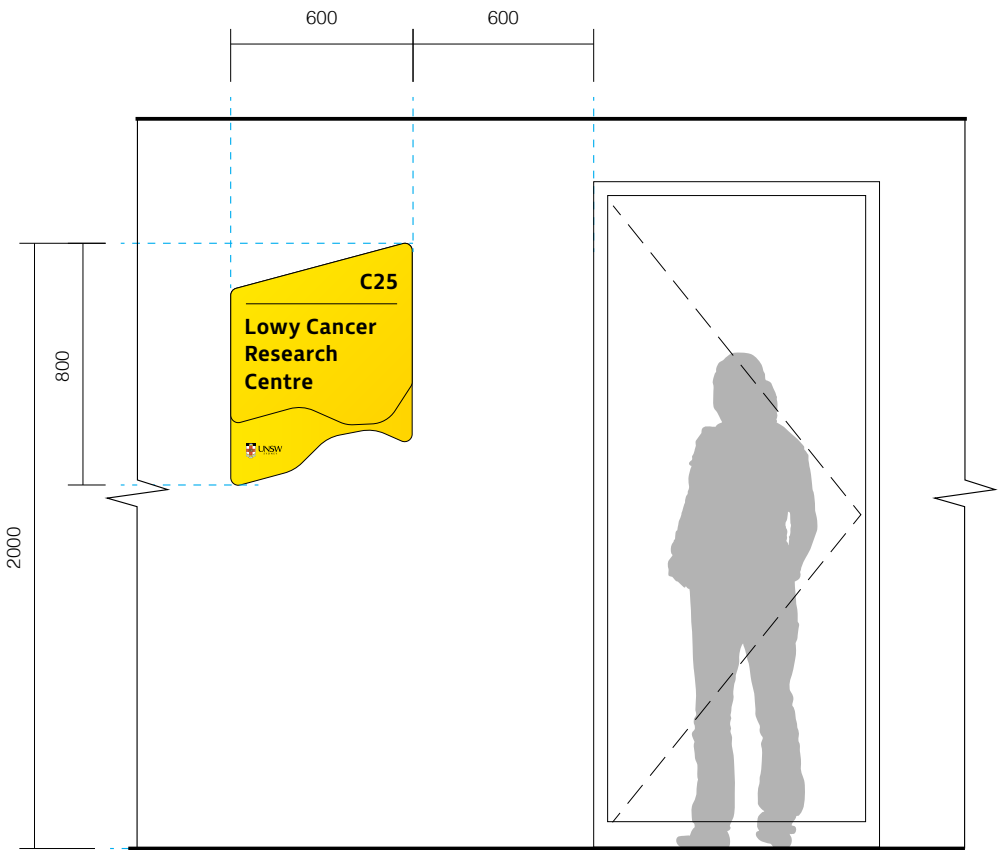

Elevation - Beside entrance
Scale 1:25

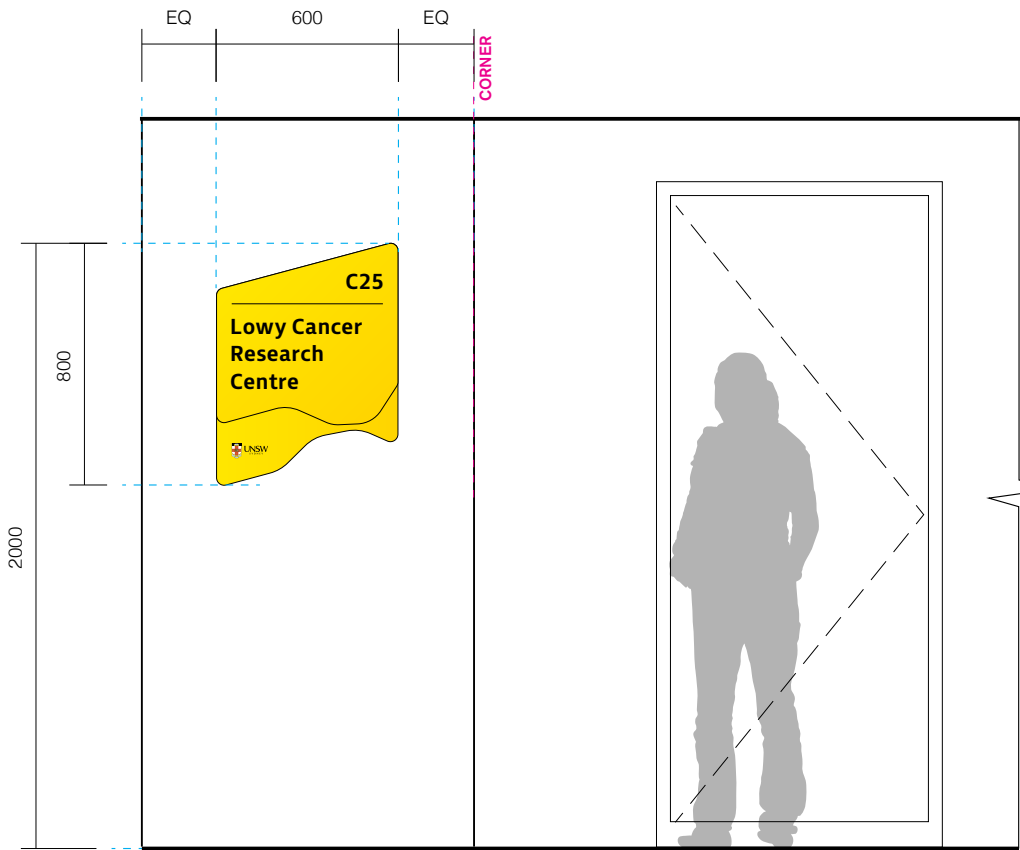


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies entry point of minor buildings and facilities.
Refer to Section 3, Terminology & Addressing, Category 6, 7, 8 ,9.

Location
Wall mounted at left or right of building or facility entry solid door.

- Note**
- For sign type selection, refer to:
Section 5, The Process, Step 3
 - For content guidelines, refer to:
Section 3, Terminology & Addressing
 - For material finishes, refer to:
Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to:
Section 21, Maintenance

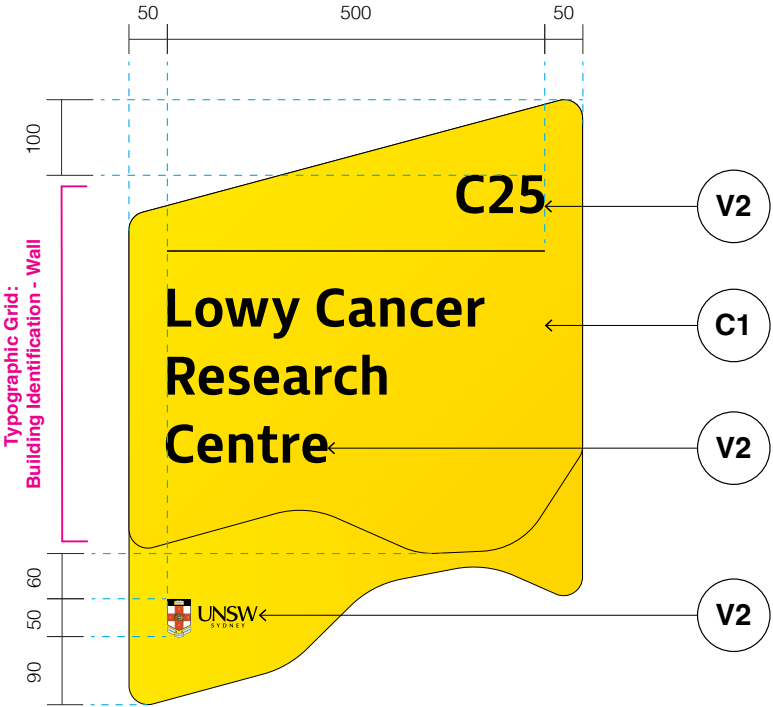

Detail
Typical messaging
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm


UNSW logo
50mm height

Construction & Materials

Materiality Legend


- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 8, Construction Standards, Layered Panel Signforms

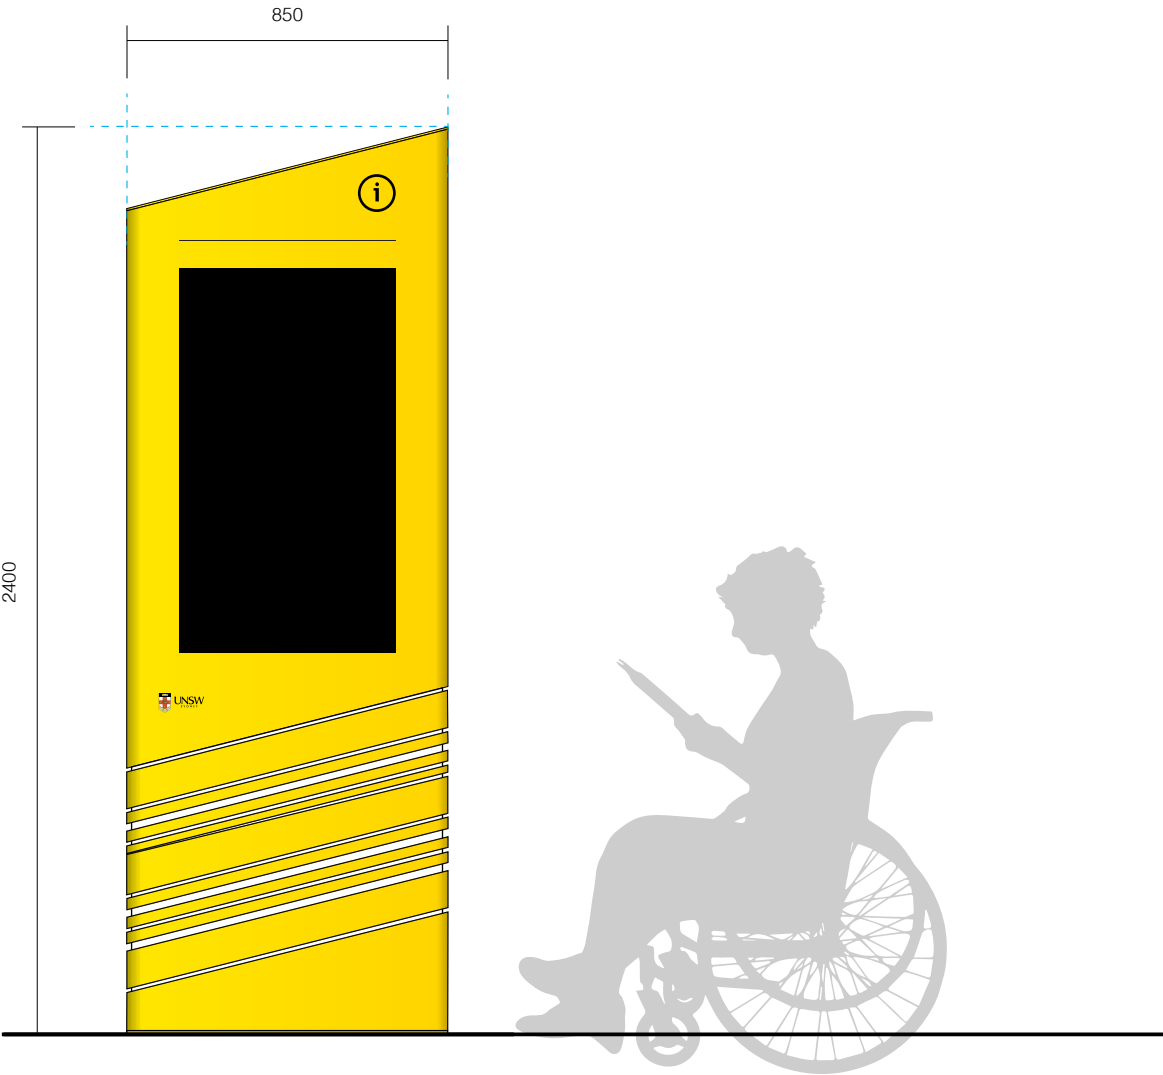

Front Elevation
Scale 1:20

Note
Totem height is based on the understanding that interactive screen elements would not sit above an accessible height of 1600mm, and all screen elements above this would not be interactive.

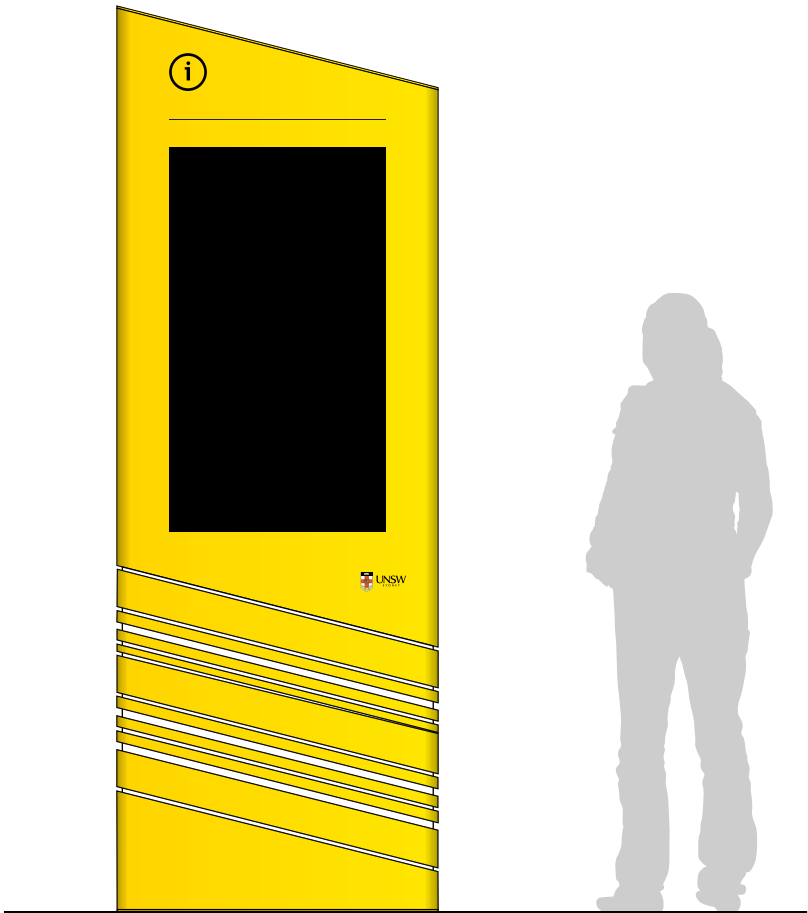

Back Elevation
Scale 1:20


Sign Location

Purpose
Directs to main building destinations. Refer to Section 3, Terminology & Addressing, Category 5, 6, 7, 8.

Location
Freestanding at decision points on major external circulation paths.

Digital Screen
Final screen specifications to be provided by UNSW and contractor, refer to Section 20, Shop Drawings. Signform size and construction to be adjusted accordingly.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

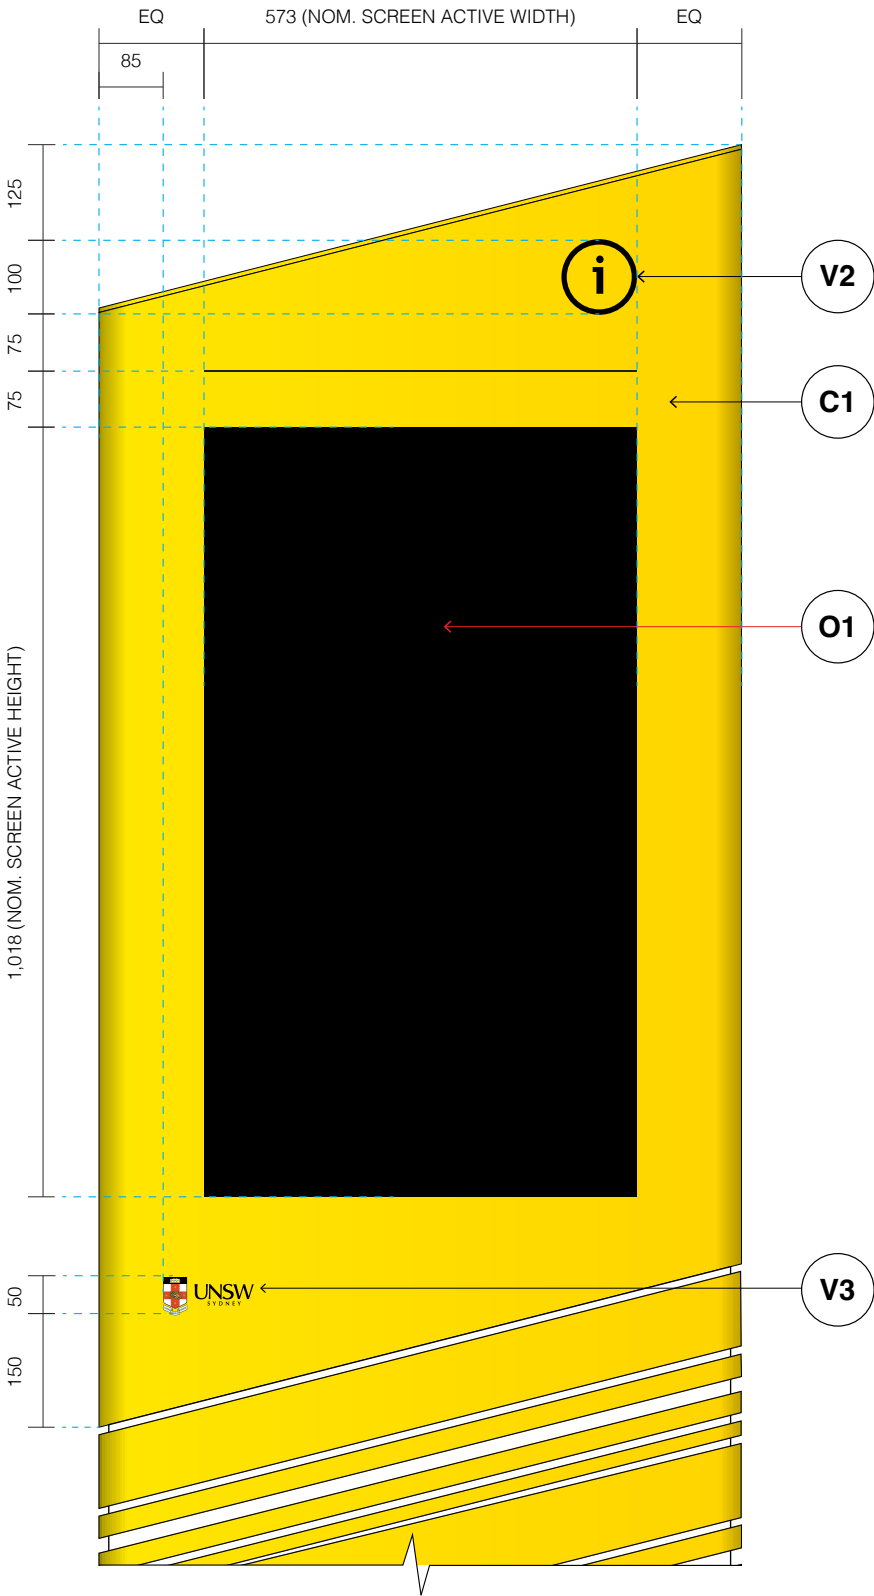

Detail
Scale 1:10


Graphic Layout

- Pictogram**
Information pictogram: 100 diameter.
Refer to Section 7, Graphic Standards, Pictogram Suite.
- Dividing Line**
Line weight: 2mm
- Digital Screen (nom. only)**
Samsung OH 46B external grade digital screen
- UNSW logo**
50mm height


Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |
- O1**
- Digital Touch Screen

- Construction Details**
- Refer to: Section 8, Construction Standards, Totem Signforms and Digital Signforms
 - Monitor specifications are nominal only, contractor is to advise based on client requirements. Allow for adequate ventilation and power supply.

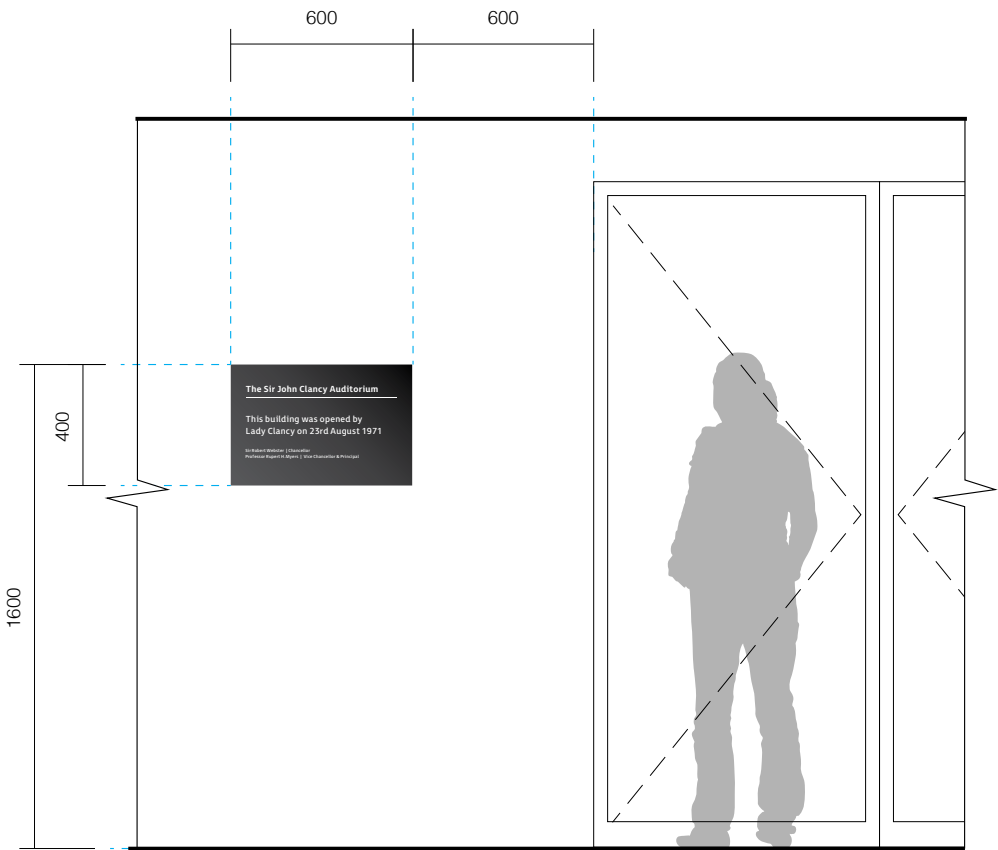

Elevation - Beside entrance
Scale 1:25

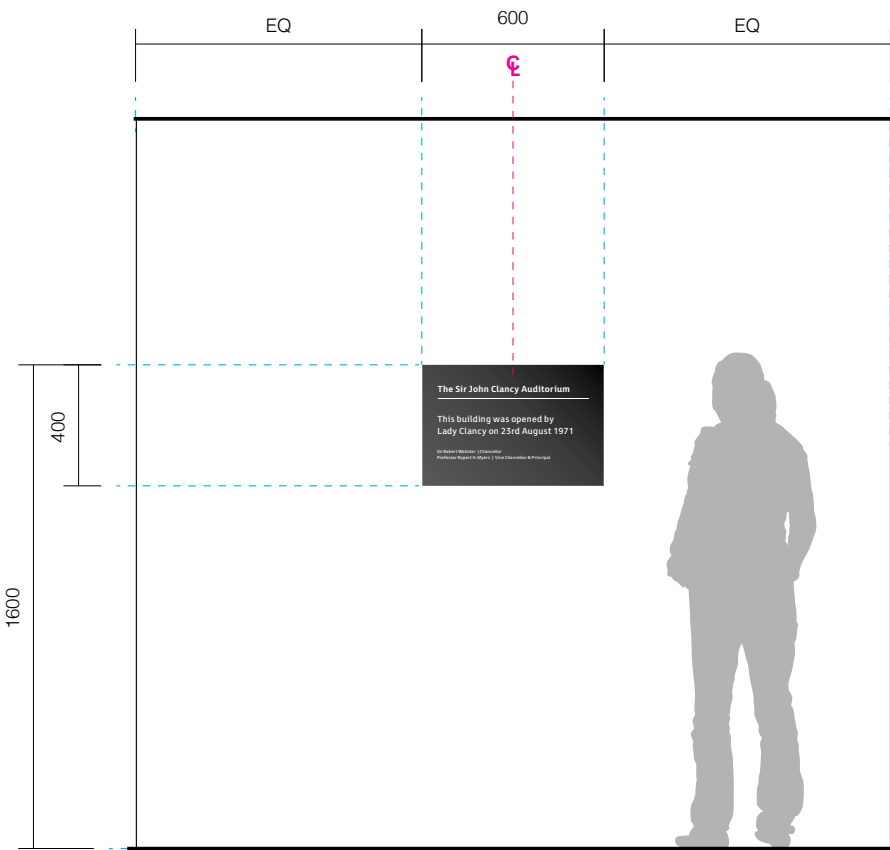


Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose
Displays key sponsors of main building

Location
Located at building entrance, adjacent to or below building identification signage.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

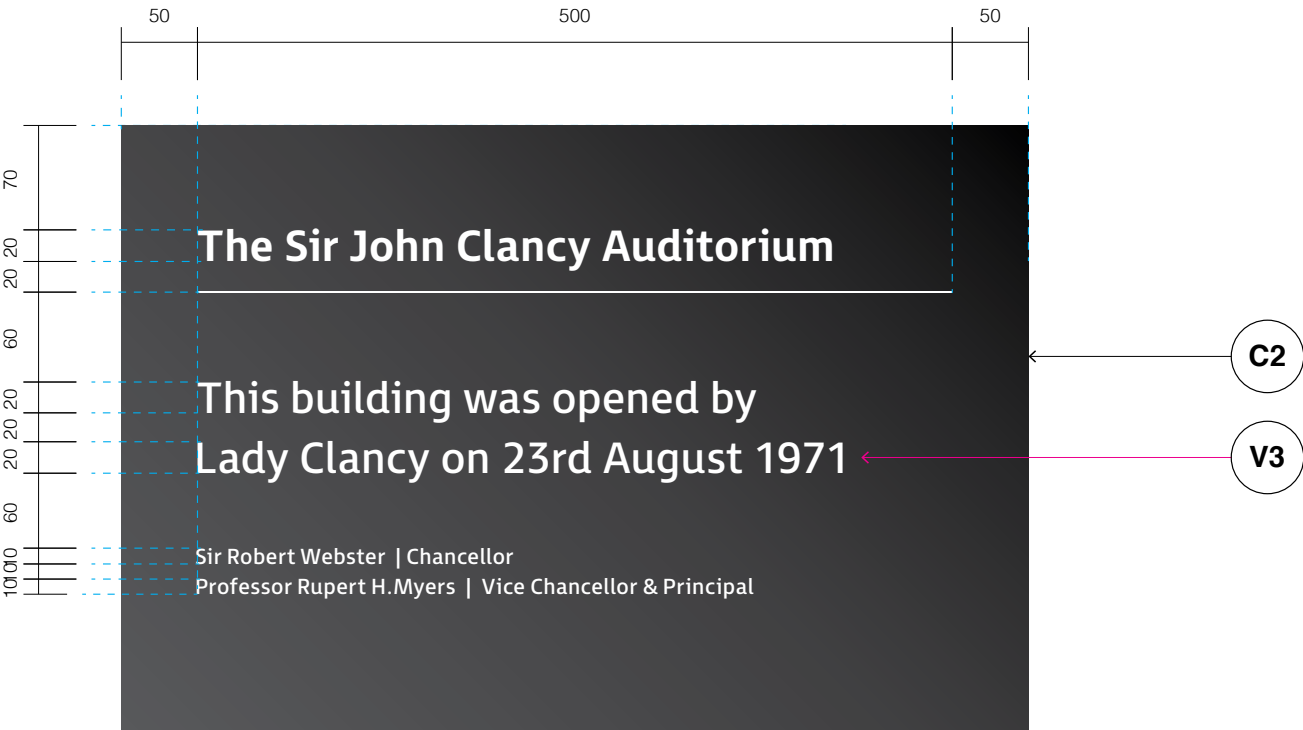

Detail
Scale 1:5

Graphic Layout

Building Name
FS Millbank Bold

Sponsor Messaging
FS Millbank Regular

Dividing Line
Line weight: 2mm

Alignment
Left alignment

Size/ Leading
20mm main body, 10mm footer text

Tracking
10+, Optical kerning

Construction & Materials


Materiality Legend

- C2


 - C2 finish on 3mm aluminium
- V3

 - V3 applied on top of aluminium

- Fixing Details**
- Refer to: Section 8, Construction Standards, Wall Mounted Signforms

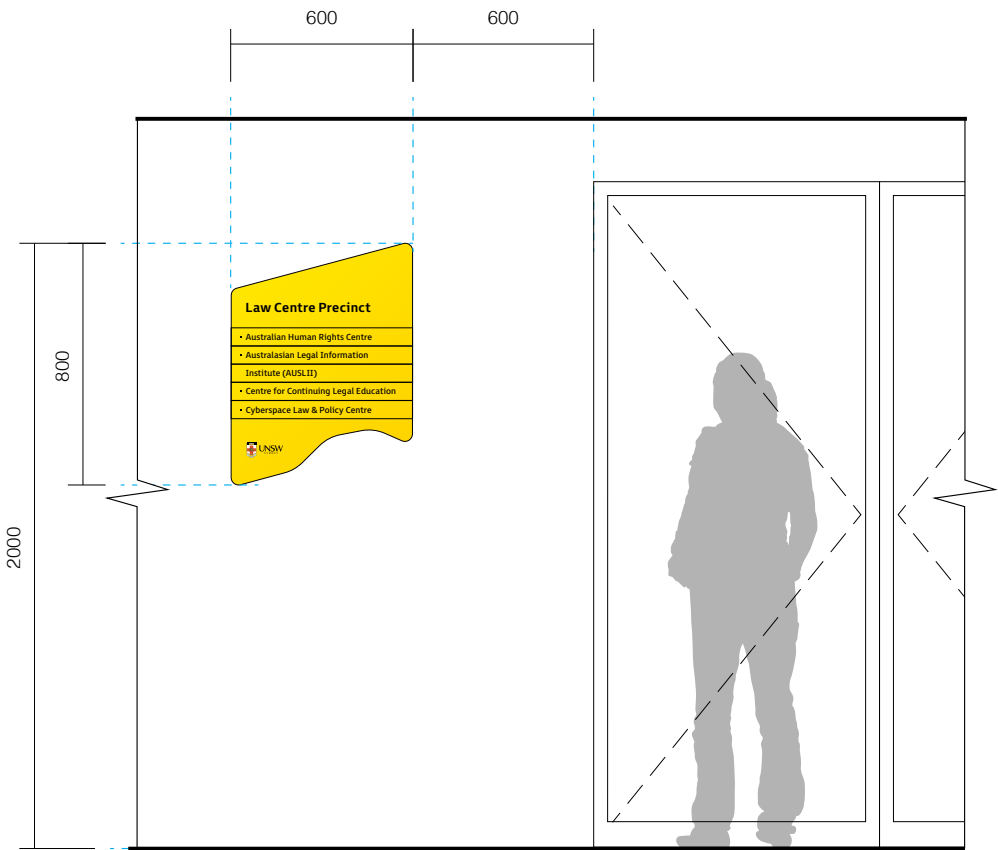

Elevation - Beside entrance
Scale 1:25

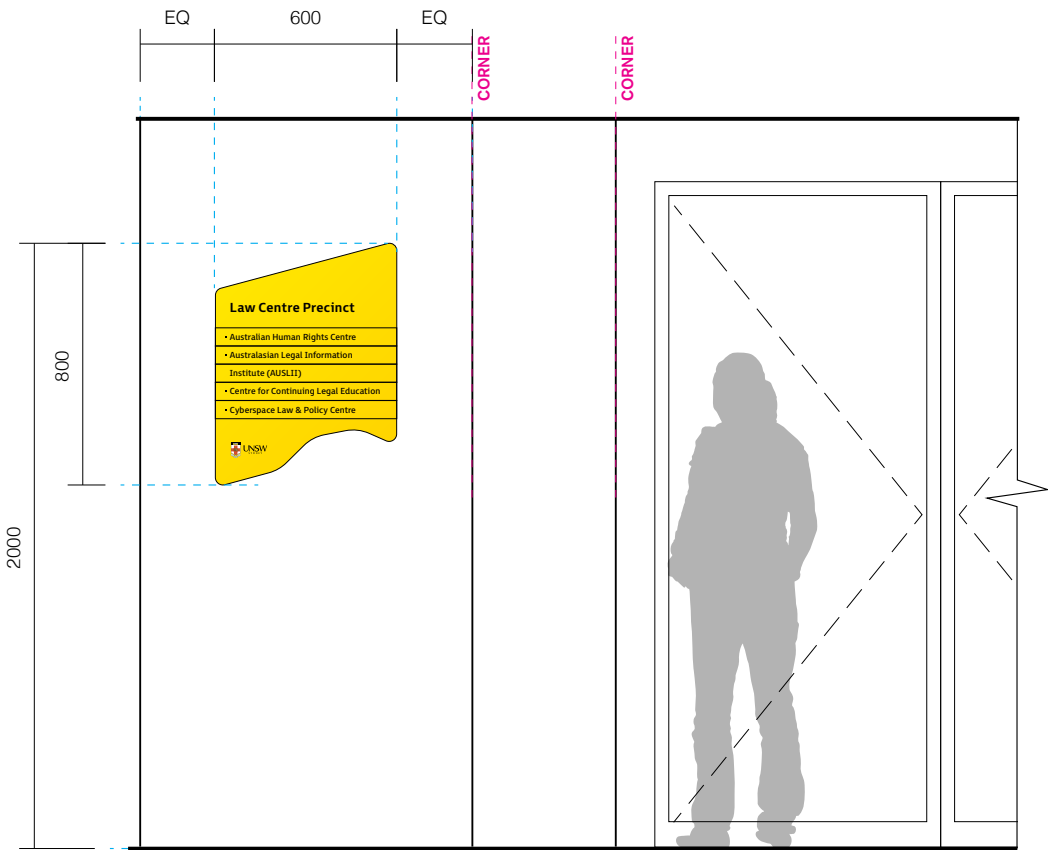


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies main tenants within building

Location
On solid wall at corridor or entry to tenant zone within building

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

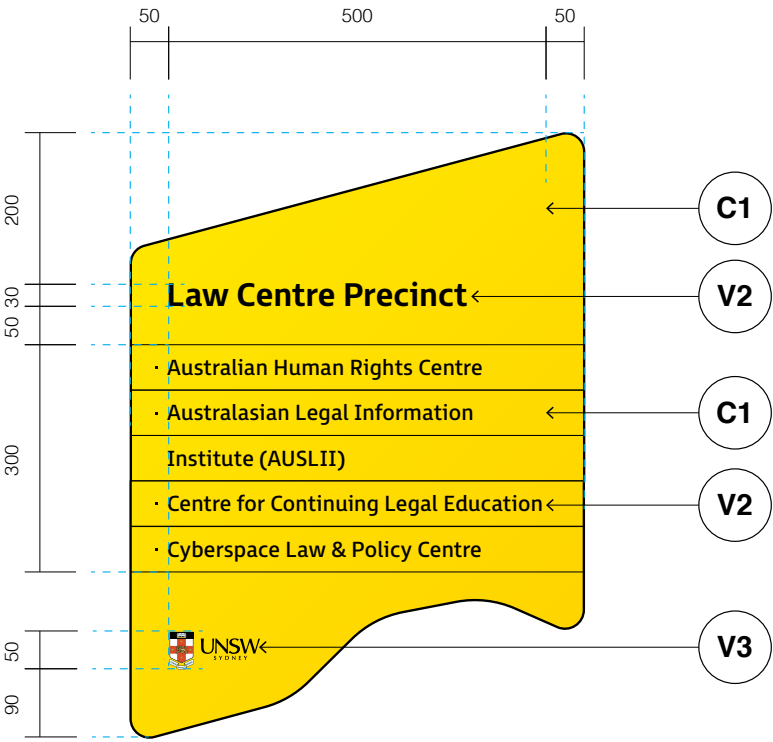

Detail
Scale 1:10




Directory Messaging
Scale 1:5

Graphic Layout


- Precinct ID**
FS Millbank Bold
Alignment: Left
Size/ Leading: 30mm, 50mm
Tracking: 10+, Optical kerning
- Level Directory Tenants**
FS Millbank Regular
Alignment: Left
Size: 20mm
Tracking: 10+, Optical kerning
One line of text per slat, up to 5 slats
- UNSW logo**
50mm height

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |
- Construction Details**
- Refer to: Section 8, Construction Standards, Layered Panel Signforms

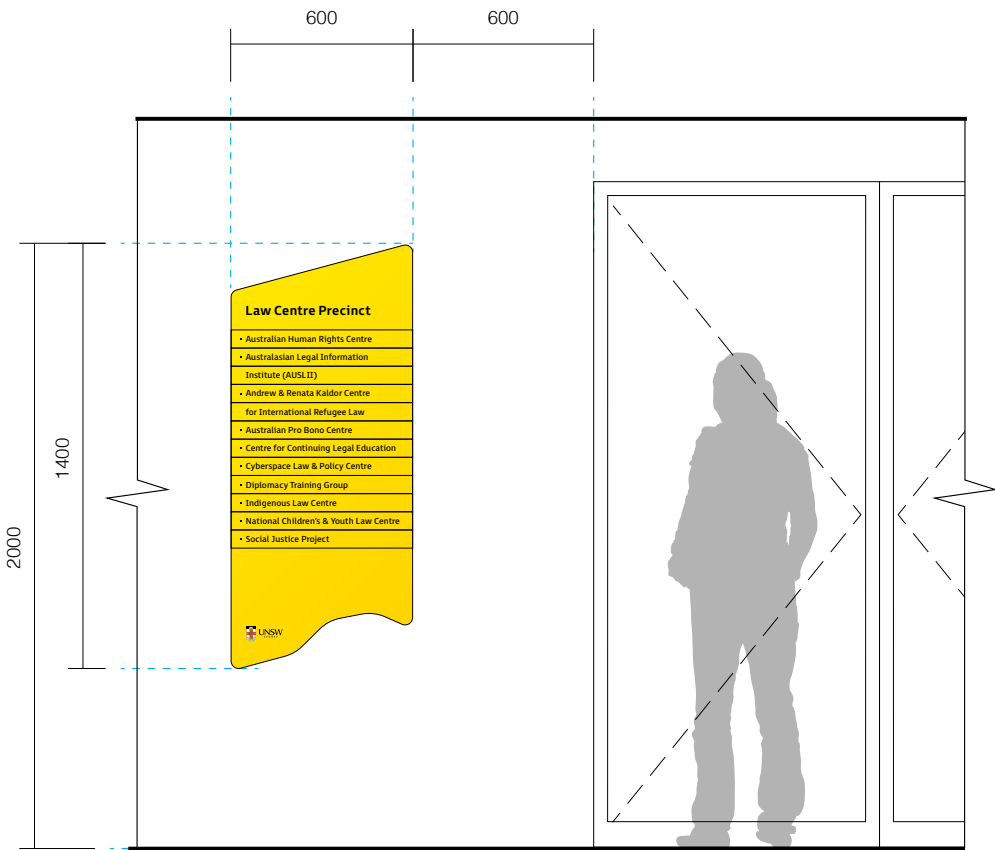

Elevation - Beside entrance
Scale 1:25

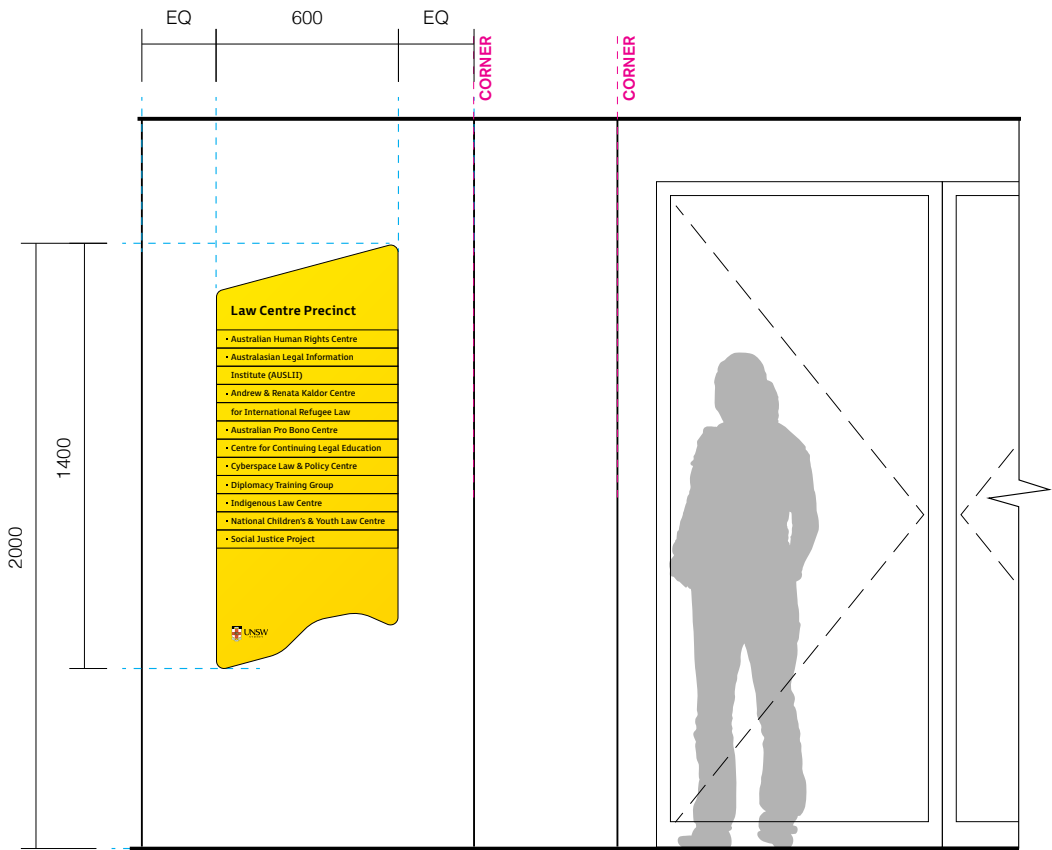


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies main tenants within building

Location
On solid wall at corridor or entry to tenant zone within building

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

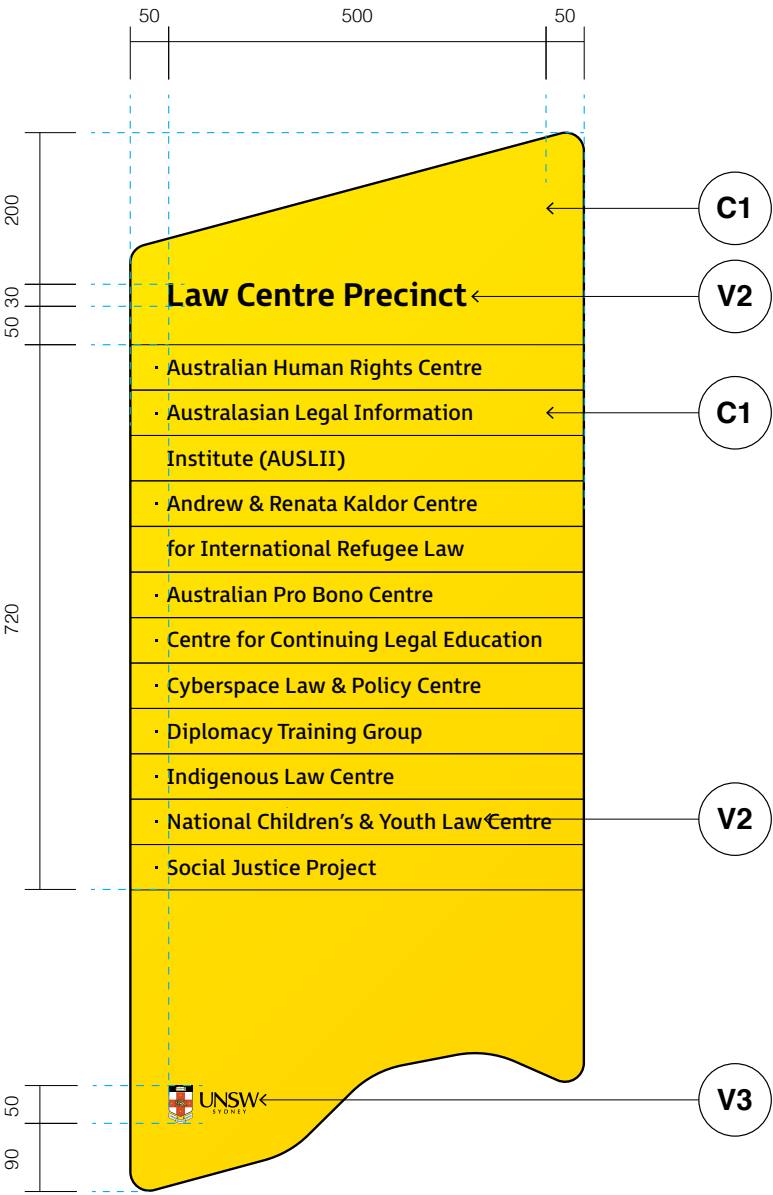

Detail
Scale 1:10



Directory Messaging
Scale 1:5

Graphic Layout

Precinct ID
FS Millbank Bold
Alignment: Left
Size/ Leading: 30mm, 50mm
Tracking: 10+, Optical kerning

Level Directory Tenants
FS Millbank Regular
Alignment: Left
Size: 20mm
Tracking: 10+, Optical kerning
One line of text per slat, up to 12 slats


UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 8, Construction Standards, Layered Panel Signforms

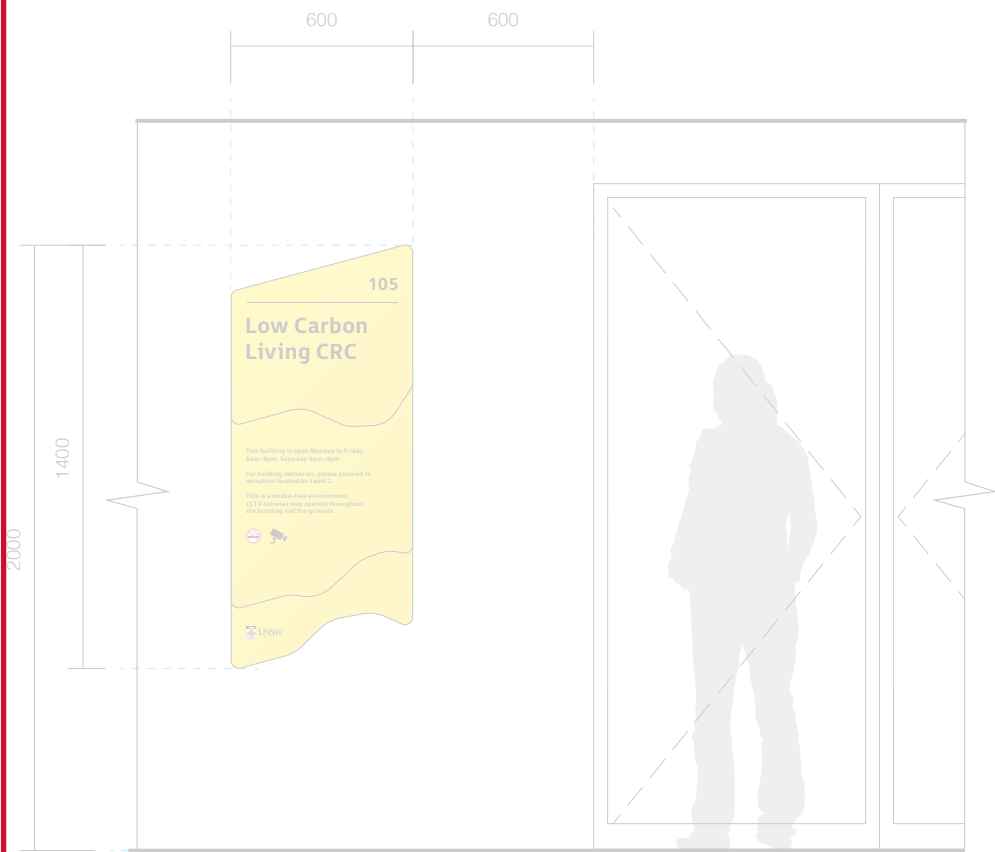

Elevation - Beside entrance
Scale 1:25

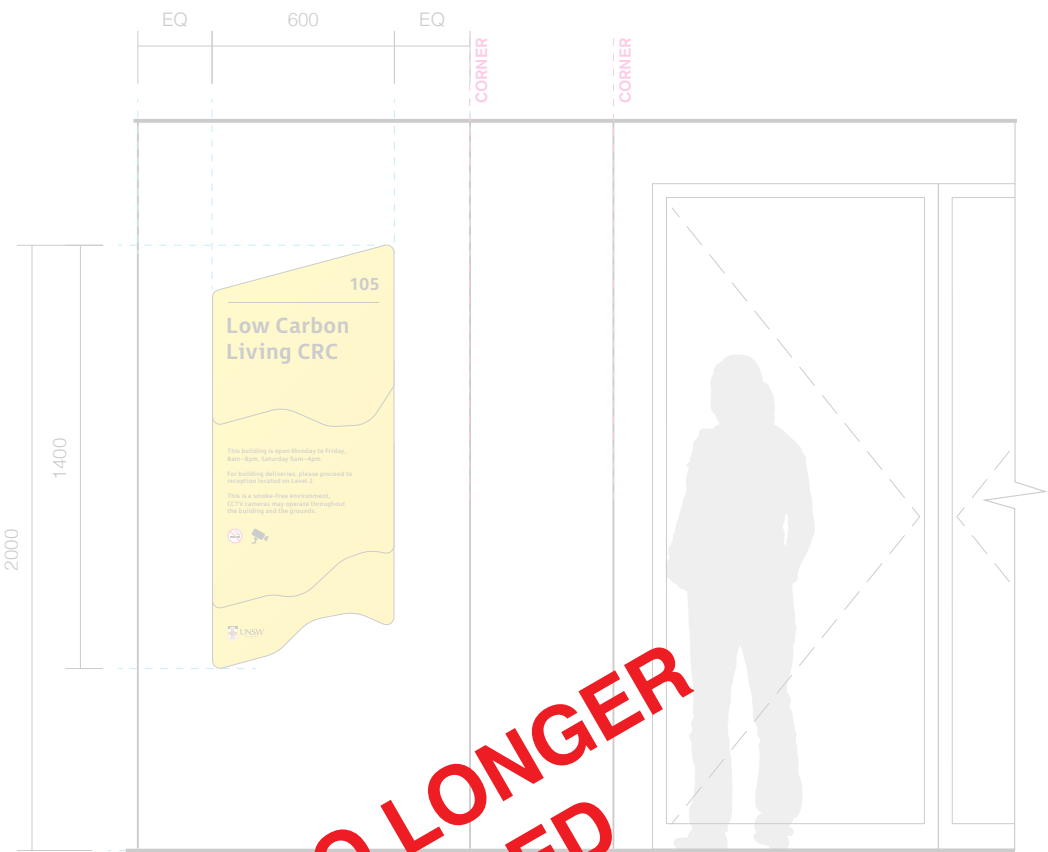

Elevation - Adjacent wall to entrance
Scale 1:25



SIGN NO LONGER REQUIRED

Sign Location

Purpose
Identifies main tenant within building, along with opening times and statutory information.

Location
Wall mounted at left or right of solid door, or at intersection of immediate pathway leading into main entry.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

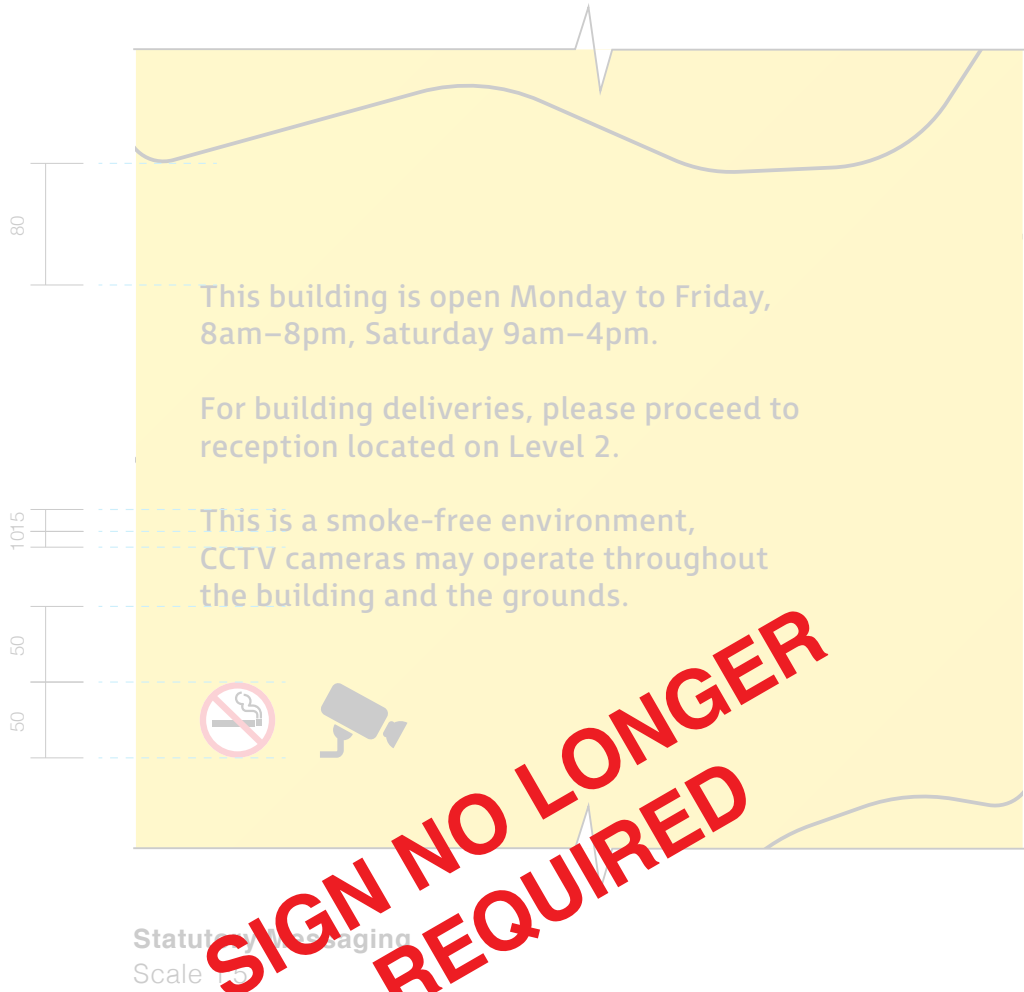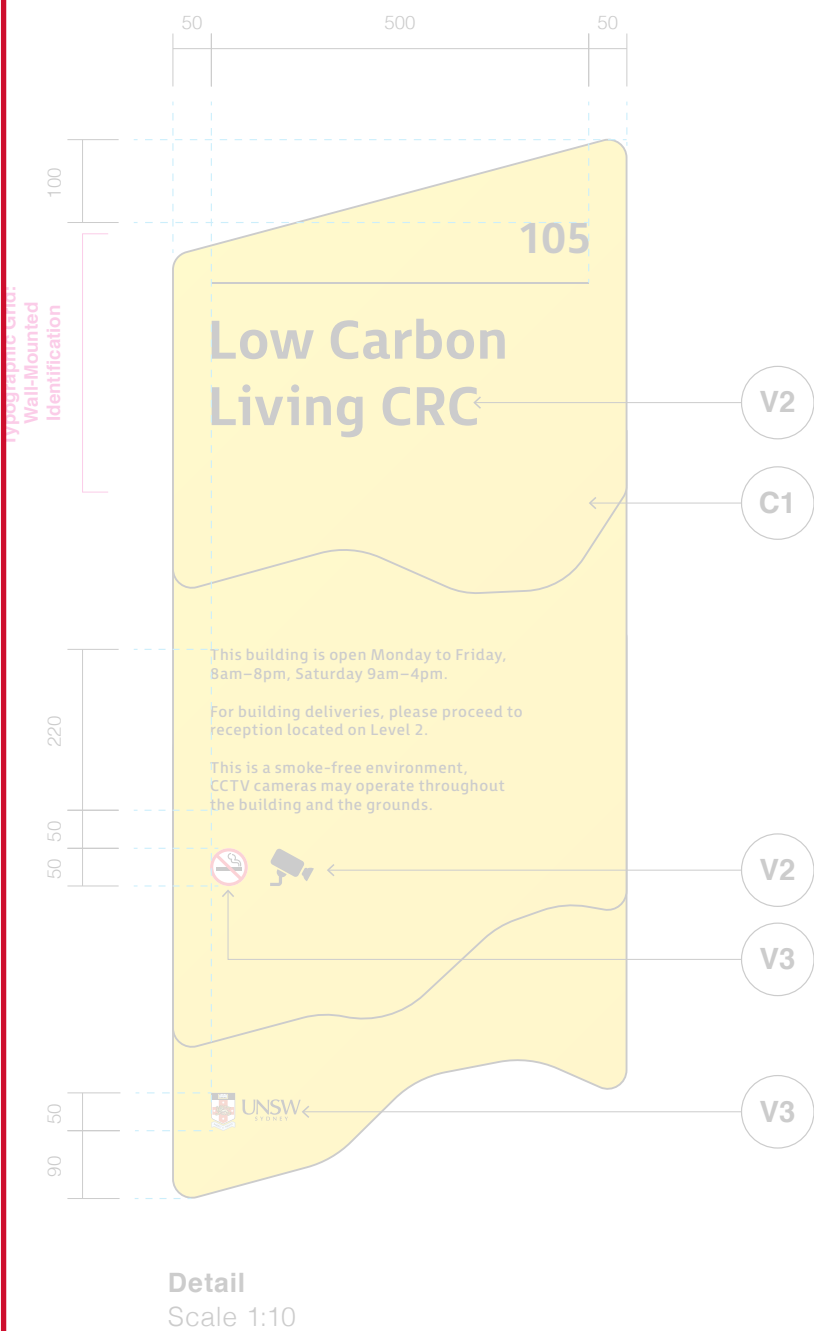

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Mount Layout. Refer to Section 7, Graphic Standards, Typographic Grids,

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
No Smoking, CCTV: 50mm diameter

UNSW logo
50mm height


Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 8, Construction Standards, Layered Panel Signforms

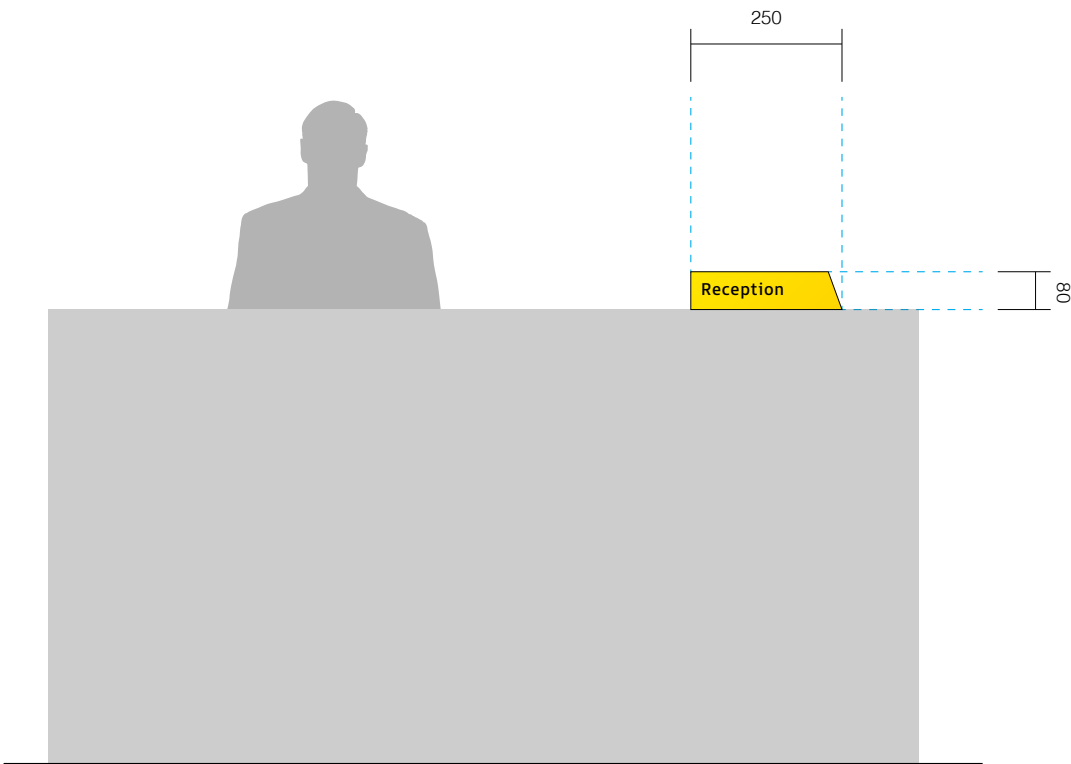


Elevation
Scale 1:20

Sign Location

Purpose
Identifies reception desk for pedestrian visitors, staff and students

Location
Freestanding on table top of reception desk.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

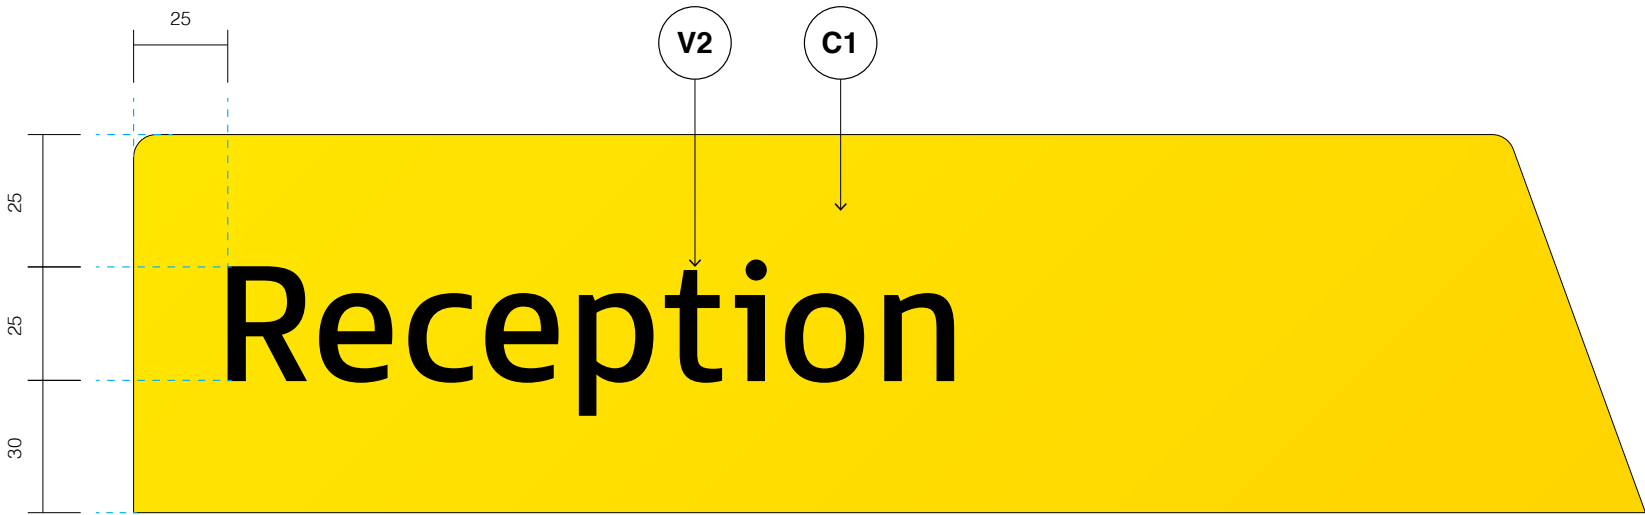

Detail
Scale 1:2

Graphic Layout

Reception Identification
FS Millbank Regular

Alignment
Left aligned

Size
25mm

Tracking
10+, Optical Kerning

Construction & Materials

Materiality Legend


- C1**

 - C1 finish on 3mm aluminium
- V2**


 - V2 finish applied on top of aluminium

Construction Details

- Refer to: Section 20, Shop Drawings

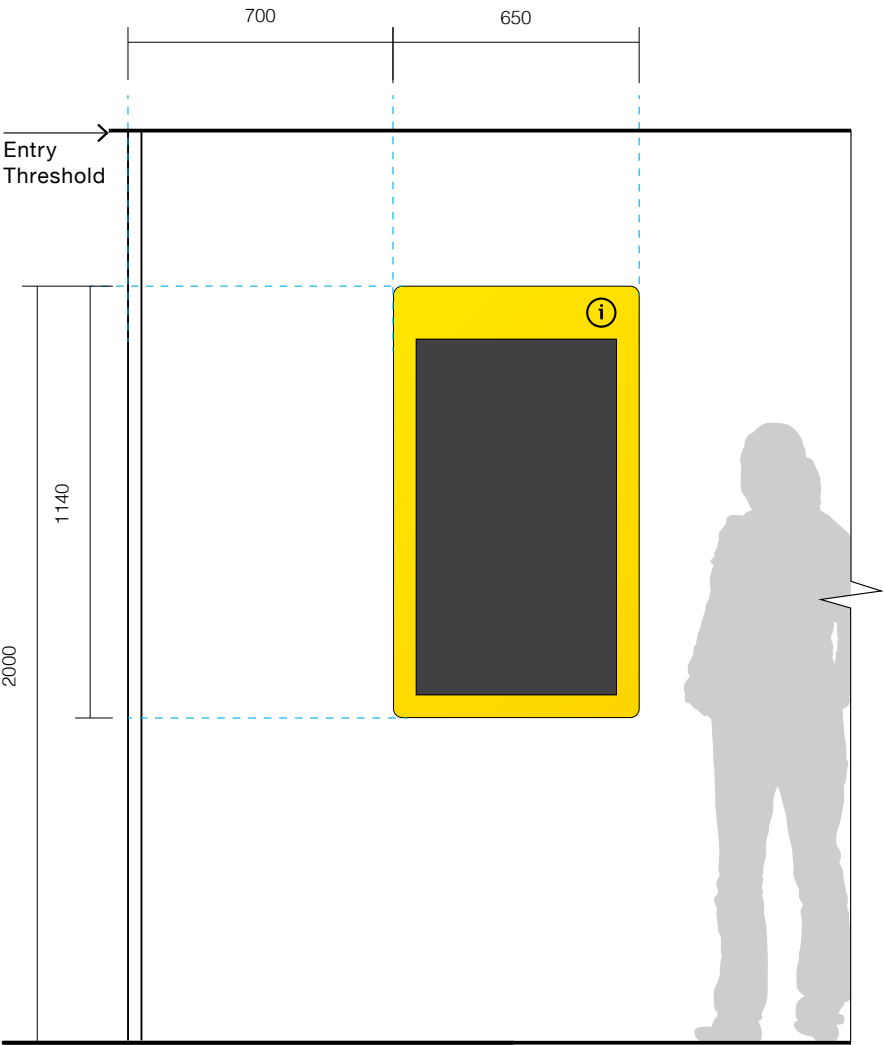

Elevation - Adjacent to threshold
Scale 1:20

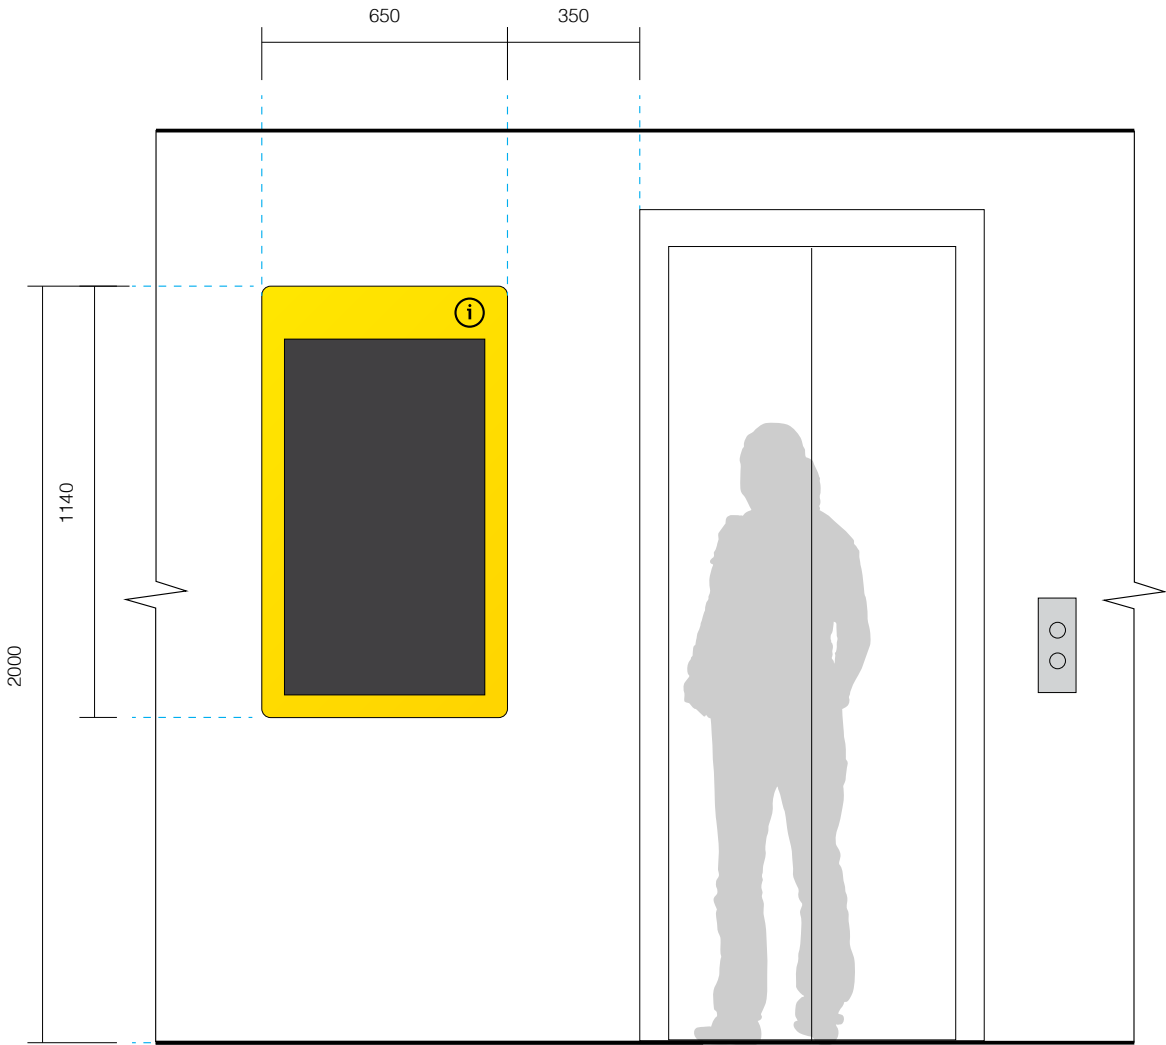

Elevation - Beside lift
Scale 1:20


Sign Location

Purpose
Directs to main level destinations and identifies on floor plan facilities/circulation devices and room numbers for all FOH destinations on that level.

Location
Applied to solid walls in lift lobby

Digital Screen
Final screen specifications to be provided by UNSW and contractor, signform size and construction to be adjusted accordingly.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

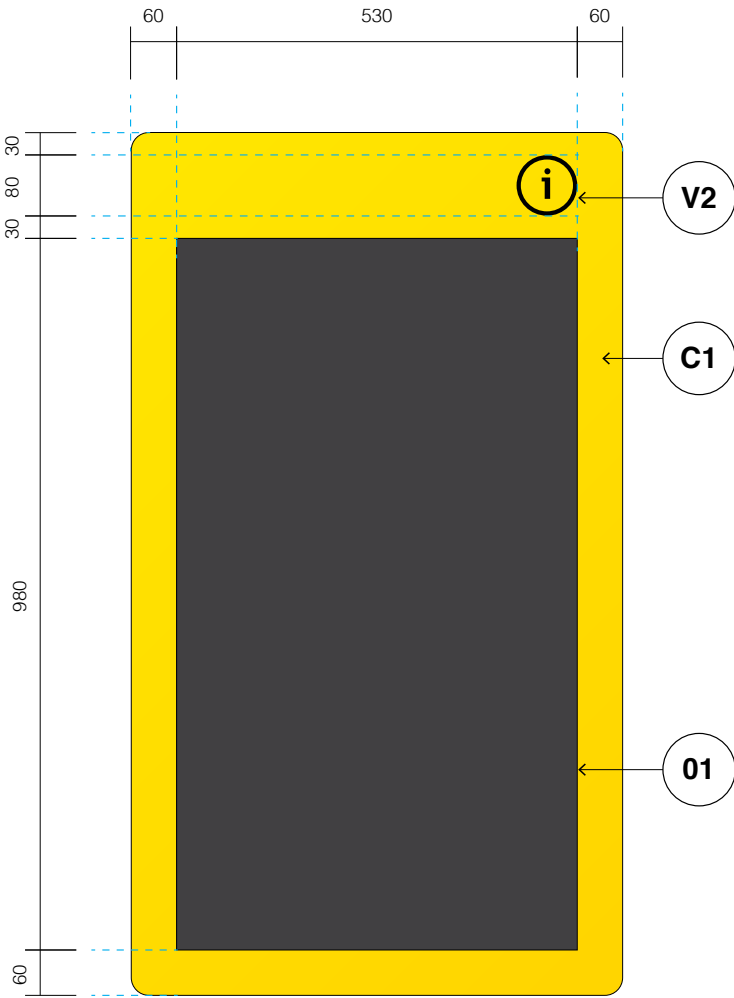

Detail
Scale 1:10

Graphic Layout

Pictogram
Information pictogram: 100 diameter
Refer to Section 7, Graphic Standards, Pictogram Suite.


Digital Screen
Samsung 43" QM3R-T Touch Screen (portrait)

Construction & Materials


Materiality Legend

C1	V2	01
• C1 finish on 3mm aluminium	• V2 applied on top of aluminium	• Digital Touch Screen

- Construction Details**
- Refer to: Section 8, Construction Standards, Digital Signforms
 - Monitor specifications are nominal only, contractor is to advise based on client requirements. Allow for adequate ventilation and power supply.

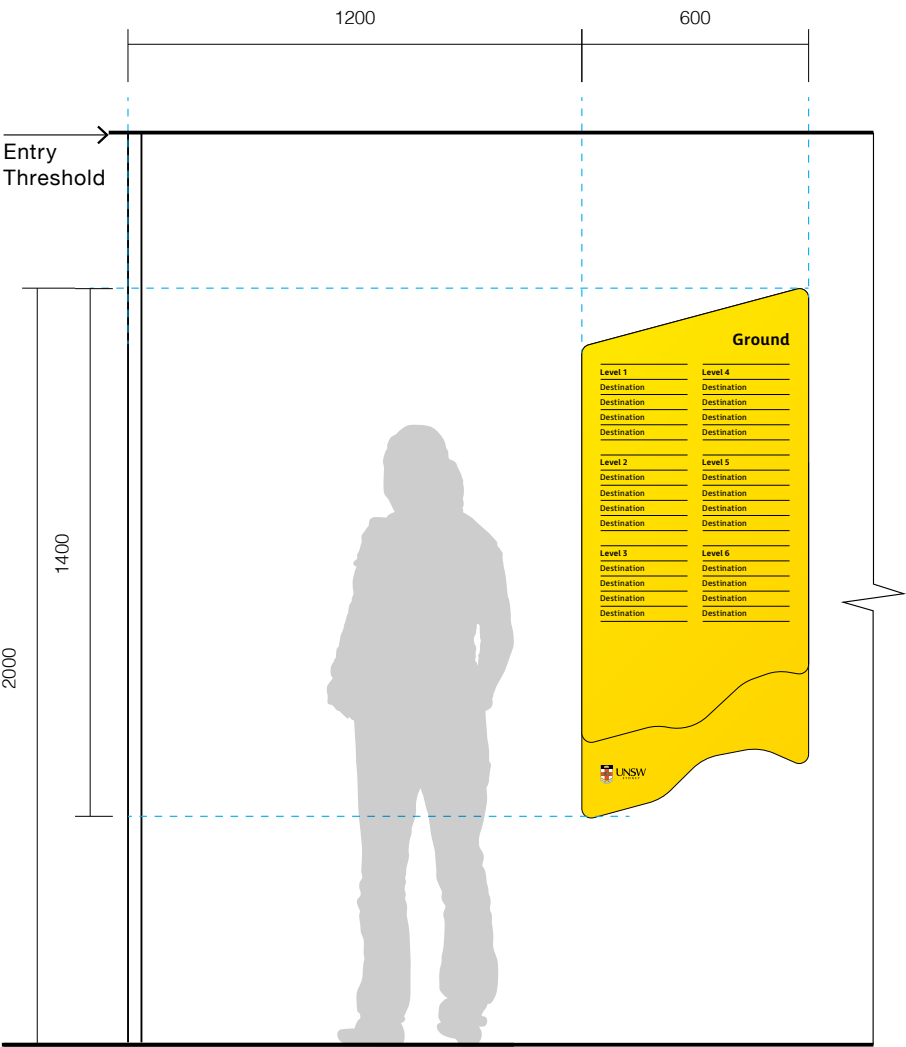

Elevation - Adjacent to threshold
Scale 1:20

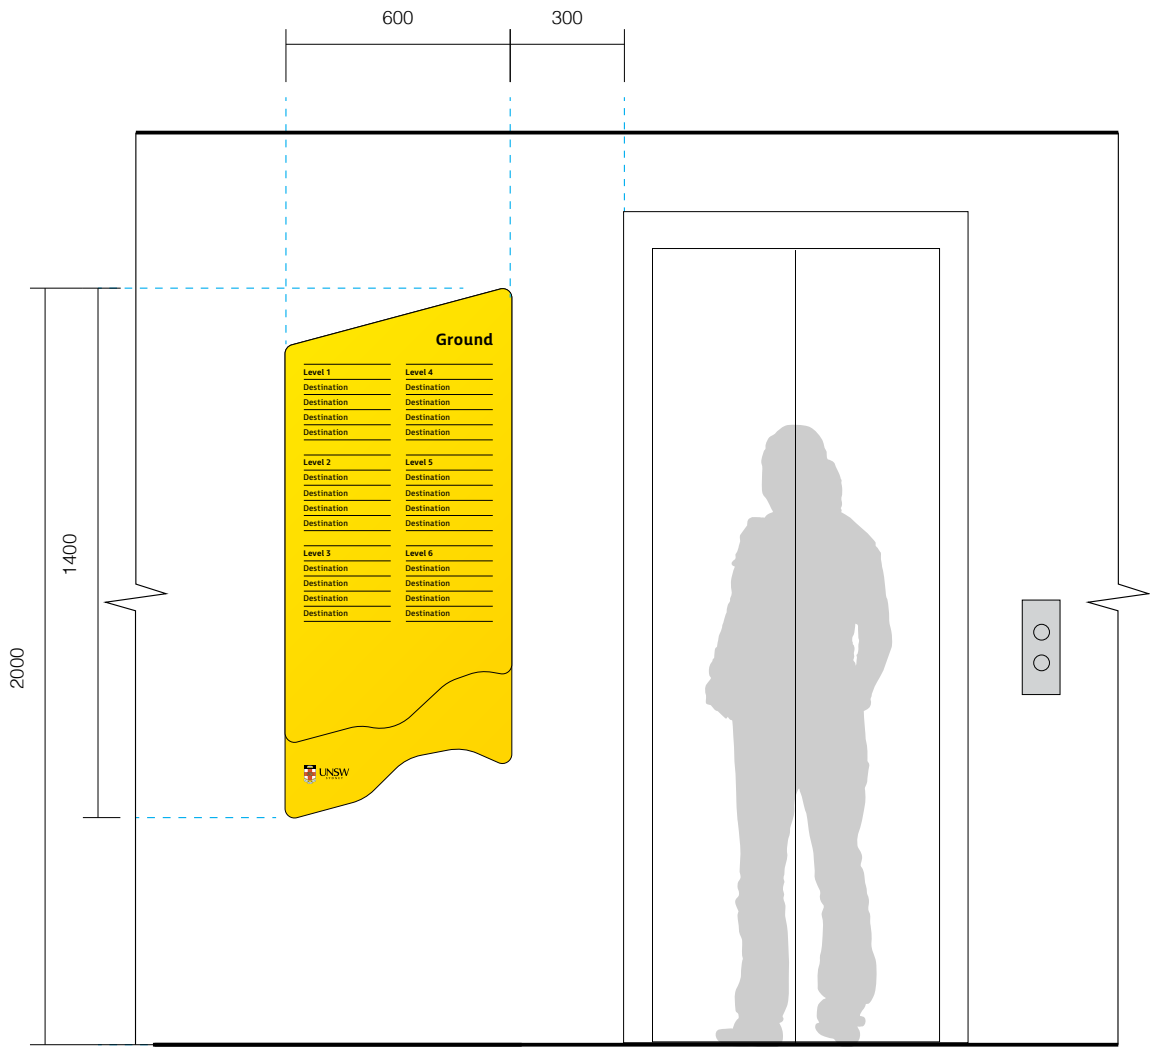

Elevation - Adjacent to lift
Scale 1:20

Sign Location


Purpose
Directs to main level destinations internally.

Location
Applied to solid walls in lift lobby.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

Section 10 – Internal: Lift Directory (Static)

ID.16

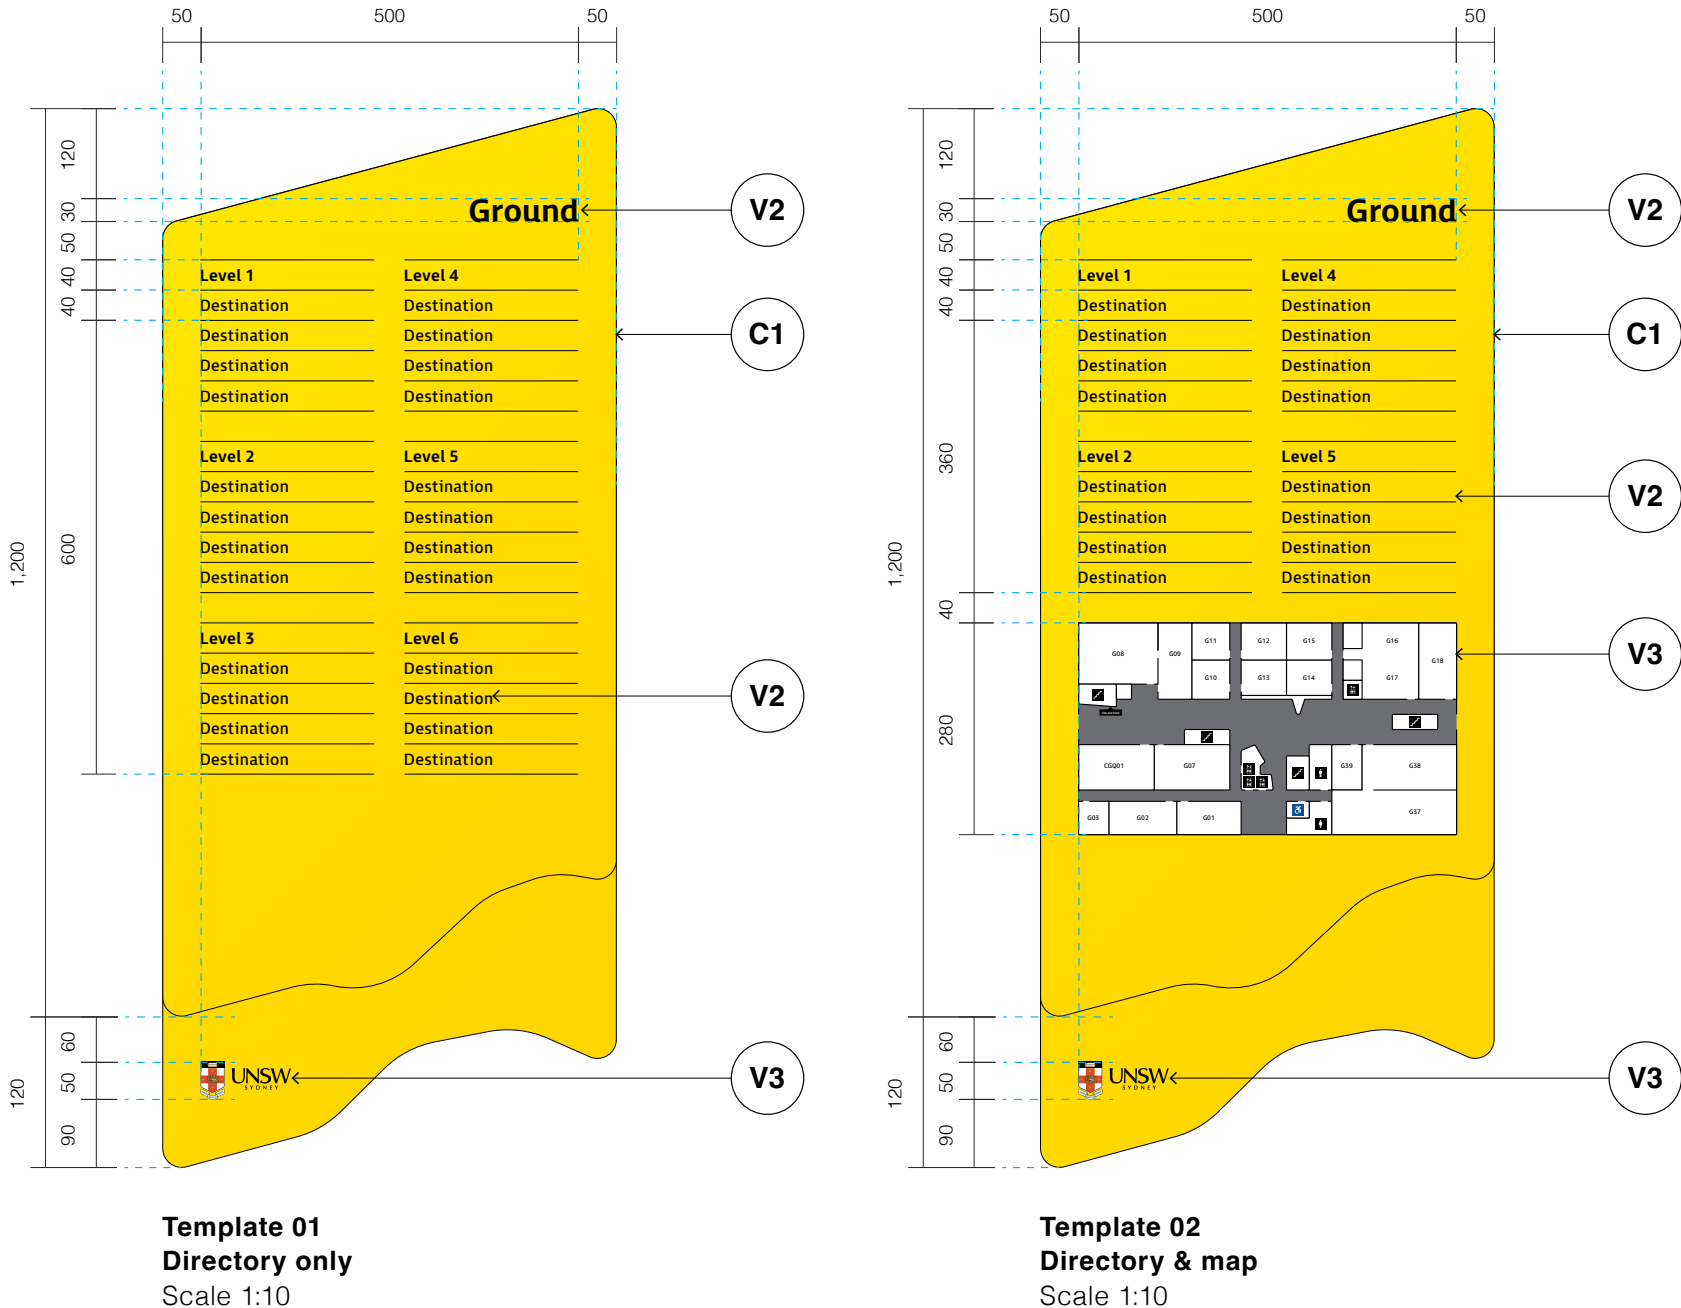

Graphic Layout

Level ID

FS Millbank Bold
Alignment: Right
Size/ Leading: 30mm
Tracking: 10+, Optical kerning

Level Directory Content


Level number: FS Millbank Bold
Typical messaging: FS Millbank Regular
Columns: Max 2
Alignment: Left
Size/Leading: 15mm, 25mm
Tracking: 10+, Optical kerning
Dividing line weight: 0.5mm

UNSW logo

50mm height

Construction & Materials

Materiality Legend



Construction Details

- Refer to: Section 8, Construction Standards,
Layered Panel Signforms




01 Lift Directory
Tyree Energies Technologies



02 Existing Sign
Tyree Energies Technologies

In Situ Comparison


Note
The images shown are indicative of sign location and are to be used as a guide only.

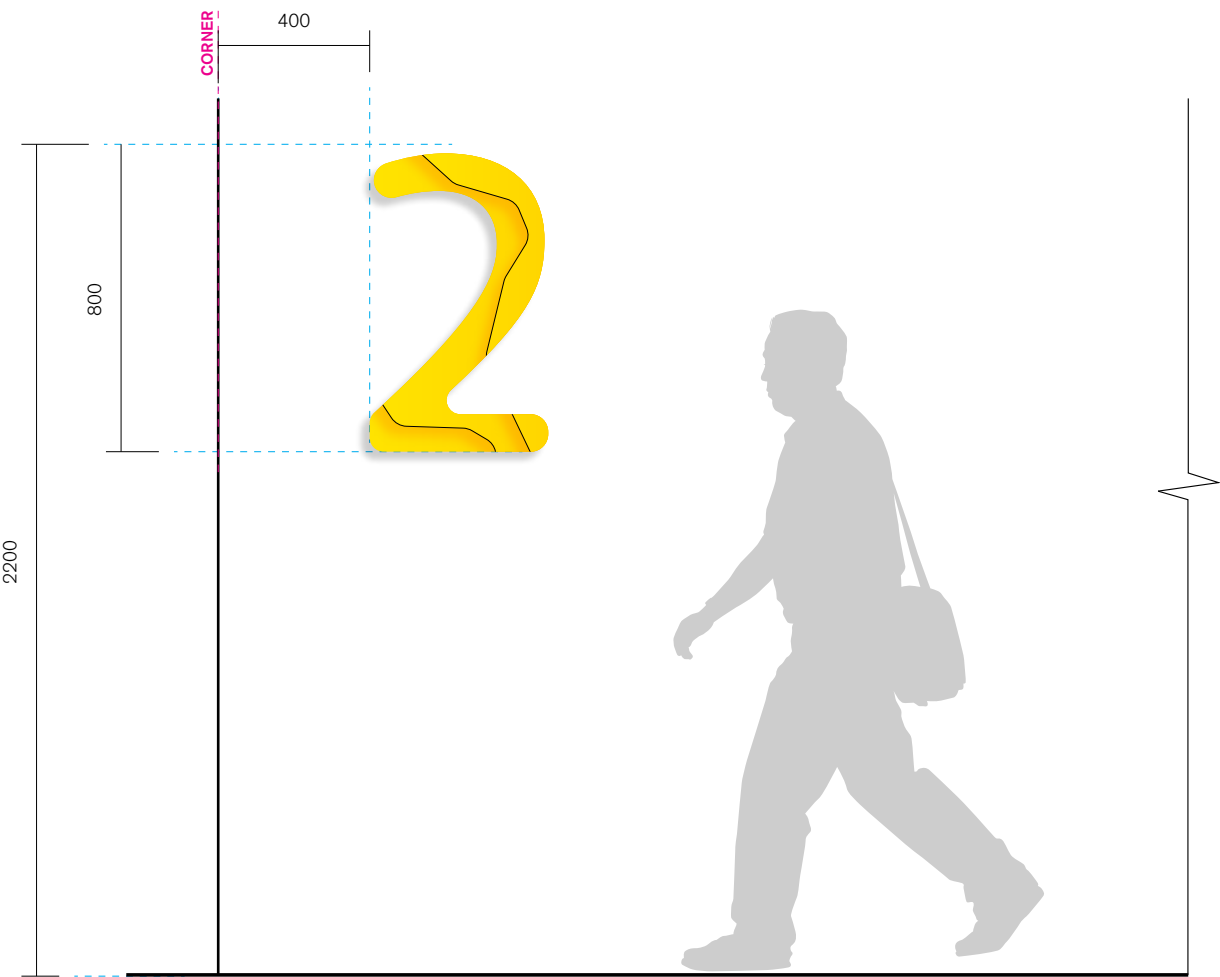


Elevation – Wall Corner
Scale 1:20



Elevation – Side
Scale 1:20

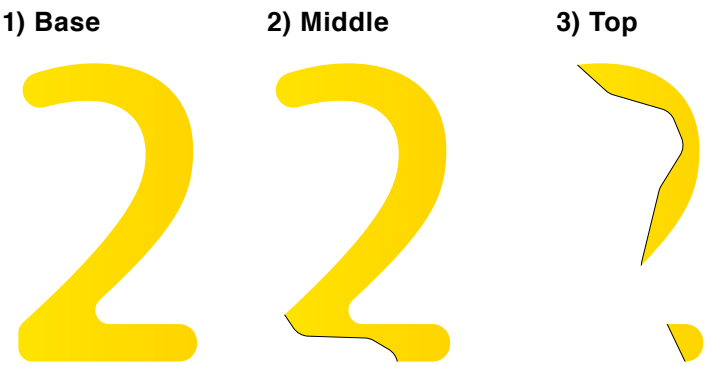

Detail – Level ID Deconstruction
Scale 1:20

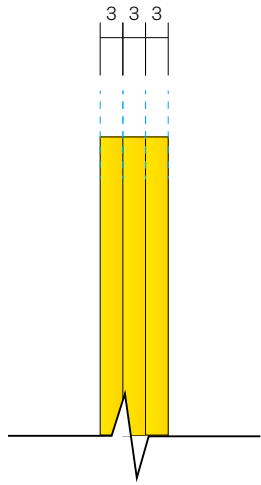


Detail
Scale 1:1

Sign Location

Purpose
Identifies building level at stair landings.


Location
Applied to solid walls adjacent to stair landing.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

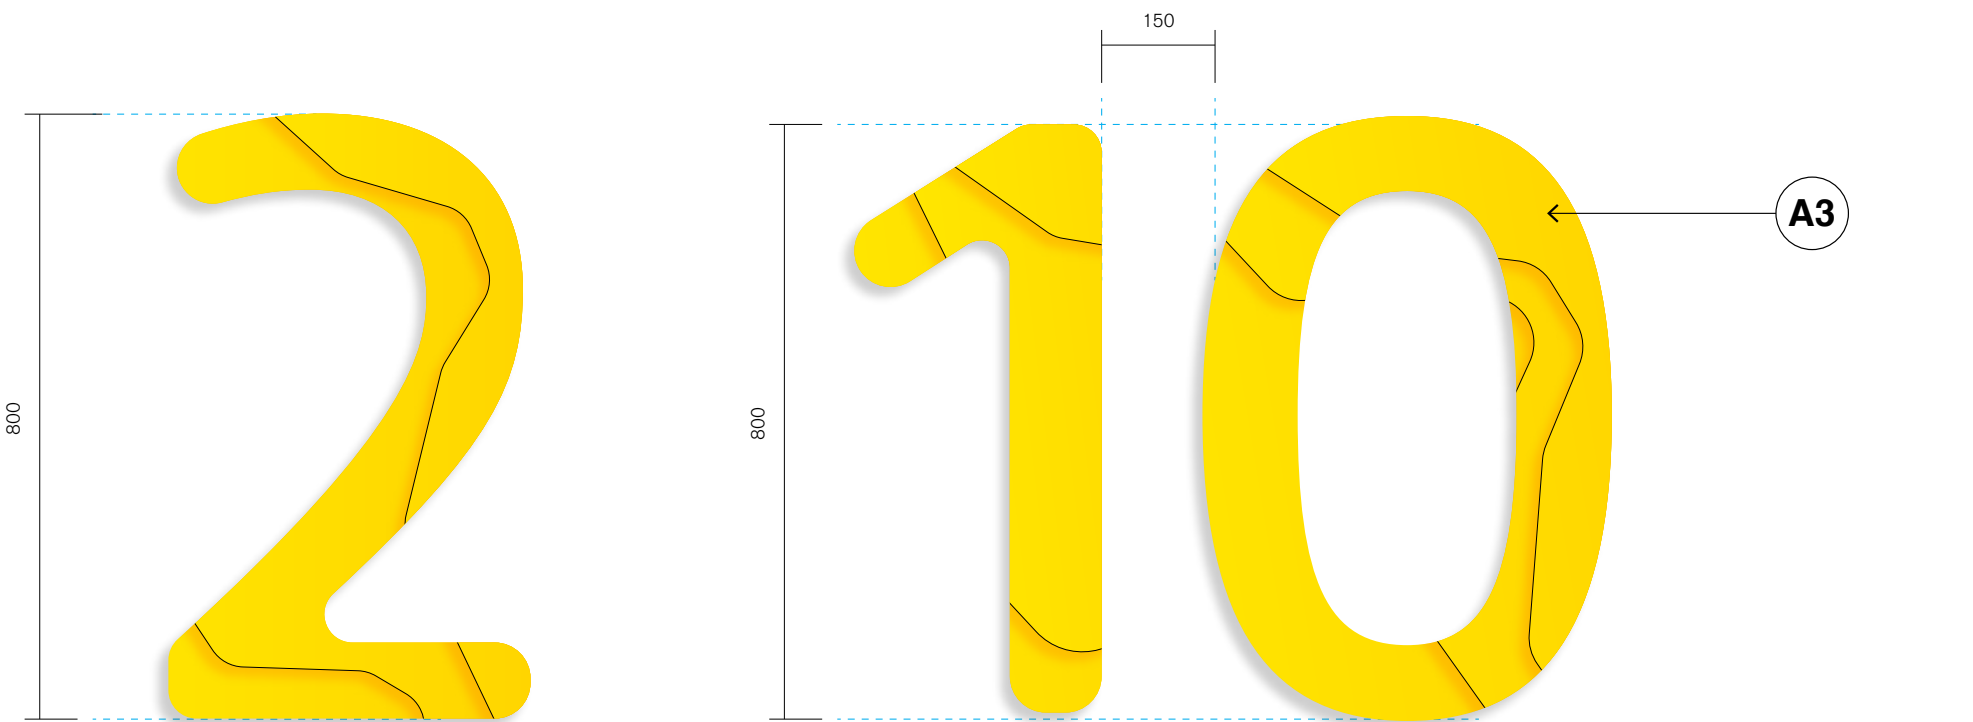

Level ID - Single Digit Detail
Scale 1:10

Level ID - Double Digit Detail
Scale 1:10

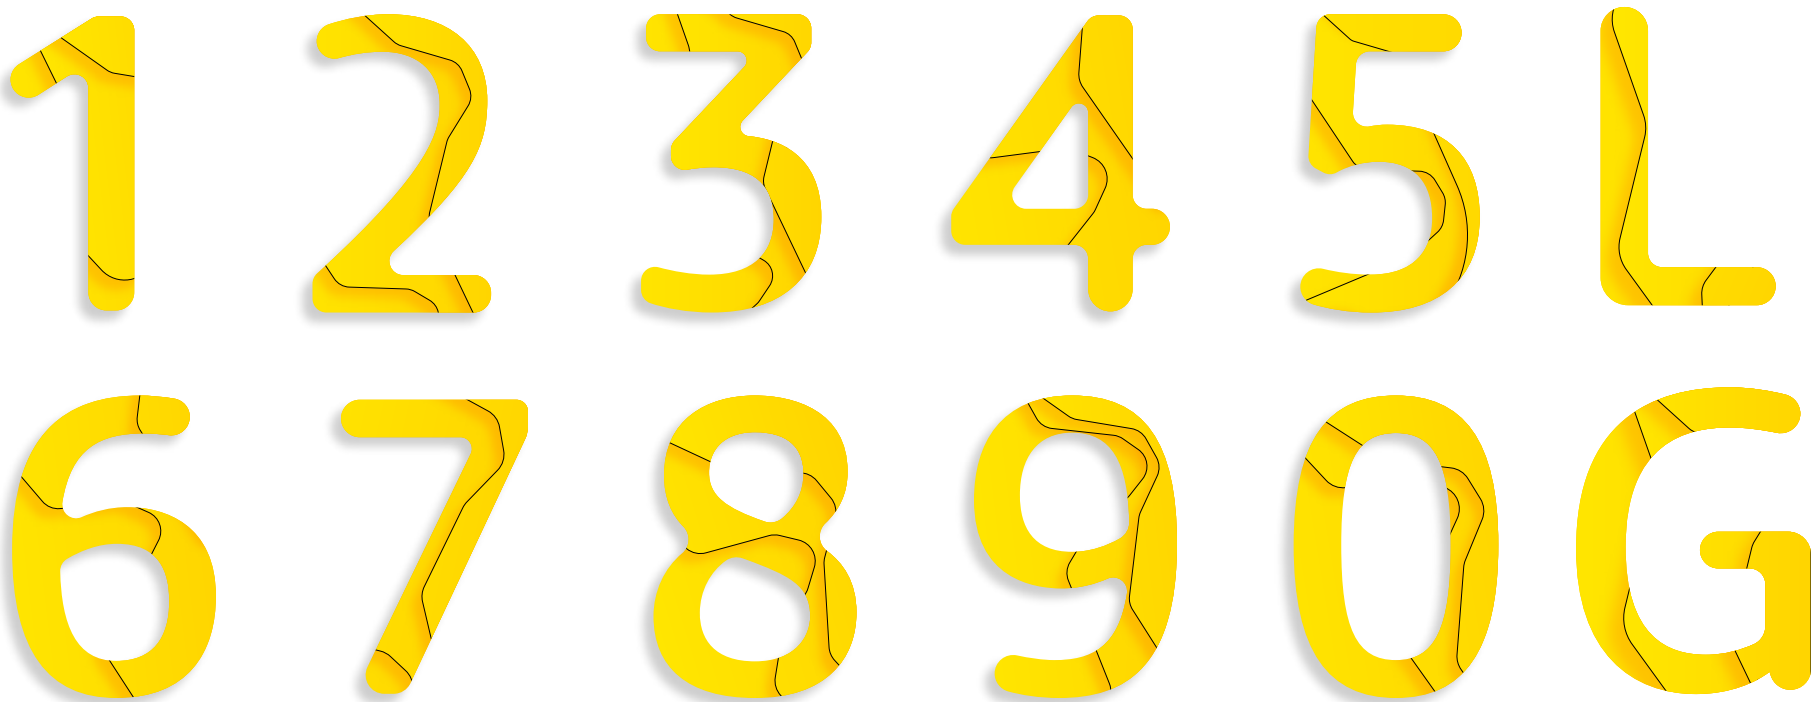

Level ID Family
Scale 1:20

Graphic Layout

Level ID
Customised FS Millbank, refer to Section 20, Shop Drawings


Size
800mm

Construction & Materials


Materiality Legend

- A3**
- A3 5mm thk acrylic

Construction Details
Refer to: Section 20, Shop Drawings

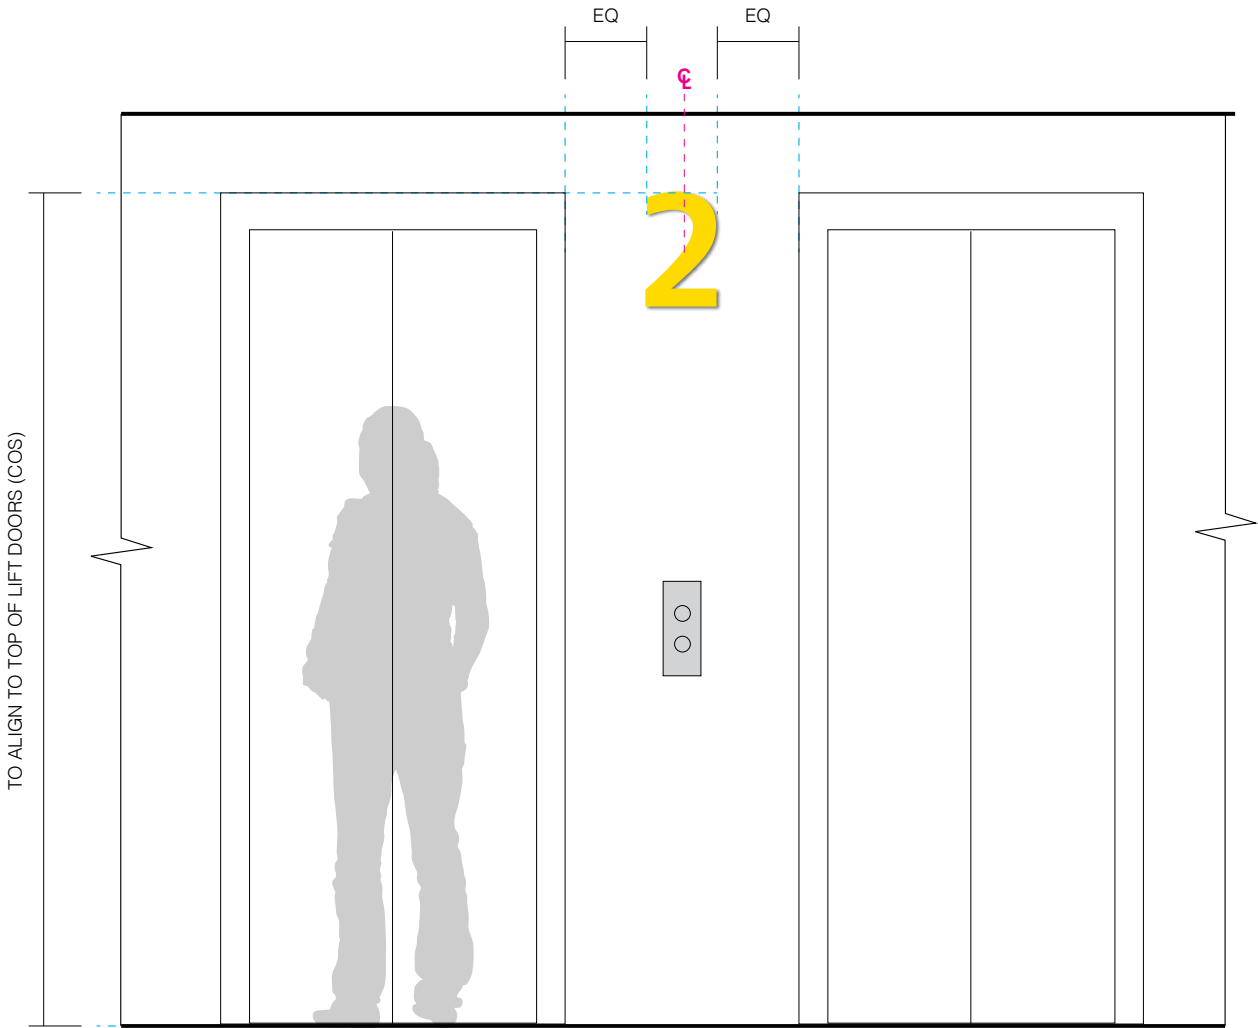

Elevation - Multiple lifts
Scale 1:20

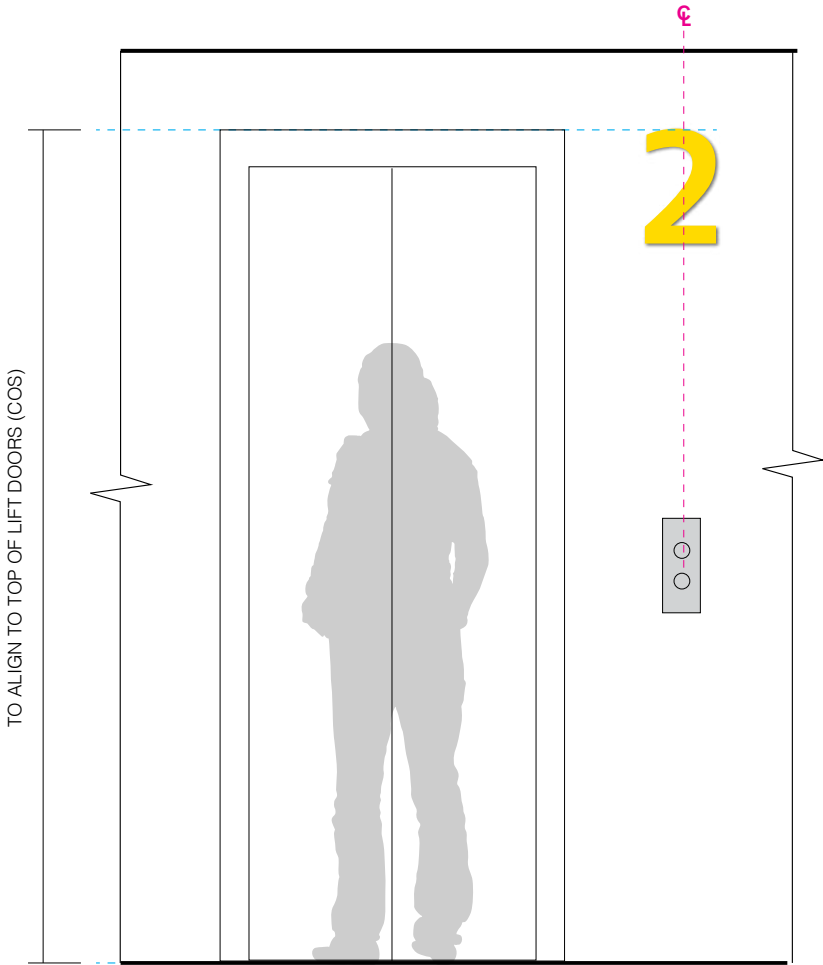


Elevation - Single lift
Scale 1:20

Sign Location

Purpose
Identifies building level at lift lobbies.

Location
Applied to solid walls above lift core button.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

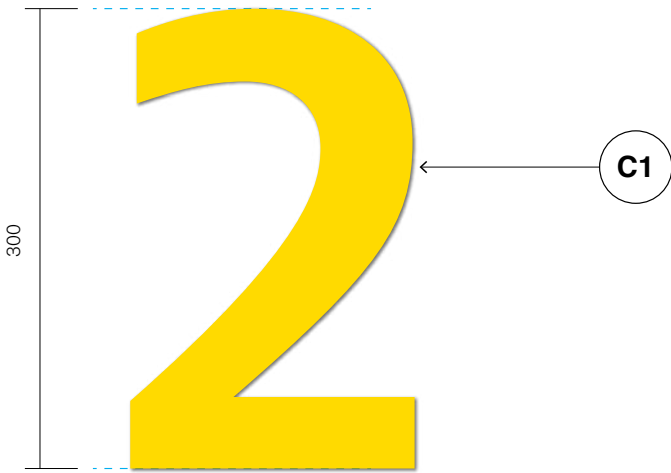

Detail - Single number
Scale 1:4



Detail - Multiple numbers
Scale 1:4

Graphic Layout

Level ID
FS Millbank Bold

Size
300mm


Construction & Materials

Materiality Legend


-  C1 finish on 3mm aluminium

Construction Details

- Refer to: Section 20, Shop Drawings

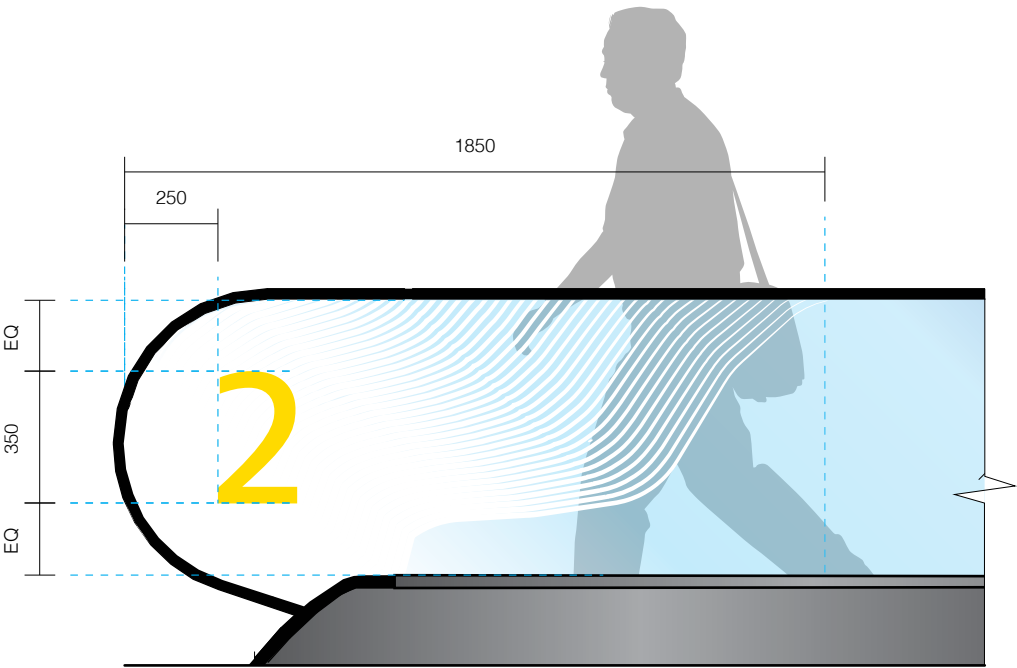

Front Elevation
Scale 1:20

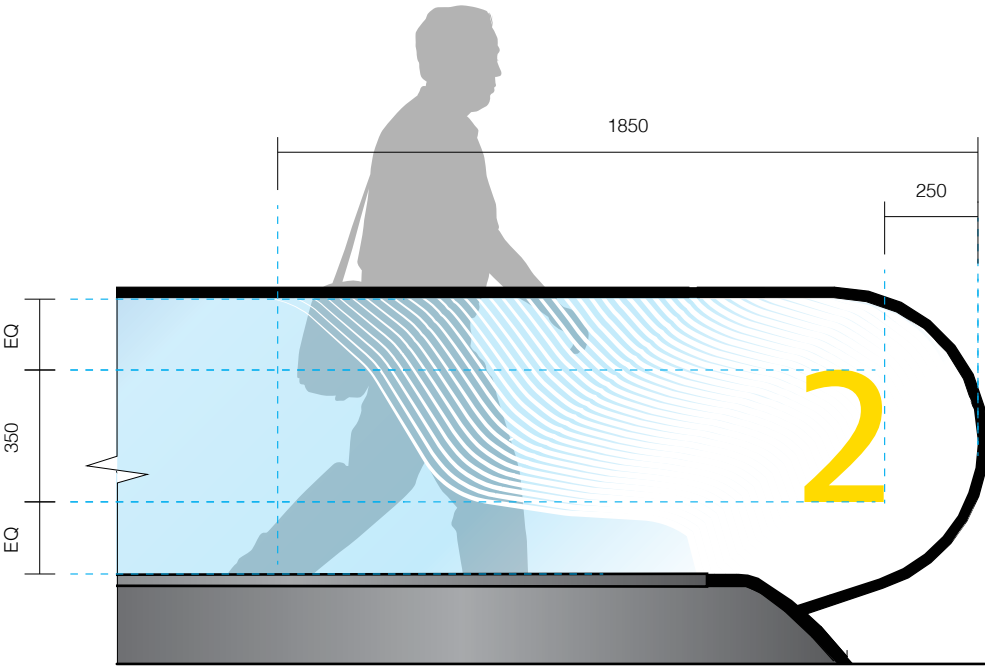


Rear Elevation
Scale 1:20

Sign Location

Purpose
Identifies building level at escalator landings.

Location
Applied to inside face of glazing of escalator landing.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

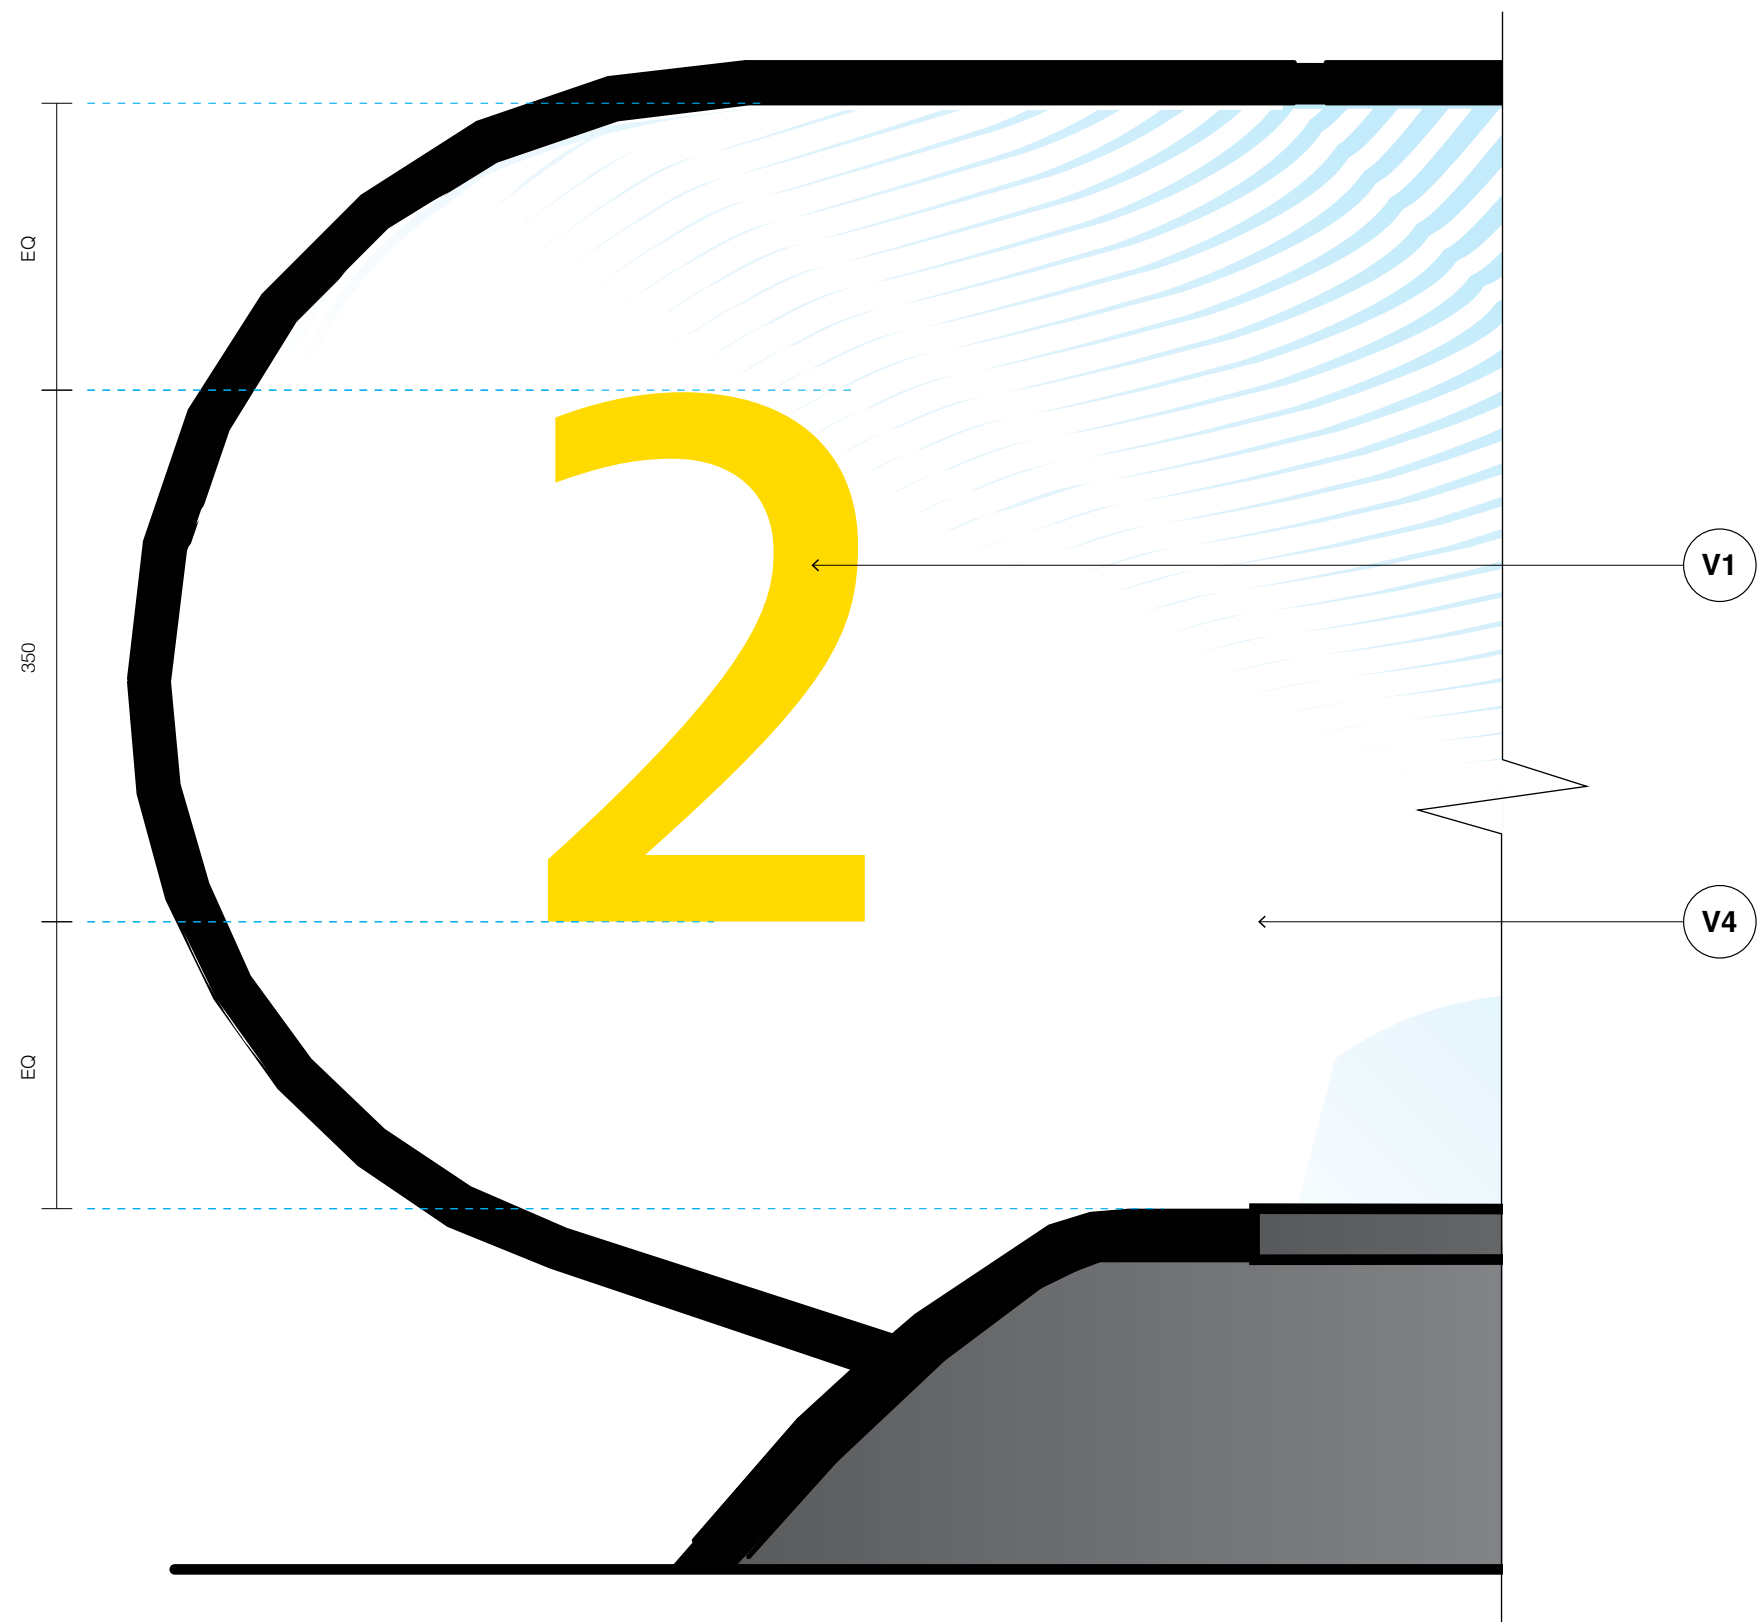

Graphic Layout

Level ID
FS Millbank Regular

Size
800mm

Construction & Materials

Materiality Legend

- | | |
|---------------------------------|---------------------------------|
| V1 | V4 |
| • V1 print applied onto glazing | • V4 print applied onto glazing |

Construction Details
• Refer to: Section 8, Construction Standards, Direct Applied Graphics




01 Escalator Level ID
Law Building




02 Existing Escalator
Law Building

In Situ Comparison


Note
The images shown are indicative of sign location and are to be used as a guide only.

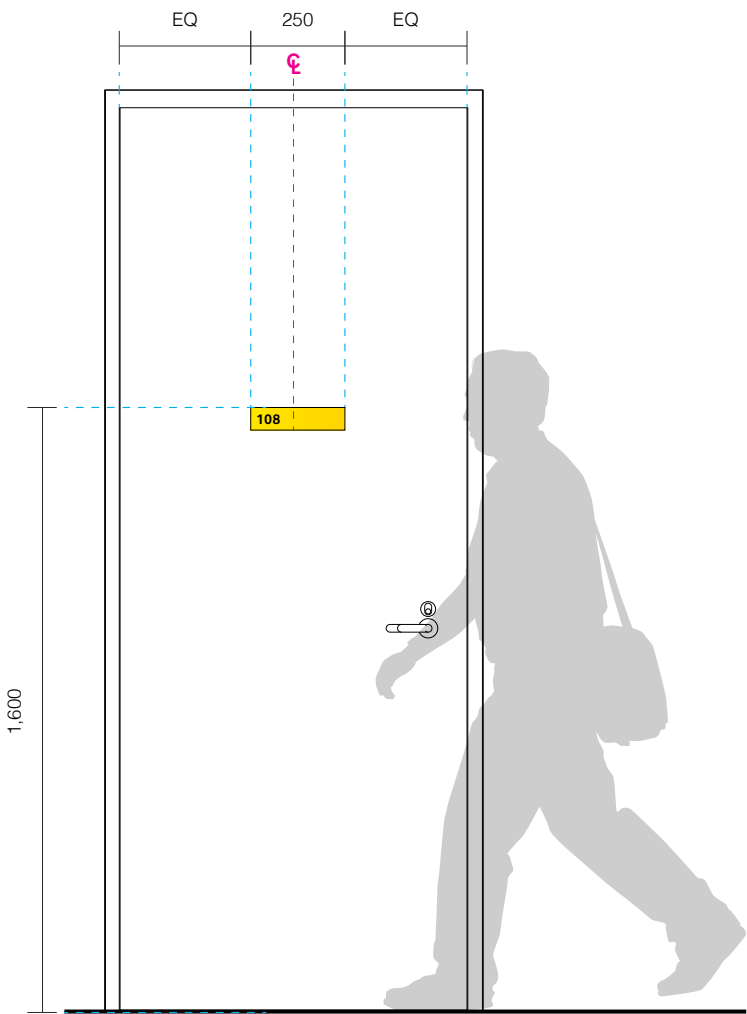

Elevation: Single panel, door
Scale 1:20

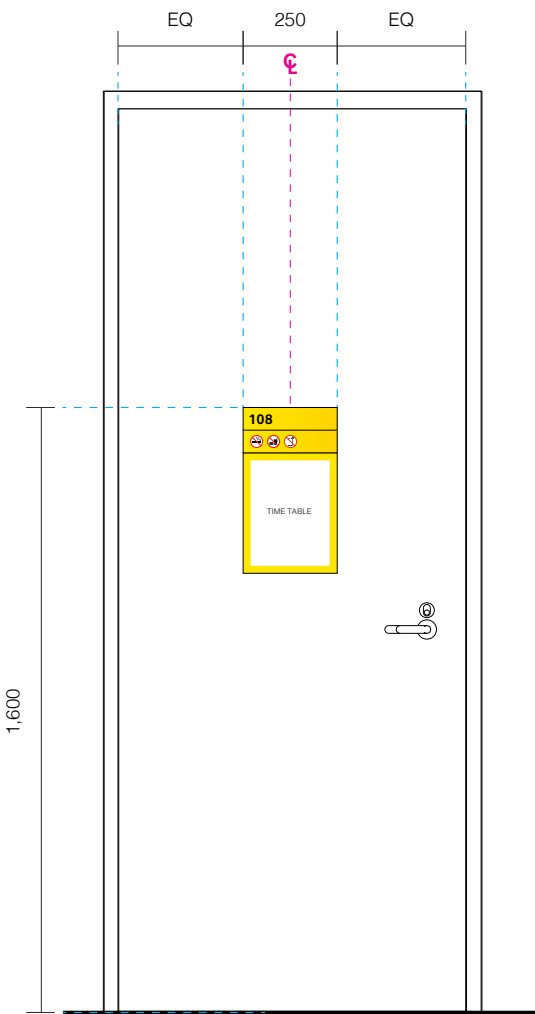

Elevation: Multiple panels, door
Scale 1:20

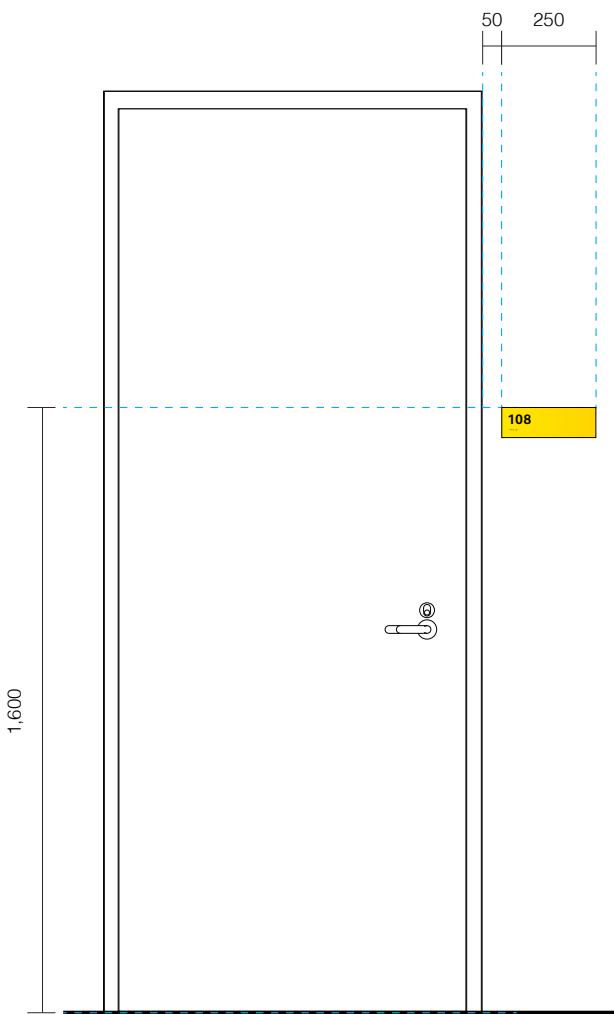

Elevation: Braille – Adjacent to door
Scale 1:20

Sign Location

Purpose


Modular panel system, that allows identification of room number with additional information if required. May also identify statutory messaging, assigned time table and personnel contact details.

Location

Applied to outside face of solid doors in most cases. All Braille Room ID signage applied 50mm adjacent to the door opening as per DDA standards.

Note


- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

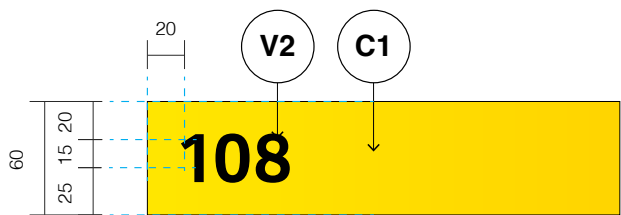


Template 01
Room Number
Scale 1:4




Template 02
Room Name - 60mm
Scale 1:4

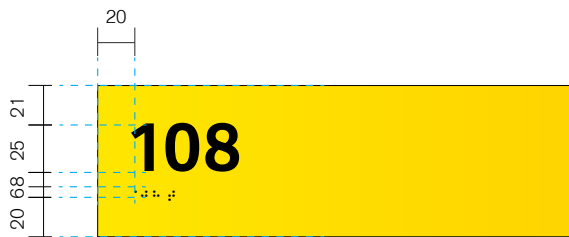

Template 09
Room Number w/ Braille
Scale 1:4

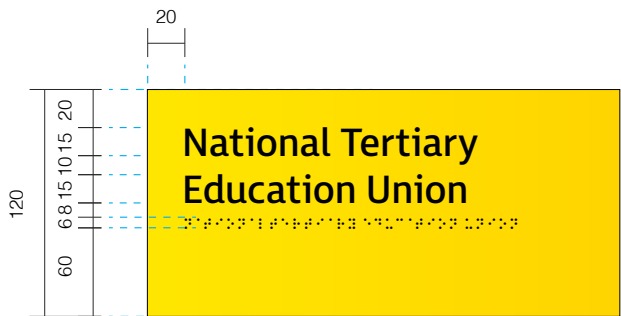


Template 03
Room Name w/ Braille - 120mm
Scale 1:4

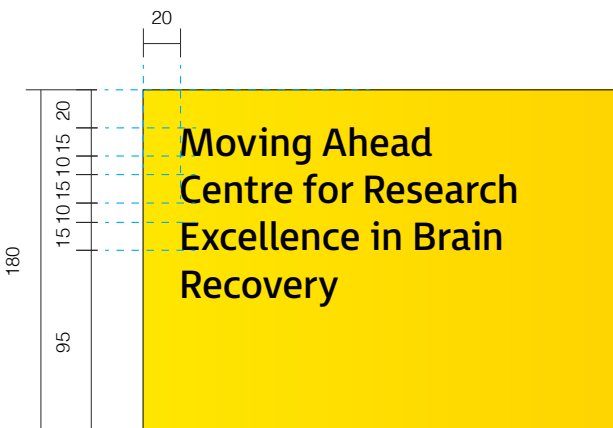


Template 04
Room Name - 180mm
Scale 1:4




Template 05
Lecture Theatre Panel
Scale 1:4

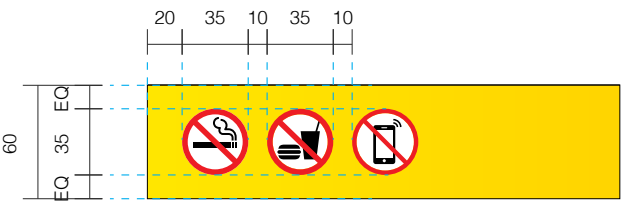

Template 06
Pictograms - 60mm
Scale 1:4

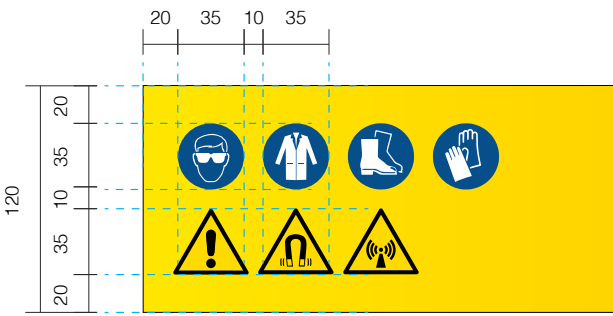

Template 07
Pictograms - 120mm
Scale 1:4

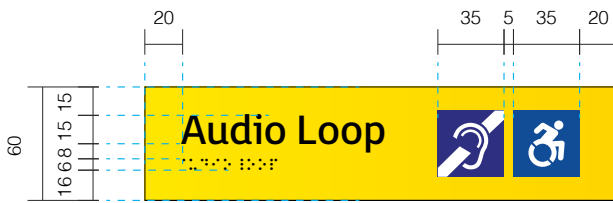

Template 08
Audio Loop Panel
Scale 1:4

Graphic Layout

Room Number
FS Millbank Bold
Alignment: Left
Size: 25mm

Room Name
FS Millbank Regular
Alignment: Left
Size: 15mm, 10mm

Pictograms
QR Code is placeholder only. To be provided by UNSW.
Refer to Section 7, Graphic Standards, Pictogram Suite

Braille
Size: 6mm
Leading: 8mm


Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium


Construction Details

- Refer to: Section 8, Construction Standards, Wall Mounted Signforms




**ID.20a
General Room ID**

- Room number




**ID.20b
Utility Room ID**

- Room number
- Room name




**ID.20c
Class Room ID**

- Room number
- Pictogram panel




**ID.20d
Learning Space ID**

- Room number
- Room name
- Pictogram panel




**ID.20e
Staff Office**

- Room number
- Room name
- Name plate




**ID.20f
Staff Directory**

- Room number
- Room name
- Name plate(s)

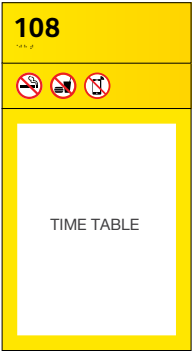


**ID.20g
Class Room ID
with timetable**

- Room number
- Braille
- Pictograms
- A4 frame



**ID.20h
Laboratory ID
with hazard table**

- Room number
- Room name
- Pictograms
- A4 frame



**ID.20i
Lecture Theatre ID**

- Room number
- Room name
- Lecture theatre panel
- Audio loop panel

Room ID Family
Scale: 1:10

Family

Panel Configurations
The ID.20 family acts as a modular system intended to identify multiple rooms of varying functionality. In result, Room ID panel configurations may vary from room to room in response to the messaging required. This page showcases the various Room ID sign types and the panels they include.

Note
Snap frame specification to be similar to Signlink Avant Garde'.

Signlink Avant Garde' aluminium framework finished in 2pack polyurethane painted Dulux Dandelion Yellow A205 Satin 2mm clear acrylic face panel with digital print (30% K) 8mm border to inside face of panel, Apply 8mm magnetic strip tape to affix to assembled framework.



01 Room ID
Lecture theatre configuration



02 Existing Sign
Lecture theatre configuration

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

When being replaced, contractor to remove and make good all areas where existing signage is located prior to installation of new signage.

Refer to Section 15, Operational Signage, OP.02: General ID for door-mounted push/pull signage.



01 Room ID
Laboratory configuration




02 Existing Sign
Laboratory configuration

In Situ Comparison


Note
The images shown are indicative of sign location and are to be used as a guide only.

When being replaced, contractor to remove and make good all areas where existing signage is located prior to installation of new signage.

Refer to Section 15, Operational Signage, OP.02: General ID for door-mounted push/pull signage.

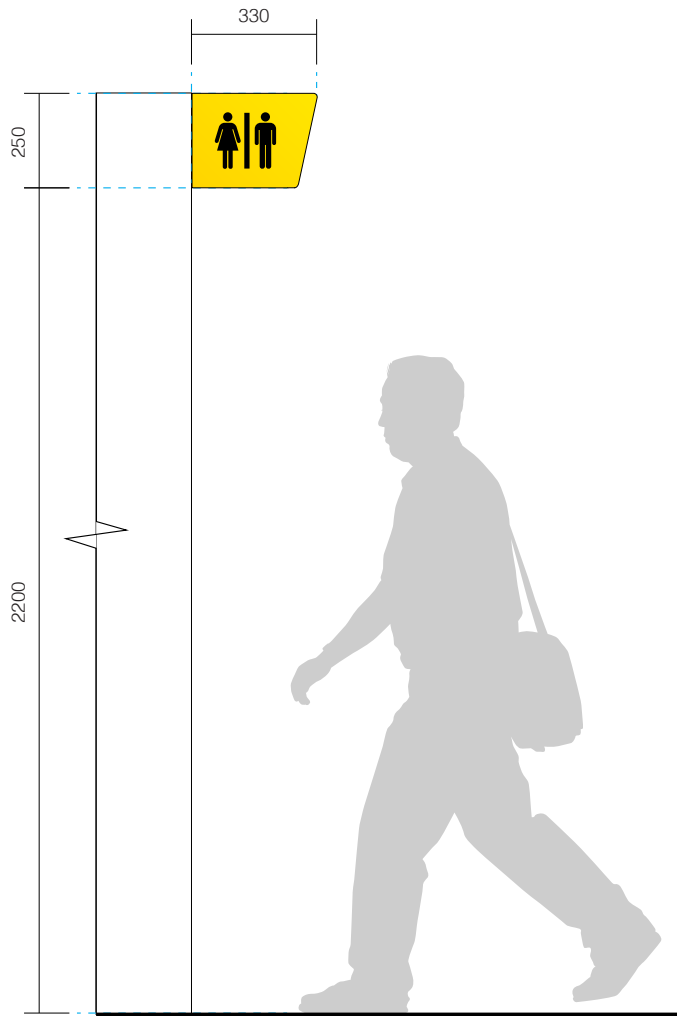

Front Elevation
Scale 1:20

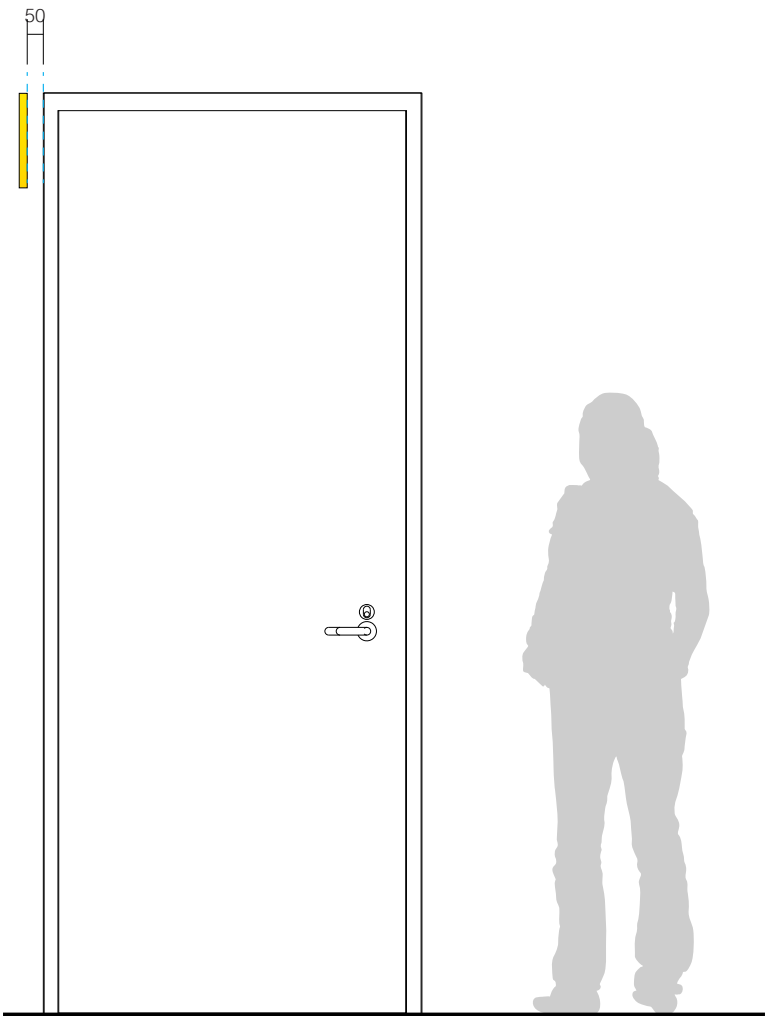


Side Elevation
Scale 1:20

Sign Location


Purpose
Identifies entry point for typical amenities.

Location
Cantilevered from solid walls in path of travel at confirmation or decision points.


- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

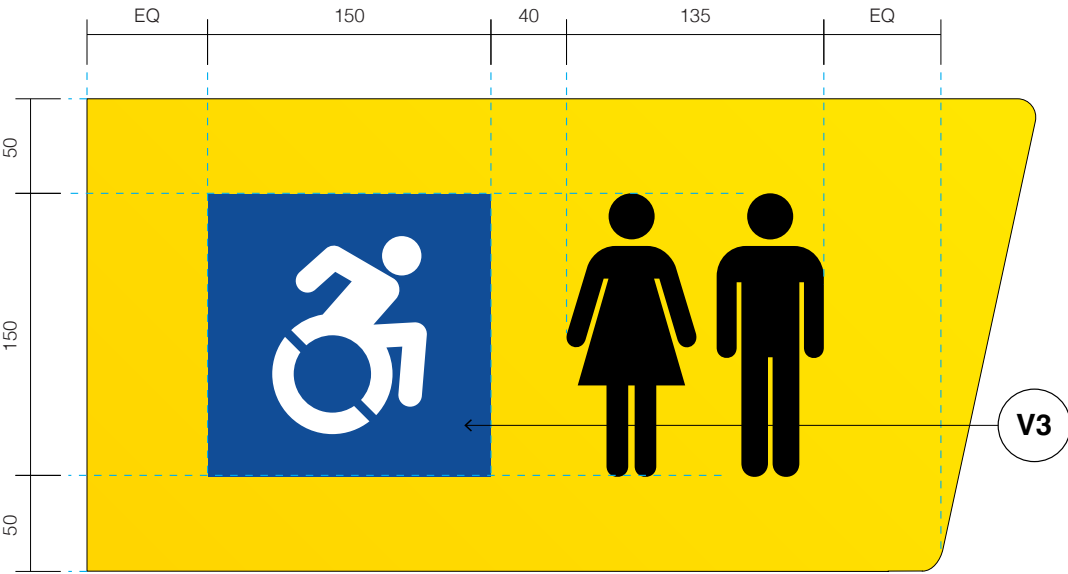


Template 01 - Accessible Unisex Toilet
Scale 1:4

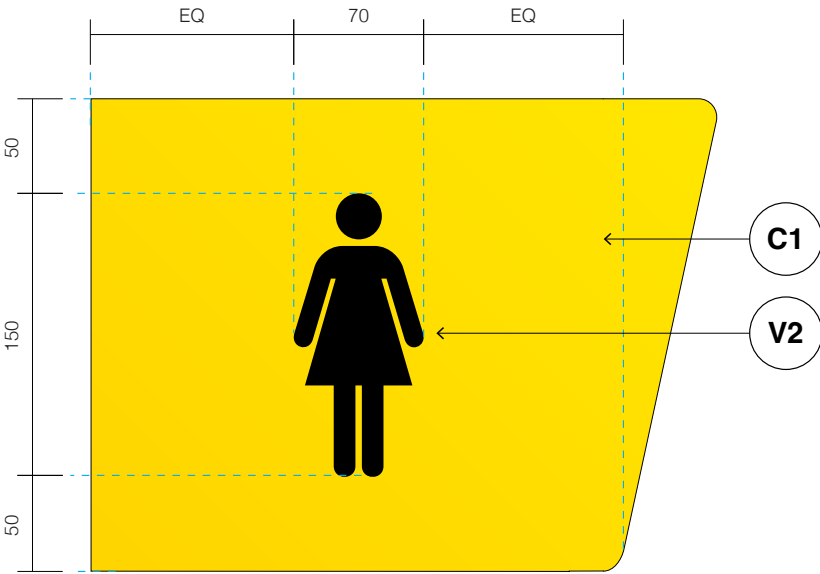

Template 03 - Female Toilet
Scale 1:4

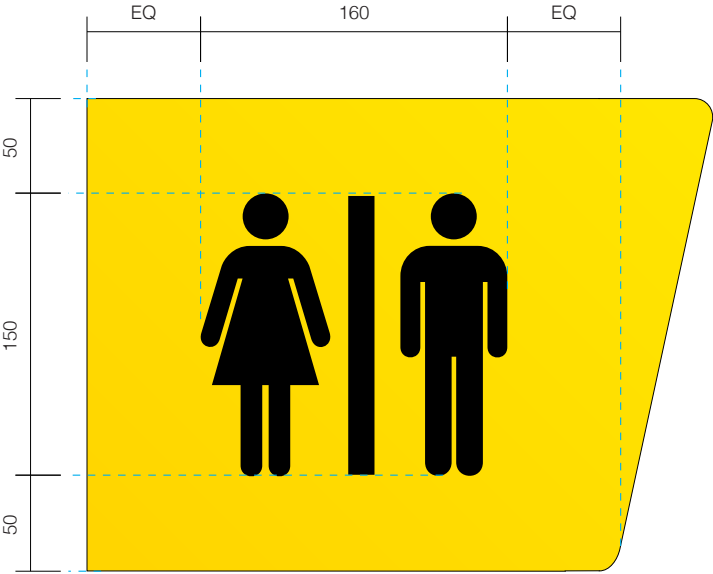

Template 02 - Male & Female Toilet
Scale 1:4

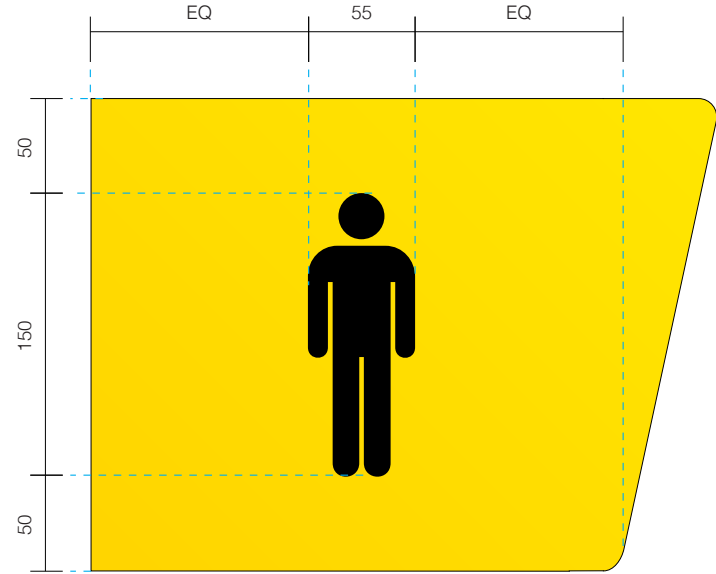

Template 04 - Male Toilet
Scale 1:4

Graphic Layout

Pictograms
Refer to Section 7, Graphic Standards, Pictogram Suite.

Construction & Materials

Materiality Legend

C1	V2	V3
• C1 finish on 3mm aluminium	• V2 applied on top of aluminium	• V3 print applied on top of aluminium

Construction Details
• Refer to: Section 8, Construction Standards, Cantilevered Signforms



01 Amenity ID
Law Building




02 Existing Sign
Law Building


In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Refer to Section 16, Statutory Signage, ST.01: Amenity Braille & Tactile Family for wall-mounted amenity signage.

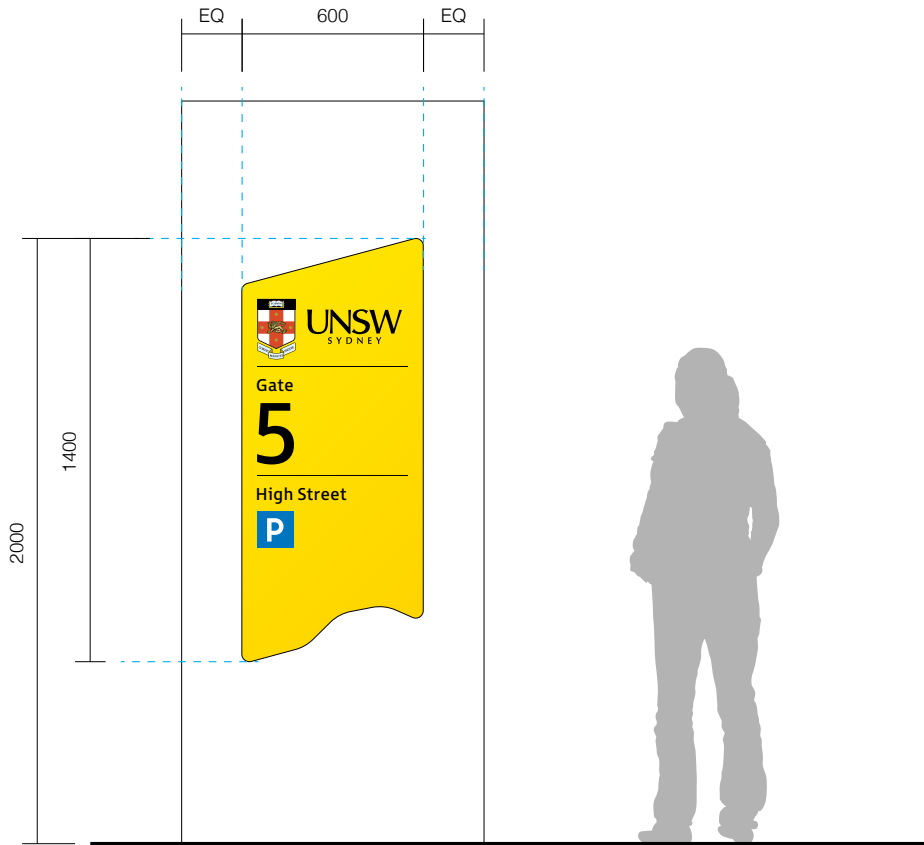

Elevation - Centered to wall
Scale 1:25

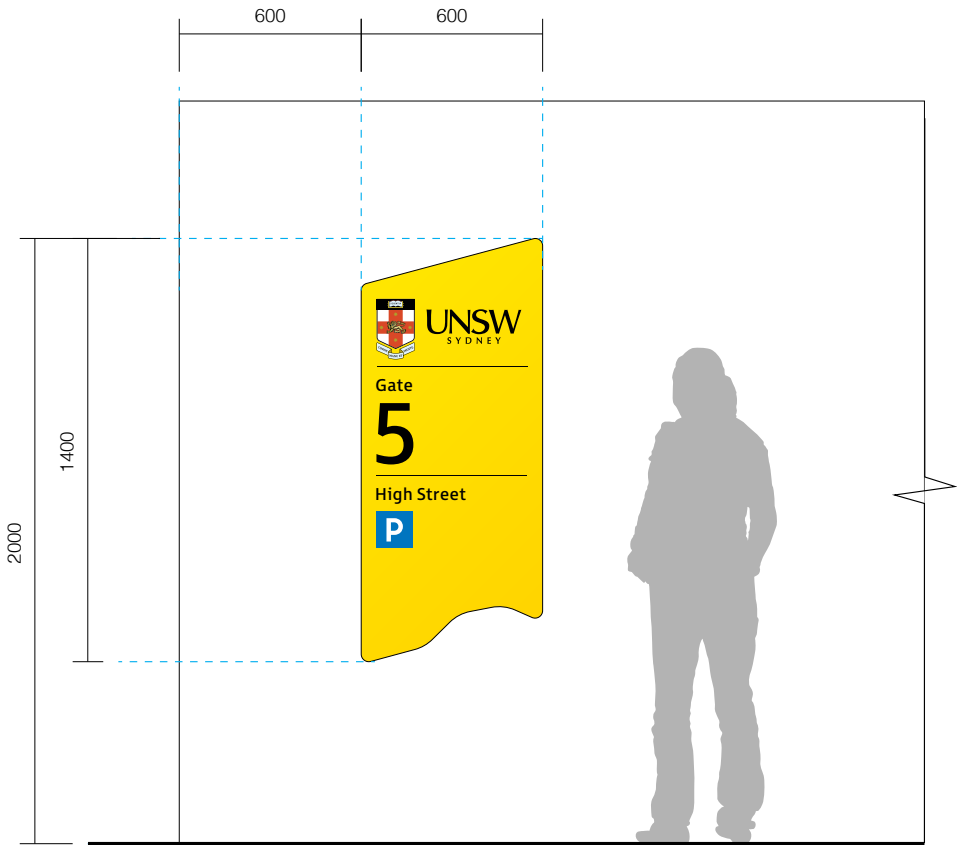


Elevation - Aligned to corner
Scale 1:25

Sign Location


Purpose
Identifies primary or secondary entries into the UNSW site. Refer to Section 3, Terminology & Addressing, Category 2.

Location
Positioned on walls, gates, or glazing at primary and secondary entry points into the UNSW site. This sign type is to be used when lacking sufficient space for a totem signform.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

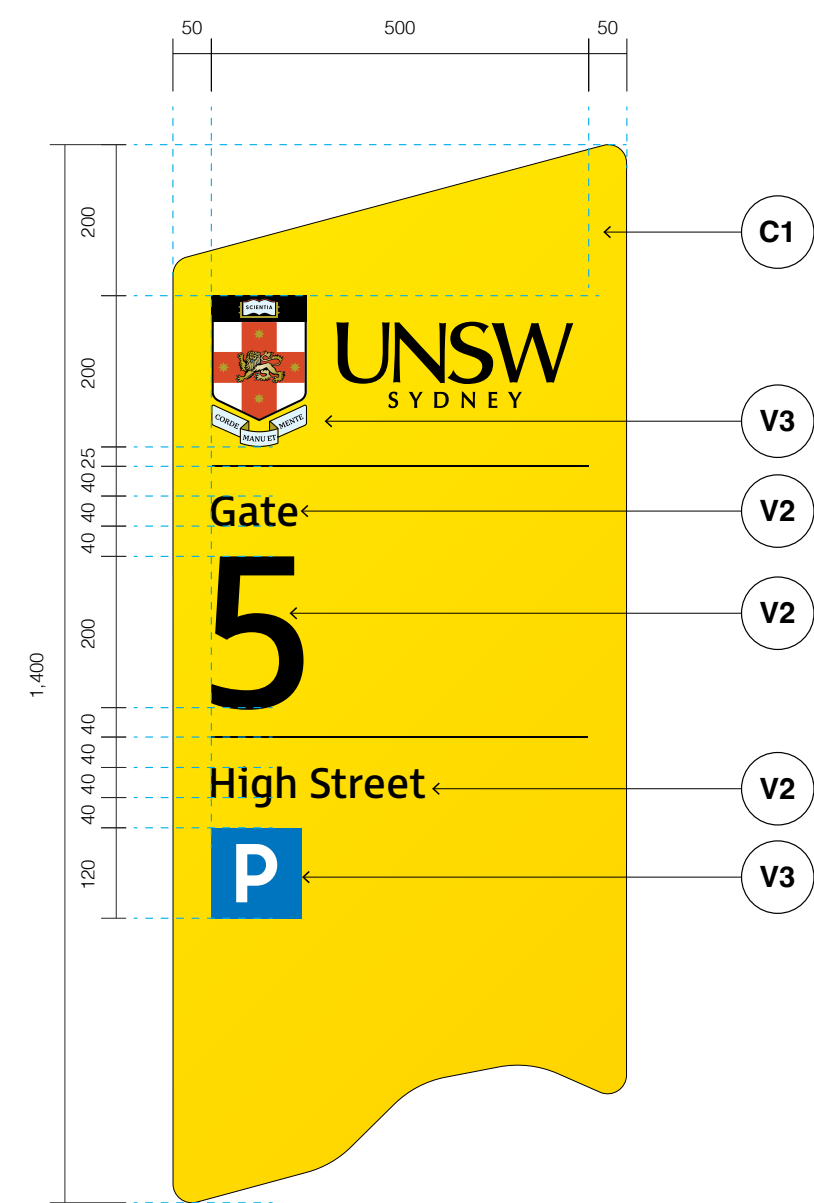

Template 01
Typical messaging
Scale 1:10

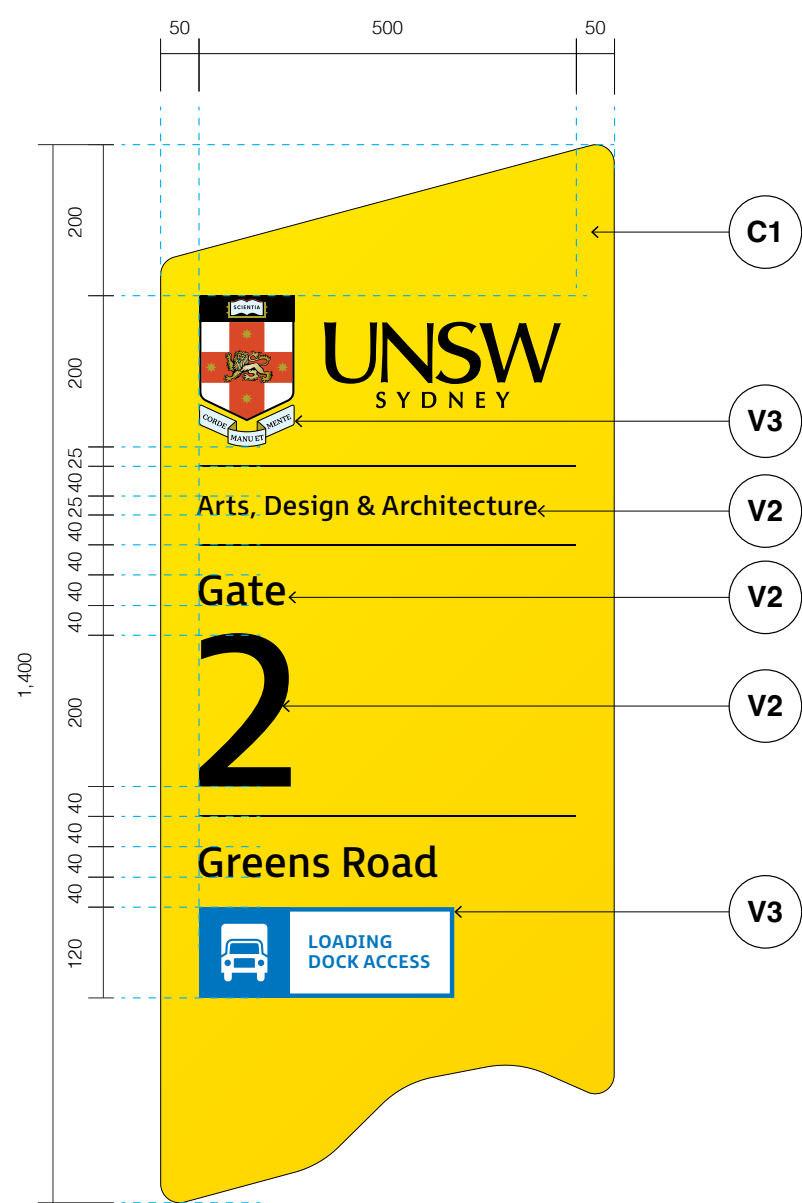

Template 02
Loading dock & secondary campus
Scale 1:10

Graphic Layout

Dividing Line

Line weight: 2mm

Gate Name & Street Name

FS Millbank Regular

Alignment: Left

Size: 40mm

Entry Number

FS Millbank Regular

Alignment: Left

Size: 200mm

Pictogram

Parking or Loading Dock: 120mm height

UNSW Logo

200mm height

Construction & Materials

Materiality Legend



- C1 finish on 3mm aluminium




- V2 applied on top of aluminium




- V3 print applied on top of aluminium

Construction Details

- Refer to: Section 8, Construction Standards, Layered Panel Signforms

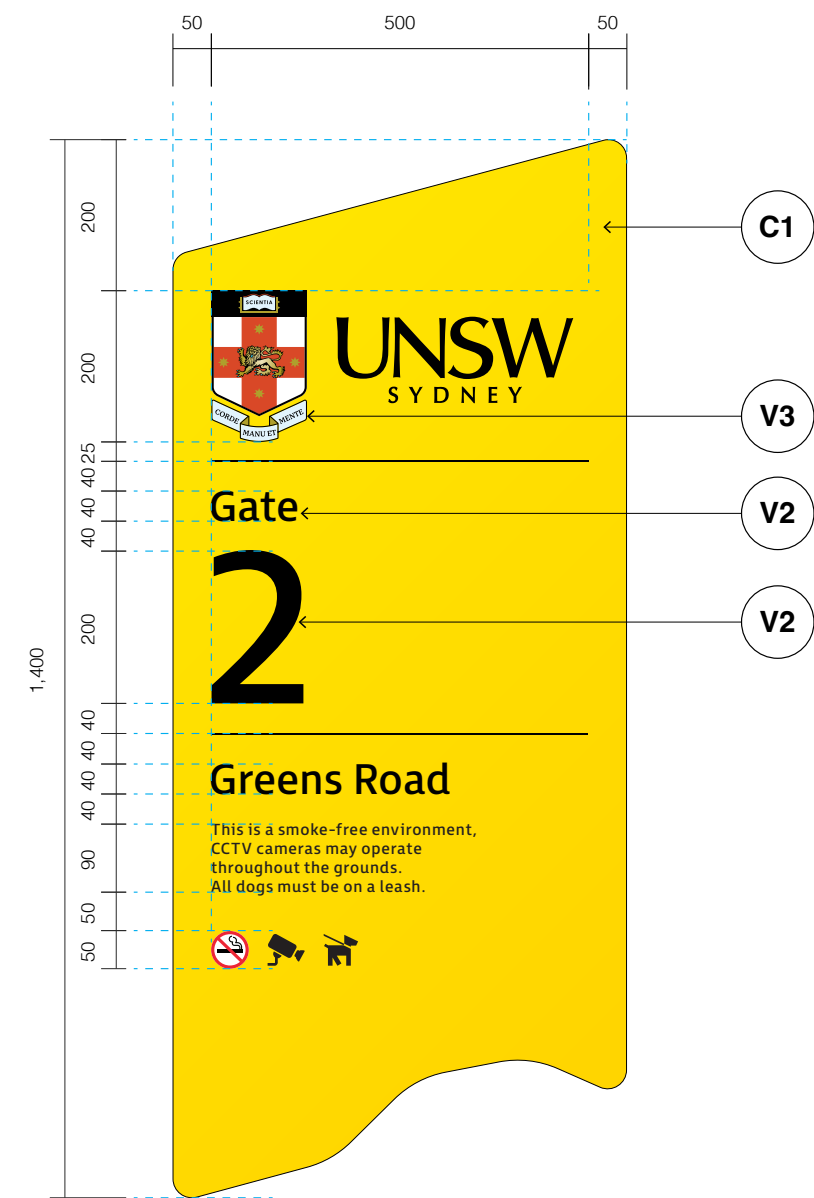

Template 03
Pedestrian entry
Scale 1:10

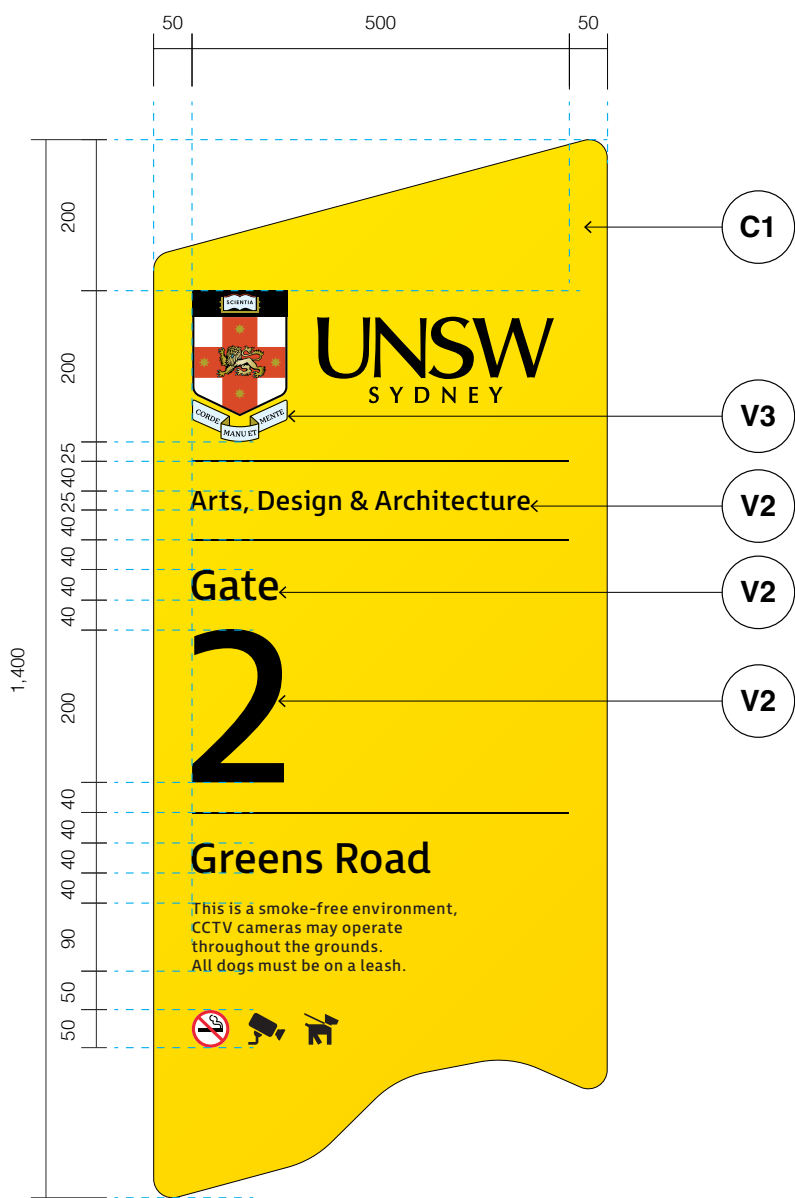

Template 04
Pedestrian entry & secondary campus
Scale 1:10

Graphic Layout

Dividing Line

Line weight: 2mm

Gate Name & Street Name

FS Millbank Regular

Alignment: Left

Size: 40mm

Entry Number

FS Millbank Regular

Alignment: Left

Size: 200mm

Regulatory Content

Alignment: Left

Size/Leading: 15mm, 10mm

Tracking: 10+, Optical kerning

Pictograms & UNSW Logo

No Smoking, CCTV & Dogs on Leash: 50mm diameter.

UNSW Logo: 200mm height

Construction & Materials

Materiality Legend



- C1 finish on 3mm aluminium



- V2 applied on top of aluminium



- V3 print applied on top of aluminium

Construction Details

- Refer to: Section 8, Construction Standards, Layered Panel Signforms



01 Campus ID Facade Mounted
UNSW Art & Design Campus




02 Existing Sign
UNSW Art & Design Campus

Sign Location

Purpose
Identifies site boundaries of UNSW campuses.

Location
Positioned on walls at site boundary edges or corners of the UNSW campus. This sign is only to be used as a replacement for existing facade mounted campus identification signage, and is to be positioned in the same location as the sign it is replacing.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

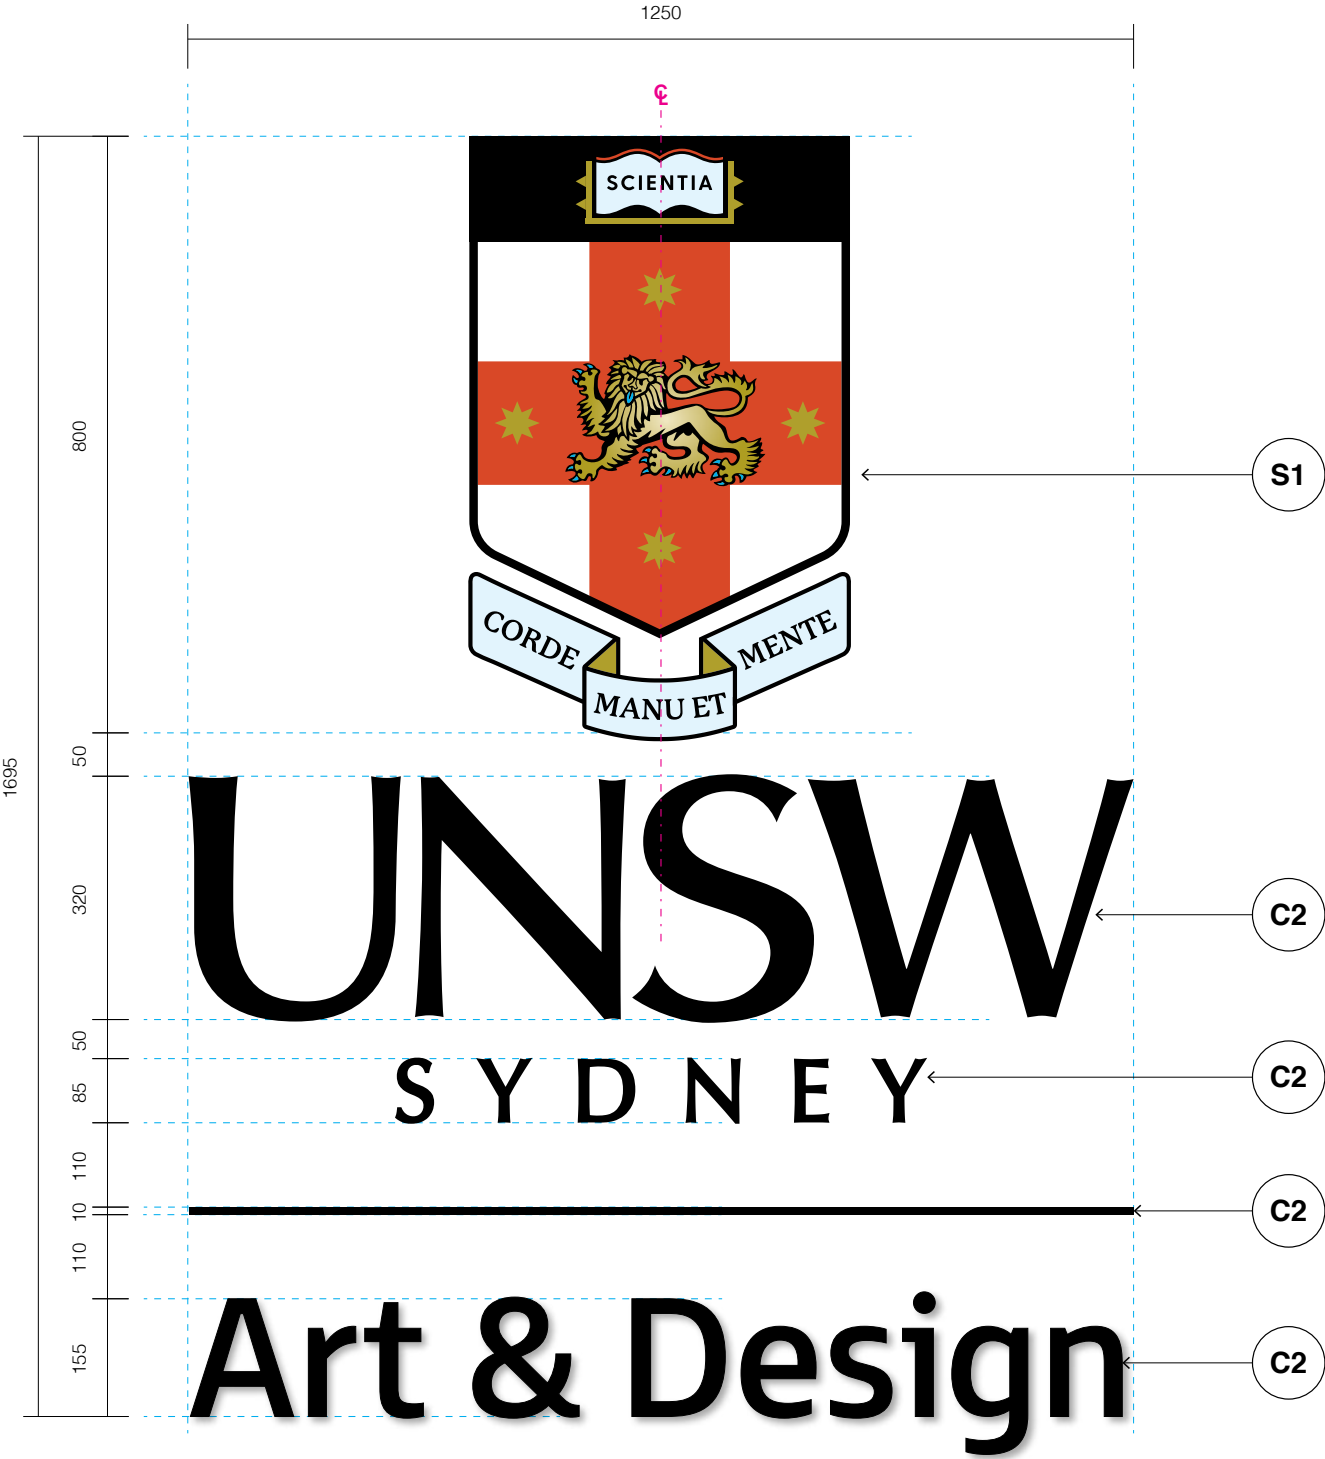

Detail
Scale 1:10

Graphic Layout

UNSW Logo

Vertical stack
1325mm

Dividing Line

10mm

Campus Name

FS Millbank Bold
Alignment: Centre

Size: 155mm

Construction & Materials


Materiality Legend




• C1 finish on
10mm aluminium



• Screenprint to
10mm aluminium

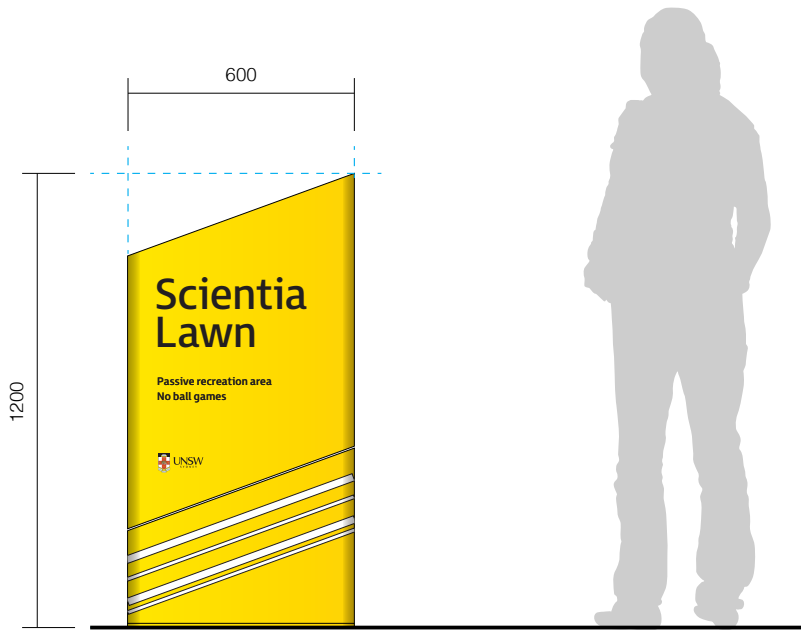

Front Elevation
Scale 1:20

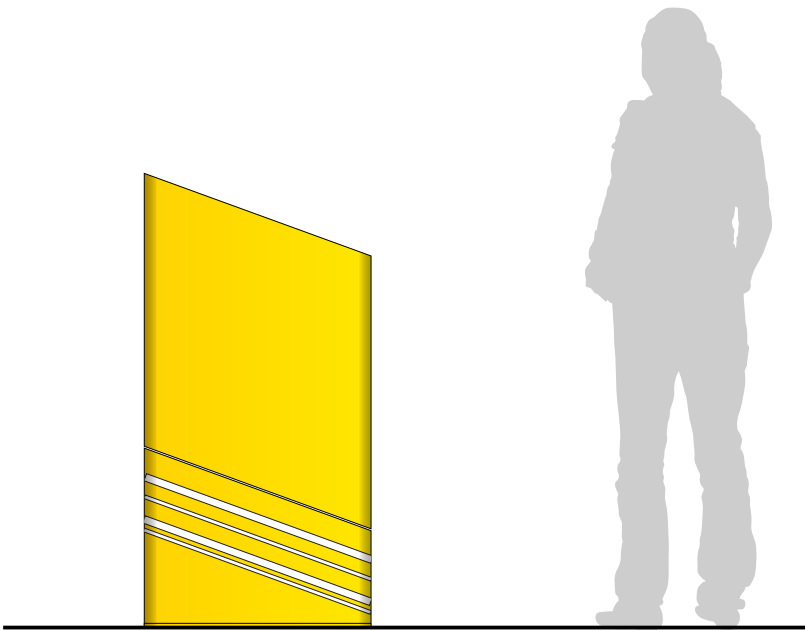


Back Elevation
Scale 1:20

Sign Location


Purpose
Identifies parks, lawns and other open spaces on the UNSW campus.

Location
Freestanding on edge or corner of park or lawn area, adjacent to main entry.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

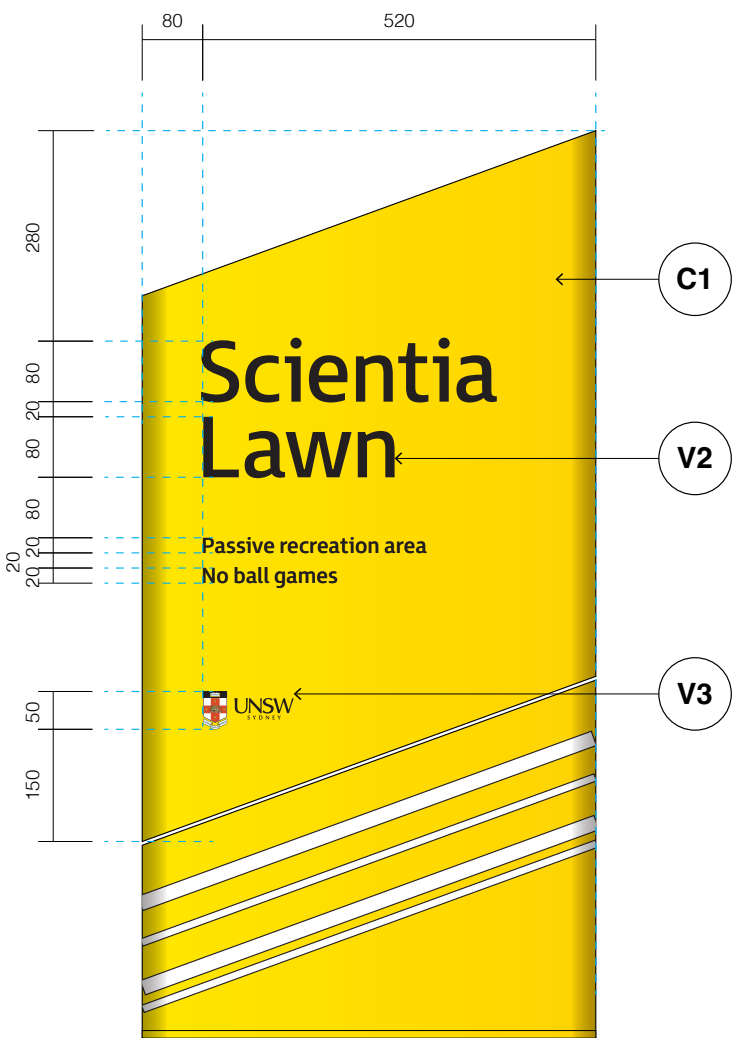

Template 01
Typical messaging
Scale 1:10

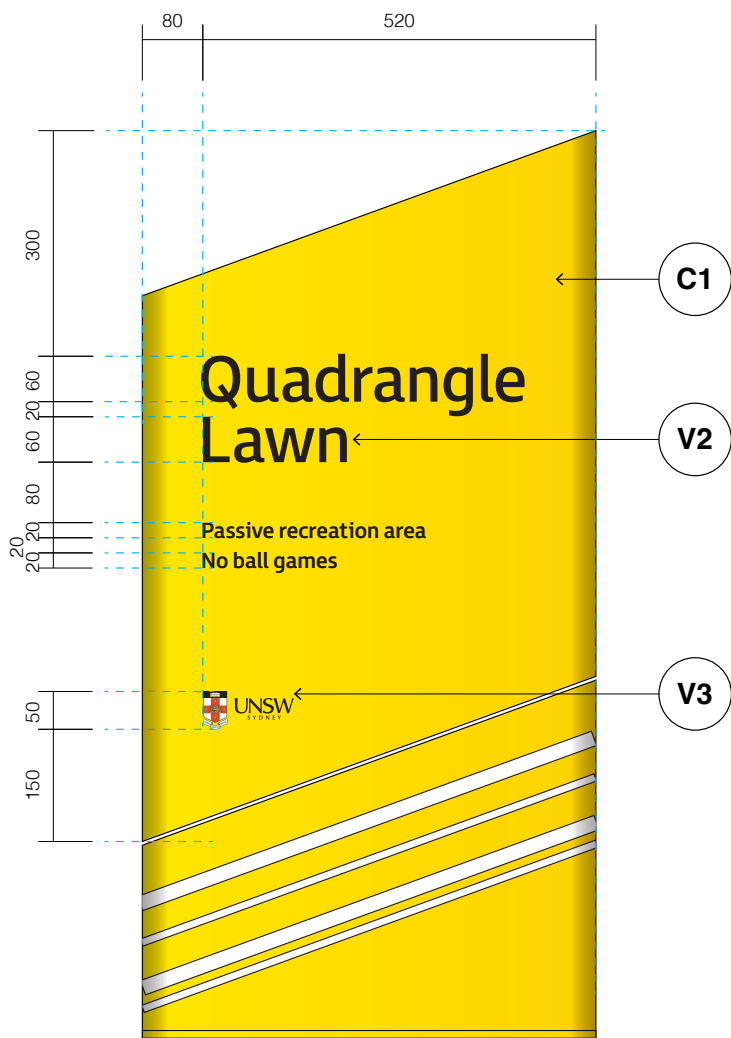

Template 02
Smaller messaging
Scale 1:10

Graphic Layout

Park Name
FS Millbank Regular
Alignment: Left
Size: 80mm / 60mm
(Template 02 only to be used where park name exceeds space provided by 80mm lettering)

Rules of Use
FS Millbank Regular
Alignment: Left
Size: 20mm

UNSW Logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 8, Construction Standards, Totem Signforms

11.0

Directional Series

This section documents all the directional signs of the system including specifications for both external and internal signs.

DR.01 External: Vehicular Totem 2400mm

DR.02 External: Pedestrian Totem 2400mm

DR.04 External: Access Bollard

DR.05 Suspended Directional Family

DR.06 External: Primary Wall Mounted (Large)

DR.07 External: Primary Wall Mounted (Small)


DR.08 Internal: Primary Wall Mounted (Large)

DR.09 Internal: Primary Wall Mounted (Small)

DR.10 Secondary Wall Mounted (Landscape)

DR.11 Secondary Wall Mounted (Portrait)

DR.12 Secondary Wall Mounted (Flag)

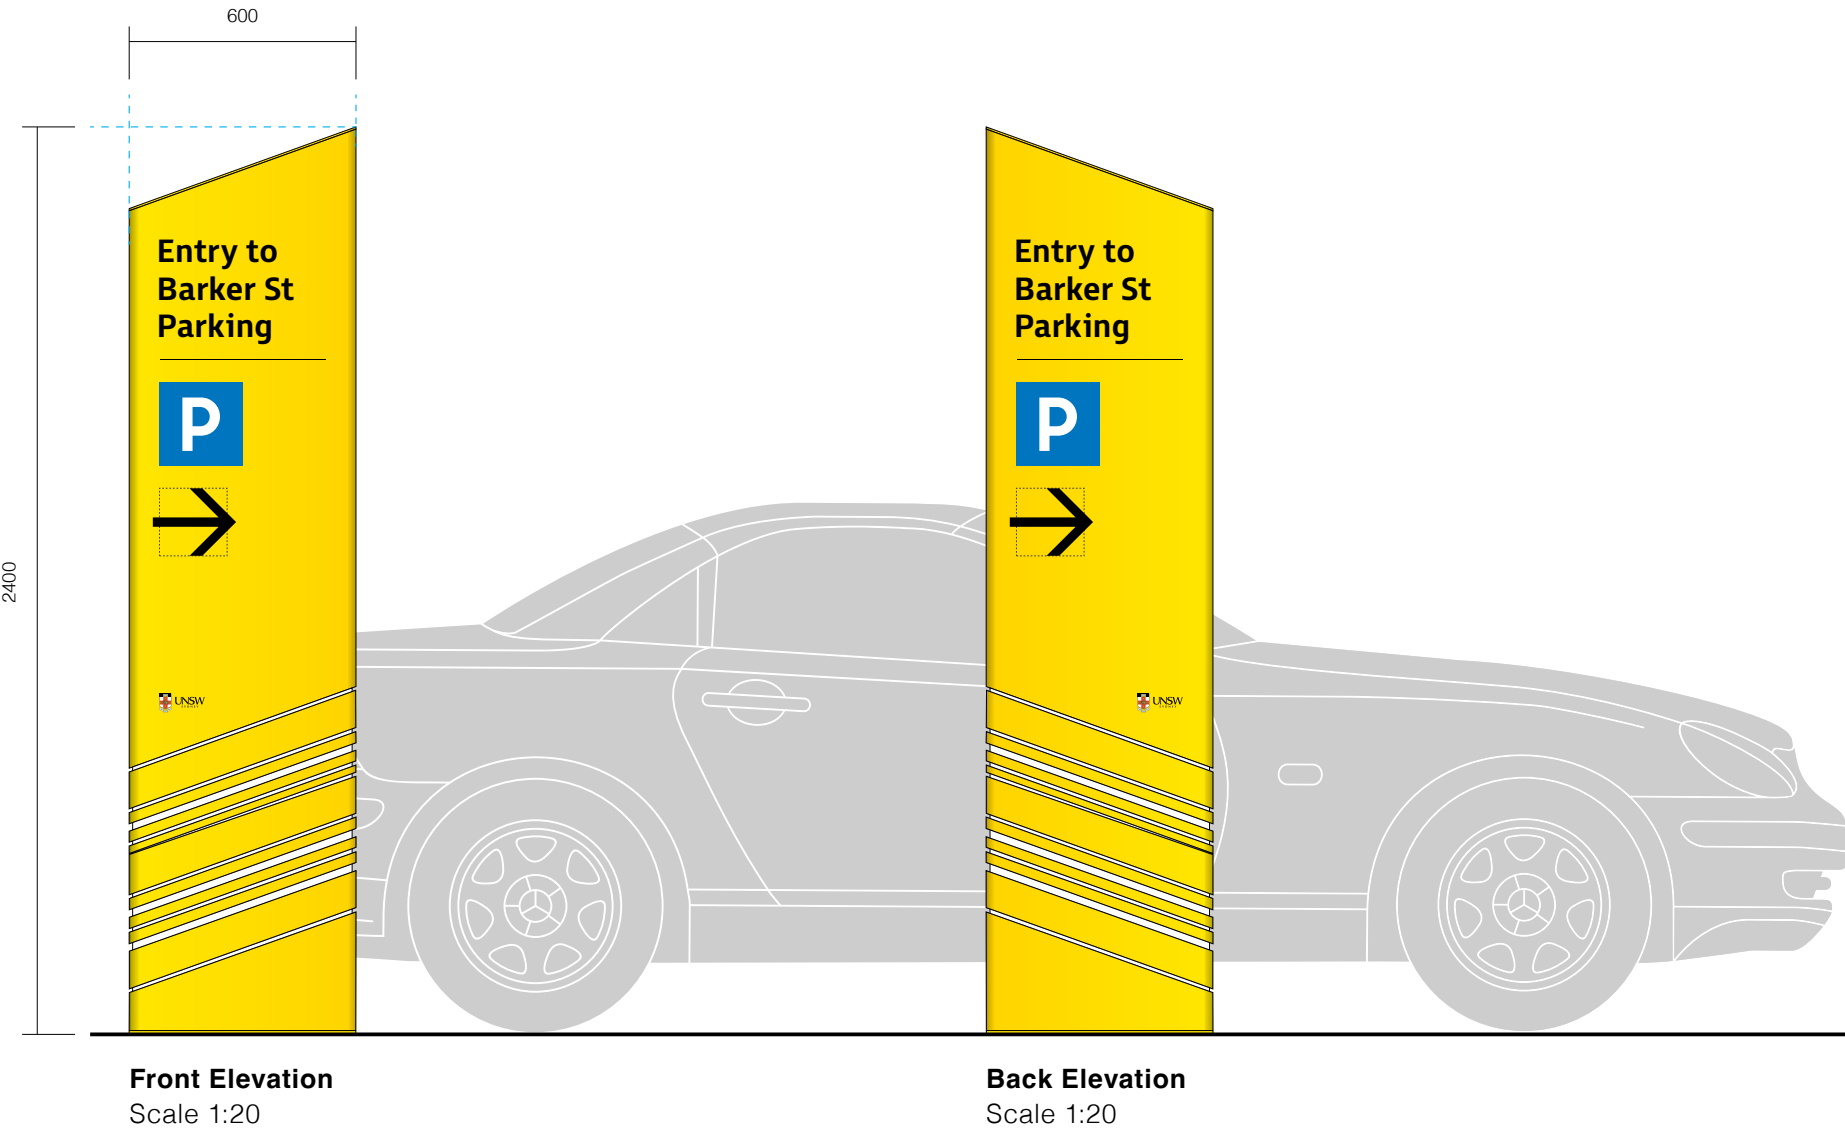


Sign Location

Purpose
Directs vehicular traffic to major car park destinations from external areas. Refer to Section 3, Terminology & Addressing, Category 11

Location
Located at decision points and on major external circulation paths

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

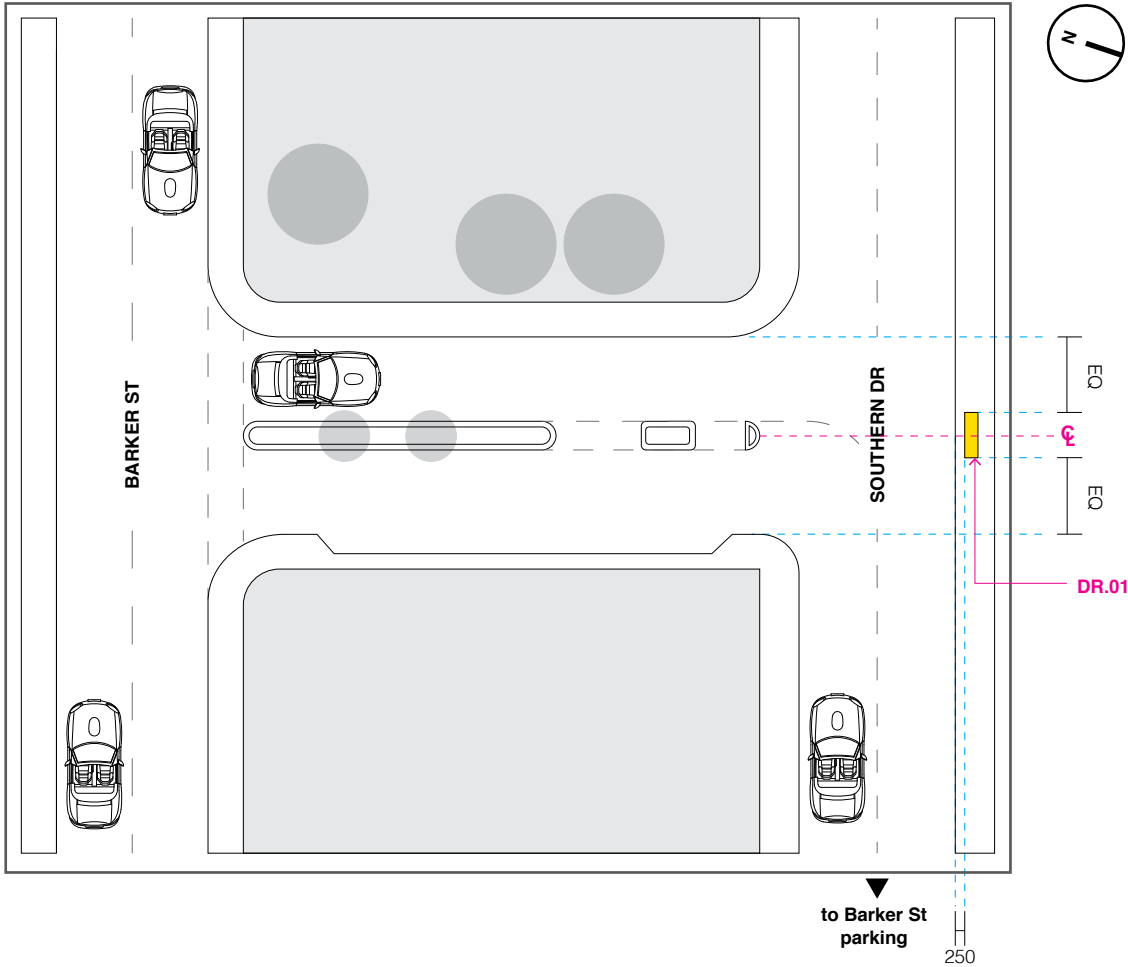

01 Vehicular Directional -
Gate 14 to Barker St parking
Scale 1:200

Positioning

Positioning Guide
Directional vehicular totems are to be placed at the intersection of vehicular circulation routes within the campus. They should be positioned as to provide equal visibility for vehicles both entering and travelling within campus boundaries.


Totems are to be placed 250mm from pathway or landscape edges, aligned to intersecting roads.

Refer to plan 01 for insitu positioning at an intersection of internal and external pathways.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys



Template 01
Single direction
Scale 1:10

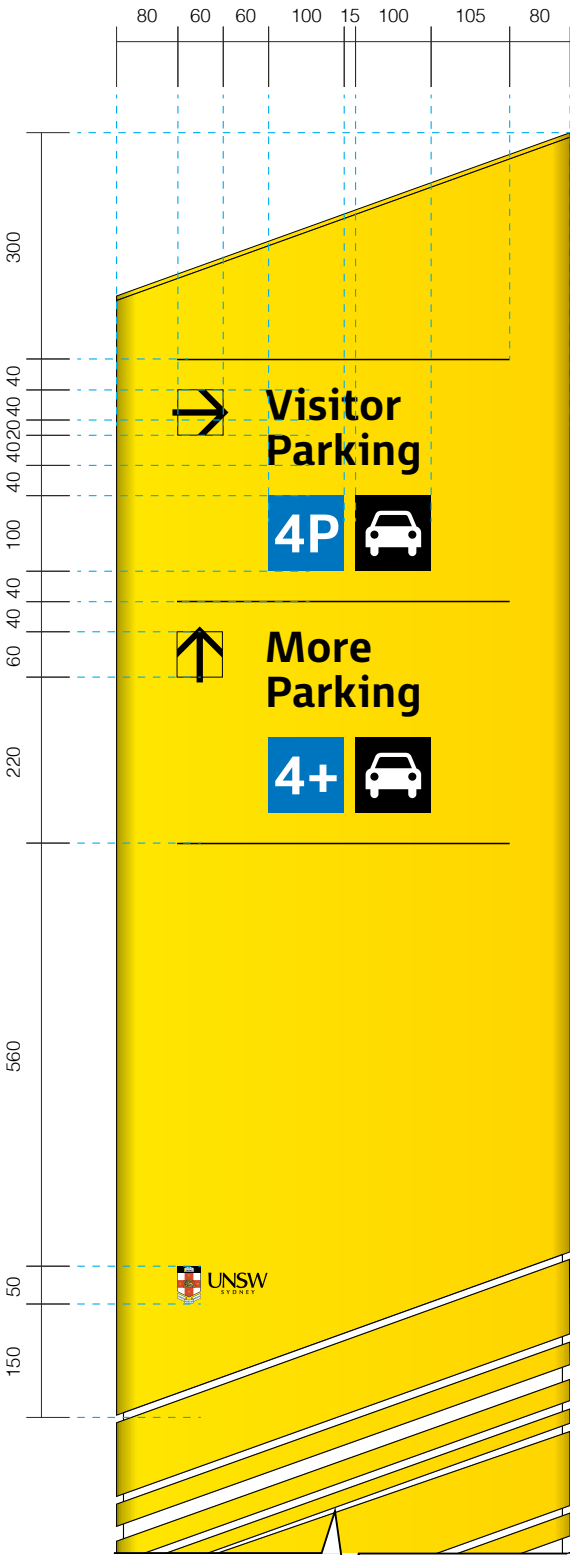

Template 02
Multiple directions
Scale 1:10

Graphic Layout

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 60mm, 40mm
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 2mm

Pictogram
100mm, 220mm height

Arrow
60mm, 100mm height

UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|--|--|---|
| C1
• C1 finish on 3mm aluminium | A1
• A1 finish to allow illumination | V3
• V3 print applied on top of acrylic |
| A4
• A4 finish to allow illumination | | |

Construction Details
• Refer to: Section 8, Construction Standards, Totem Signforms



01 Vehicular Totem 2400mm (day time view)
Southern Drive to Baker Street parking




02 Vehicular Totem 2400mm (night time view)
Southern Drive to Baker Street parking



03 Existing Totem
Southern Drive to Baker Street parking

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

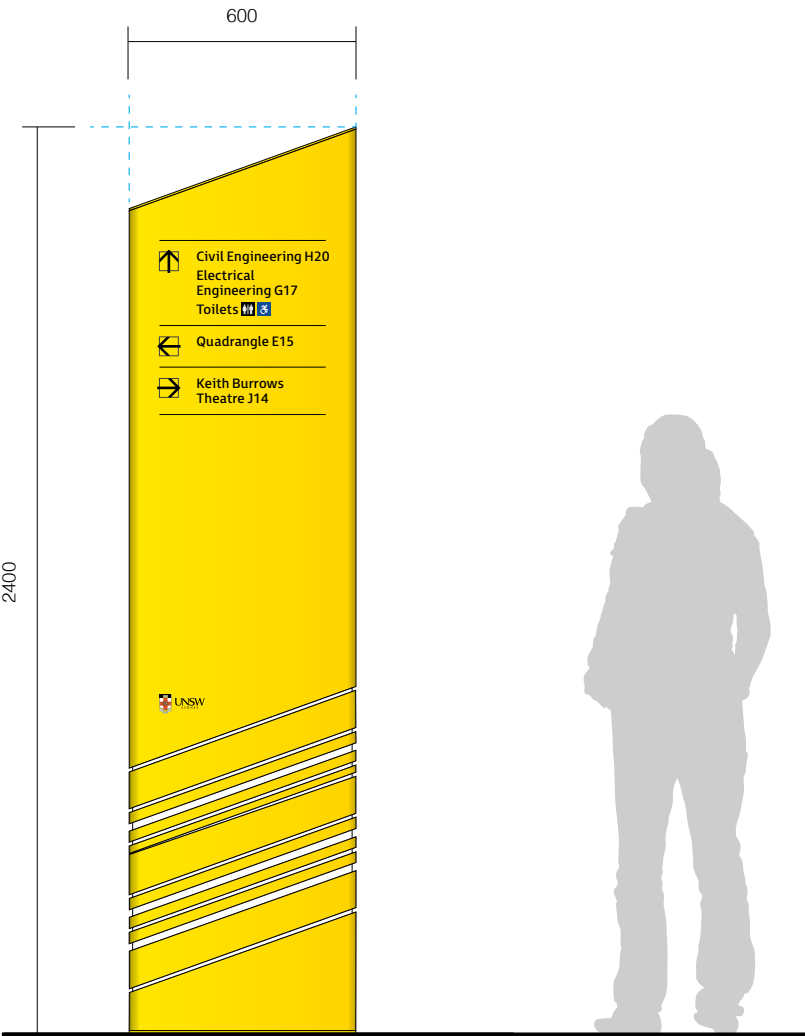

Front Elevation
Scale 1:20




Back Elevation
Scale 1:20

Sign Location


Purpose
Directs to pedestrian traffic major site destinations from external areas. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Located at decision points and on major external circulation paths.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

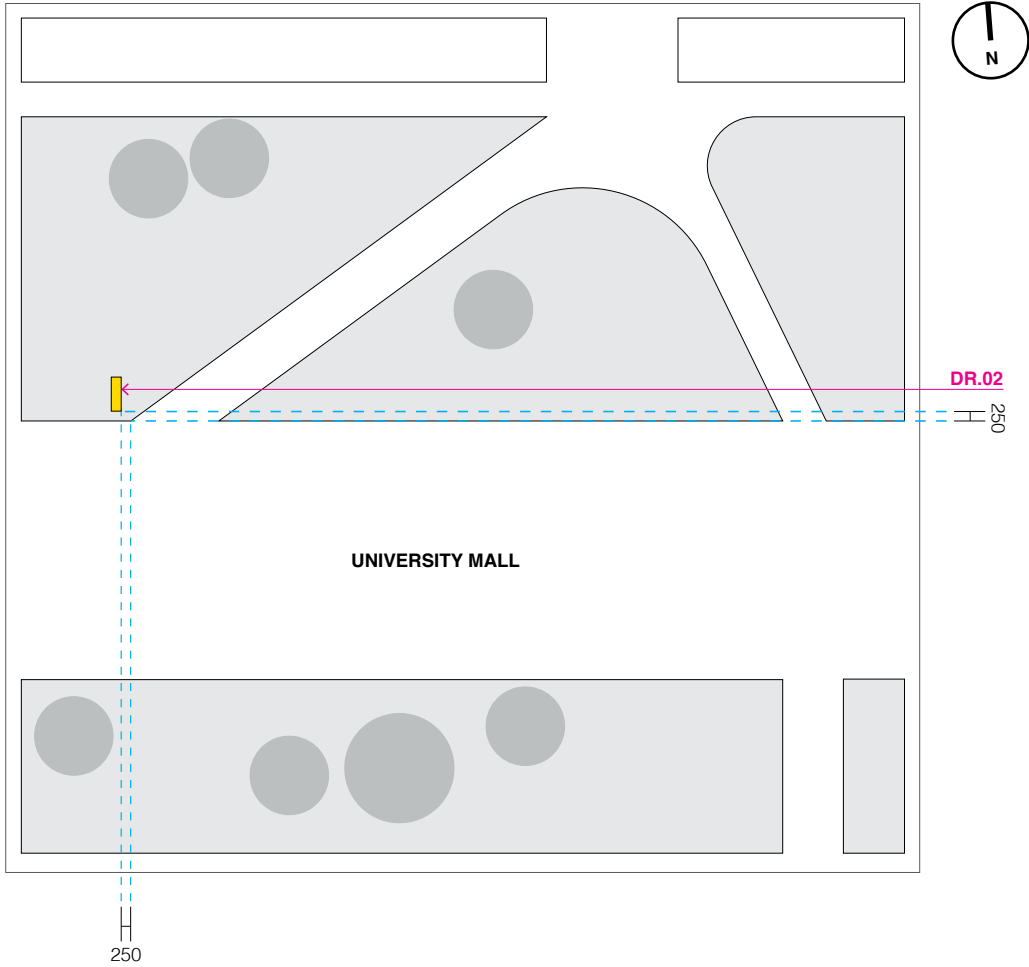

01 Pedestrian Totem 2400mm
University Mall
Scale 1:200

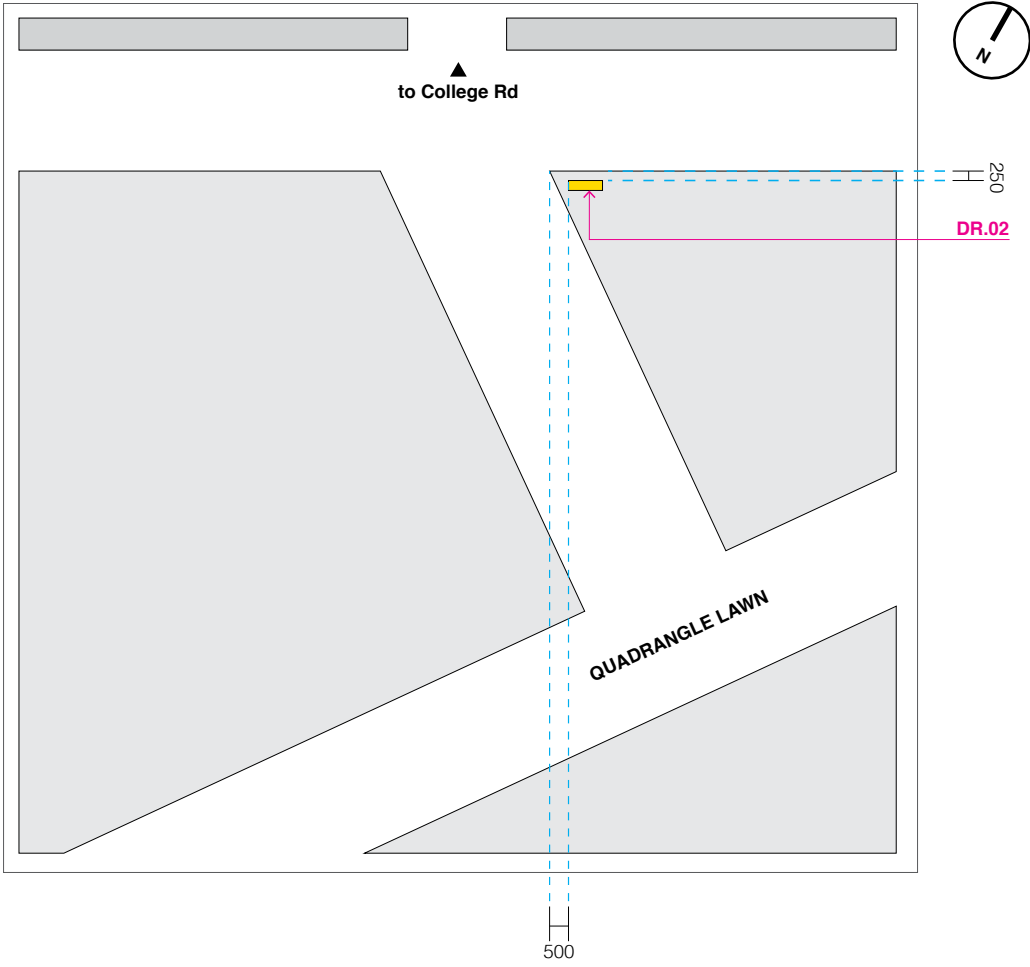

02 Pedestrian Totem 2400mm
Quadrangle
Scale 1:200

Positioning


Positioning Guide
Directional pedestrian totems are to be placed at decision points on major external circulation paths within the campus. They should ideally be placed within landscaping elements, to avoid impeding foot traffic.

Totems are to be placed 250mm from pathway or landscape edges, aligned perpendicular to circulation routes so as to provide equal visibility for pedestrians coming from either direction.


Refer to plan 01 for insitu positioning at an intersection of a major circulation path with secondary pathways.

Refer to plan 02 for insitu positioning at the exit/entrance of a courtyard space.

- Note**
- For wayfinding principles, refer to: Section 6, Wayfinding Principles

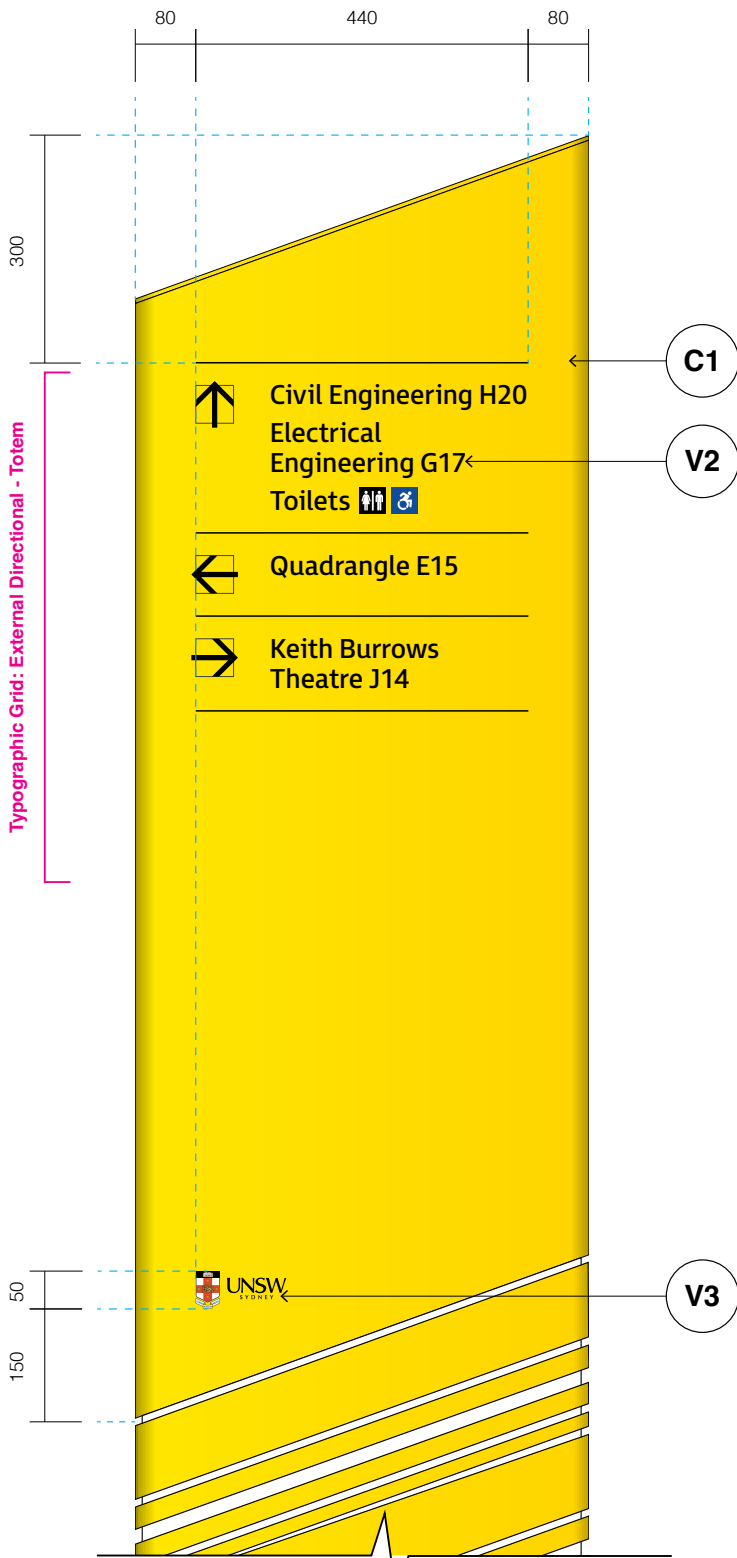

Template 01
Directional messaging
Scale 1:10

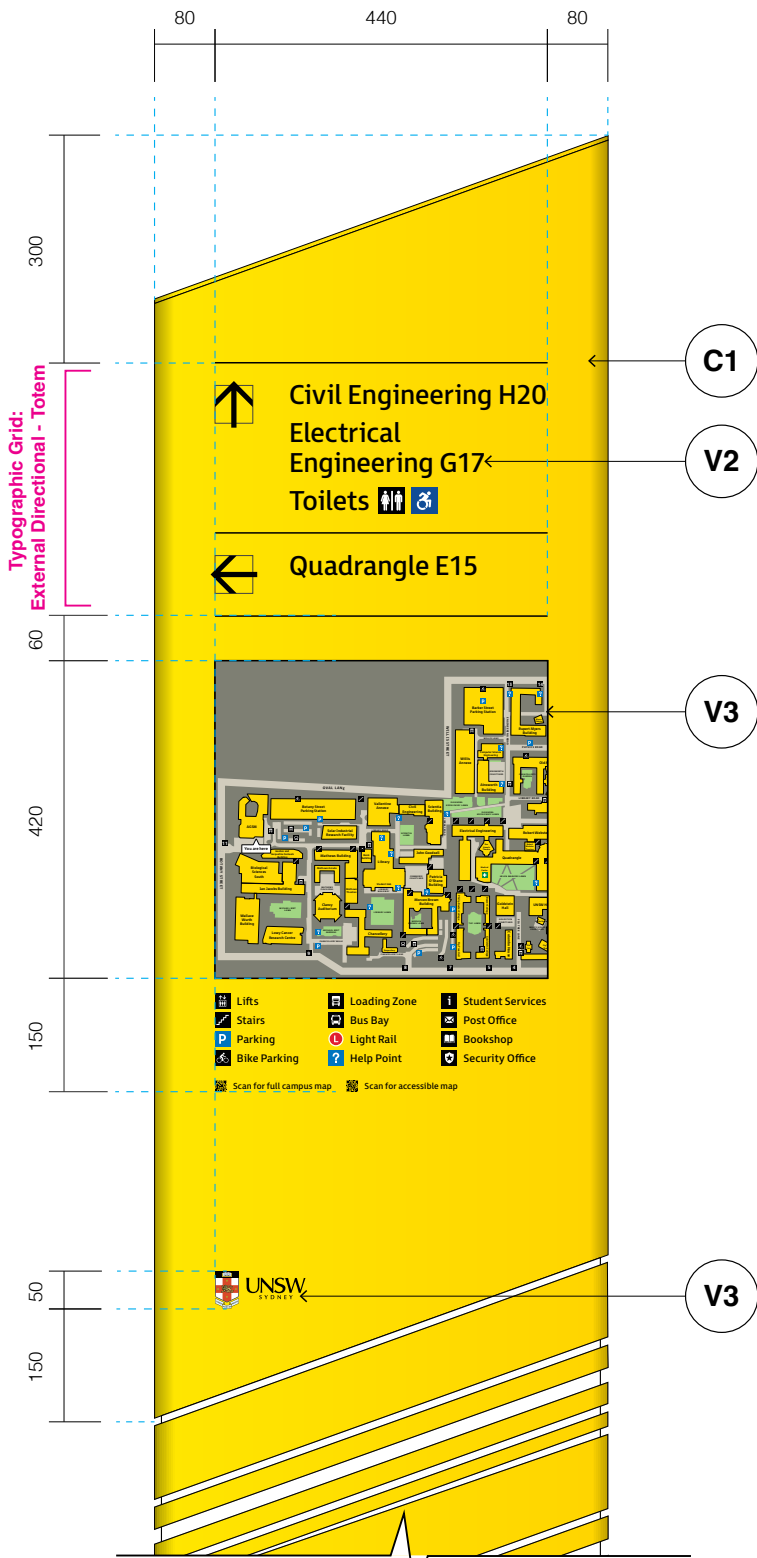

Template 03
Directional messaging with map
Scale 1:10

Graphic Layout

Typographic Grid – Directional
External Directional Totem layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

UNSW logo
50mm height

Back
Double sided messaging where applicable, otherwise to be left blank.


Construction & Materials

Materiality Legend


- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 8, Construction Standards, Totem Signforms
- Refer to: Section 18, Map, for map dimensions and standards

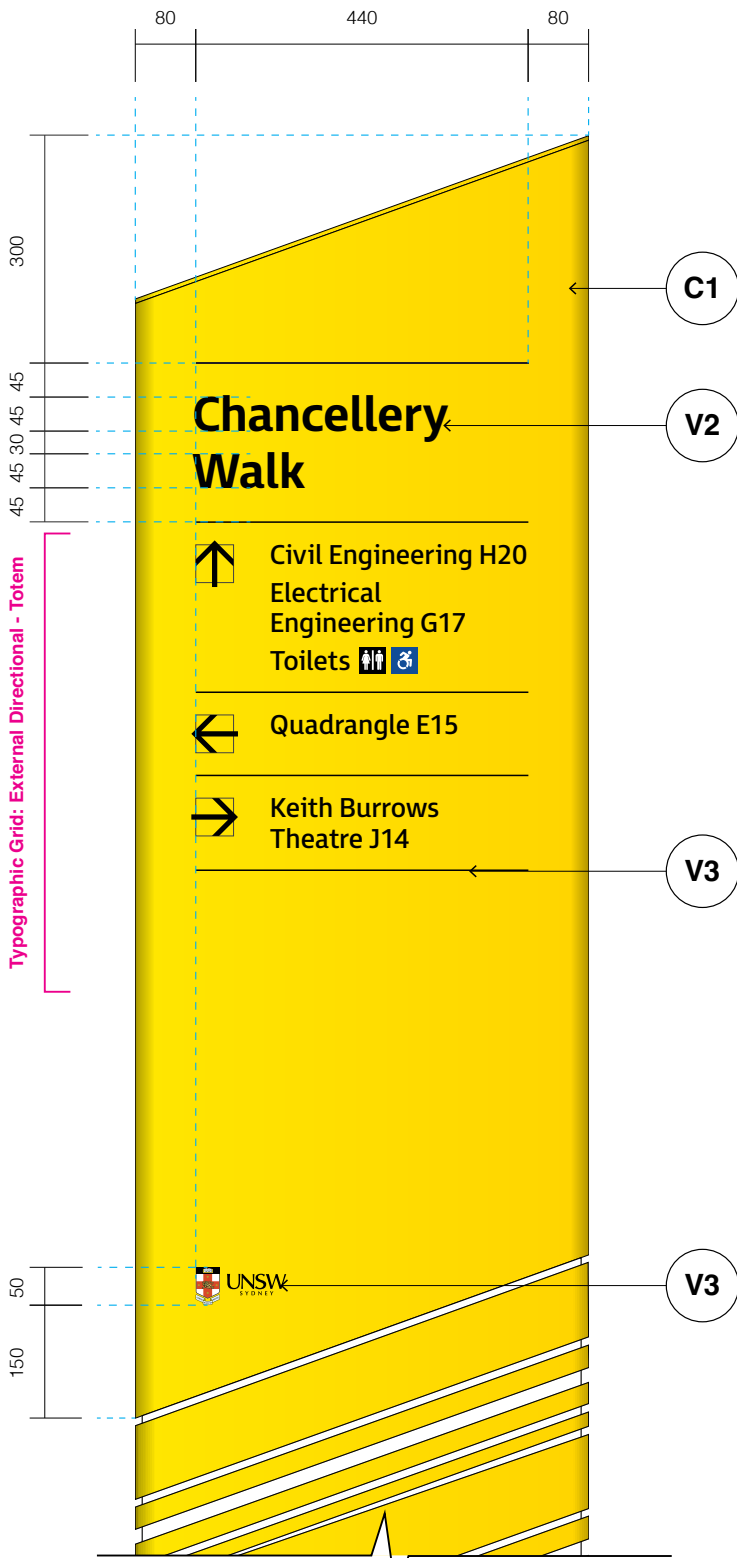

Template 03
Directional & identification messaging
Scale 1:10

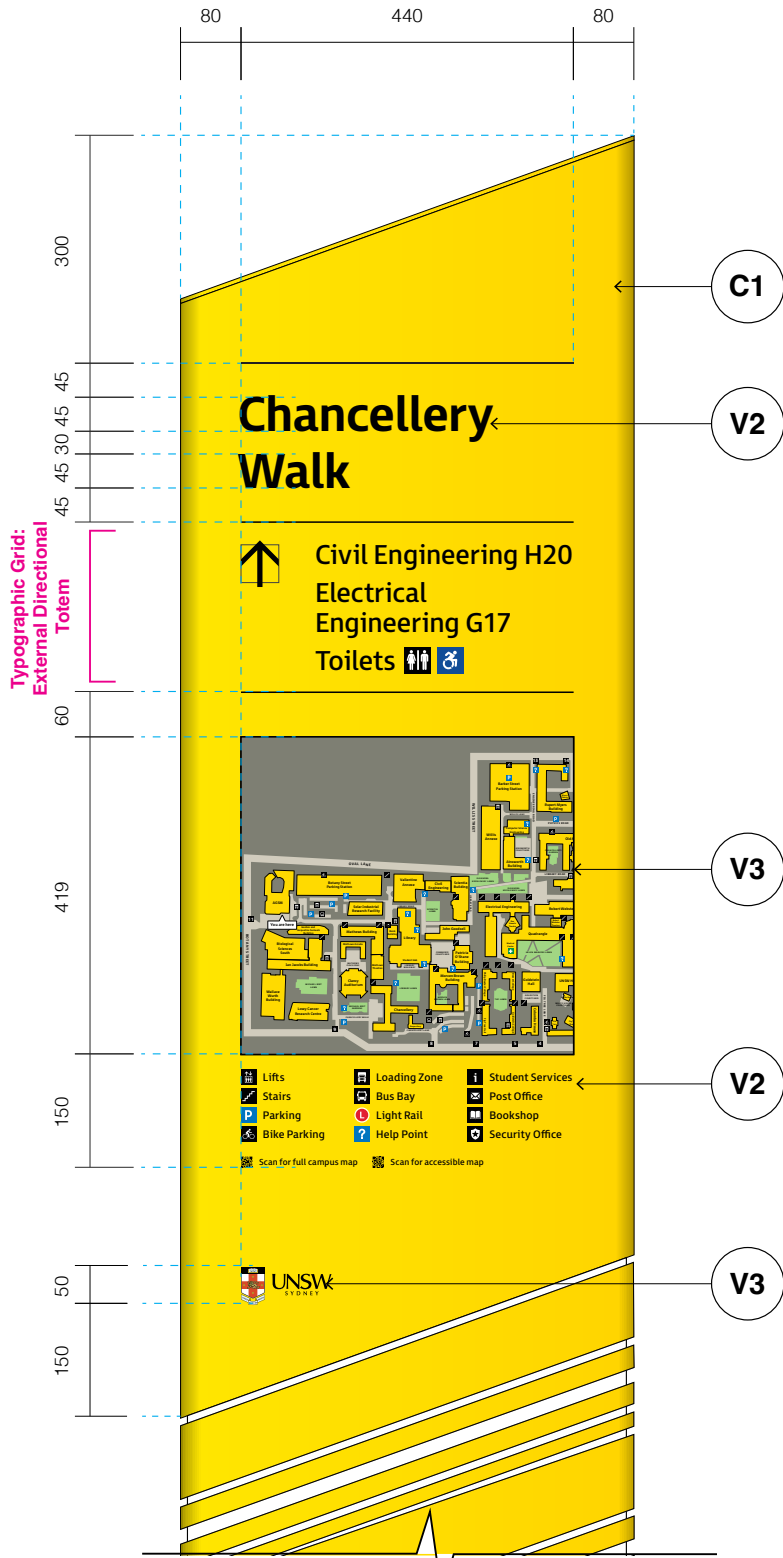

Template 04
Directional & identification
messaging with map
Scale 1:10

Graphic Layout

Typographic Grid – Directional
External Directional Totem layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

UNSW logo
50mm height

Back
Double sided messaging where applicable, otherwise to be left blank.

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 8, Construction Standards, Totem Signforms
- Refer to: Section 18, Map, for map dimensions and standards



01 Pedestrian Totem 2400mm
Lower campus University Mall




02 Existing Totem
Lower campus University Mall


In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Messaging has been altered as per wayfinding and terminology strategy.

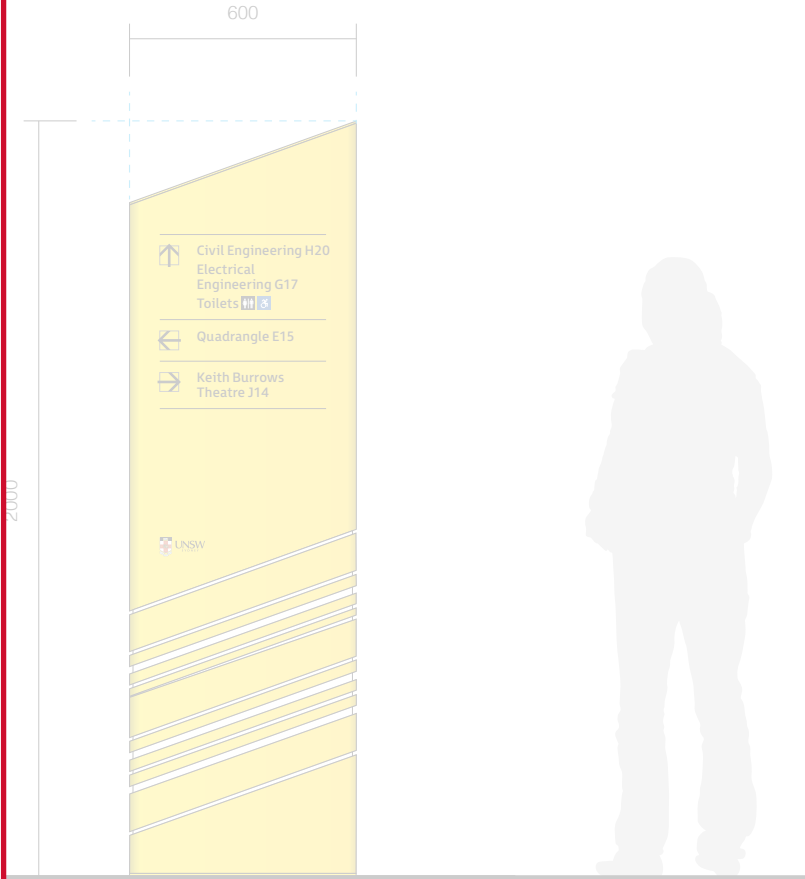

Front Elevation
Scale 1:20

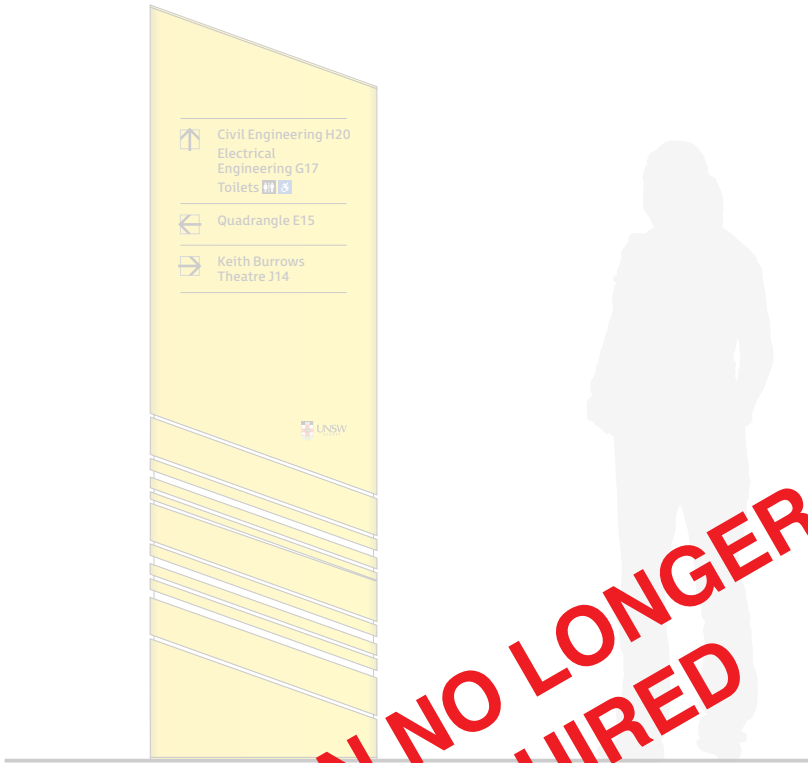


Back Elevation
Scale 1:20

Sign Location

Purpose
Directs pedestrian traffic to major site destinations from external areas. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Located at decision points and on major external circulation paths.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

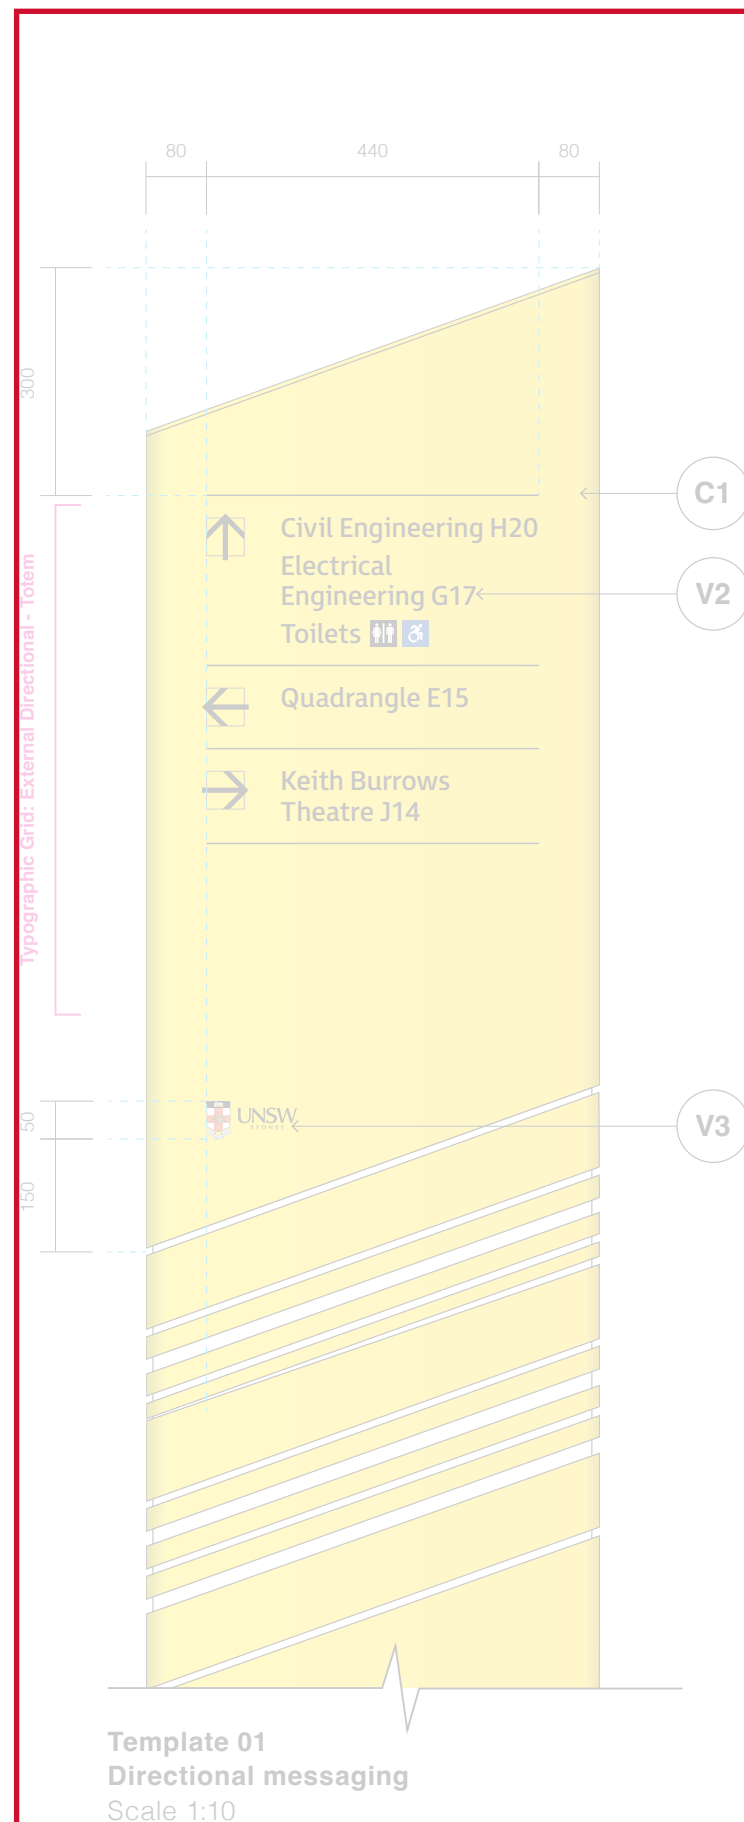

**SIGN NO LONGER
REQUIRED**

Graphic Layout

Typographic Grid – Identification

Dividing Line

Line weight: 2mm

UNSW logo

50mm height


[Back](#)

Construction & Materials


Materiality Legend

- **C1** finish on 3mm aluminium
- **V2** applied on top of aluminium
- **V3** print applied on top of aluminium


Construction Details

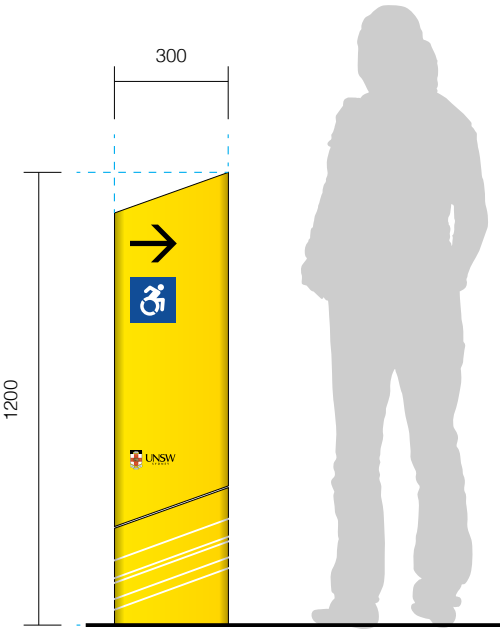

Front Elevation
Scale 1:20

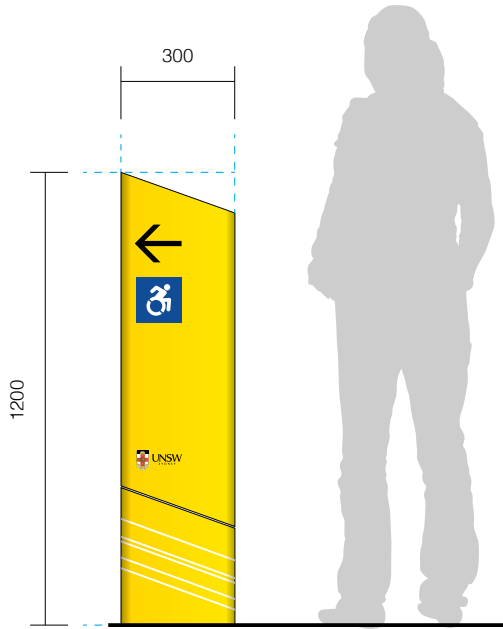

Back Elevation
Scale 1:20

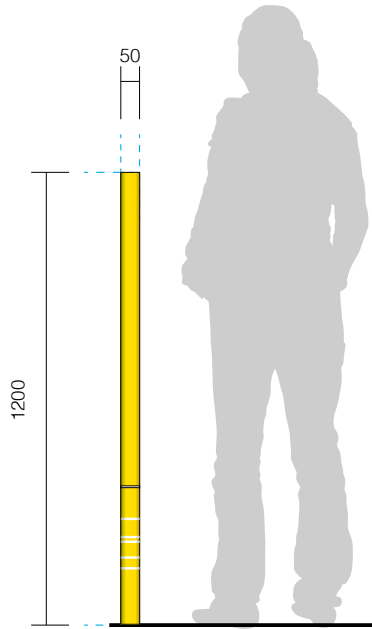

Side Elevation
Scale 1:20


Sign Location

Purpose
Directs pedestrians to accessibility routes. Refer to Section 3, Terminology & Addressing, Category 11.

Location
Located at decision points and on major external circulation paths.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate base of totem.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

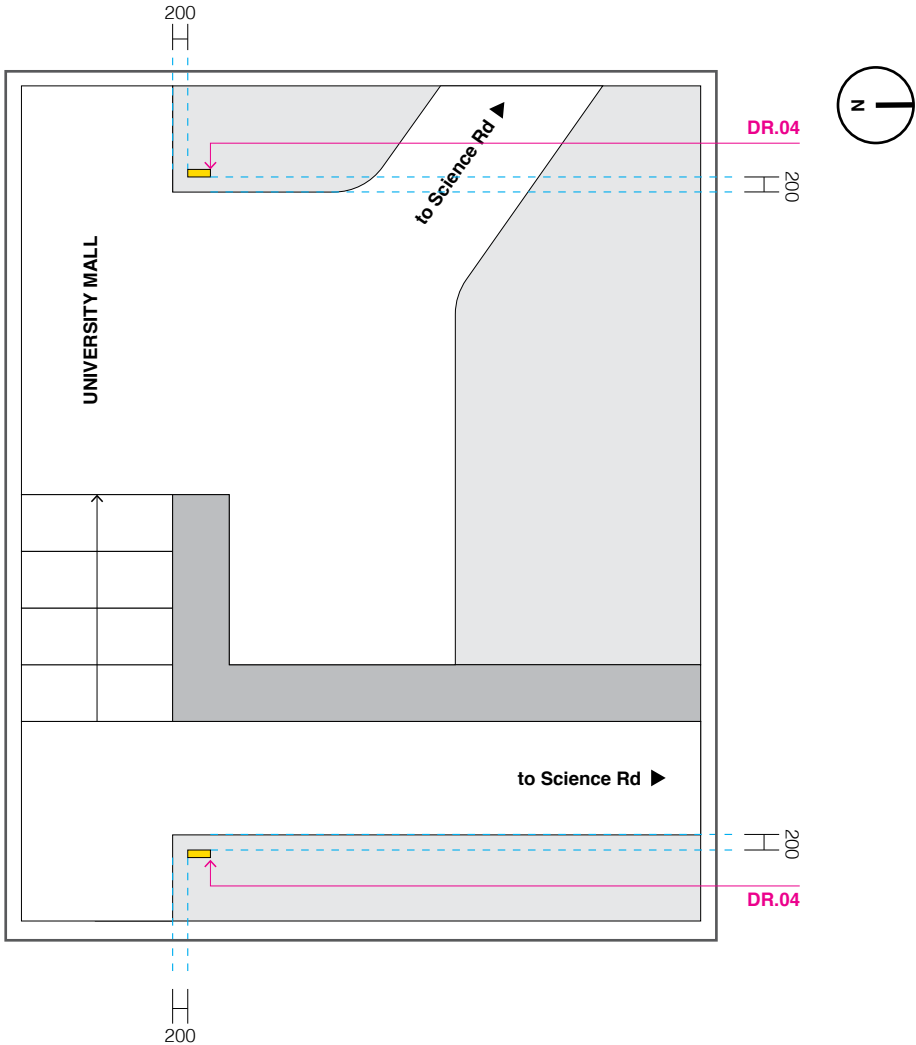

01 Bollard Totem
University Mall
Scale 1:100


Positioning

Positioning Guide
Bollard totems are to be positioned on the intersections of major circulation routes and accessible pathways, located within landscape elements at these intersections.


Totems are to be placed 200mm from edges of pathways, positioned to align with the indicated accessible pathway.

Refer to plan 01 for insitu positioning at an intersection of main circulation and accessible pathways.


- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

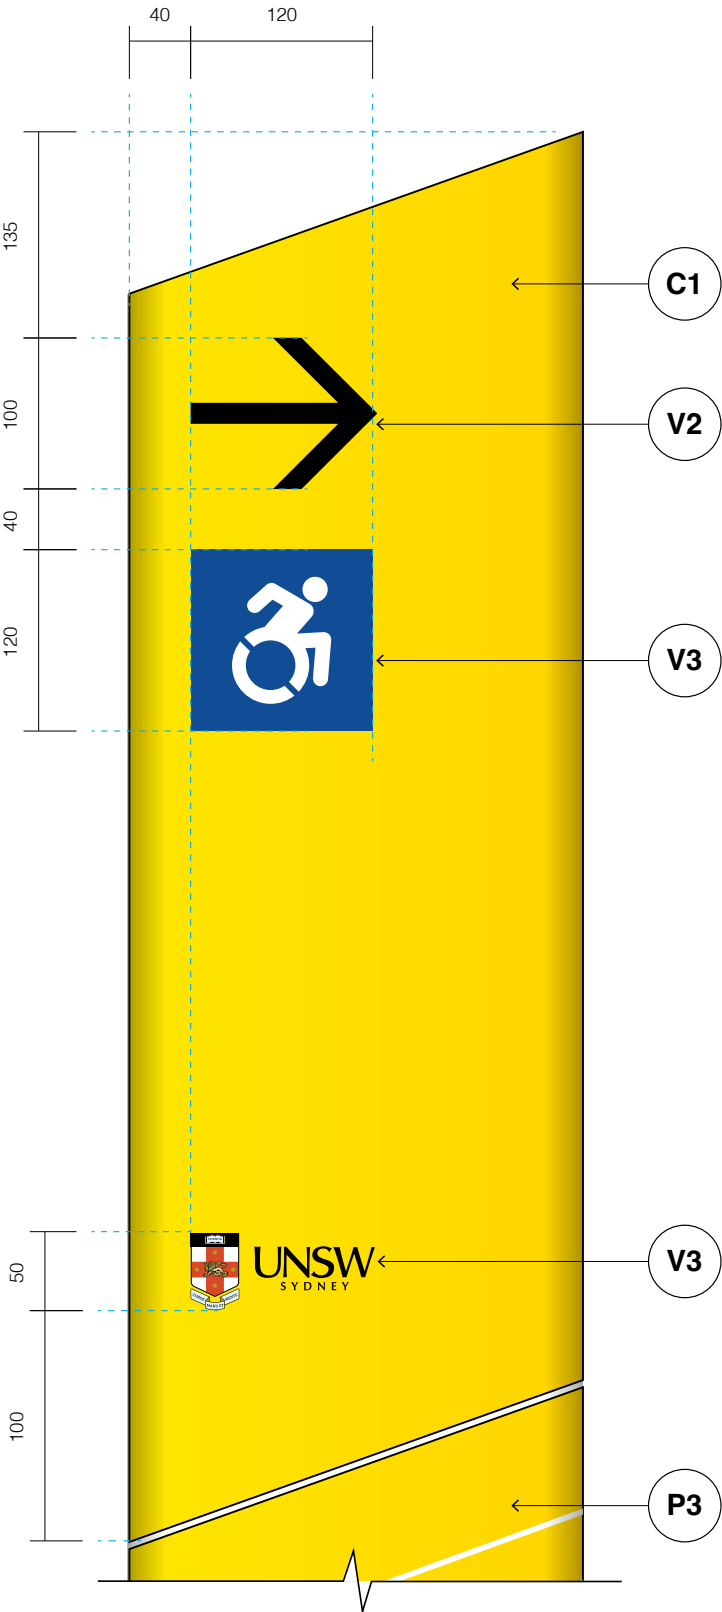

Template 01 - Single pictogram
Scale 1:5

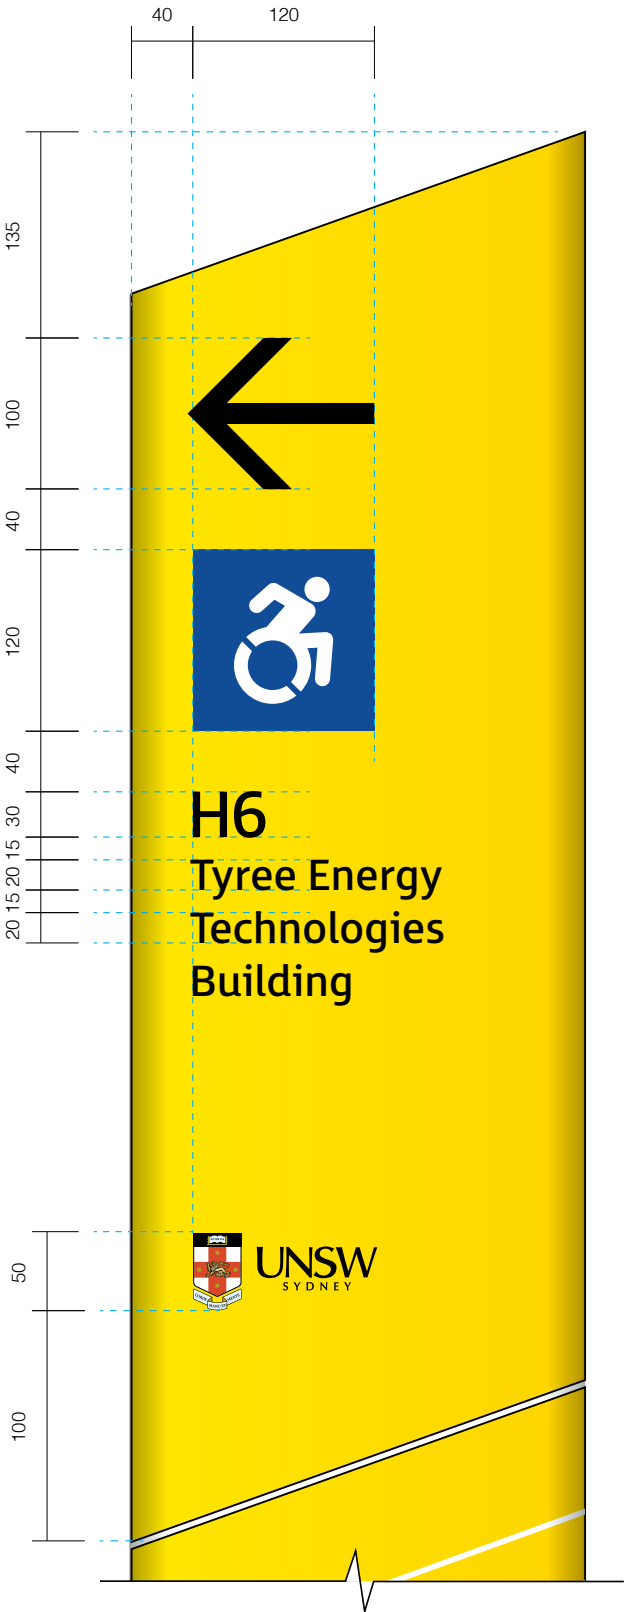

Template 02 - Single pictogram
and single destination with
building number
Scale 1:5

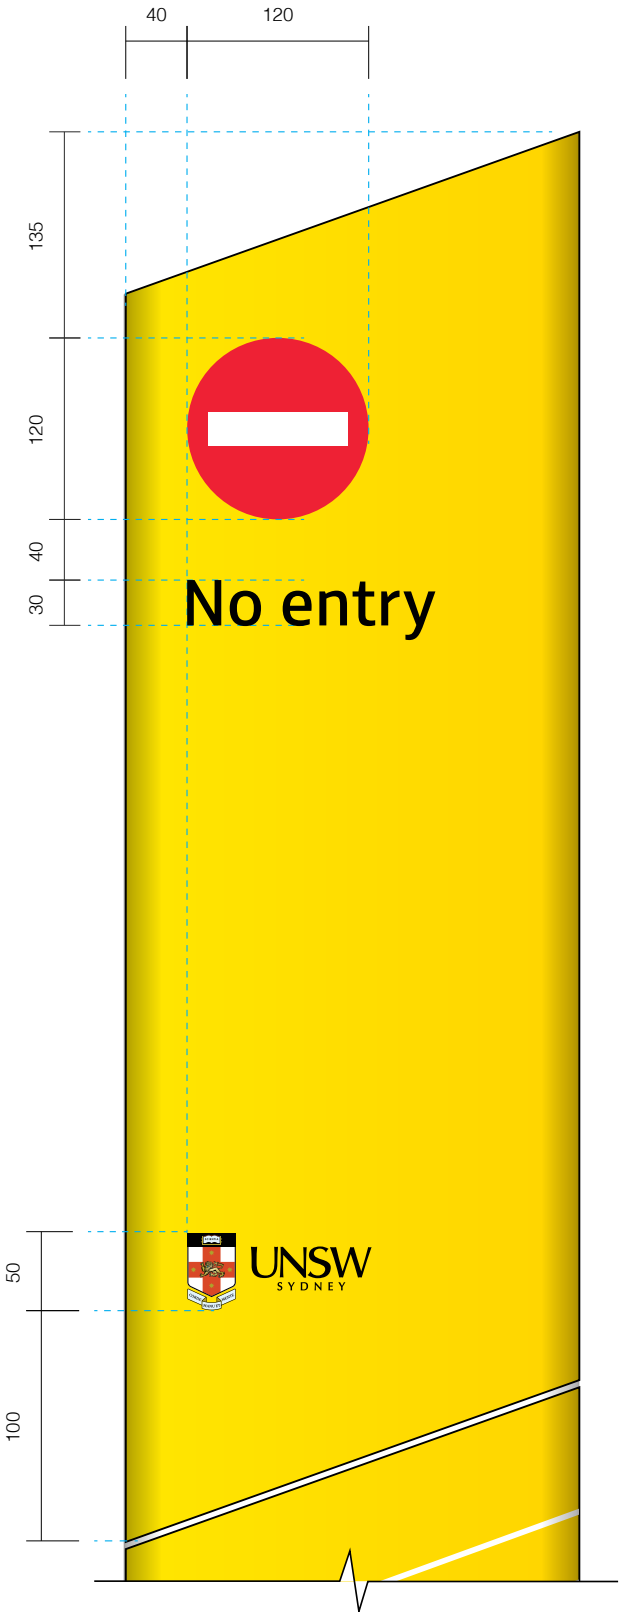

Template 03 - Single pictogram
with no entry messaging
Scale 1:5


Graphic Layout

- Arrow**
75-100mm height
- Pictogram**
Accessibility Pictogram, 100-120mm height
- UNSW logo**
50mm height


Construction & Materials

- Materiality Legend**
- C1**
• C1 finish on 3mm aluminium
 - V2**
• V2 applied on top of aluminium
 - V3**
• V3 print applied on top of aluminium
 - P3**
• P3 finish in 4mm routed groove

- Construction Details**
- Refer to: Section 20, Shop Drawing

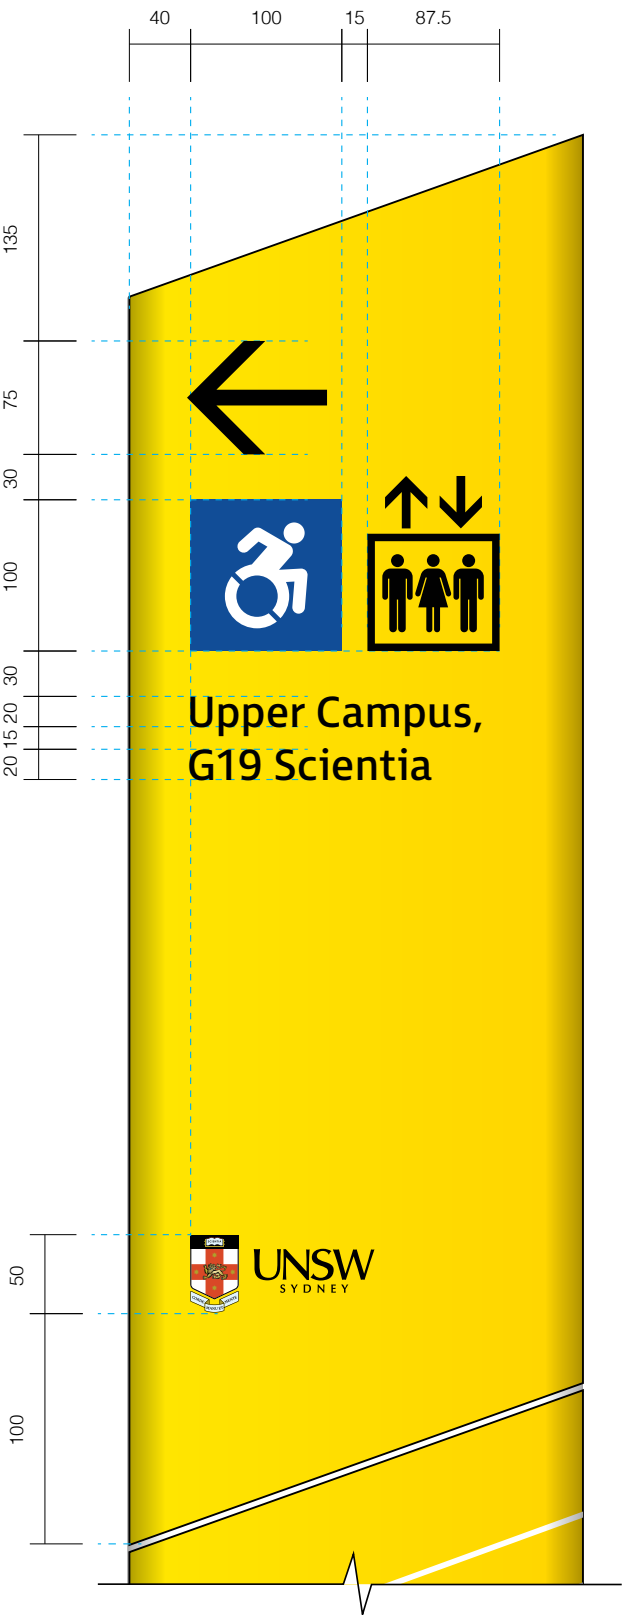

Template 04 - Multiple pictograms and single destination
Scale 1:5

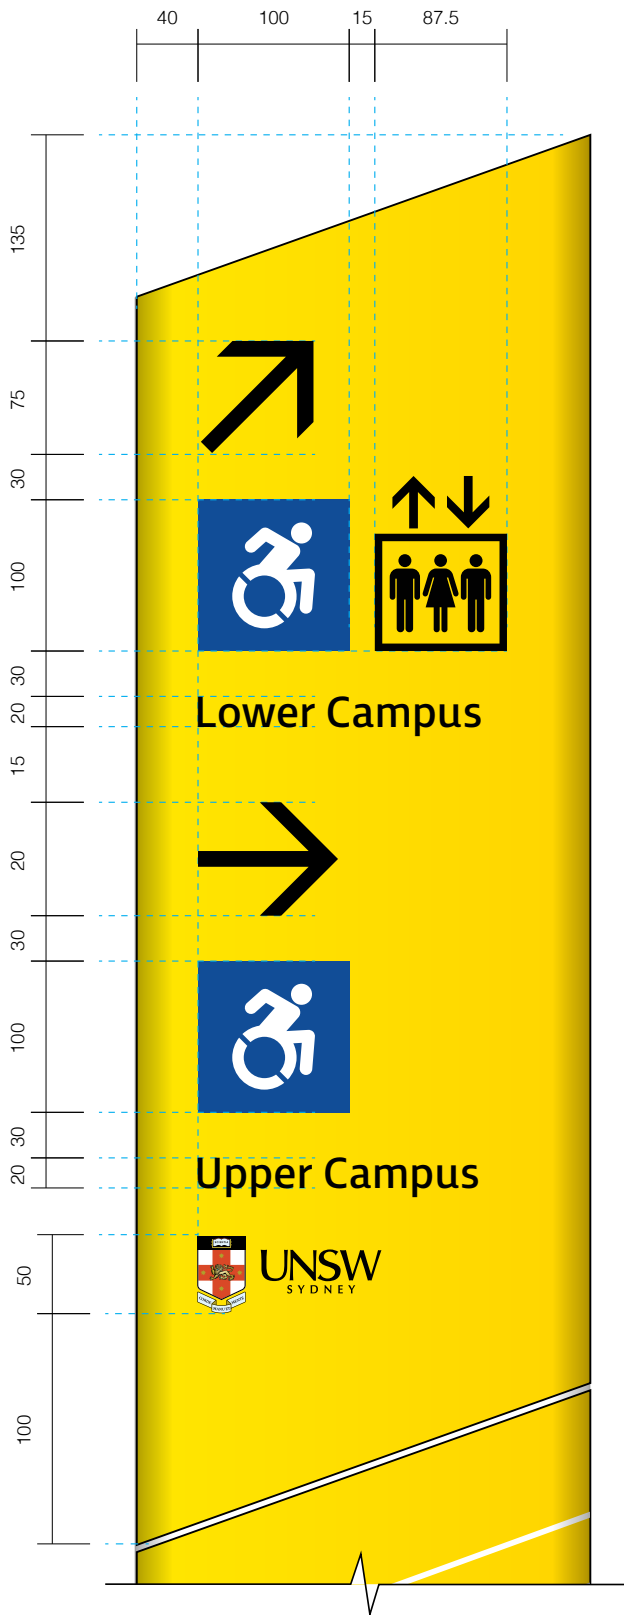

Template 05 - Multiple pictograms and multiple destinations
Scale 1:5

Graphic Layout

Arrow
75-100mm height

Pictogram
Accessibility Pictogram, 100-120mm height

UNSW logo
50mm height

Construction & Materials

Materiality Legend

- C1**
 - C1 finish on 3mm aluminium
- V2**
 - V2 applied on top of aluminium
- V3**
 - V3 print applied on top of aluminium
- P3**
 - P3 finish in 4mm routed groove

Construction Details

- Refer to: Section 20, Shop Drawing




01 Bollard Totem
Lower campus University Mall



02 Existing Sign
Lower campus University Mall

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

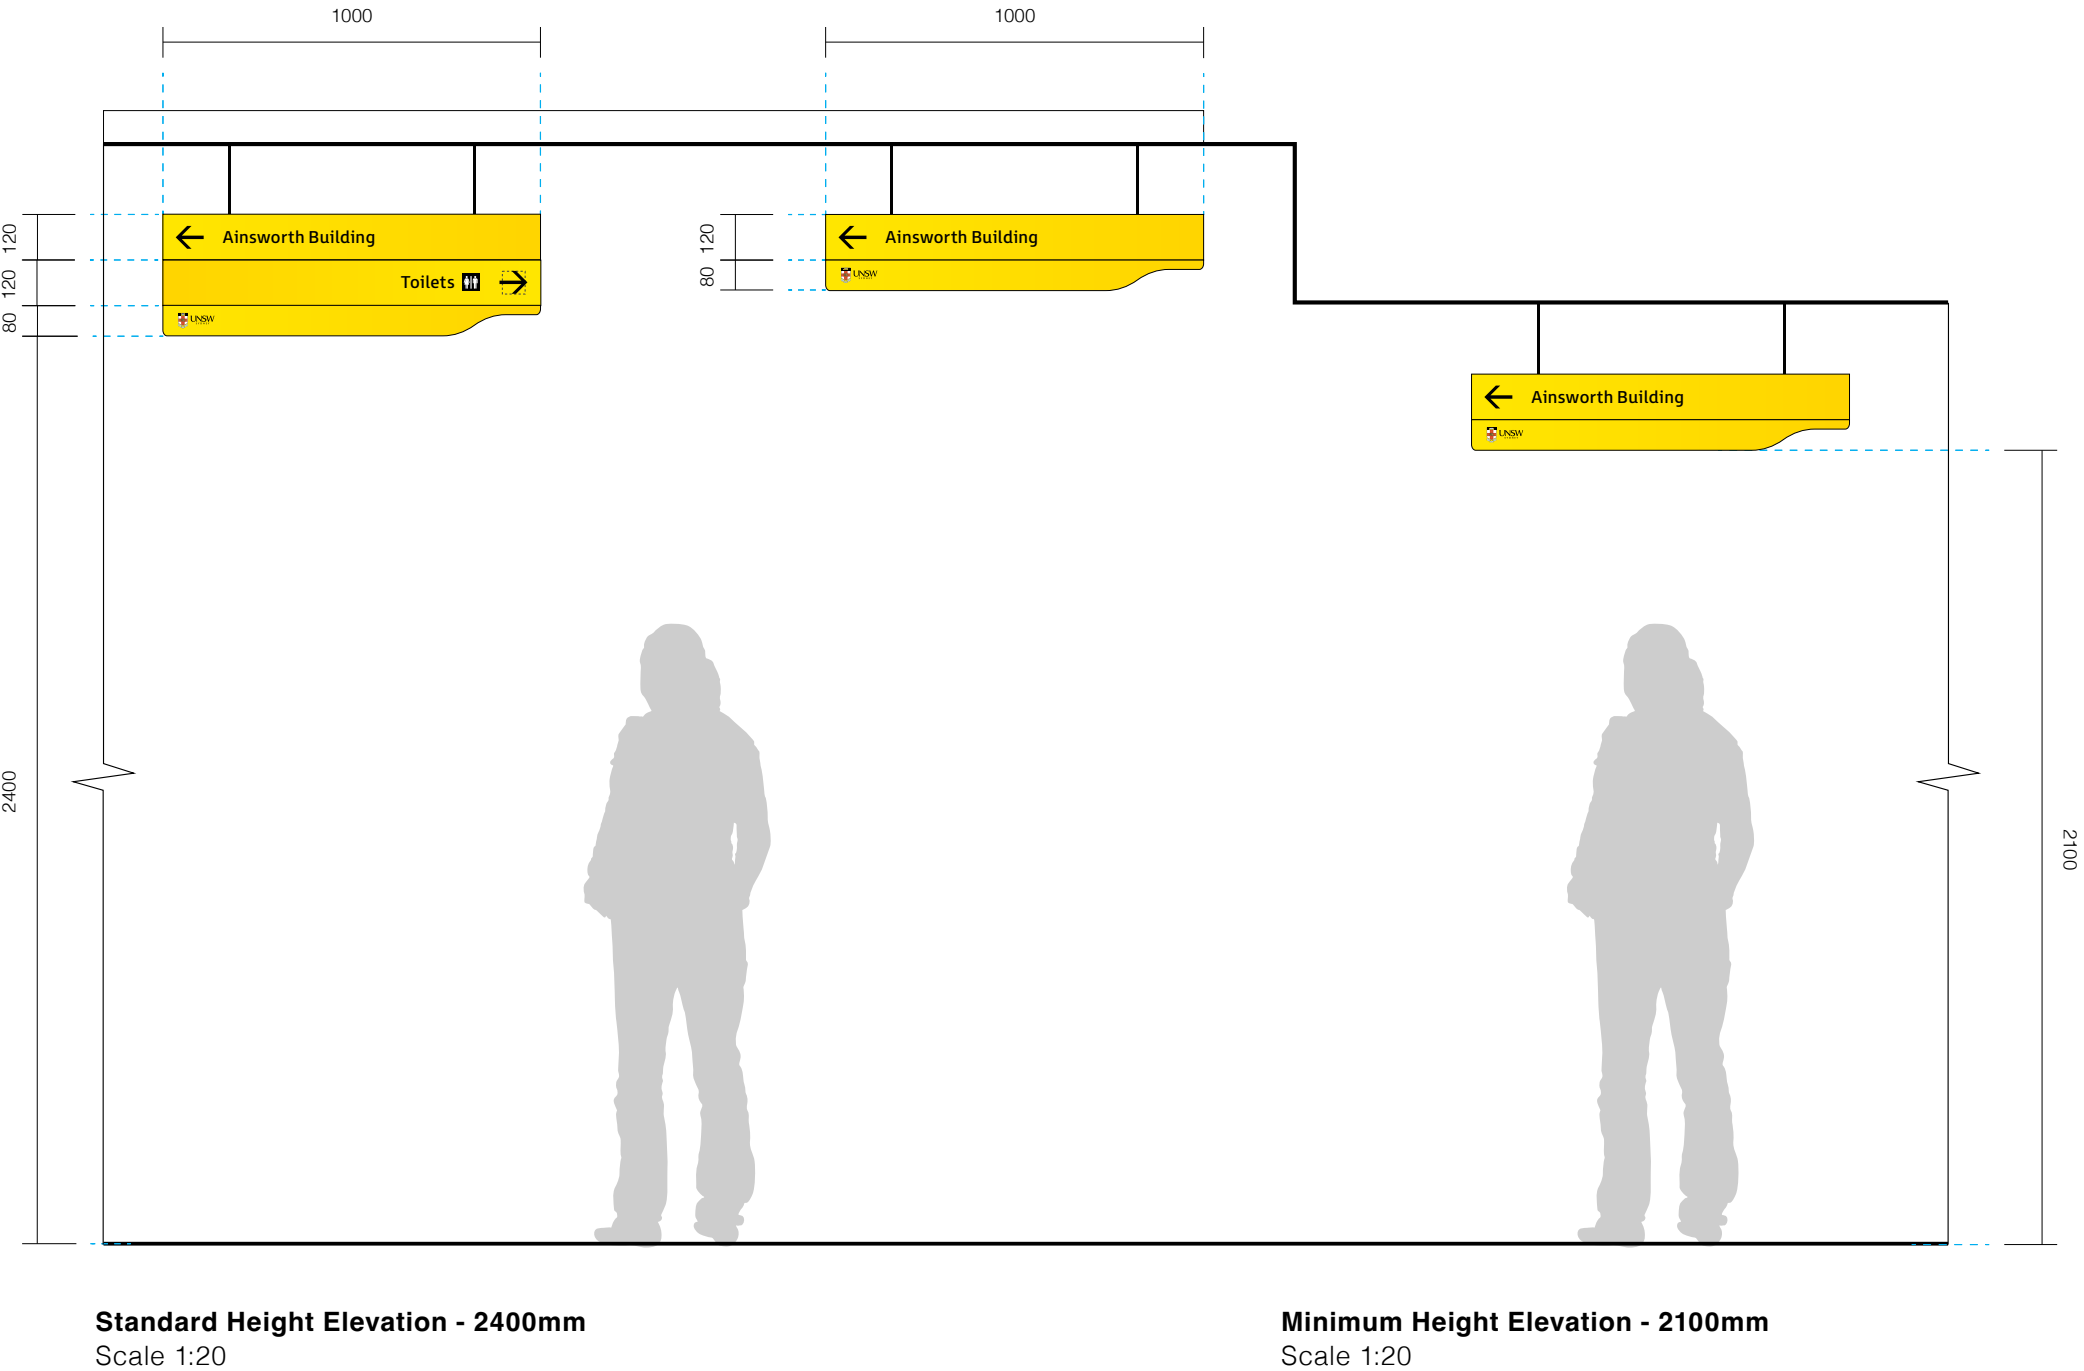


Sign Location

Purpose
Directs to main destinations at an external and internal level. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.


Location
Suspended along circulation corridors, at confirmation and decision points. Message content to be applied to both sides, with directions to various destinations as required by the circulation pattern.

Alternate Location
For buildings with ceiling heights of higher than 2700mm utilise alternate location. Confirm on site or during design phase.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

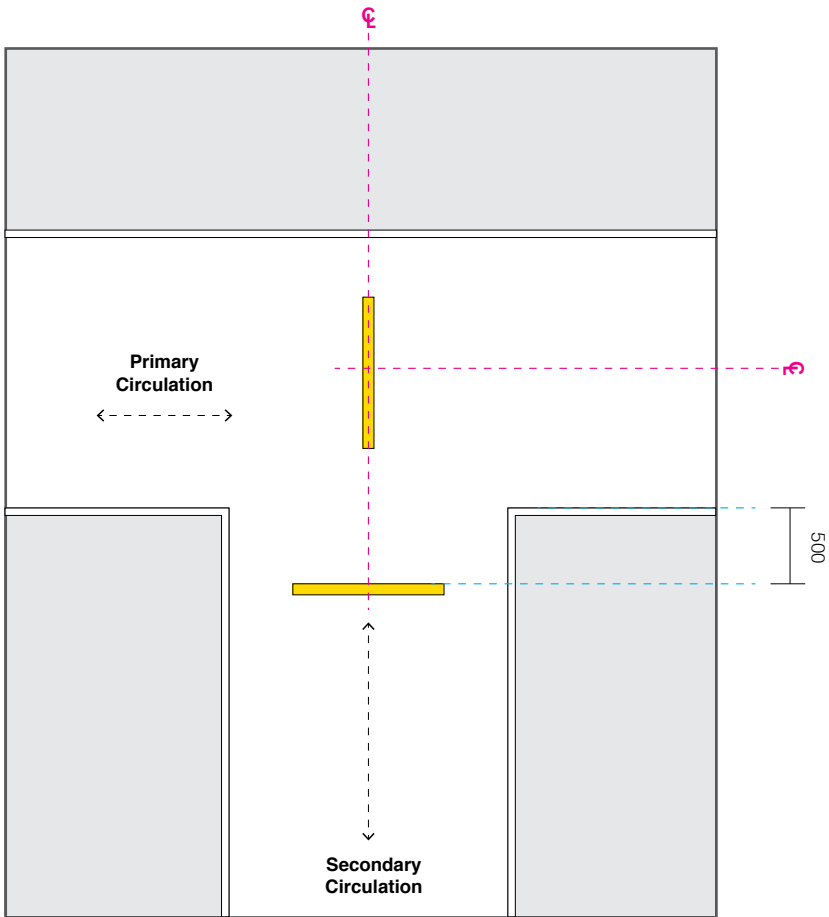

01 Suspended Directional
T-intersection
Scale 1:50

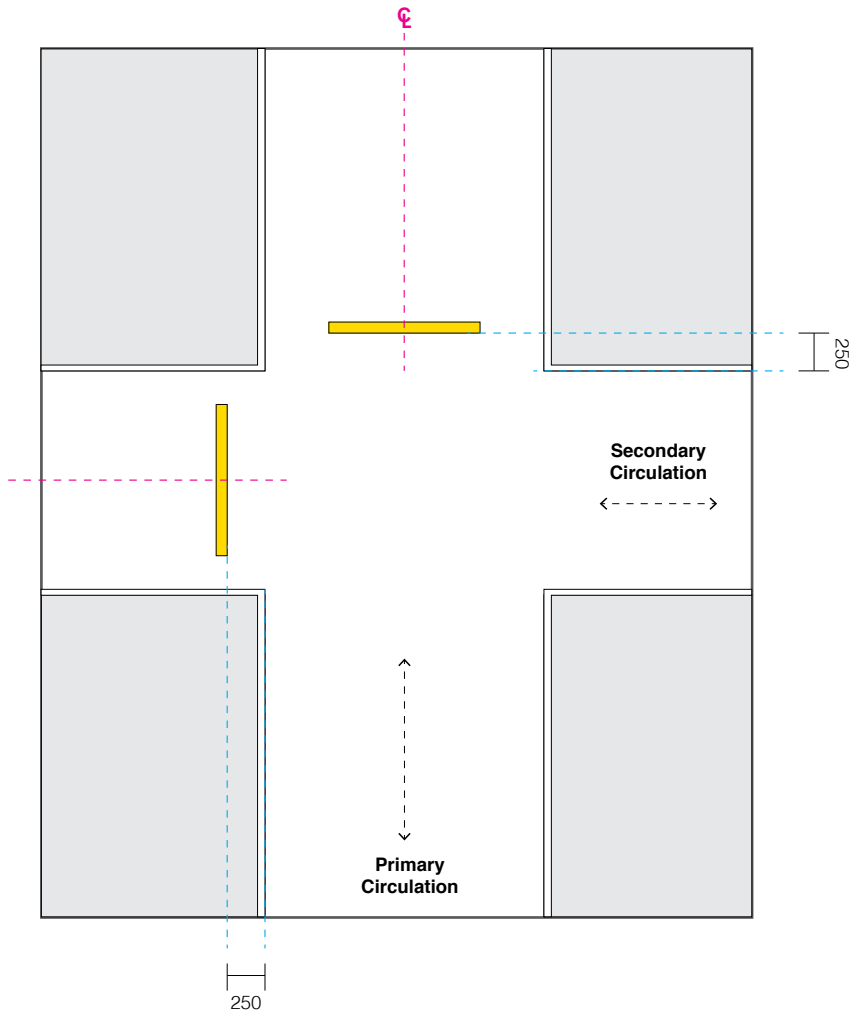

02 Suspended Directional
X-intersection
Scale 1:50


Positioning

Positioning Guide
Suspended directional signs are to be placed within circulation corridors at confirmation and decision points within both internal and external campus areas.


Signs to be centered within the circulation corridor, mounted at 2400 FFL. Positioning should be adjusted to avoid obstruction by ceiling mounted elements e.g. lighting, emergency exit signage.

Refer to plan 01 for insitu positioning at a T-intersection and plan 02 for insitu positioning at a X-intersection.


- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

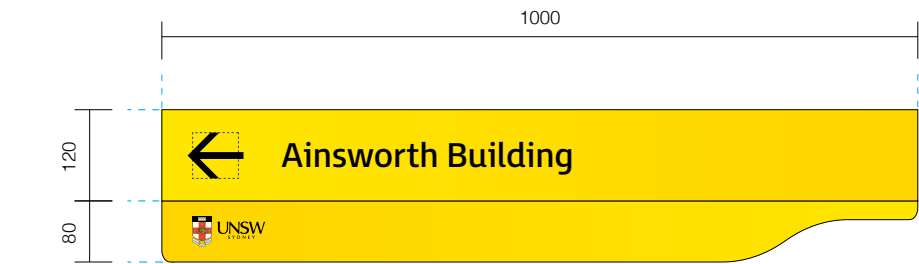


Template 01 - Small Single Panel
Scale 1:10

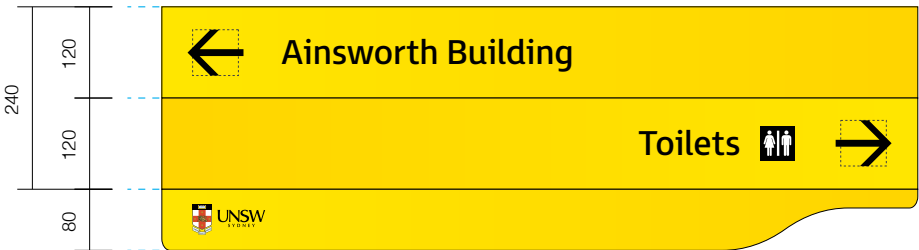


Template 02 - Medium Double Panel
Scale 1:10

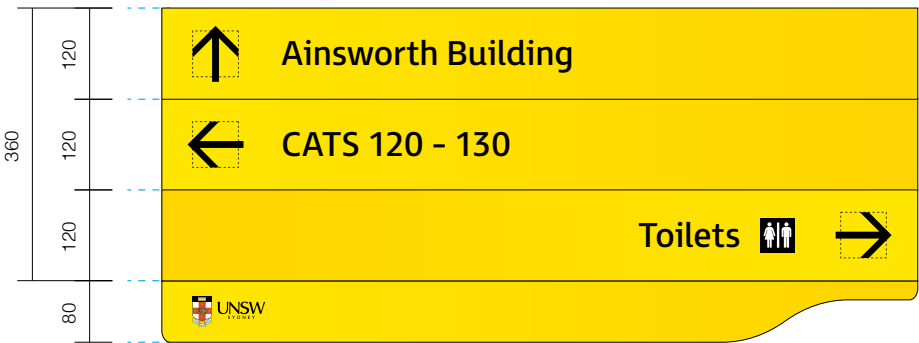


Template 04 - Large Triple Panel
Scale 1:10

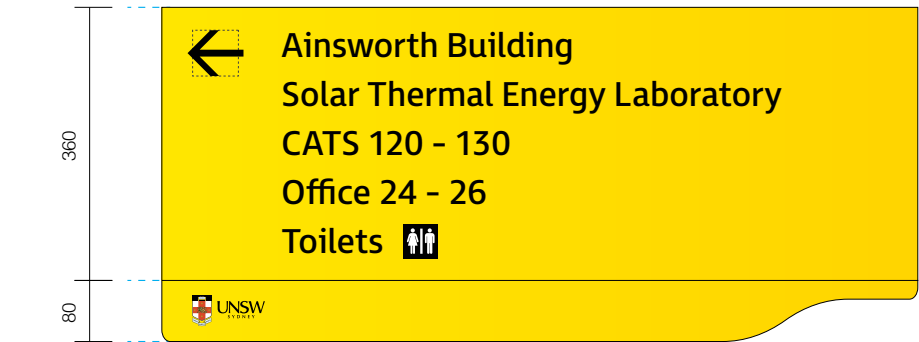

Template 06 - Large Single Panel
Scale 1:10

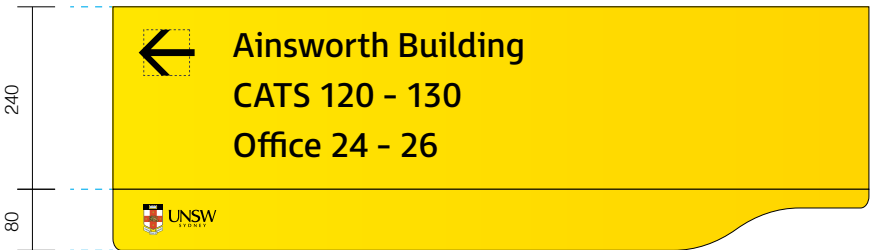

Template 03 - Medium Single Panel
Scale 1:10

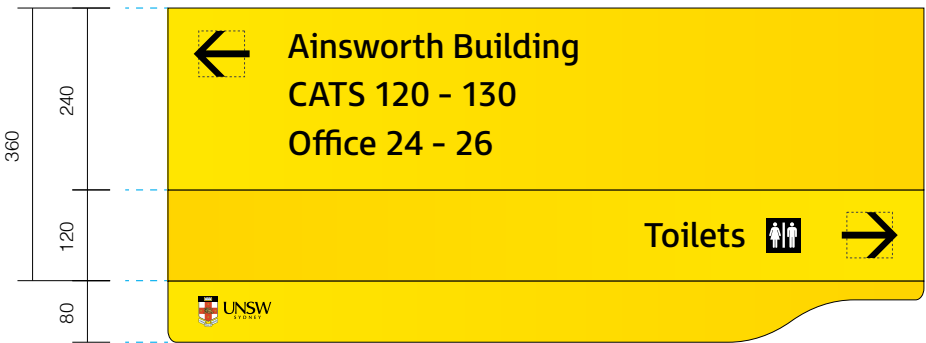

Template 05 - Large Combination Panel
Scale 1:10

Family

Sign Selection


Selection of sign panel configuration is to respond to messaging specific to its location.

Destination Quantities

A maximum of 5 destinations. Only to be applied on DR.05f suspended sign panel. When location requires more than 5 destinations, it is advised to use DR.06 or DR.08 wall mounted signs instead.

Note


- For wayfinding placement principles, refer to: Section 4, User Journeys

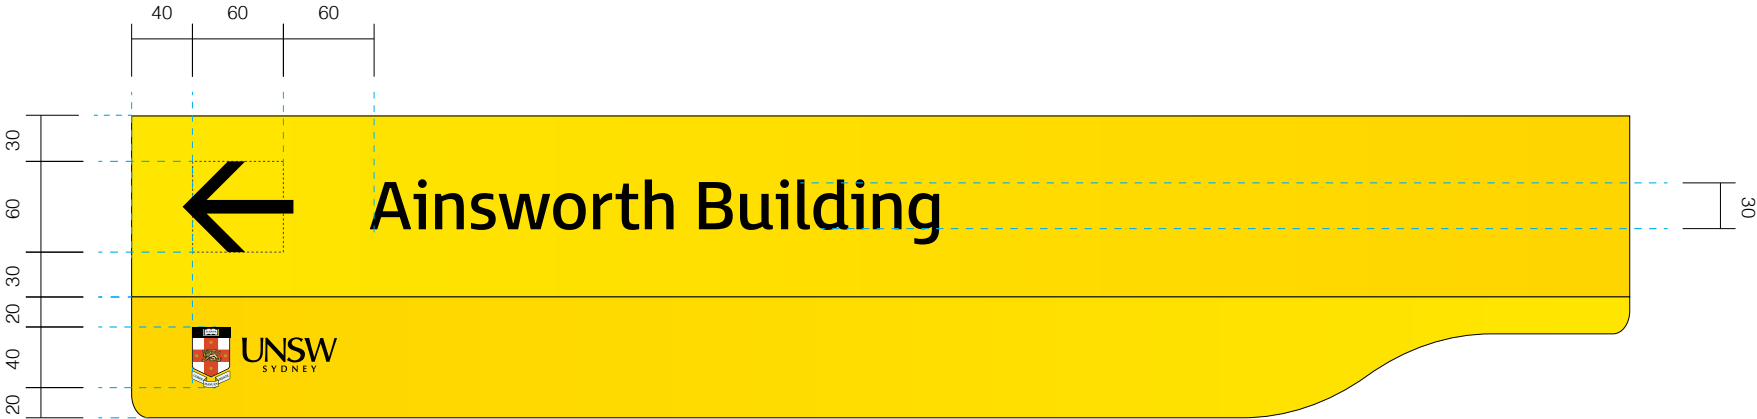


Typical Single Panel
Arrow & Destination
Scale 1:5



Typical Single Panel
Arrow, Destination &
Pictogram
Scale 1:5

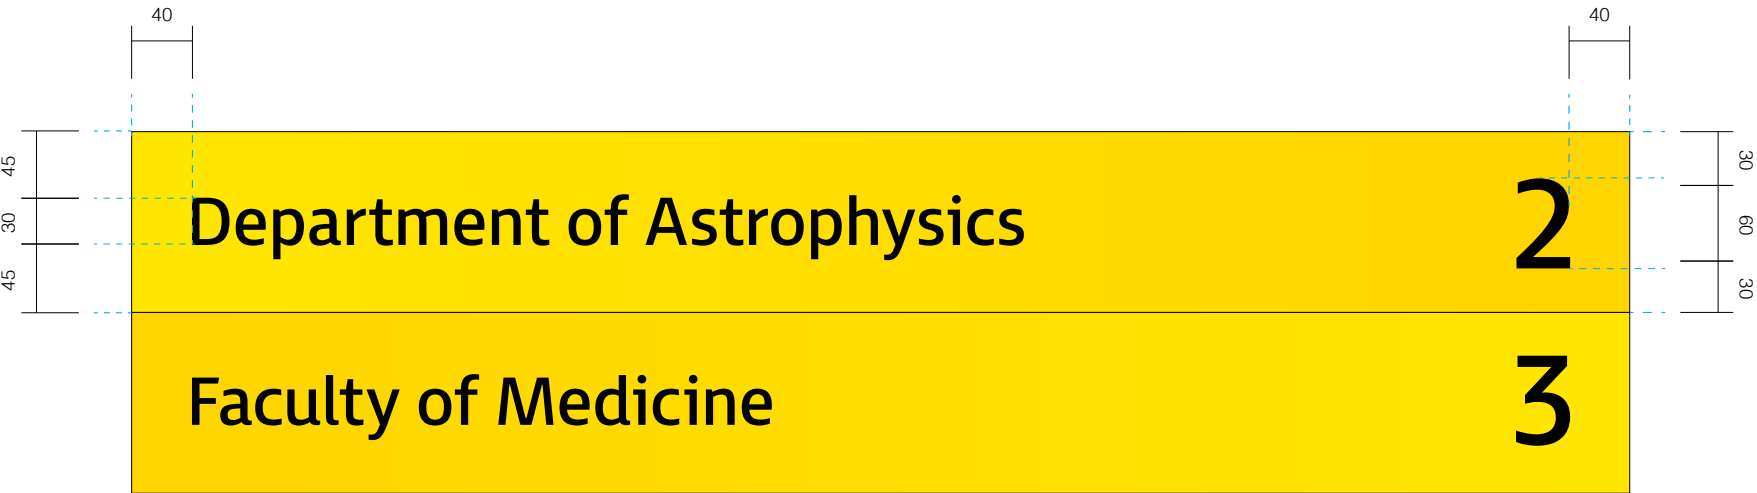

Typical Single Panel
Level Identification
Scale 1:5

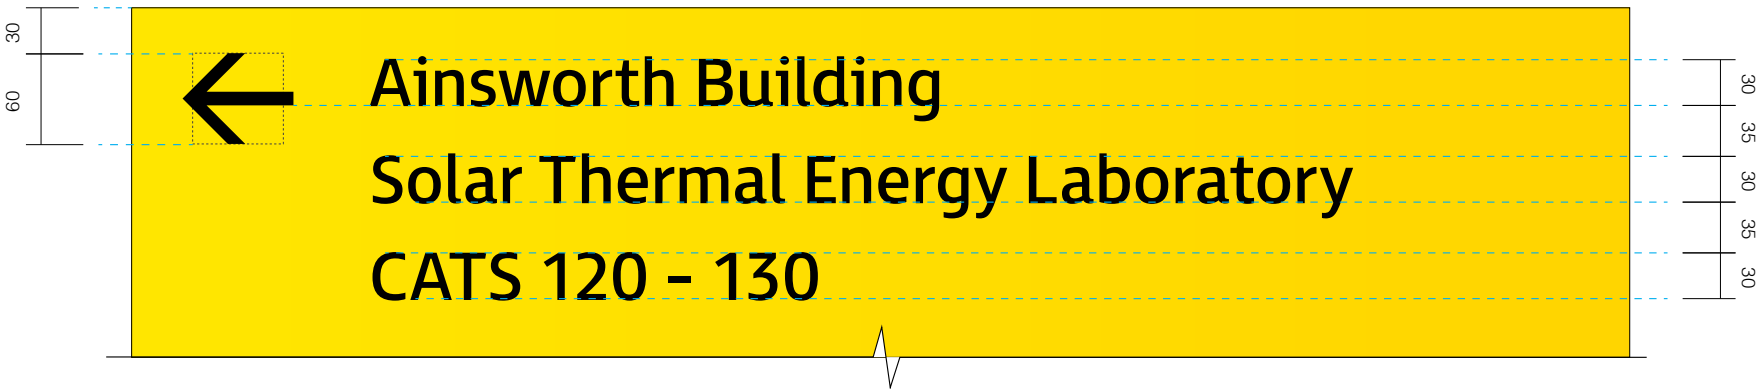

Large Panels
Arrow & Destination
Scale 1:5

Graphic Layout

Destination Name
FS Millbank Regular
Alignment: To respond to arrow direction.
Size: 30mm
Tracking: 10+, Optical Kerning

Pictograms
Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 7, Graphic Standards, Pictogram Suite.

Arrow
60mm height

UNSW Logo
40mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Fixing Details
• Refer to: Section 8, Construction Standards, Suspended Signforms



01 Directional Suspended Sign
Chemical Sciences Building




02 Existing Sign
Chemical Sciences Building


In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy.

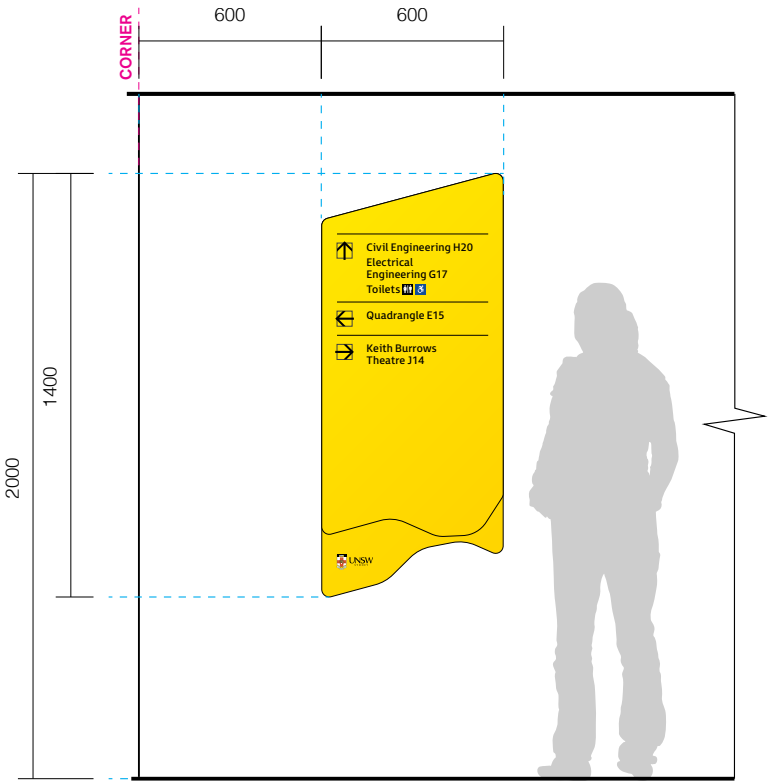

Elevation - Aligned to corner
Scale 1:25

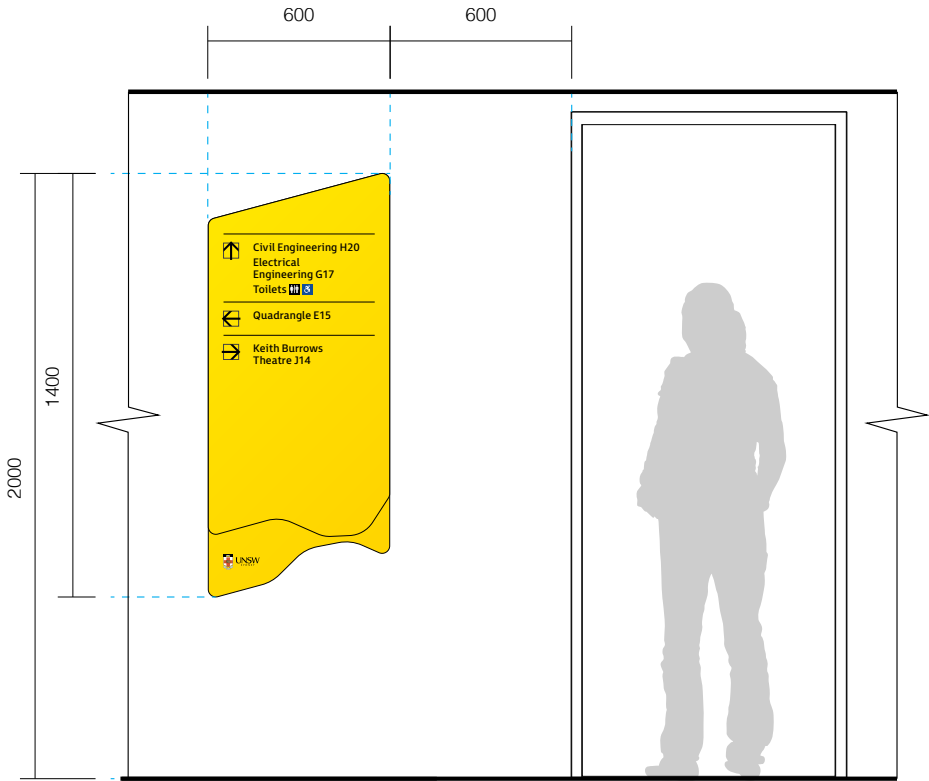

Elevation - Beside door or opening
Scale 1:25

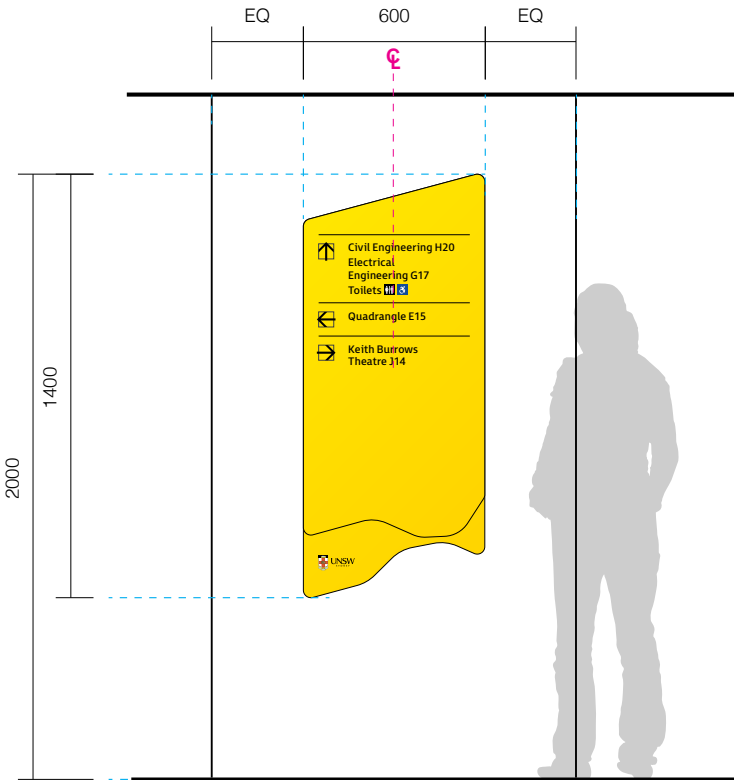


Elevation - Centered to wall
Scale 1:25

Sign Location


Purpose
Directs pedestrians to main destinations from an external area. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

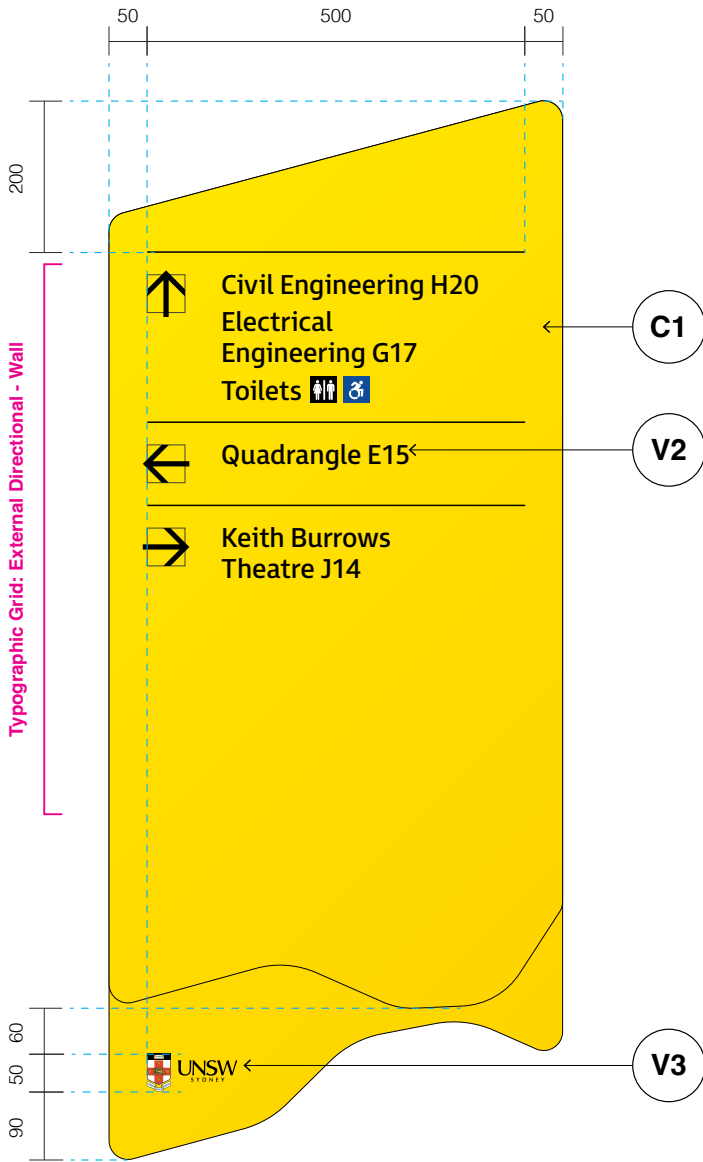

Template 01
Typical messaging
Scale 1:10

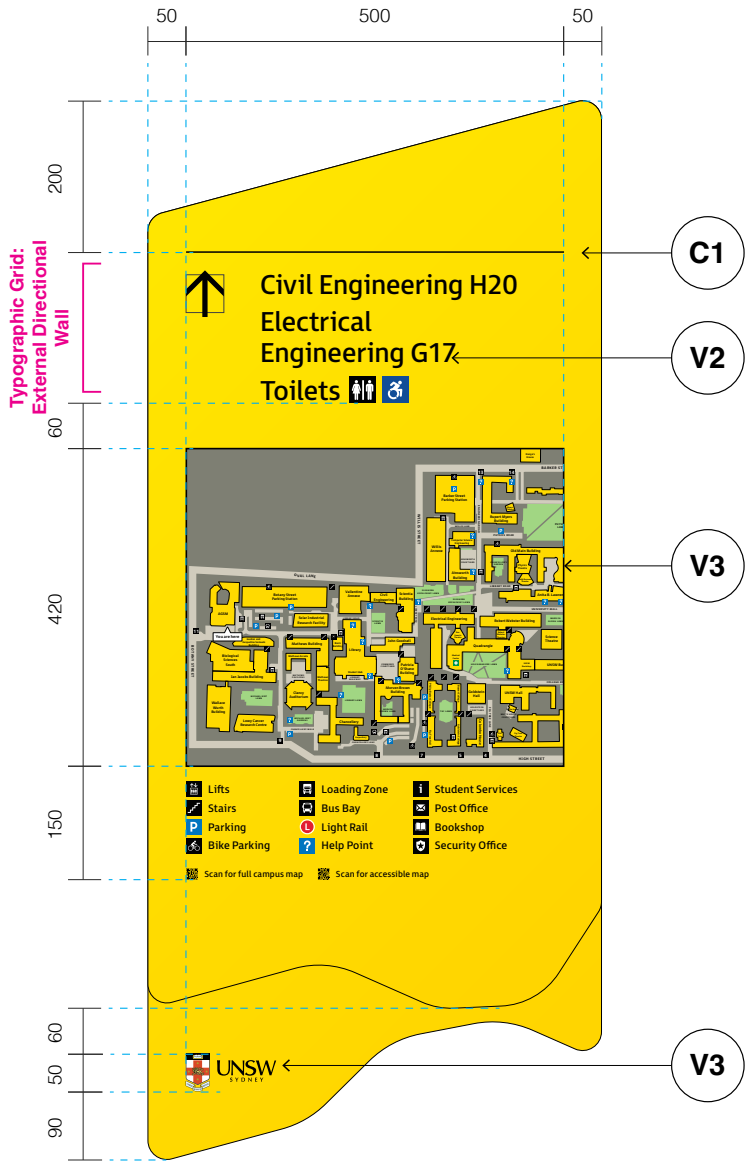

Template 02
Directional messaging & map
Scale 1:10

Graphic Layout

Typographic Grid – Identification
External Wall Mounted Directional Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 3 arrow directions.
Maximum 8 destinations in total.
Destinations must not exceed below 250mm footer of front message panel.


UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

- Construction Details**
- Refer to: Section 8, Construction Standards, Layered Panel Signforms
 - Refer to: Section 18, Map, for map dimensions and standards

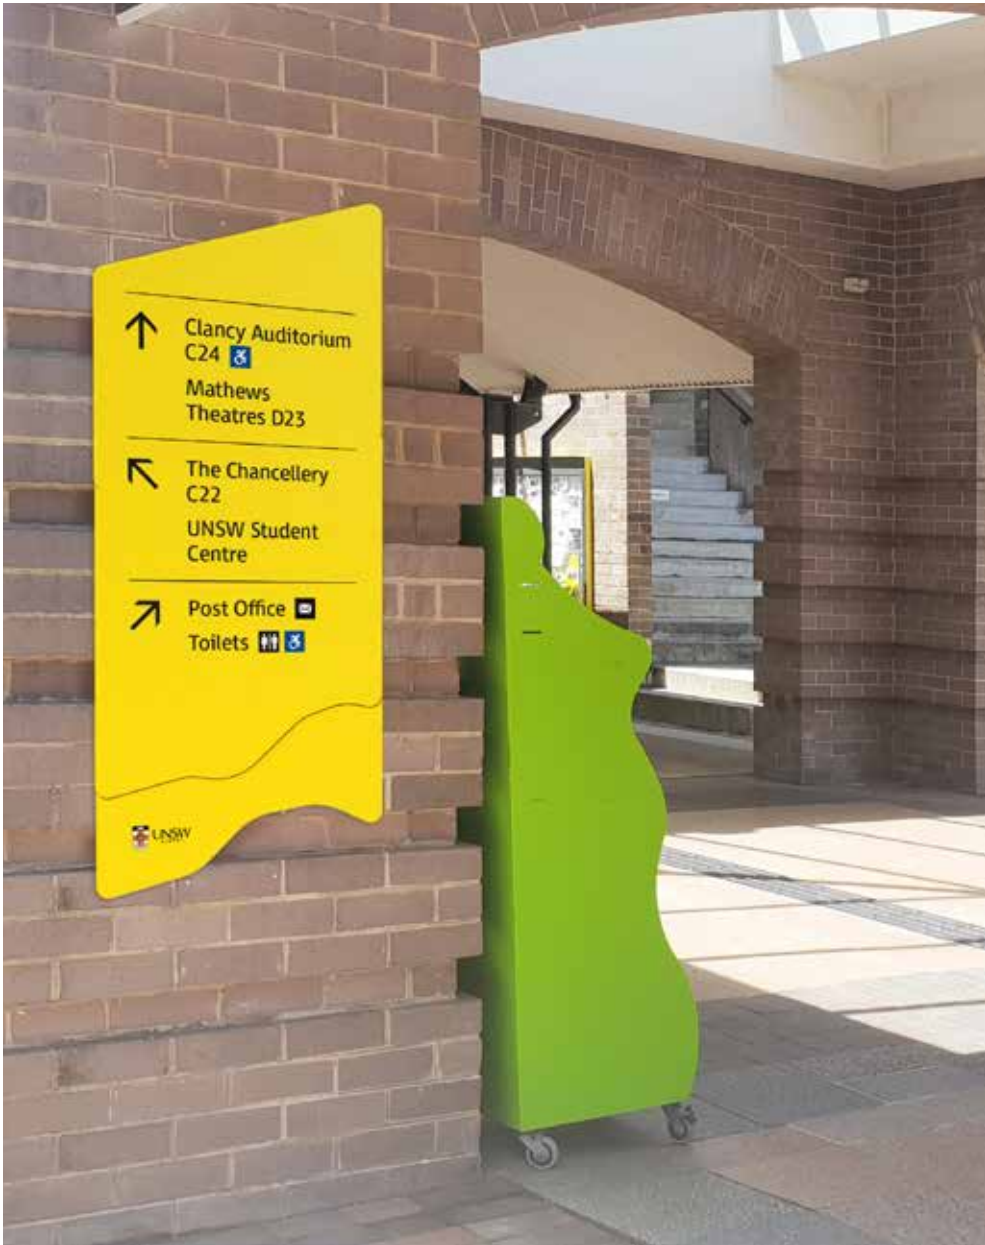

01 External Wall-Mounted Directional
Library Lawn




02 Existing Sign
Library Lawn


In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy.

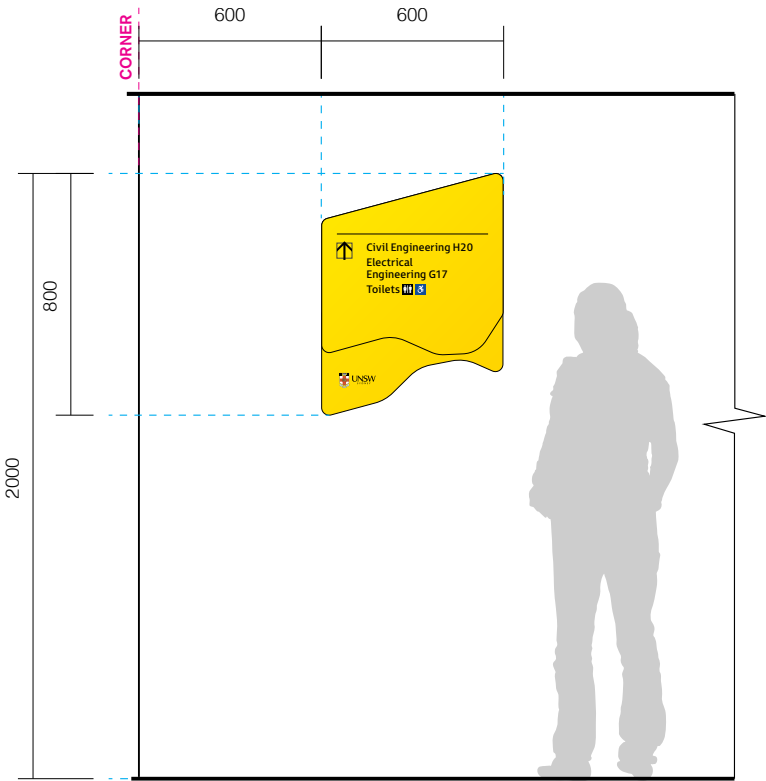

Elevation - Aligned to corner
Scale 1:25

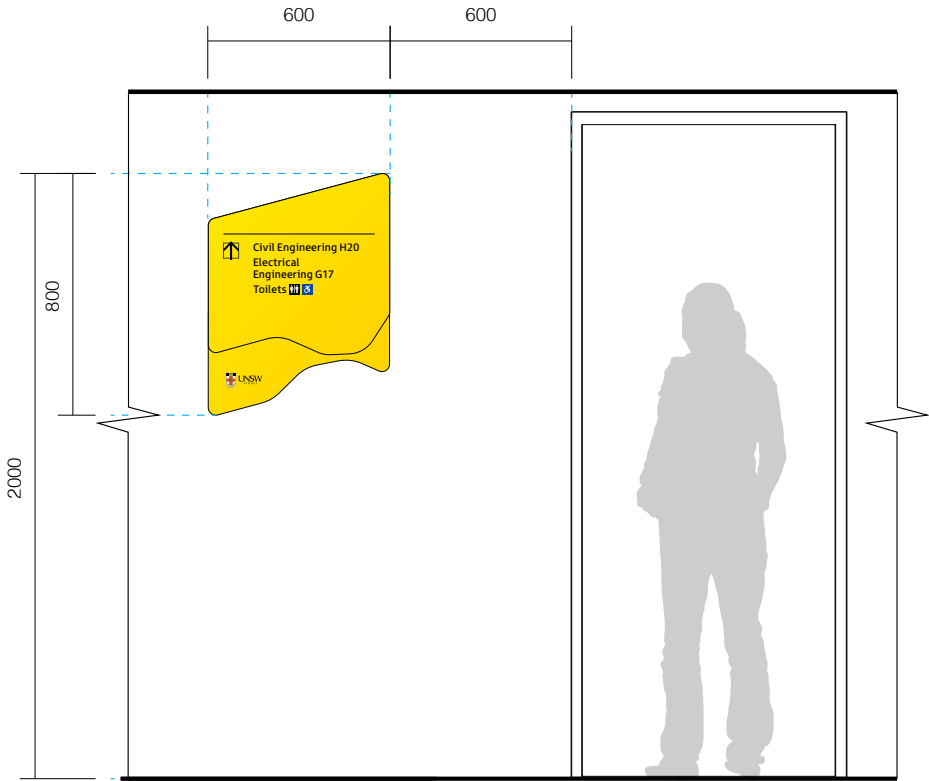

Elevation - Beside door or opening
Scale 1:25

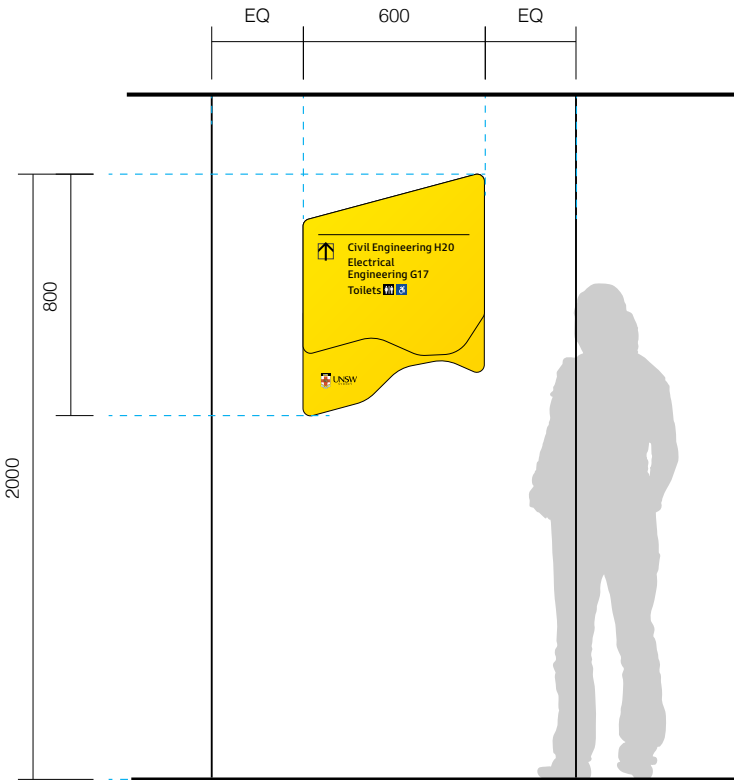

Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose


Directs pedestrians to main destinations from an external area. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location

Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

Note

- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

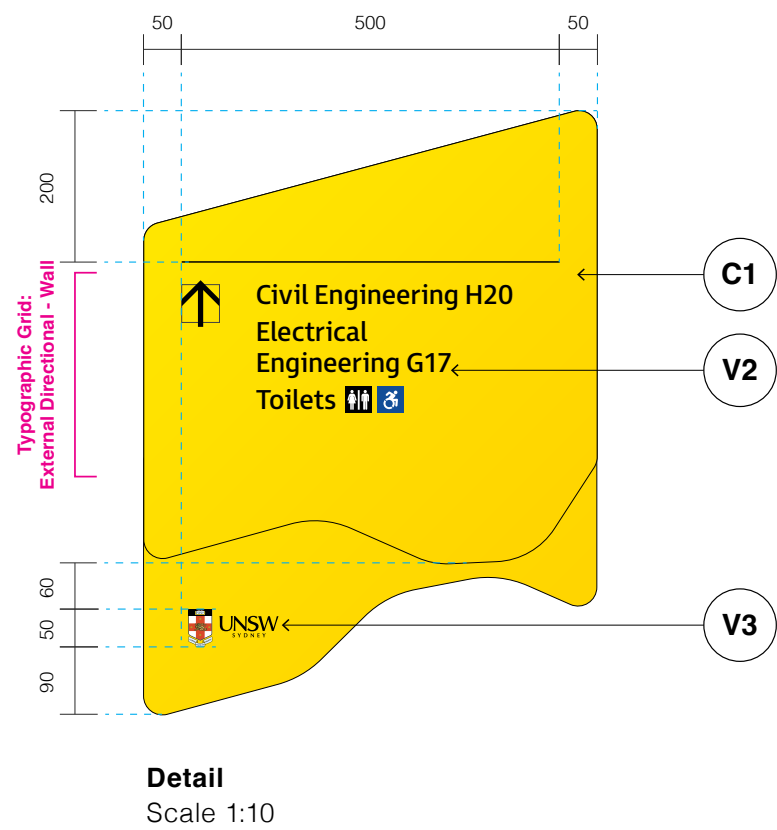

Graphic Layout

Typographic Grid – Identification
External Wall Mounted Directional Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

UNSW logo
50mm height


Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |


Construction Details
• Refer to: Section 8, Construction Standards, Layered Panel Signforms

Section 11 – Internal: Primary Wall Mounted (Large)


DR.08

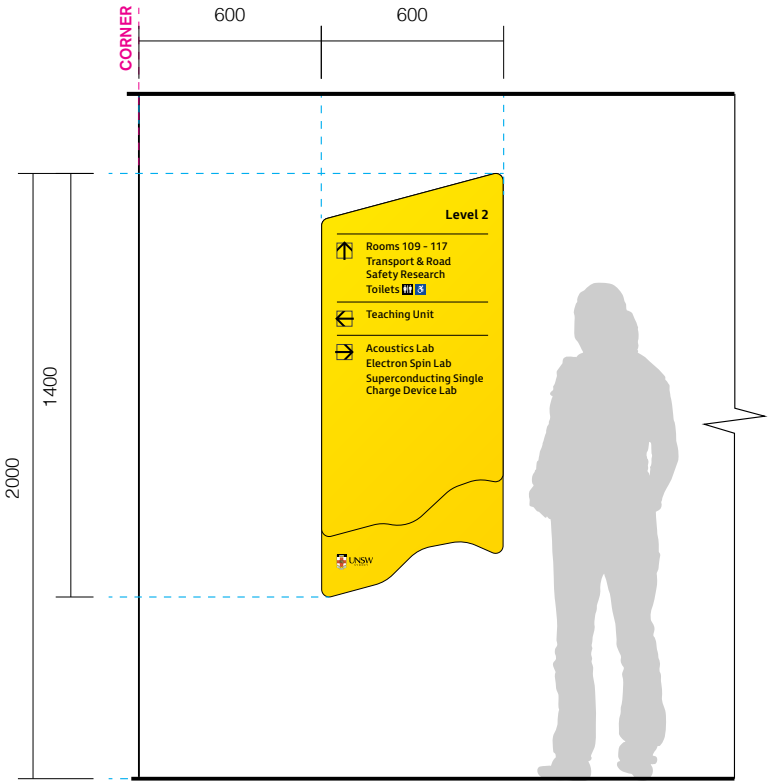

Elevation - Aligned to corner
Scale 1:25

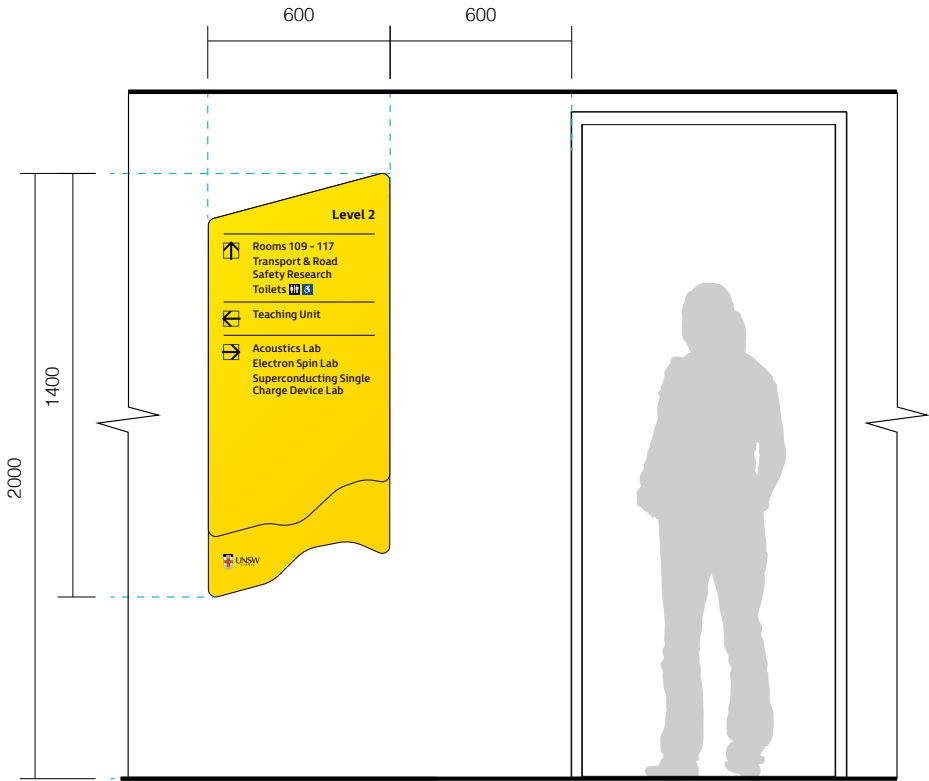

Elevation - Beside door or opening
Scale 1:25

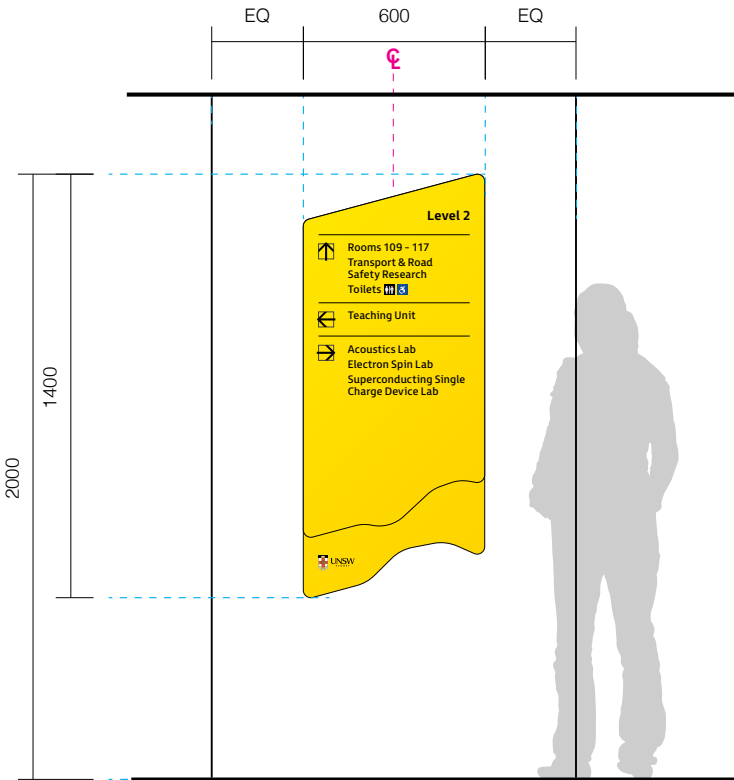

Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose


Directs pedestrians to main destinations from in an internal area. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location

Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

Note

- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

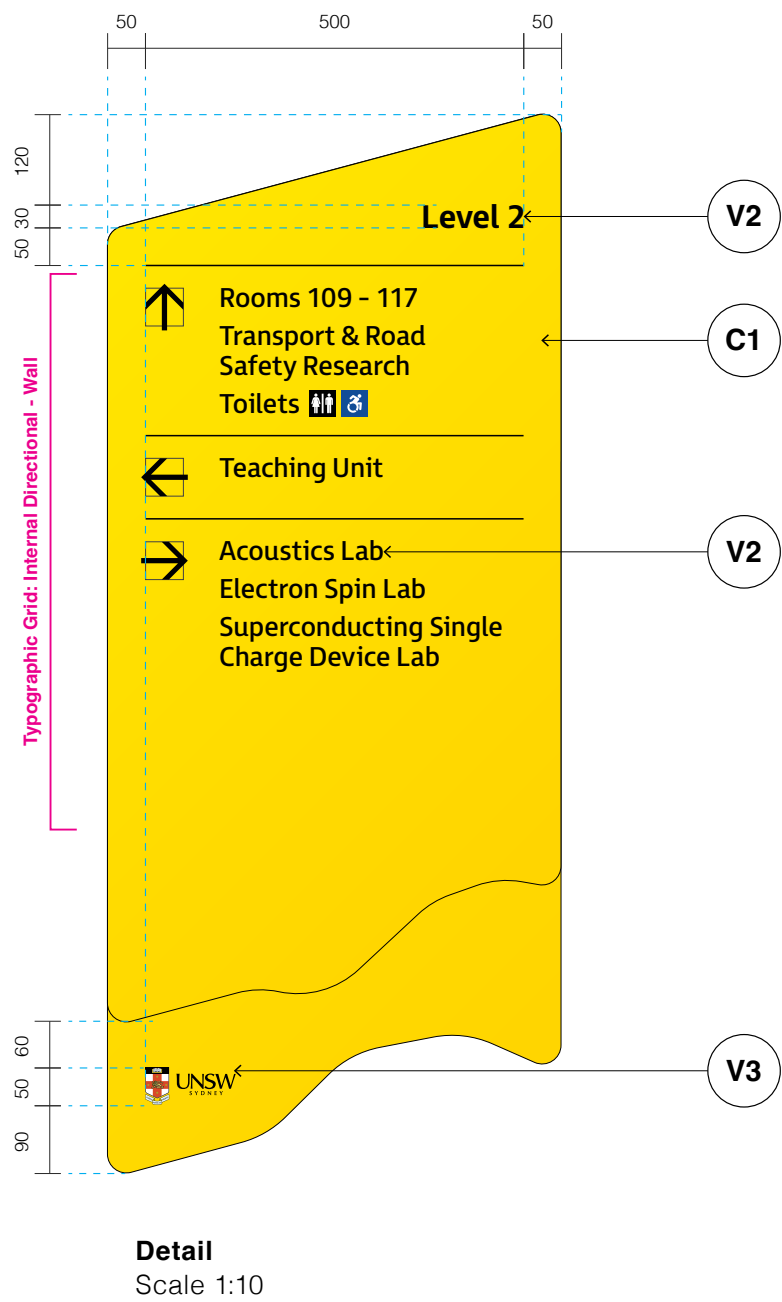

Graphic Layout

Typographic Grid – Identification
Internal Wall Mounted Directional Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

UNSW logo
50mm height


Construction & Materials

Materiality Legend


C1	V2	V3
• C1 finish on 3mm aluminium	• V2 applied on top of aluminium	• V3 print applied on top of aluminium

Construction Details


- Refer to: Section 8, Construction Standards, Layered Panel Signforms

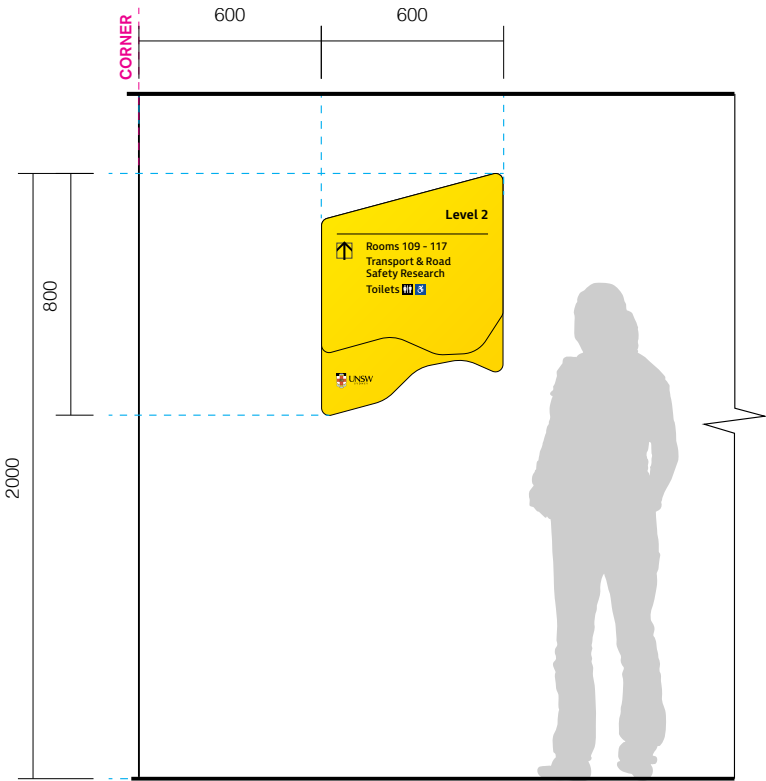

Elevation - Aligned to corner
Scale 1:25

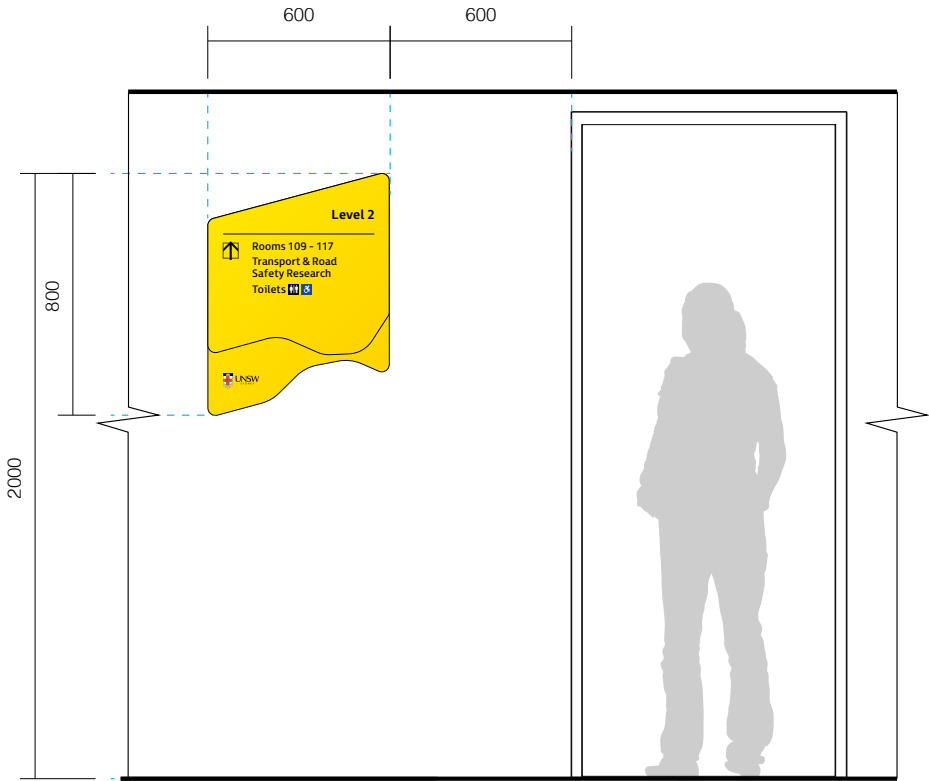

Elevation - Beside door or opening
Scale 1:25

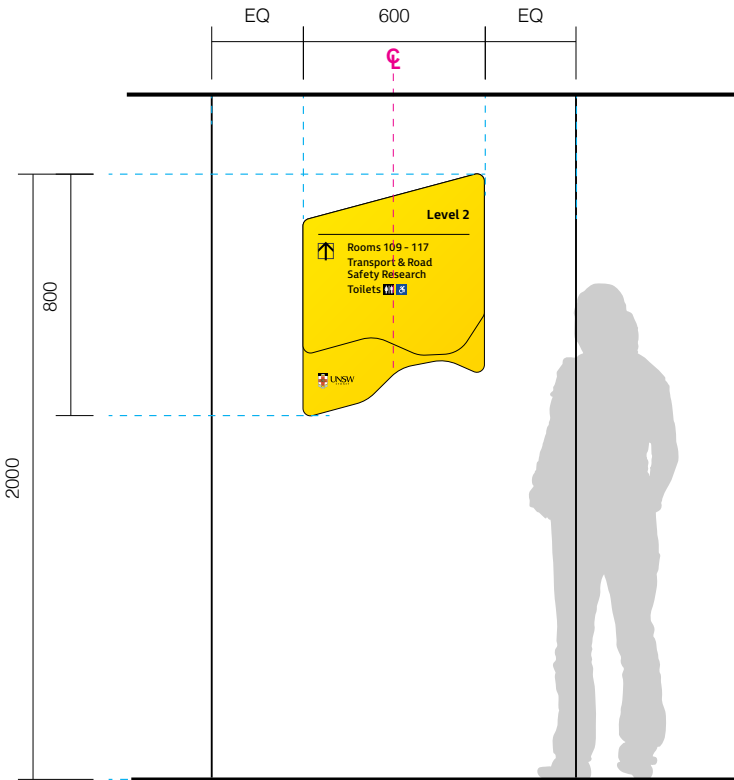


Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose
Directs pedestrians to main destinations from in an internal area. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

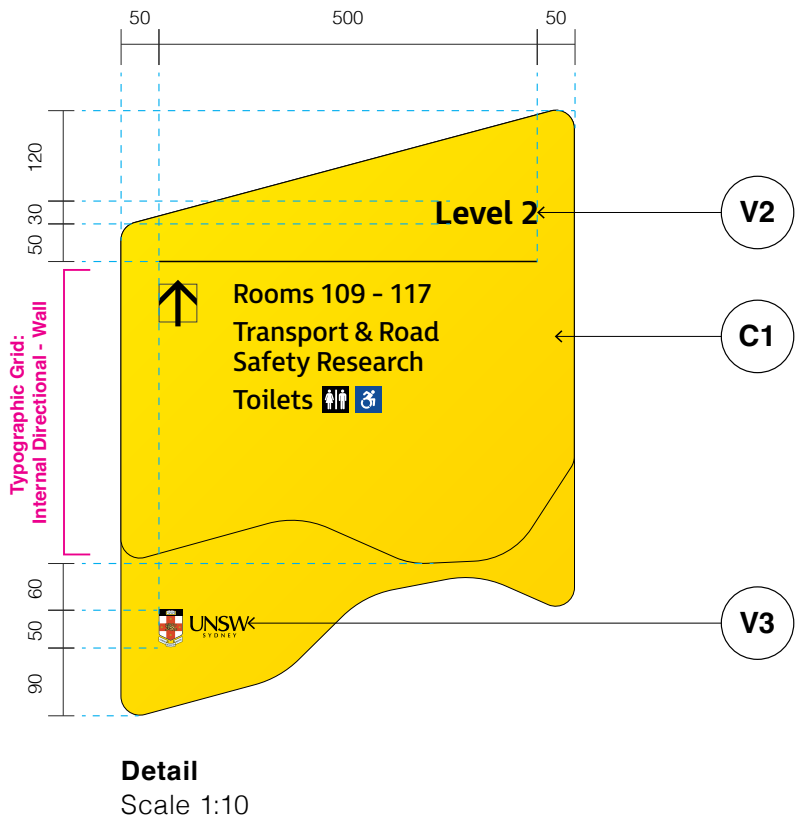

Graphic Layout

Typographic Grid – Identification
Internal Wall Mounted Directional Layout. Refer to Section 7, Graphic Standards, Messaging Layouts

Dividing Line
Line weight: 2mm

UNSW logo
50mm height


Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 8, Construction Standards, Layered Panel Signforms

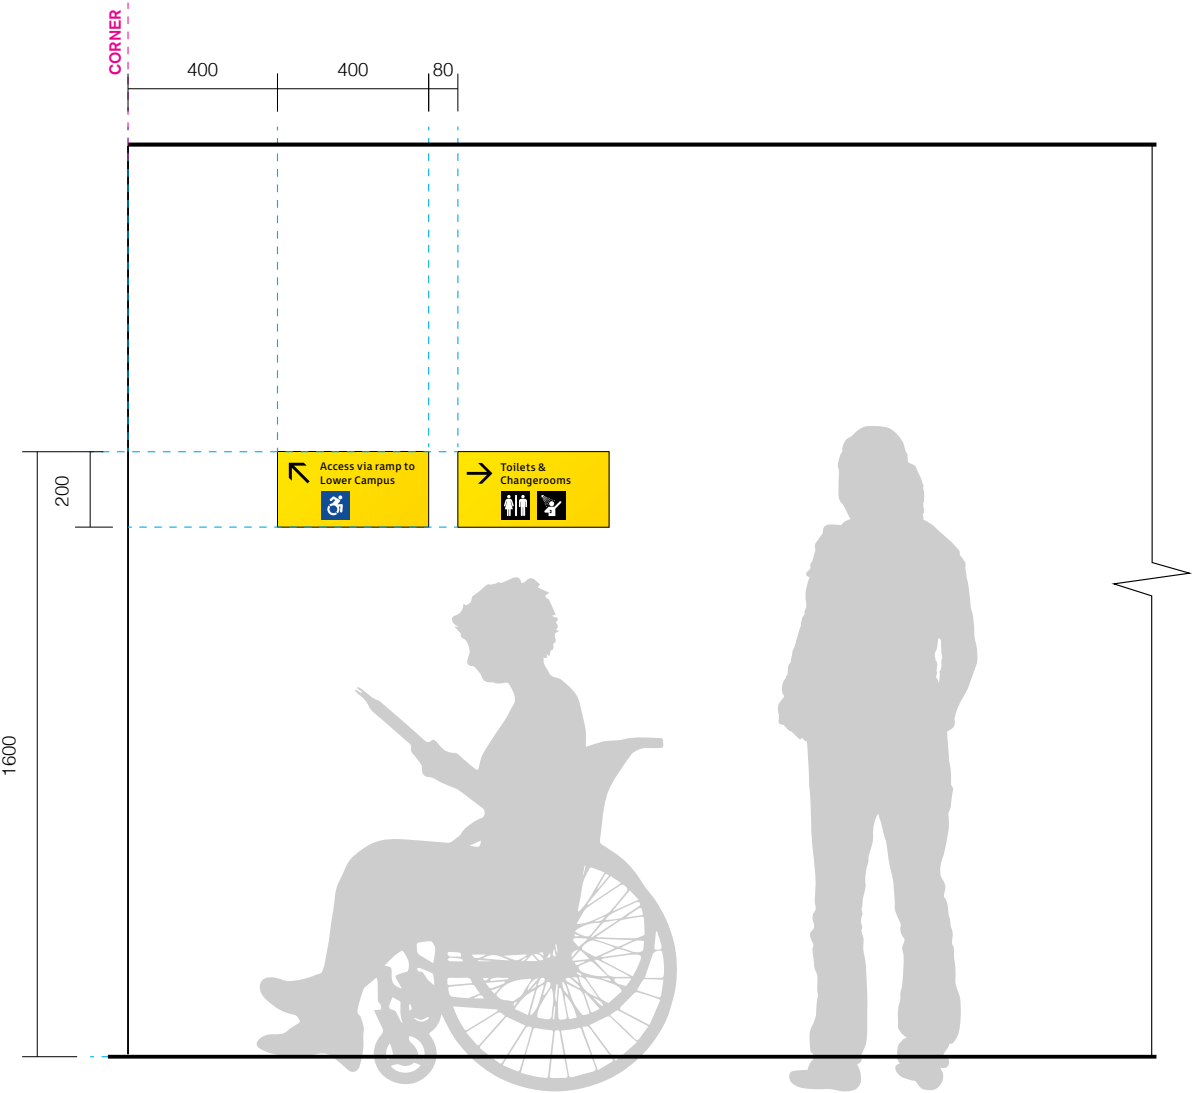


Elevation
Scale 1:20

Sign Location

Purpose
Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls at major decision points within circulation routes. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.


- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

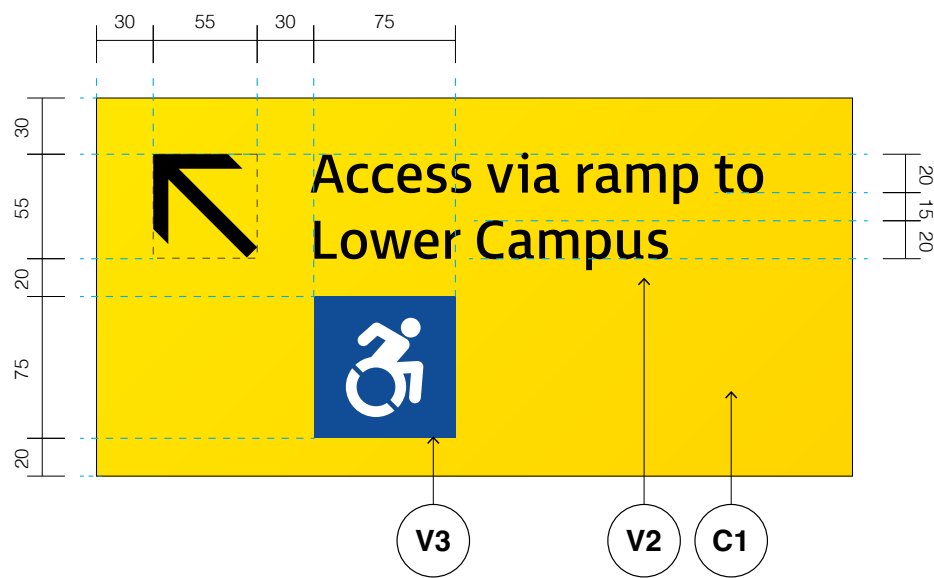

Template 01 - Single pictogram
Scale 1:4



Template 02 - Two pictograms
Scale 1:4

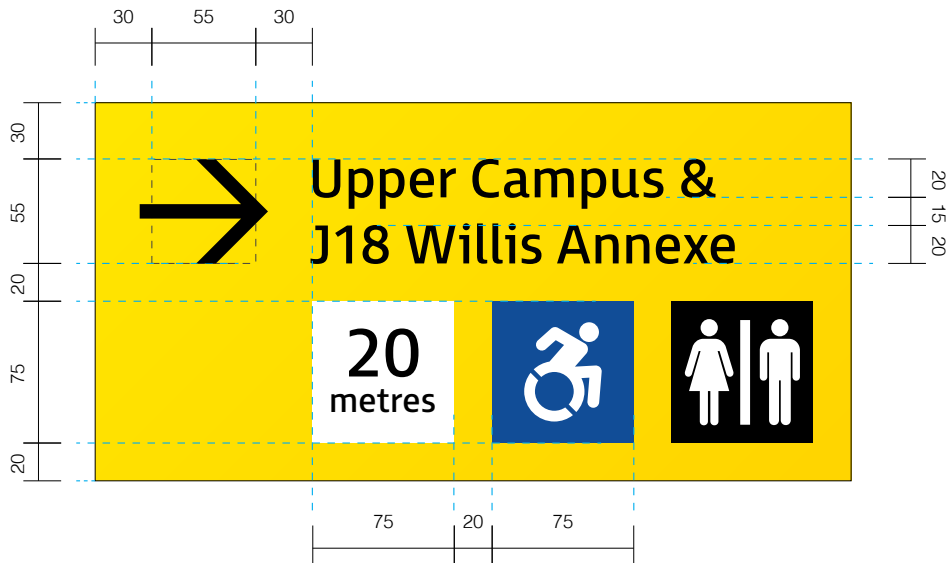

Template 03 - Multiple pictograms
Scale 1:4

Graphic Layout

Messaging
FS Millbank Regular
Alignment: Left
Size/ Leading: 20mm, 15mm
Tracking: 10+, Optical Kerning


Pictograms
Refer to Section 7, Graphic Standards, Pictogram Suite.

Arrow
55mm height


Construction & Materials

- Materiality Legend**
- C1**
 - C1 finish on 3mm aluminium
 - V2**
 - V2 applied on top of aluminium
 - V3**
 - V3 print applied on top of aluminium

Fixing Details
• Refer to: Section 8, Construction Standards, Wall Mounted Signforms

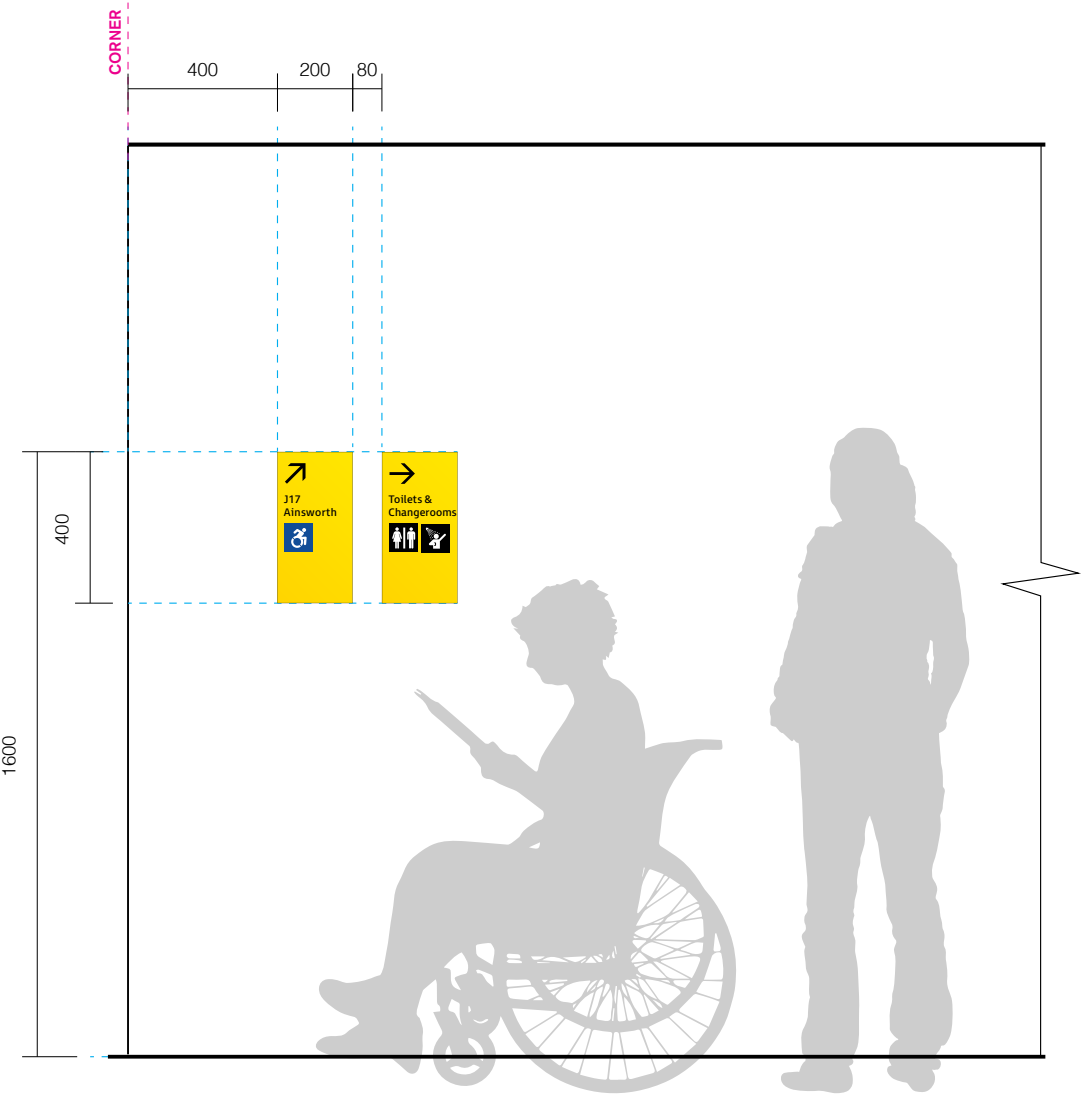

Elevation – Wall
Scale 1:20

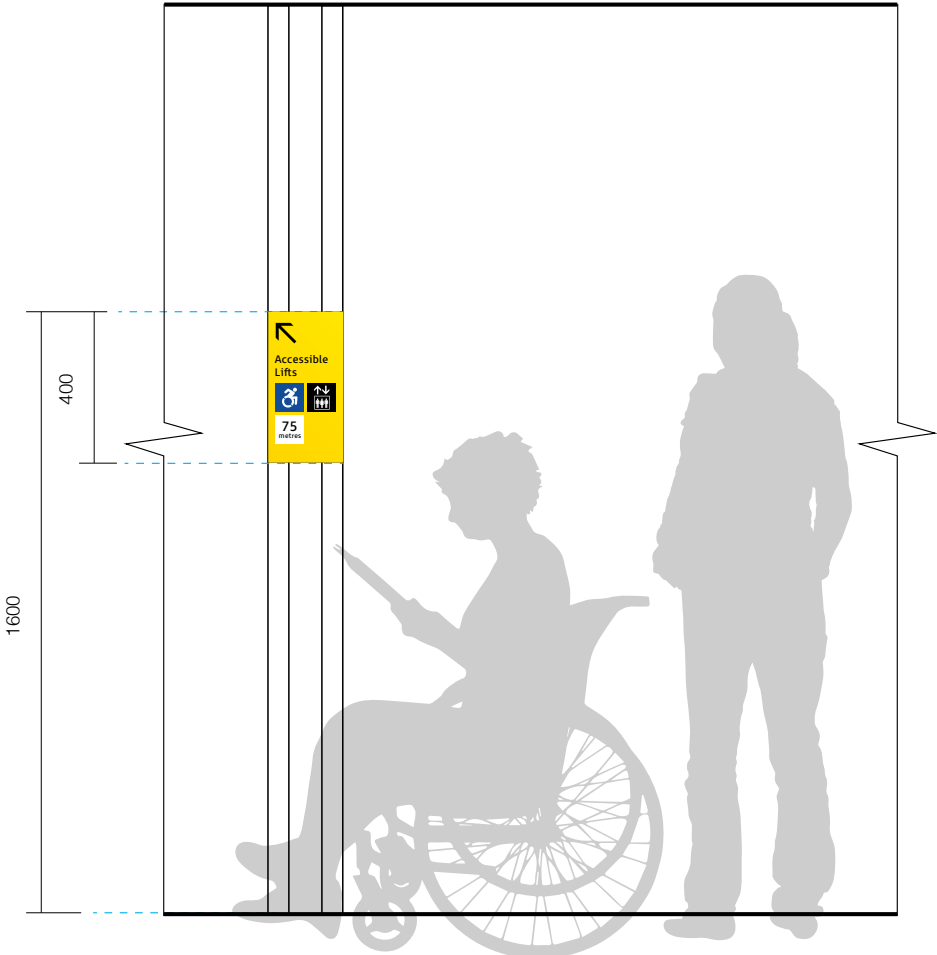

Elevation – Pillar
Scale 1:20

Sign Location

Purpose
Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls or columns at major decision points within circulation routes. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

Graphic Layout

- Messaging**
FS Millbank Regular
Alignment: Left
Size/ Leading: 20mm, 15mm
Tracking: 10+, Optical Kerning
- Pictograms**
Refer to Section 7, Graphic Standards, Pictogram Suite.
- Arrow**
55mm height

Construction & Materials


- Materiality Legend**
- C1

• C1 finish on 3mm aluminium
- V2

• V2 applied on top of aluminium
- V3

• V3 print applied on top of aluminium


- Fixing Details**
- Refer to: Section 8, Construction Standards, Wall Mounted Signforms

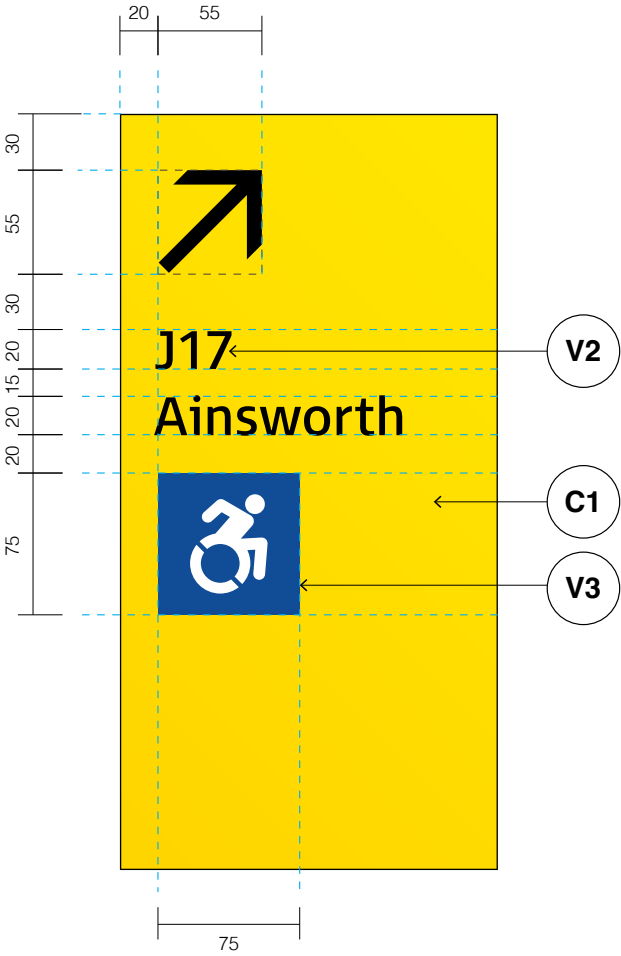


Template 01 - Single pictogram
Scale 1:4



Template 02 - 2 pictograms
Scale 1:4

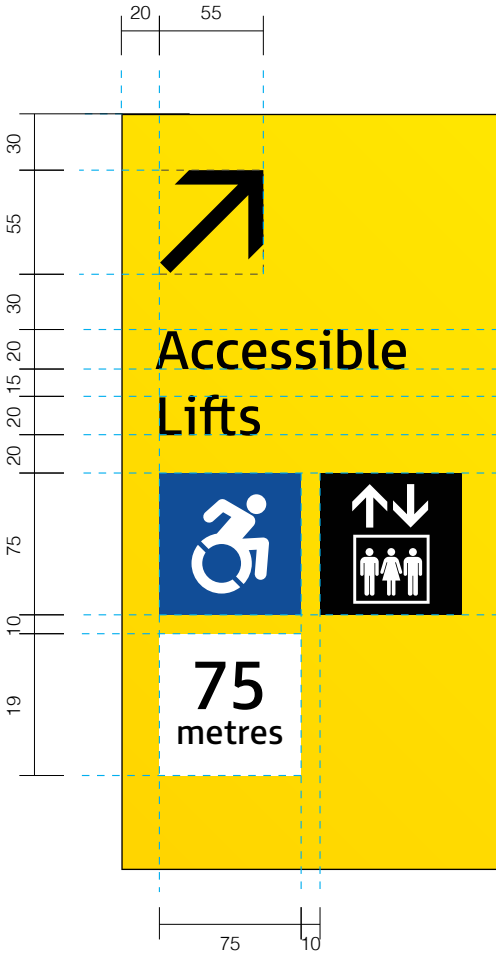

Template 03 - Multiple pictograms
Scale 1:4

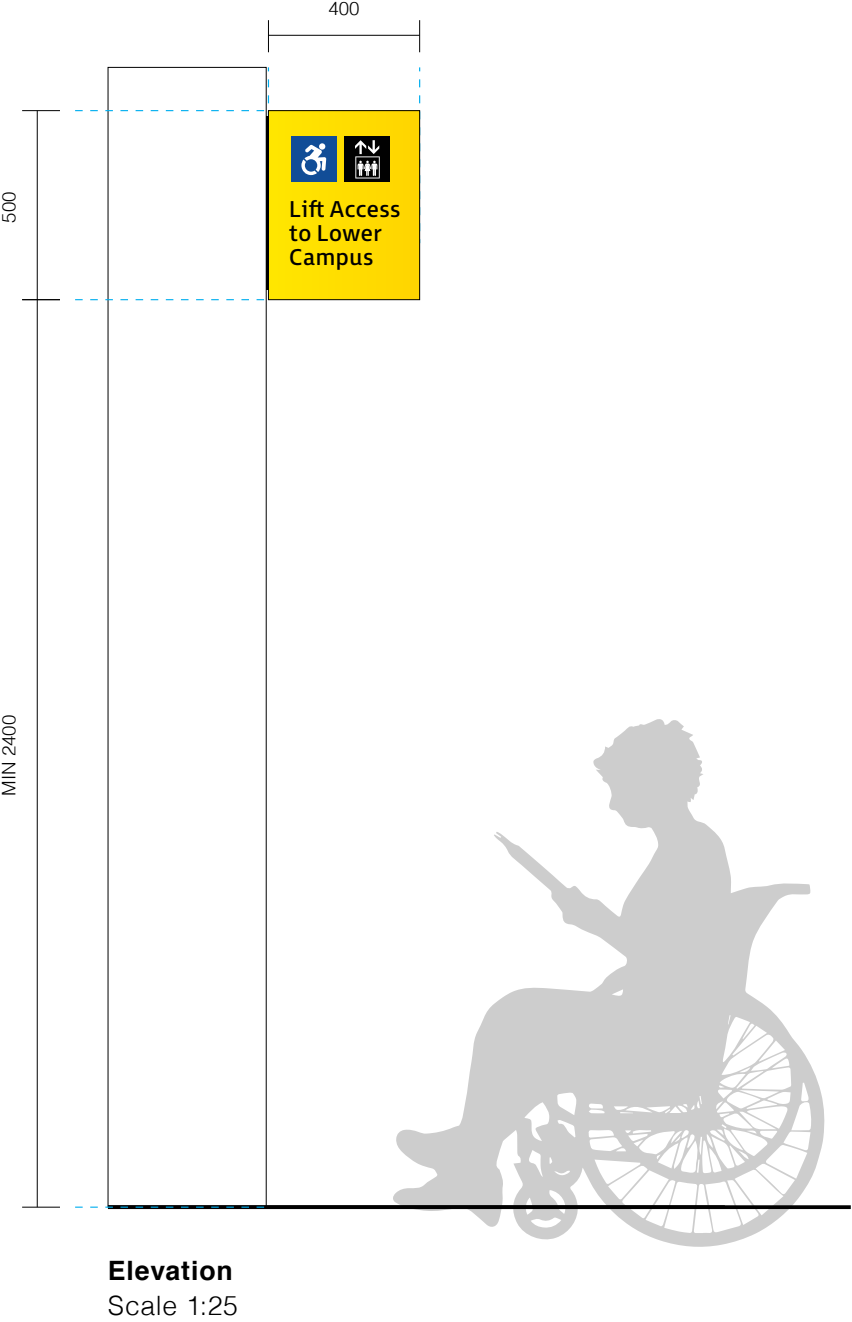


Sign Location


Purpose
Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Terminology & Addressing, Category 3, 5, 6, 8, 9, 11.

Location
Mounted on solid walls or columns at major decision points within accessibility circulation routes.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

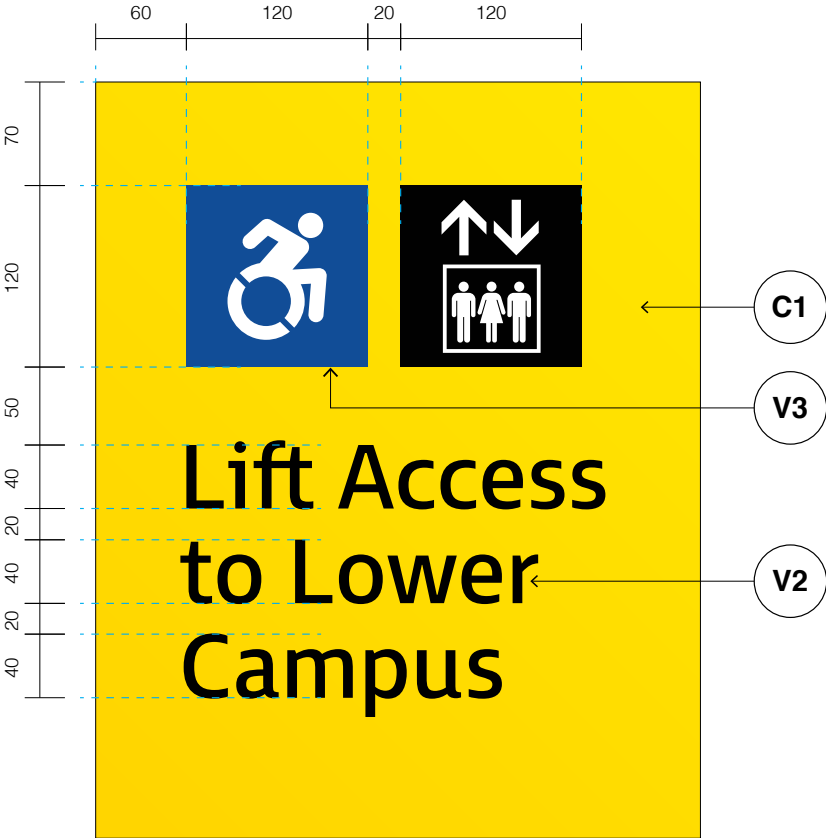

Template 01 - Three Lines Messaging
Scale 1:5

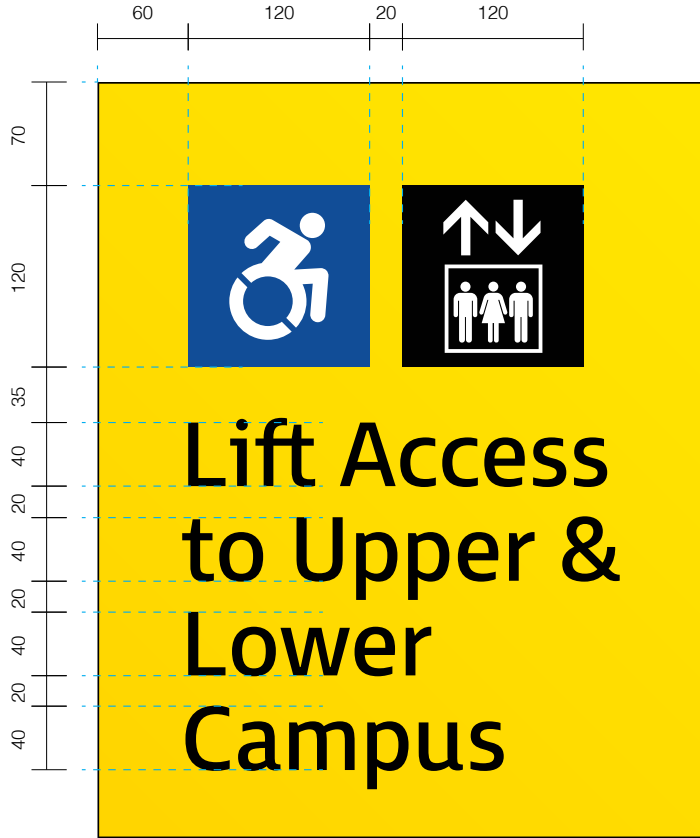

Template 02 - Four Lines Messaging
Scale 1:5

Graphic Layout

Messaging
FS Millbank Regular
Alignment: Left
Size/ Leading: 30mm, 20mm
Tracking: 10+, Optical Kerning

Pictograms
Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 7, Graphic Standards, Pictogram Suite.

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Fixing Details
• Refer to: Section 8, Construction Standards, Cantilevered Signforms


Section 12.0

Car Park Series

This section documents all the car park signs of the system including specifications for both external and internal signs.

CP.01 Entry ID: Vehicular Wall Mounted
CP.03 Entry ID: Bulk Head
CP.04 Lift ID
CP.05 Car Park Rules & Pay Meter
CP.06 Suspended Directional Family
CP.07 Loading Dock ID
CP.08 Column: Level ID
CP.09 Column: Zone ID
CP.10 Column: Reserved ID

CP.11 Column: Directional
CP.12 Pole: Lot ID
CP.13 Pole: Directional
CP.14 Floor Graphics
CP.15 Reserved Parking ID

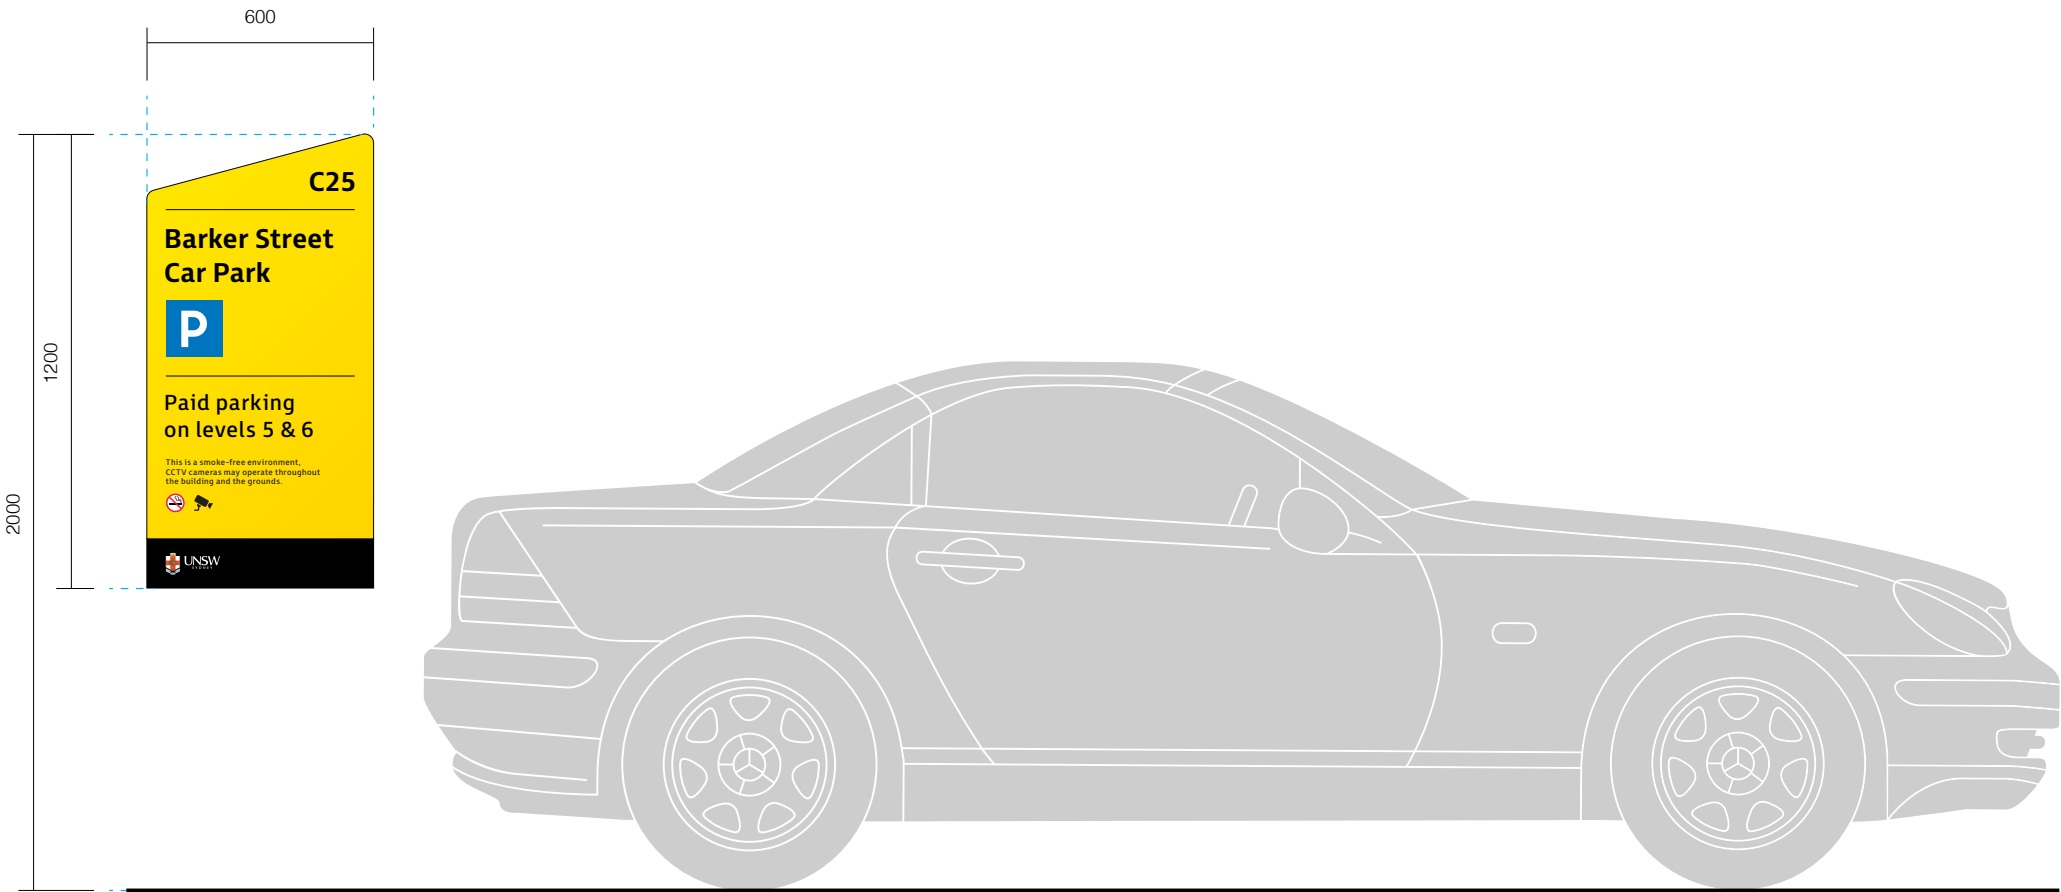

Front Elevation
Scale 1:20

Sign Location


Purpose
Confirms car park entry point for vehicular traffic from a viewing distance of at least 20m. Refer to Section 3, Terminology & Addressing, Category 11.

Location
Located at vehicular entry points at car parks.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

Section 12 – Entry ID: Vehicular Wall Mounted

CP.01

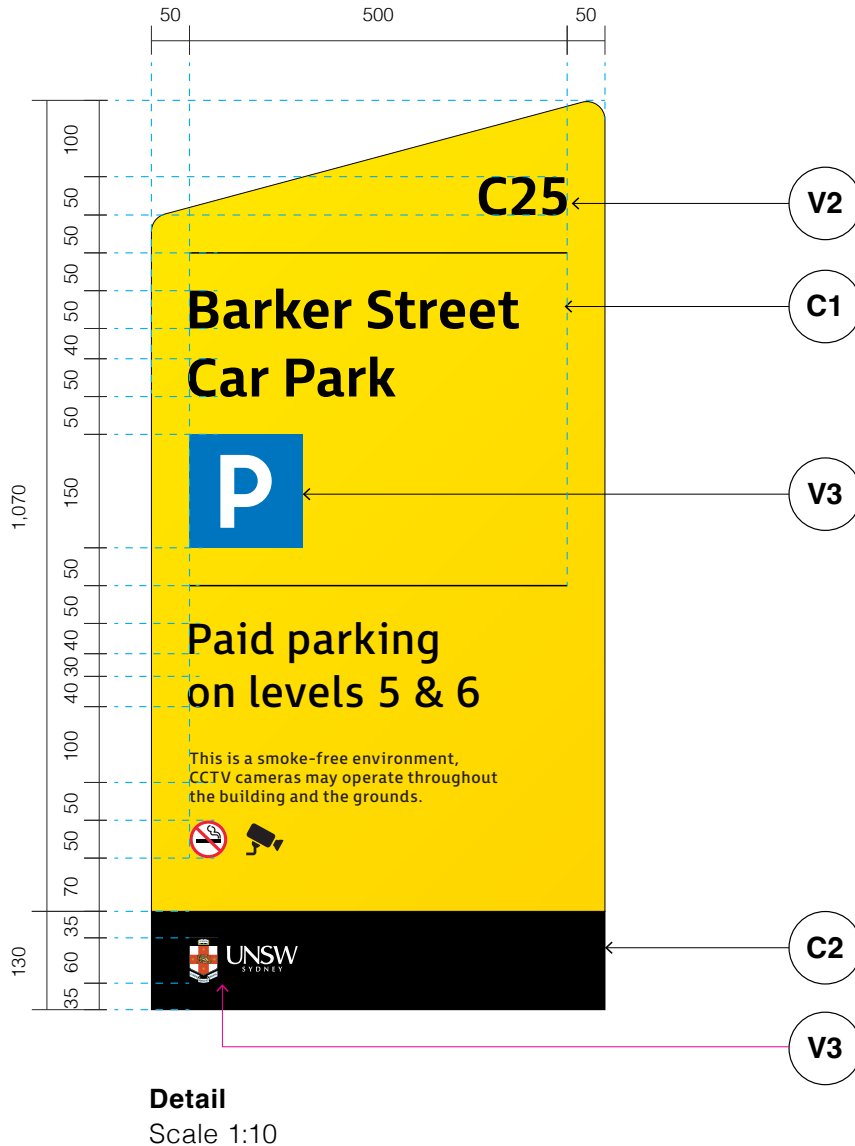

Graphic Layout

Typographic Grid - Identification

Building Identification Layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line

Line weight: 2mm

Messaging

FS Millbank Regular

Alignment: Left

Size Leading: 40mm, 30mm

Tracking: 10+, Optical Kerning

Pictogram


Parking Pictogram: 200mm height

UNSW logo

50mm height


Construction & Materials

Materiality Legend

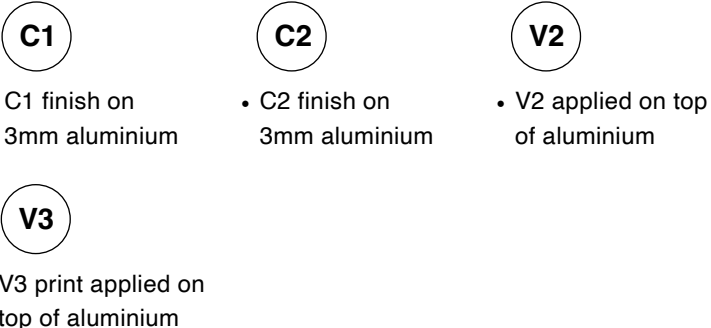

Fixing Details

- Refer to: Section 8, Construction Standards, Wall Mounted Signforms

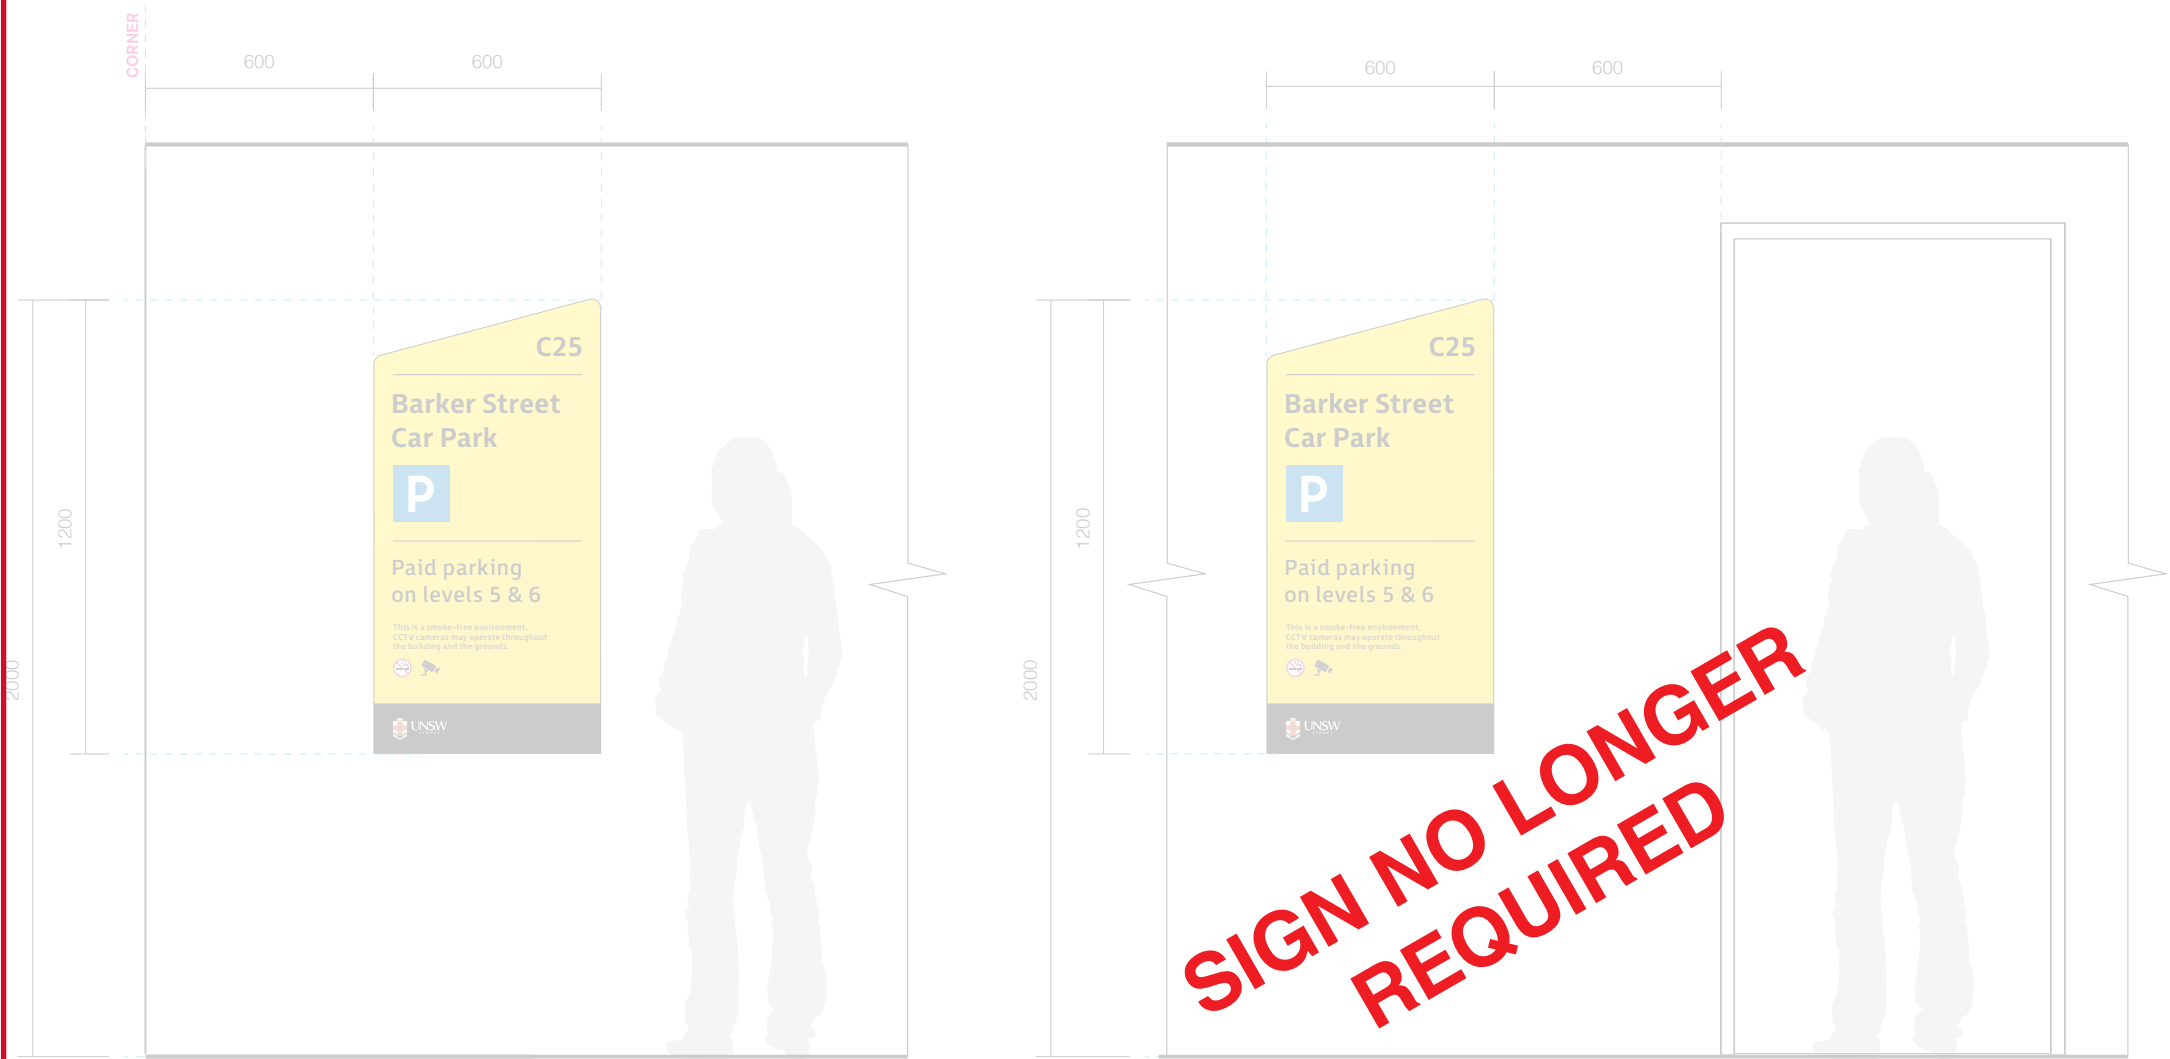

Elevation - Aligned to corner
Scale 1:20


Elevation - Beside door or opening
Scale 1:20

Sign Location

Purpose
Confirms car park entry point for pedestrian traffic from a viewing distance of at least 20m. Refer to Section 3, Terminology & Addressing, Category 11.

Location
Located at pedestrian entry points at car parks.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

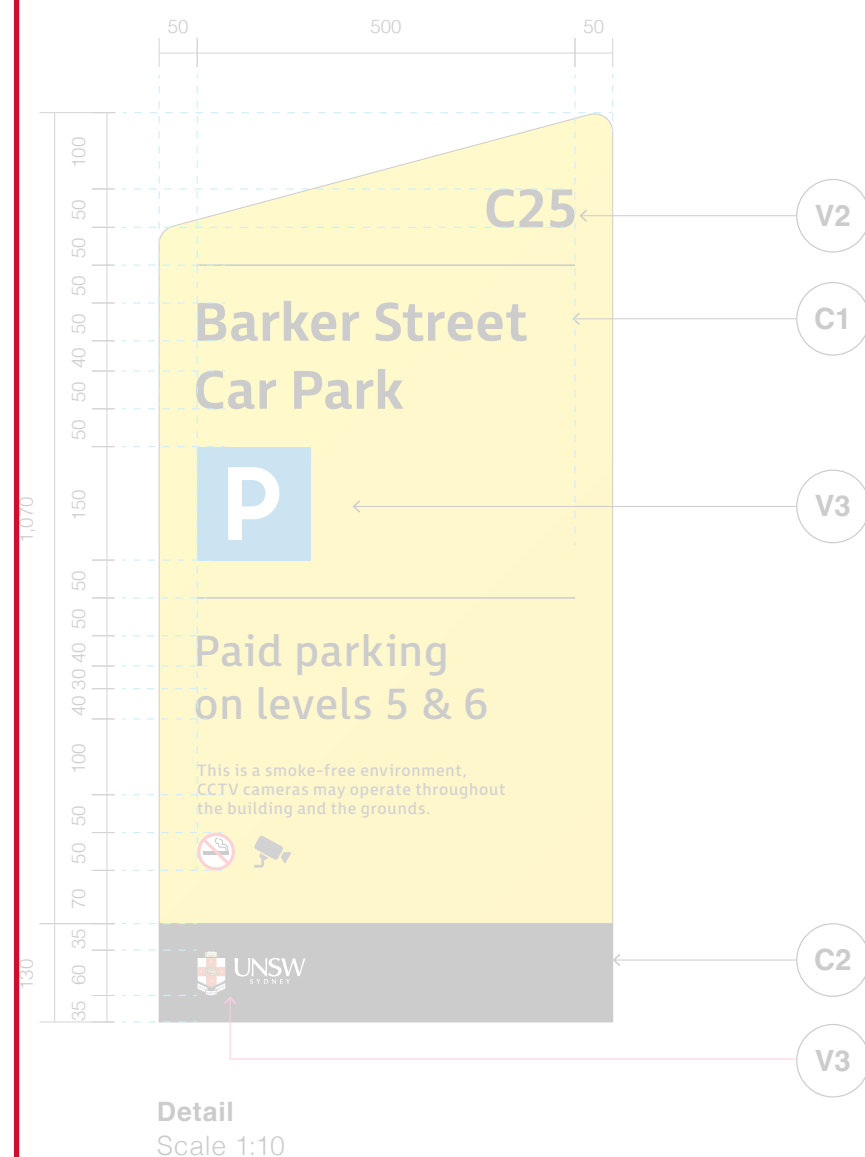

**SIGN NO LONGER
REQUIRED**

Graphic Layout

Typographic Grid - Identification

Dividing Line

Line weight: 2mm

Messaging

FS Millbank Regular

Alignment: Left

Size Leading: 40mm, 30mm

Tracking: 10+, Optical Kerning

Pictograms

Parking Pictogram: 200mm height


UNSW logo

50mm height

Construction & Materials

Materiality Legend

Fixing Details

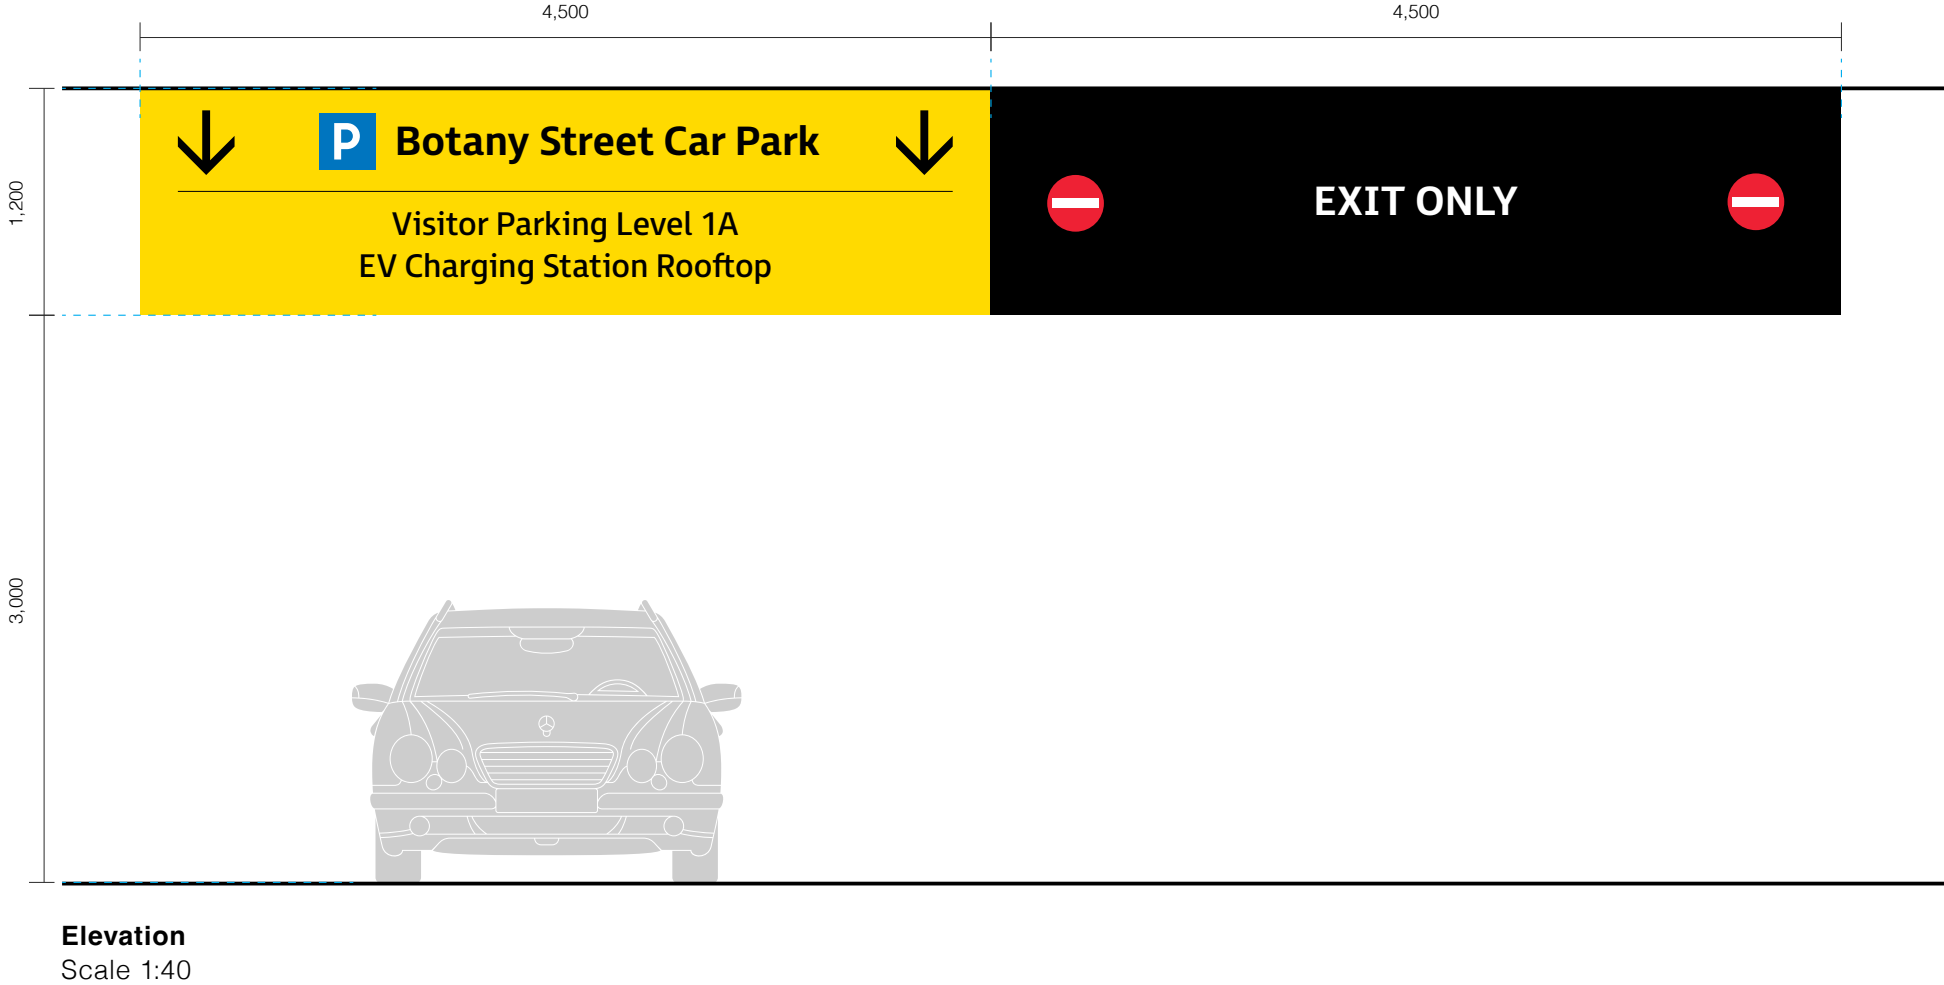

Sign Location



Purpose
Confirms car park entry point for vehicular traffic from a viewing distance of at least 160m. Refer to Section 3, Terminology & Addressing, Category 11.

Location
Located at vehicular entry points at car parks.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

Section 12 – Entry ID: Bulk Head

CP.03

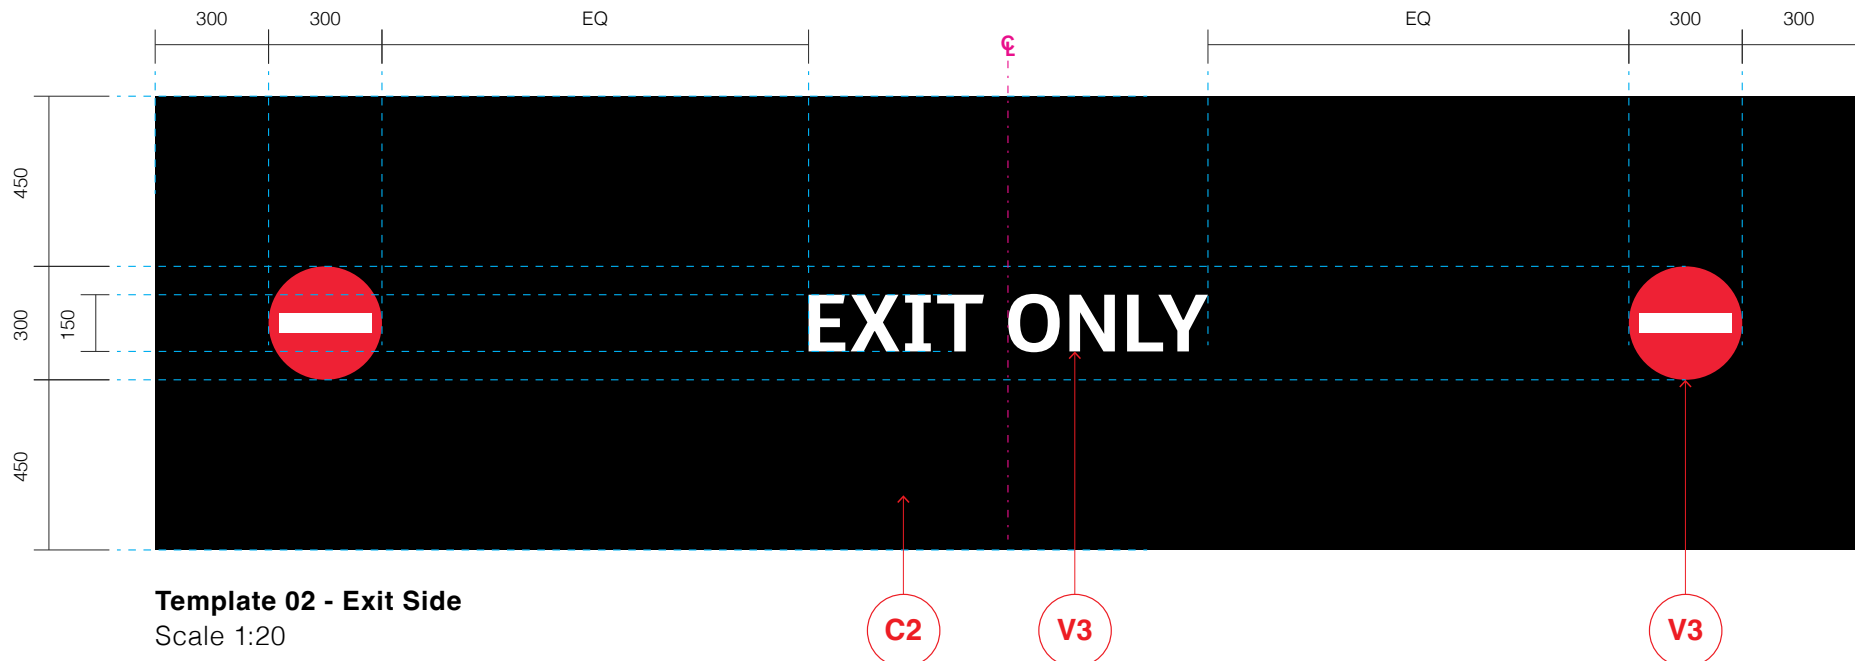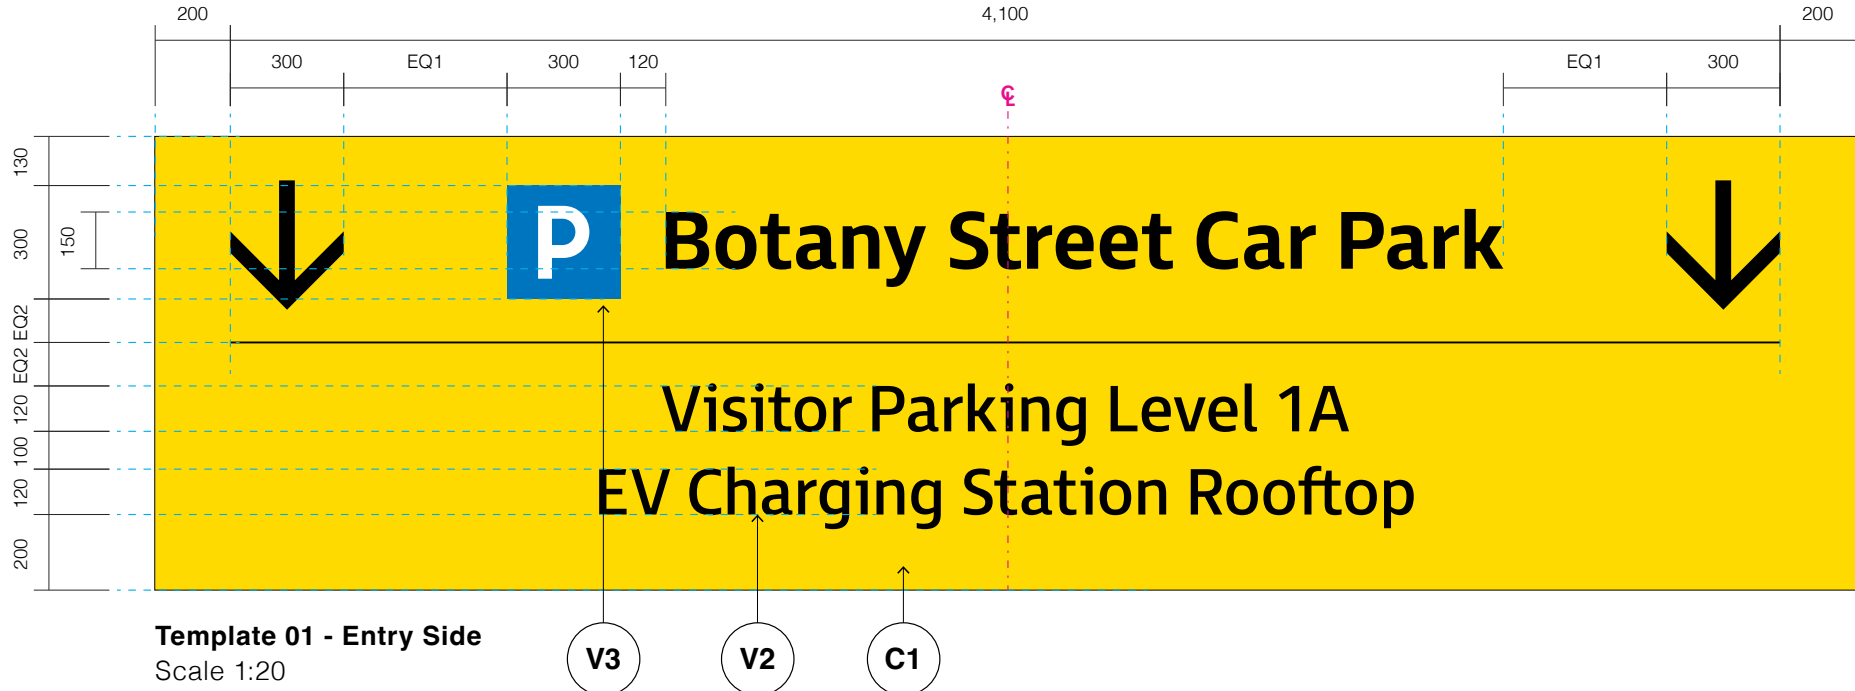

Graphic Layout

Car Park Name and Exit

FS Millbank Bold
Alignment: Centre
Size: 150mm
Tracking: 10+, Optical Kerning

Messaging

FS Millbank Regular
Alignment: Centre
Size: 120mm
Tracking: 10+, Optical Kerning
Dividing line weight: 5mm

Pictogram


Parking: 300mm height
No Entry: 300mm diameter

Arrows

300mm height


Construction & Materials

Materiality Legend

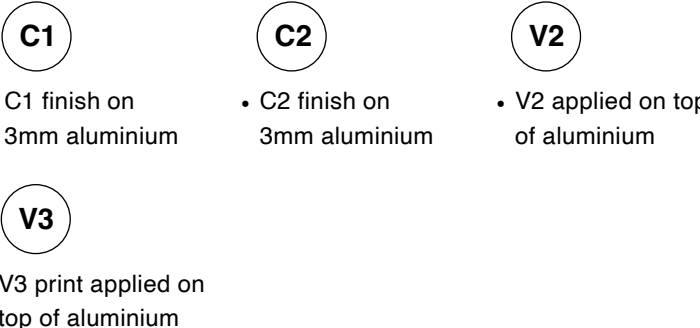

Fixing Details

Refer to: Section 20, Shop Drawings

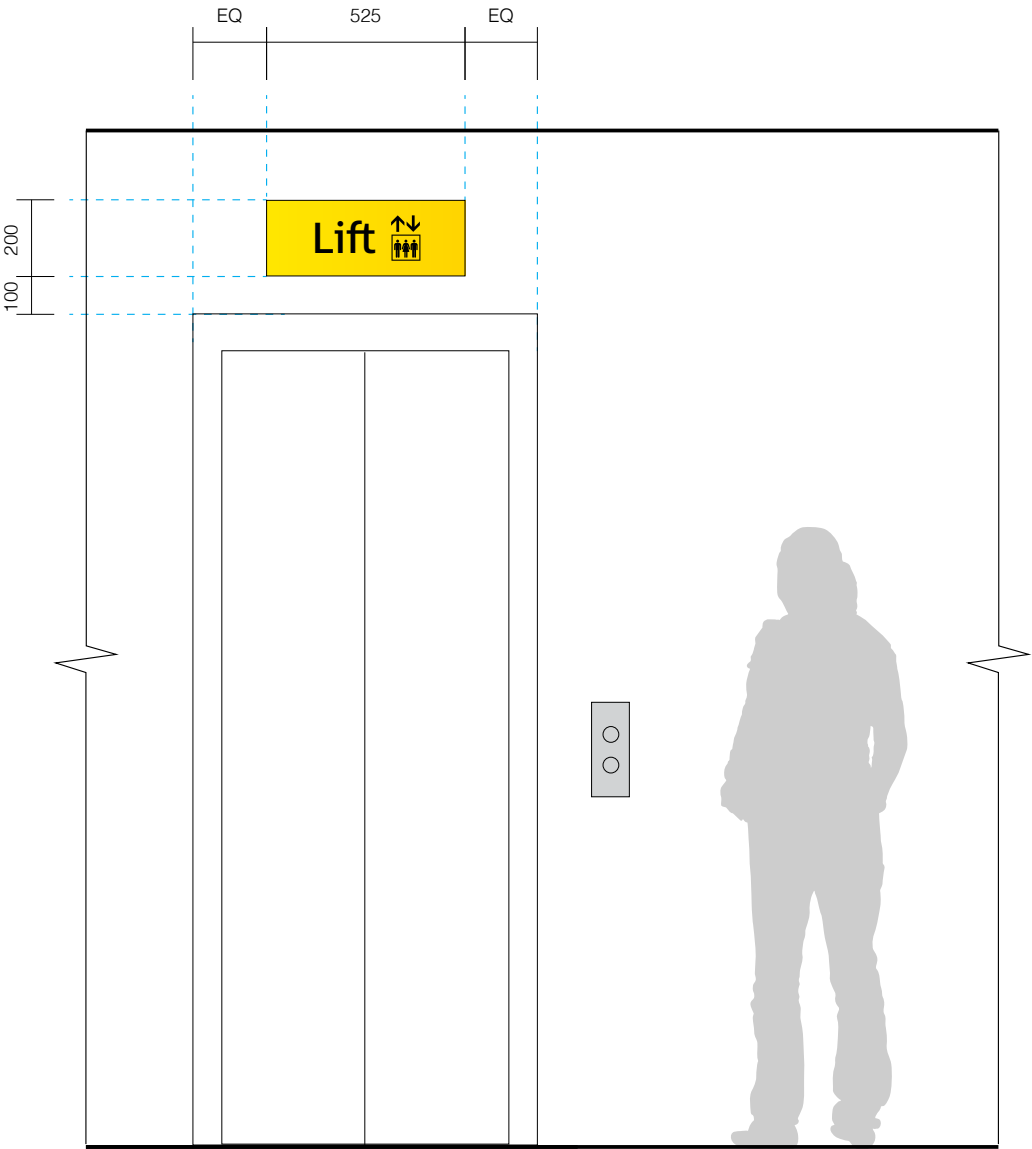


Elevation
Scale 1:20

Sign Location

Purpose
Identifies Lift for pedestrian traffic within car parks
Refer to Section 3, Terminology & Addressing, Category 11.

Location
Mounted above lift entries.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

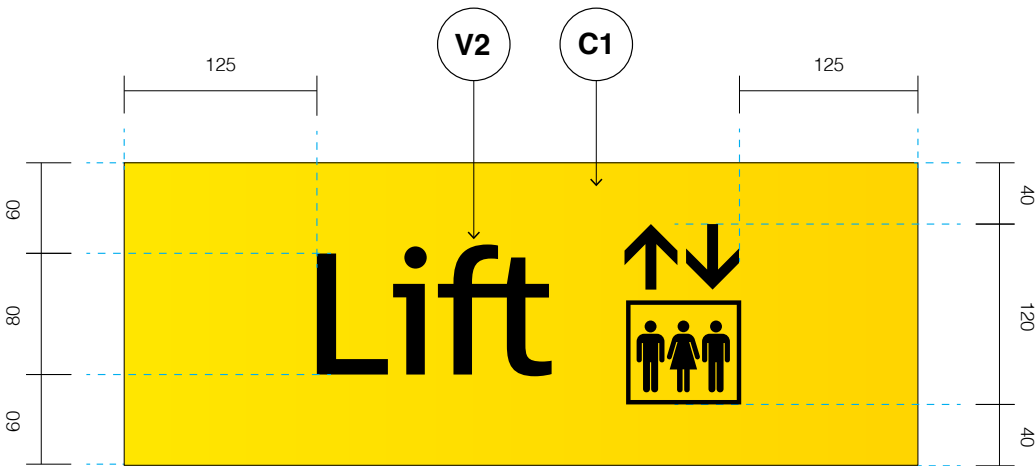

Detail
Scale 1:5

Graphic Layout

Lift ID
FS Millbank Regular
Size: 80mm height
Tracking: 10+, Optical Kerning

Pictogram
120mm height


Construction & Materials

Materiality Legend

- C1

 - C1 finish on 3mm aluminium
- V2

 - V2 applied on top of aluminium

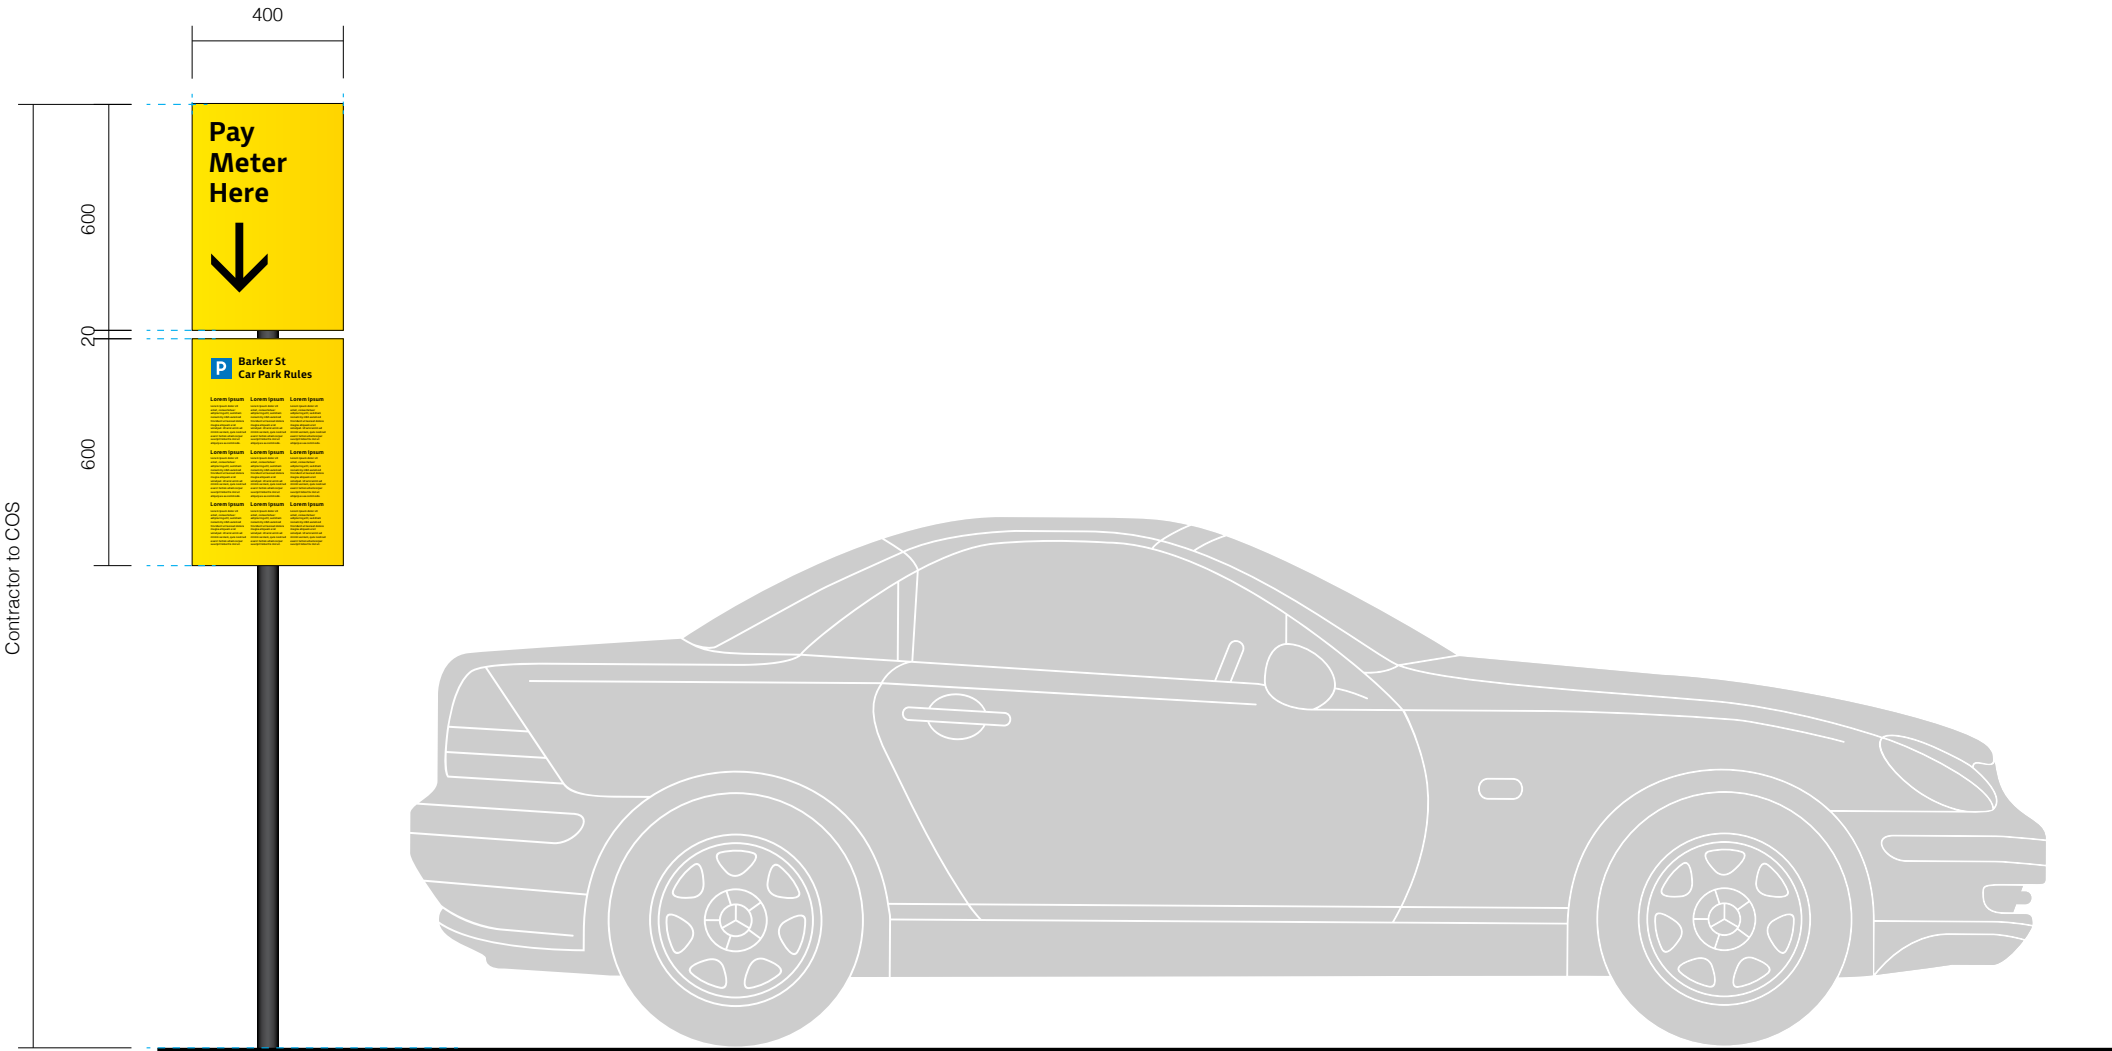


Sign Location


Purpose
Identifies pay meter and rules of parking space.

Location
Mounted above pay meter.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

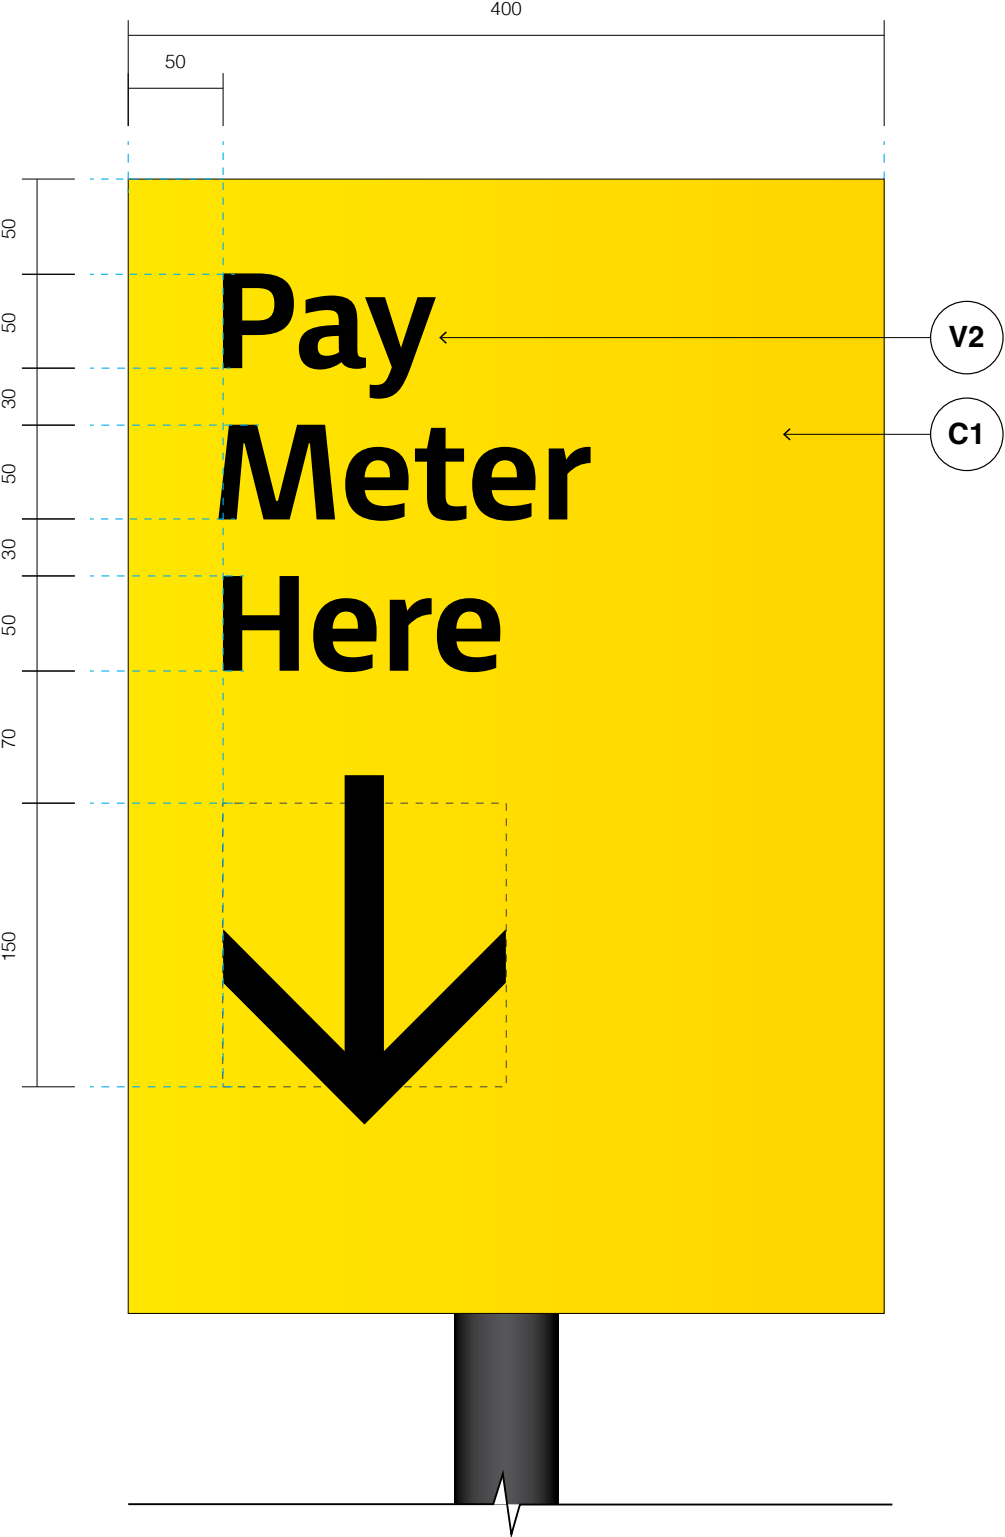

Template 01 - Pay Meter Here
Scale 1:4

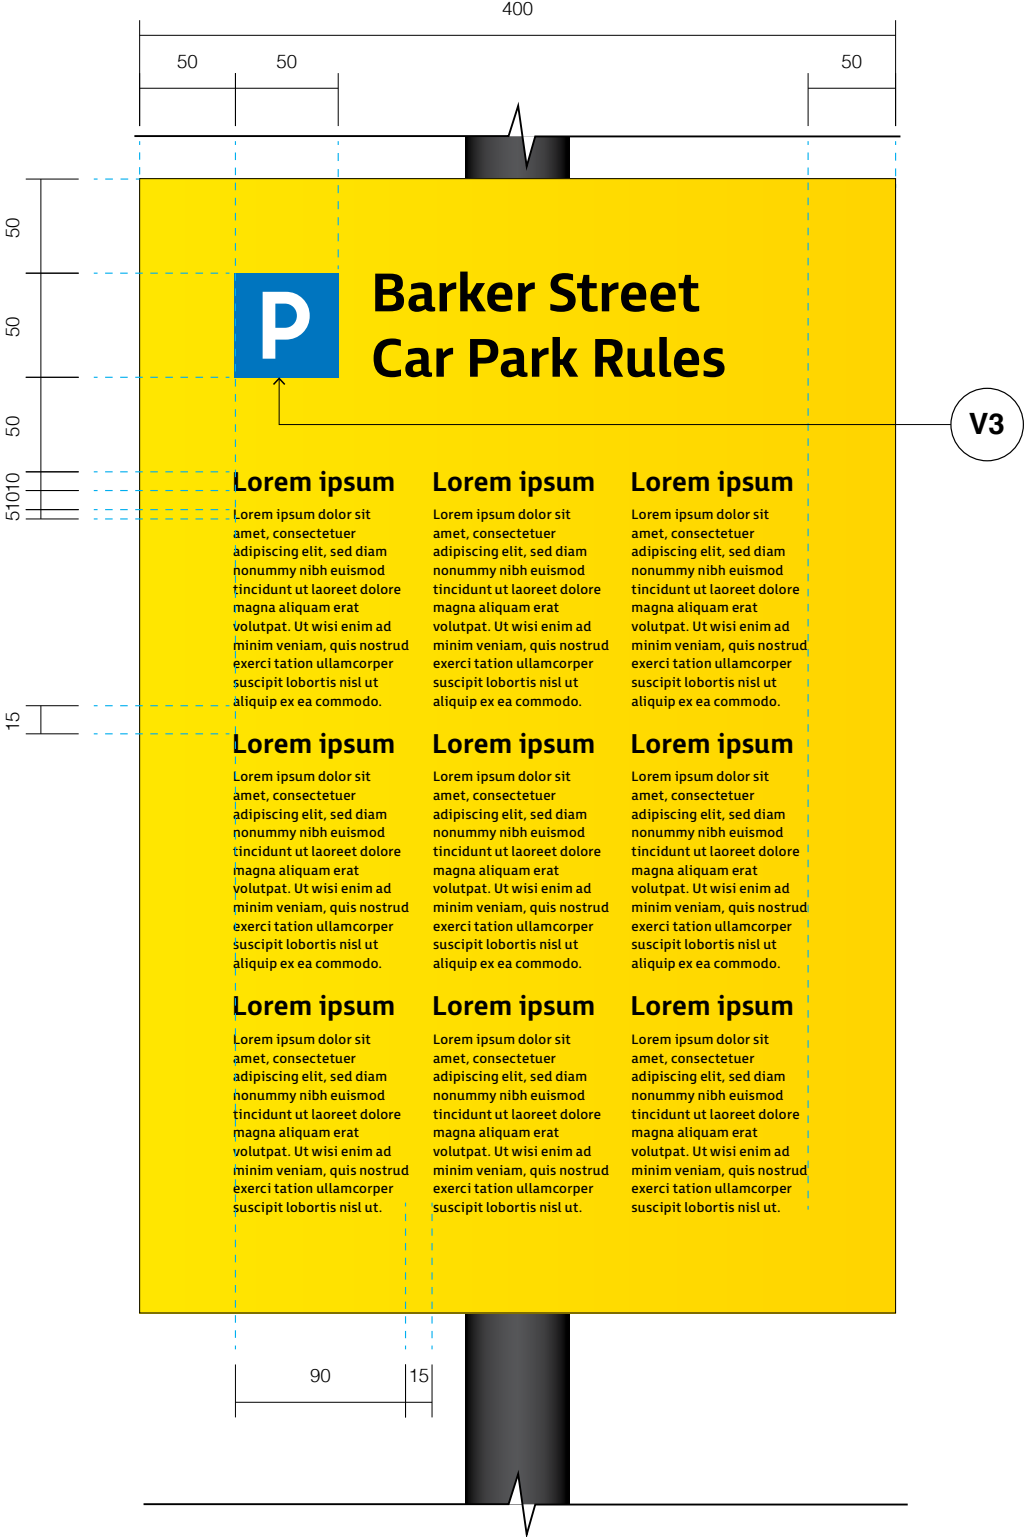

Template 02 - Parking Rules
Scale 1:4

Graphic Layout

Pay Meter ID
FS Millbank Bold
Alignment: Left
Size Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning

Car Park ID
FS Millbank Bold
Alignment: Left
Size Leading: 20mm, 10mm
Tracking: 10+, Optical Kerning

Content
FS Millbank Regular
Alignment: Left
Size Leading: 5mm, 5mm
Tracking: 10+, Optical Kerning

Pictogram
Parking Pictogram: 50mm height


Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium

Fixing Details

- Refer to: Section 20, Shop Drawings

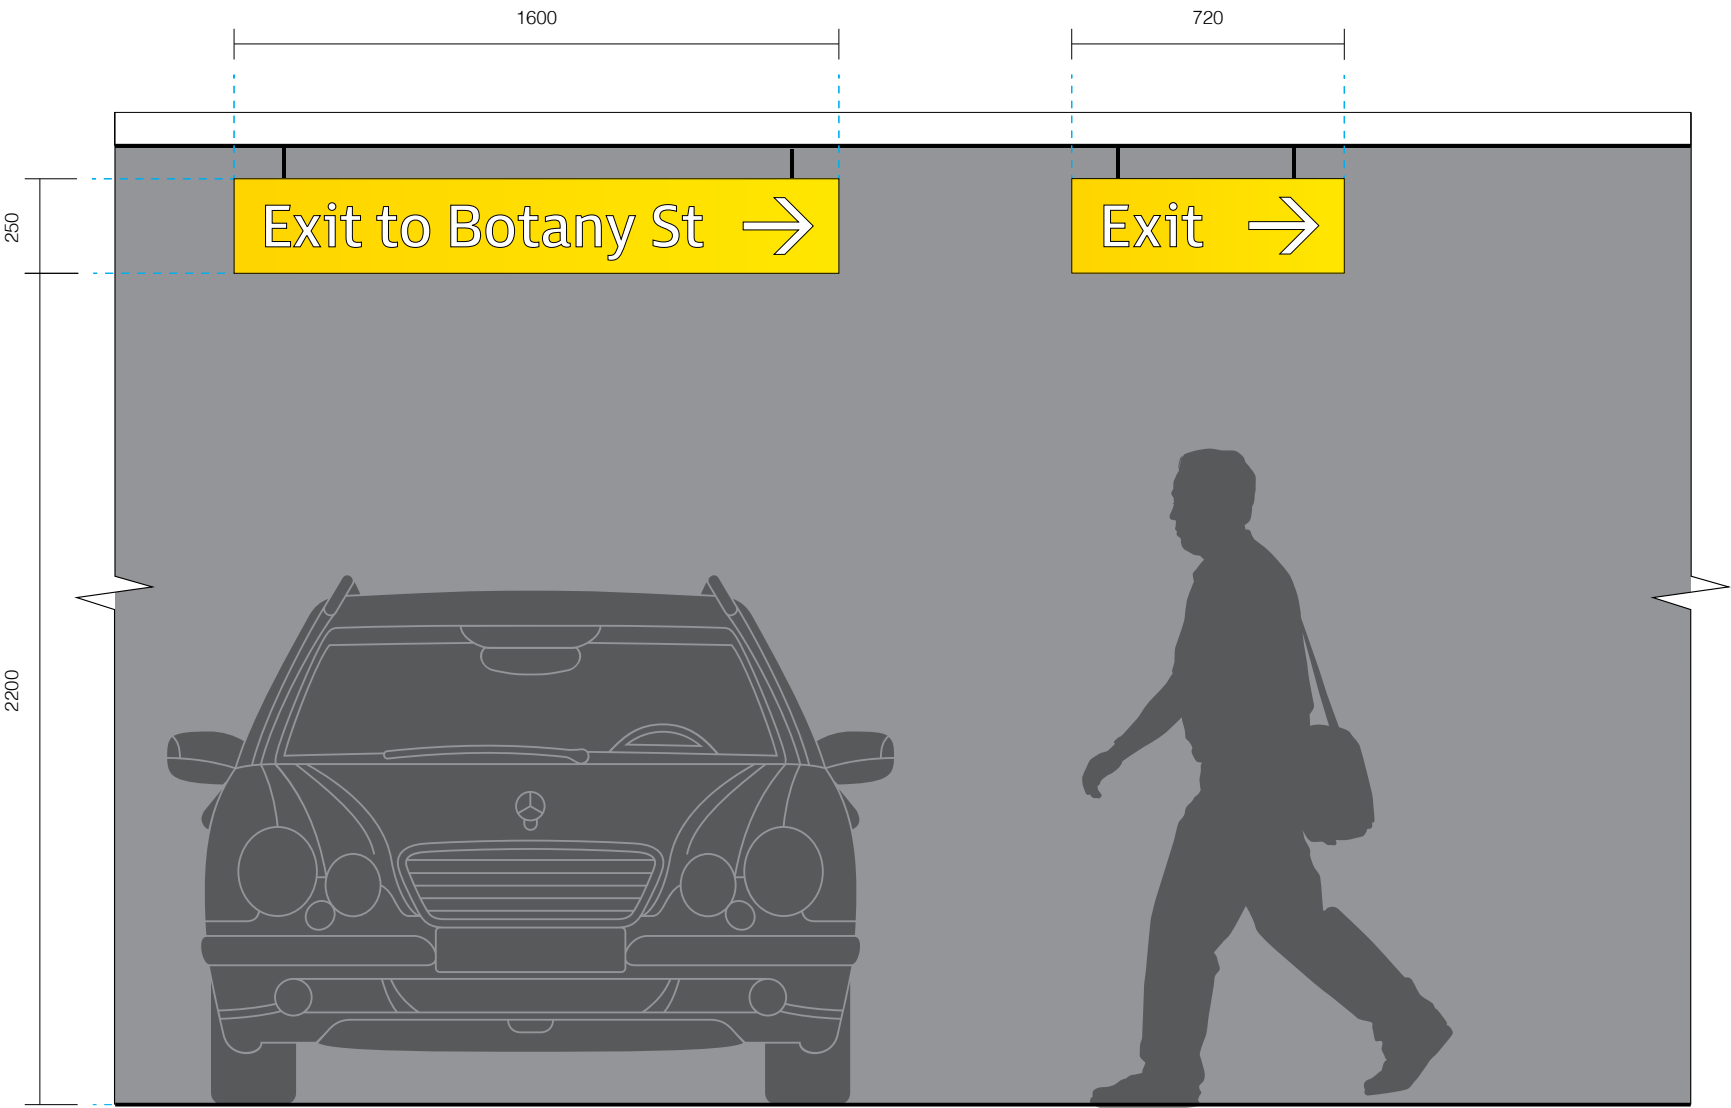


Elevation
Scale 1:20

Sign Location


Purpose
Directs vehicular and pedestrian traffic to main level and exit destinations in internal levels

Location
Suspended at major vehicular decisions point

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

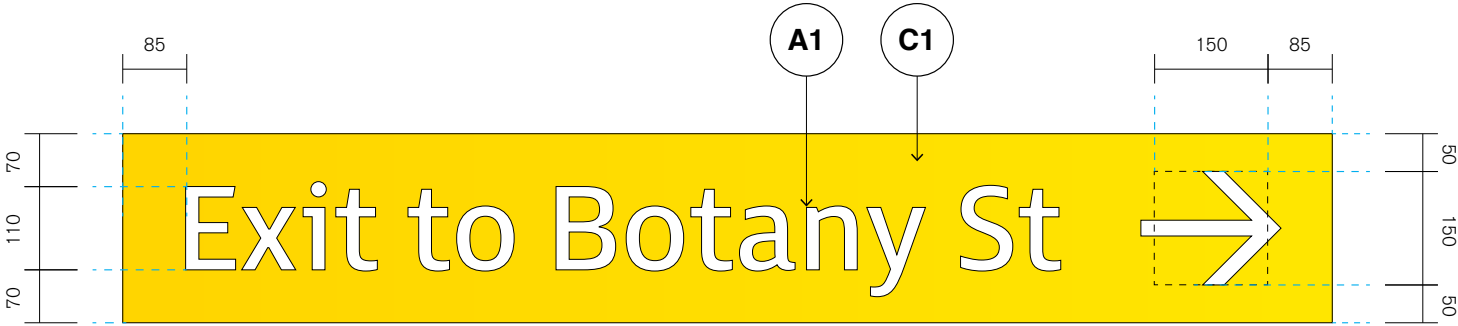

CP.06a - 1600mm Sign
Scale 1:10

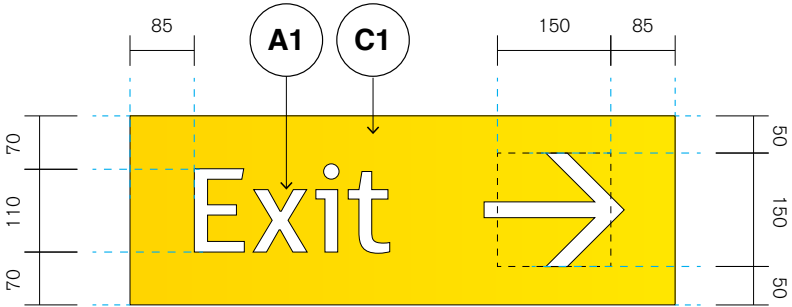

CP.06b - 700mm Sign
Scale 1:10

Graphic Layout

Messaging
FS Millbank Bold
Alignment: To respond to arrow direction
Size: 110mm height
Tracking: 10+, Optical Kerning
Dividing line weight: 2mm

Arrow
150mm height

Construction & Materials

Materiality Legend

- | | |
|--|--|
| <div>C1</div> <ul style="list-style-type: none">C1 finish on 3mm aluminium | <div>A1</div> <ul style="list-style-type: none">A4 finish for illumination |
|--|--|

Construction Details
• Refer to: Section 20, Shop Drawings



01 Car Park Suspended Directional
Baker Street Parking




02 Existing Sign
Baker Street Parking

In Situ Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Messaging has been altered as per wayfinding and terminology strategy.

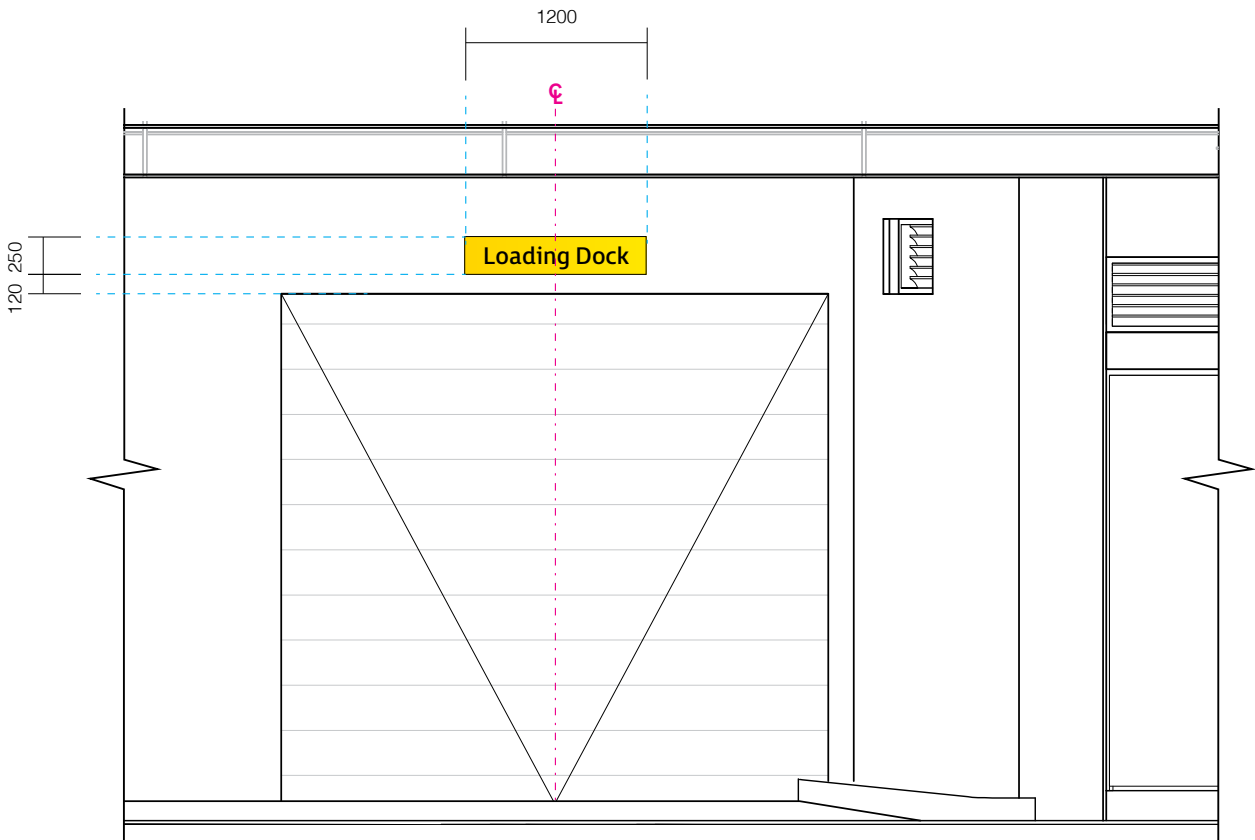

Elevation
Scale 1:50

Sign Location

Purpose
Identifies Loading Dock area for vehicular traffic. Refer to Section 3, Terminology & Addressing, Category 12.

Location
Applied above loading dock entry at bulk head.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance



Detail
Scale 1:10

Graphic Layout

Loading Dock ID
FS Millbank Regular
Alignment: Centre aligned
Size: 110mm height
Tracking: 10+, Optical Kerning

Construction & Materials

Materiality Legend


- C1**

 - C1 finish on 3mm aluminium
- V2**


 - V2 applied on top of aluminium

Fixing Details

- Refer to: Section 8, Construction Standards, Wall Mounted Signforms

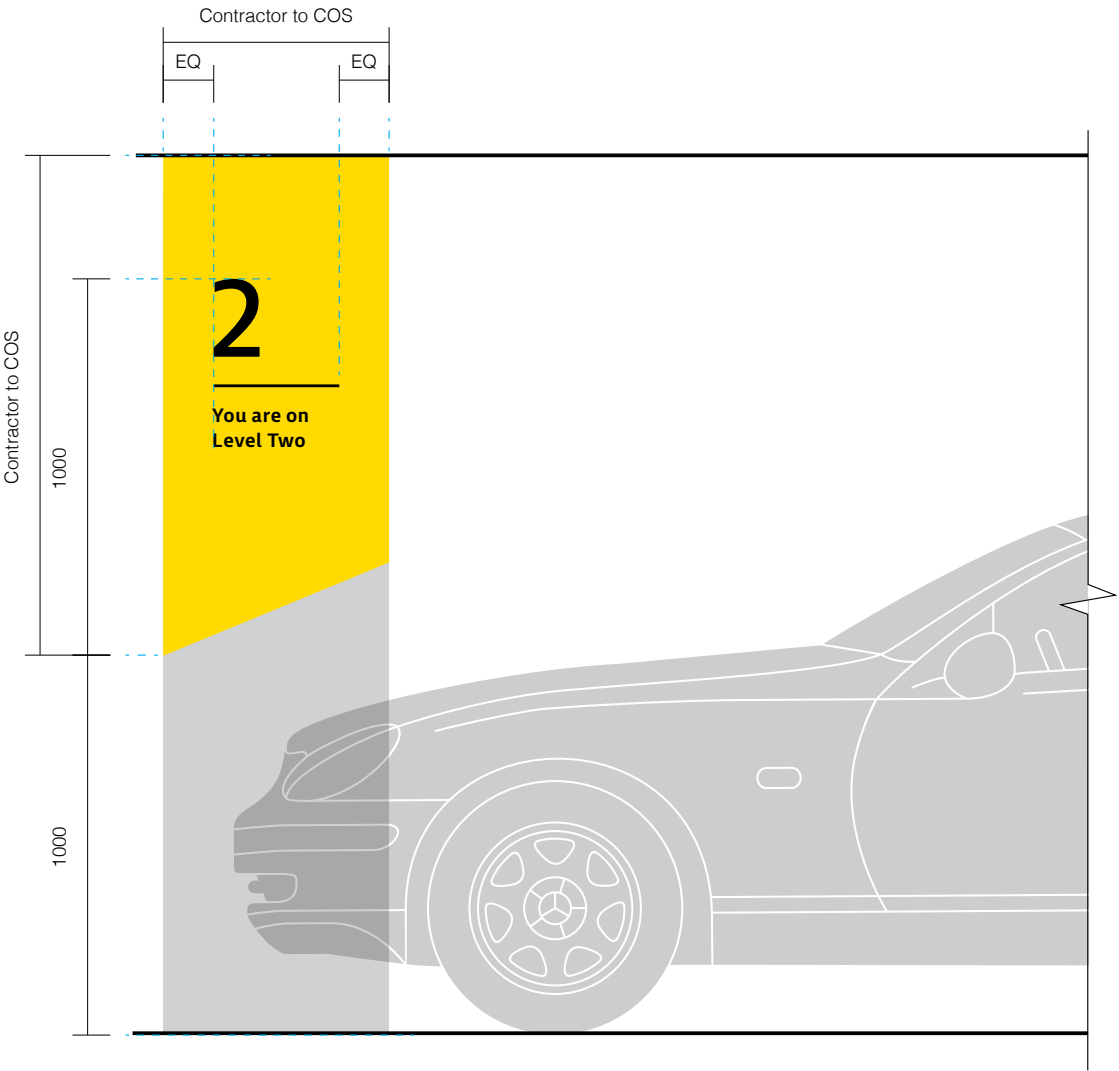

Front Elevation
Scale 1:20

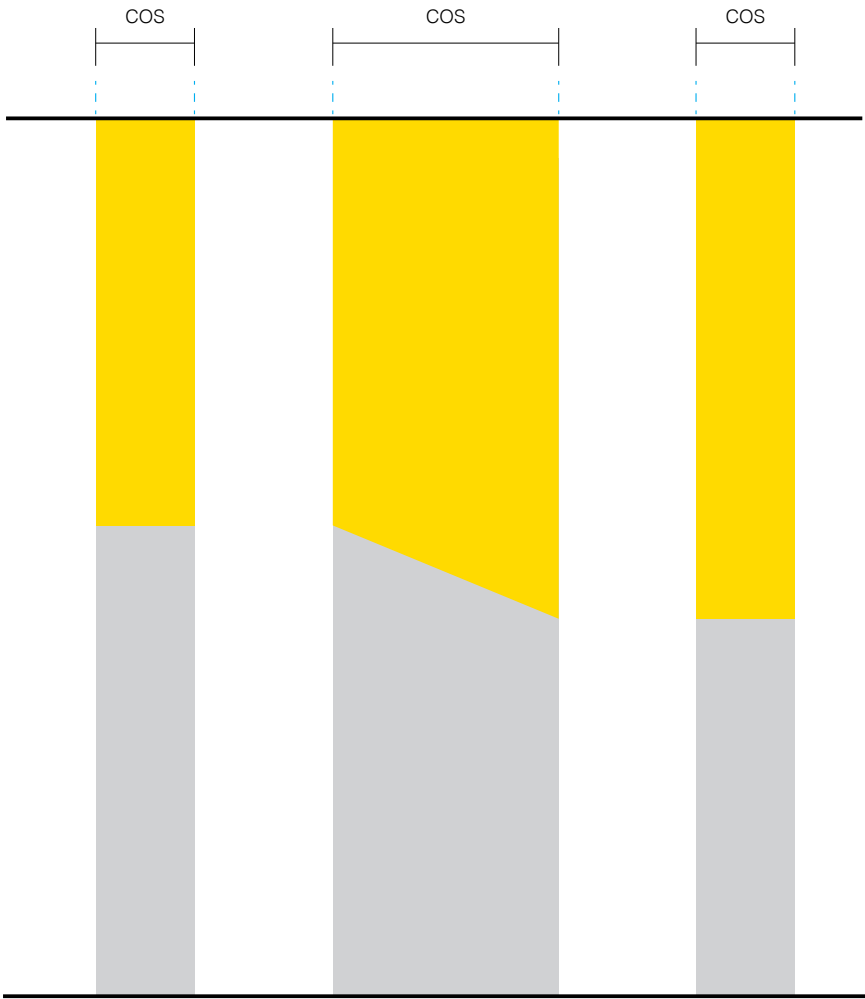

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20


Side Elevation
Scale 1:20

Sign Location

Purpose
Identifies car park level for vehicular and pedestrian traffic. Refer to Section 3, Terminology & Addressing, Category 4.

Location
Applied on surface of designated columns facing circulation paths.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

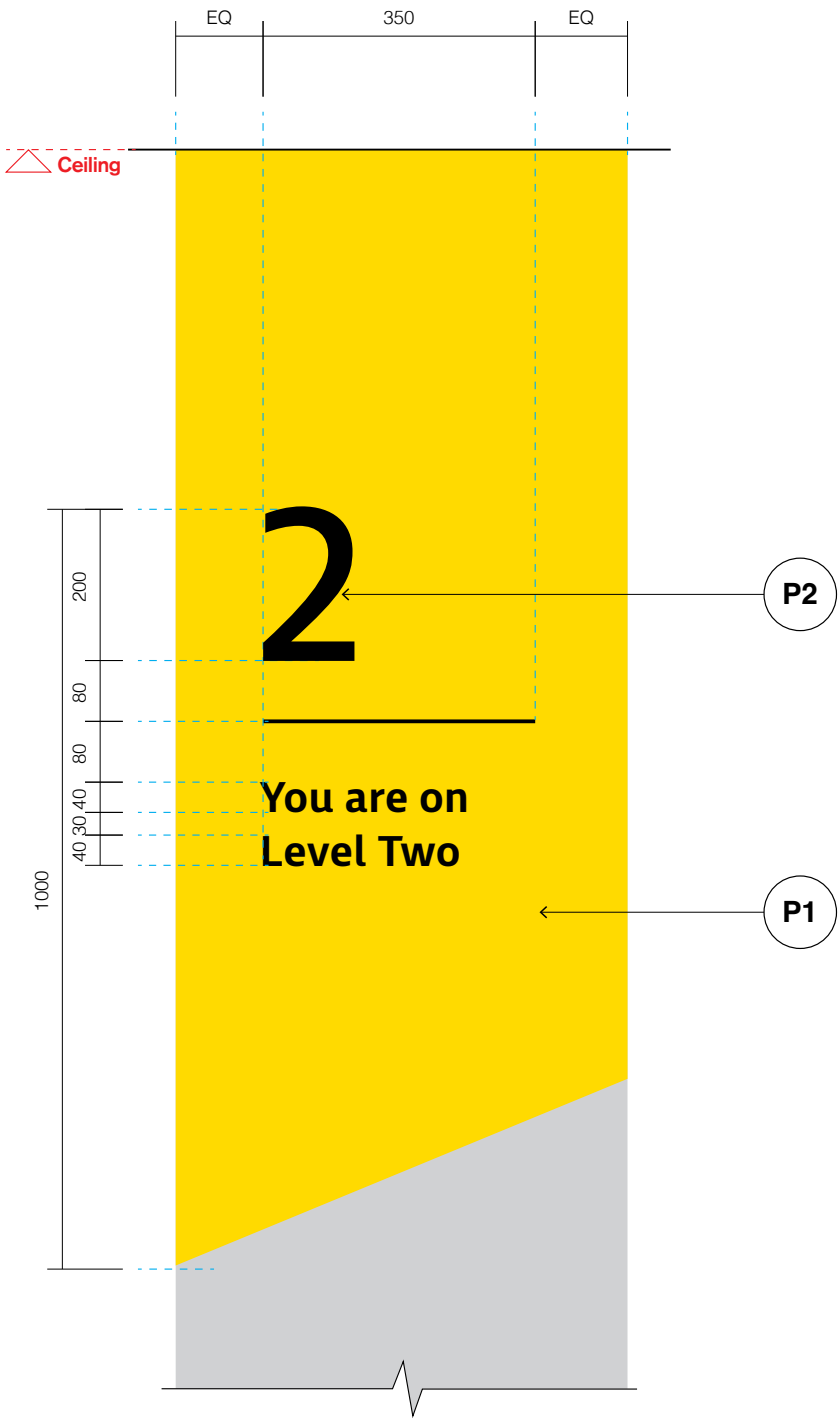

Detail
Scale 1:10

Graphic Layout

Level Number
FS Millbank Regular
Alignment: Left
Size: 200mm height
Tracking: 10+, Optical Kerning

Dividing Line
Line weight: 5mm

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning


Construction & Materials

- Materiality Legend**
- P1**


 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column

- Application Details**
- Refer to: Section 8, Construction Standards, Direct Applied Graphics

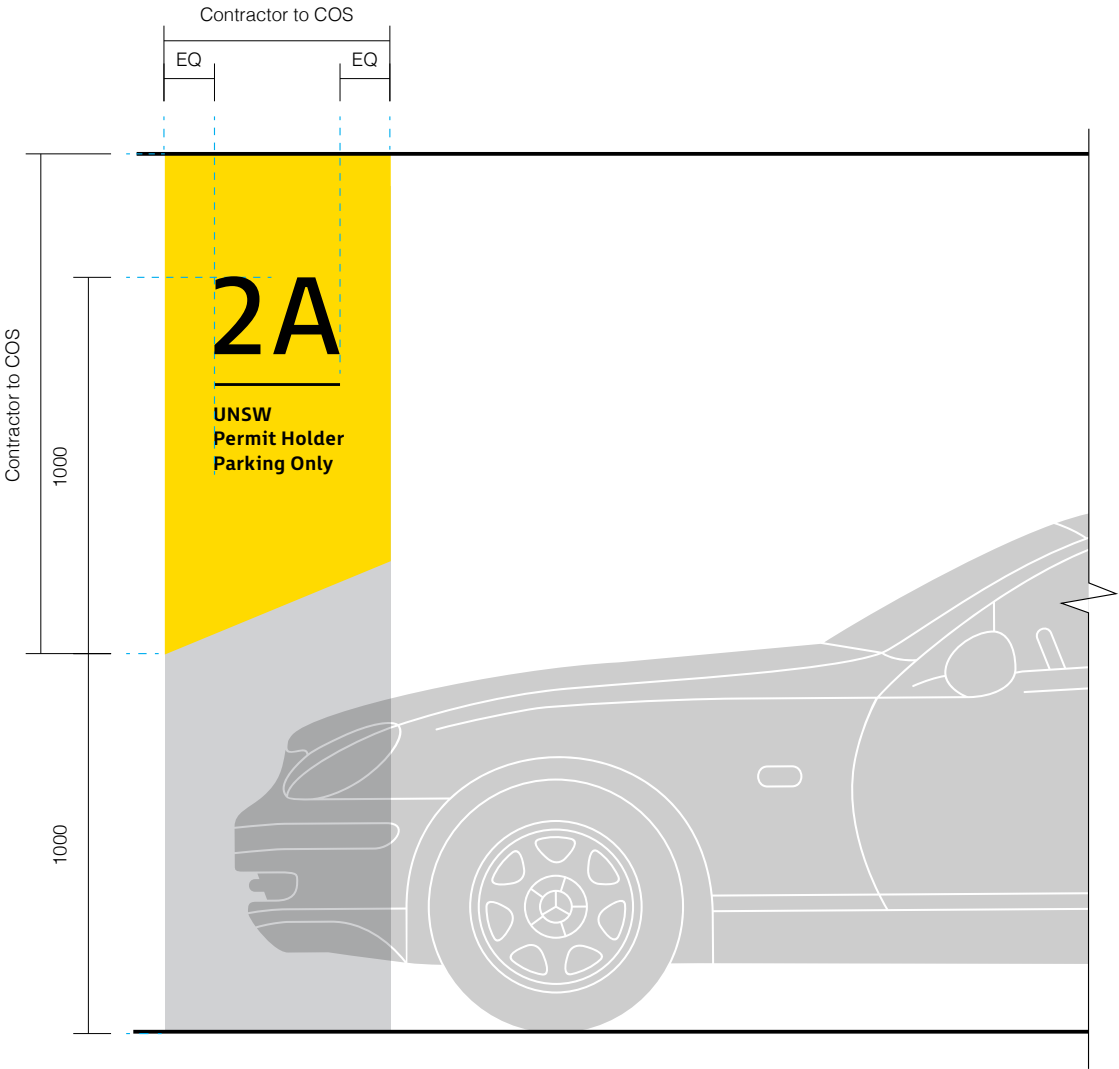

Front Elevation
Scale 1:20

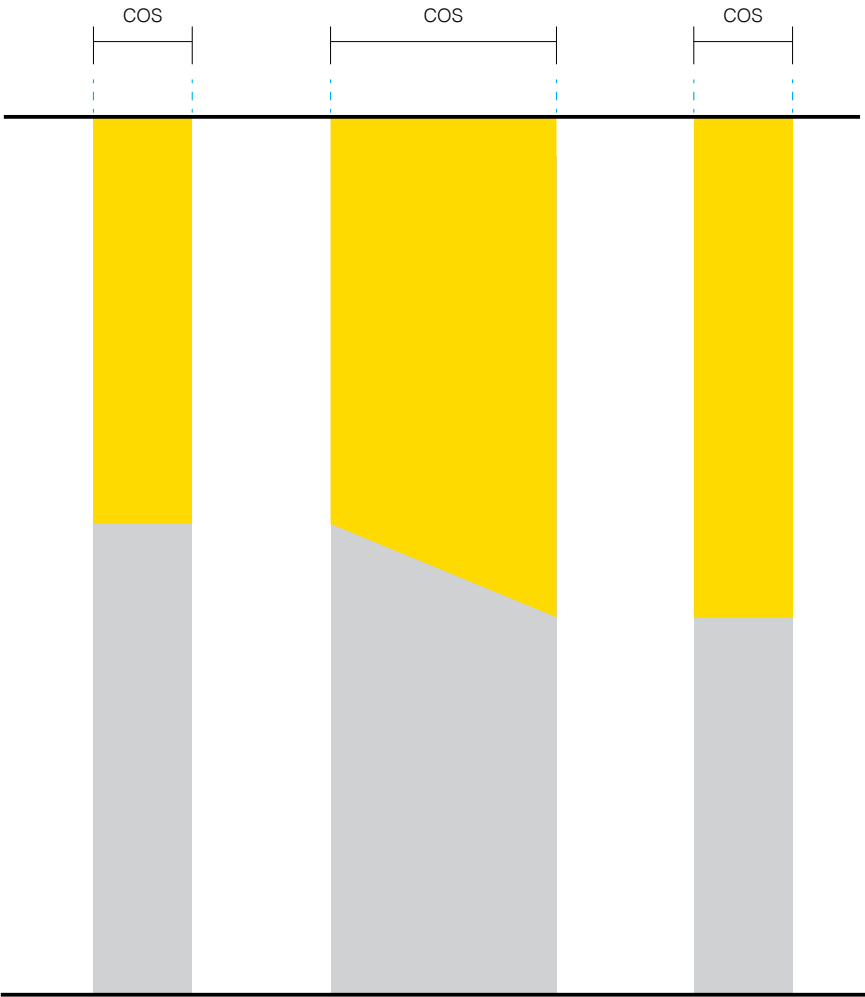

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20


Side Elevation
Scale 1:20

Sign Location

Purpose
Identifies parking zone ID for vehicular and pedestrian traffic.

Location
Applied on surface of designated columns facing circulation paths.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

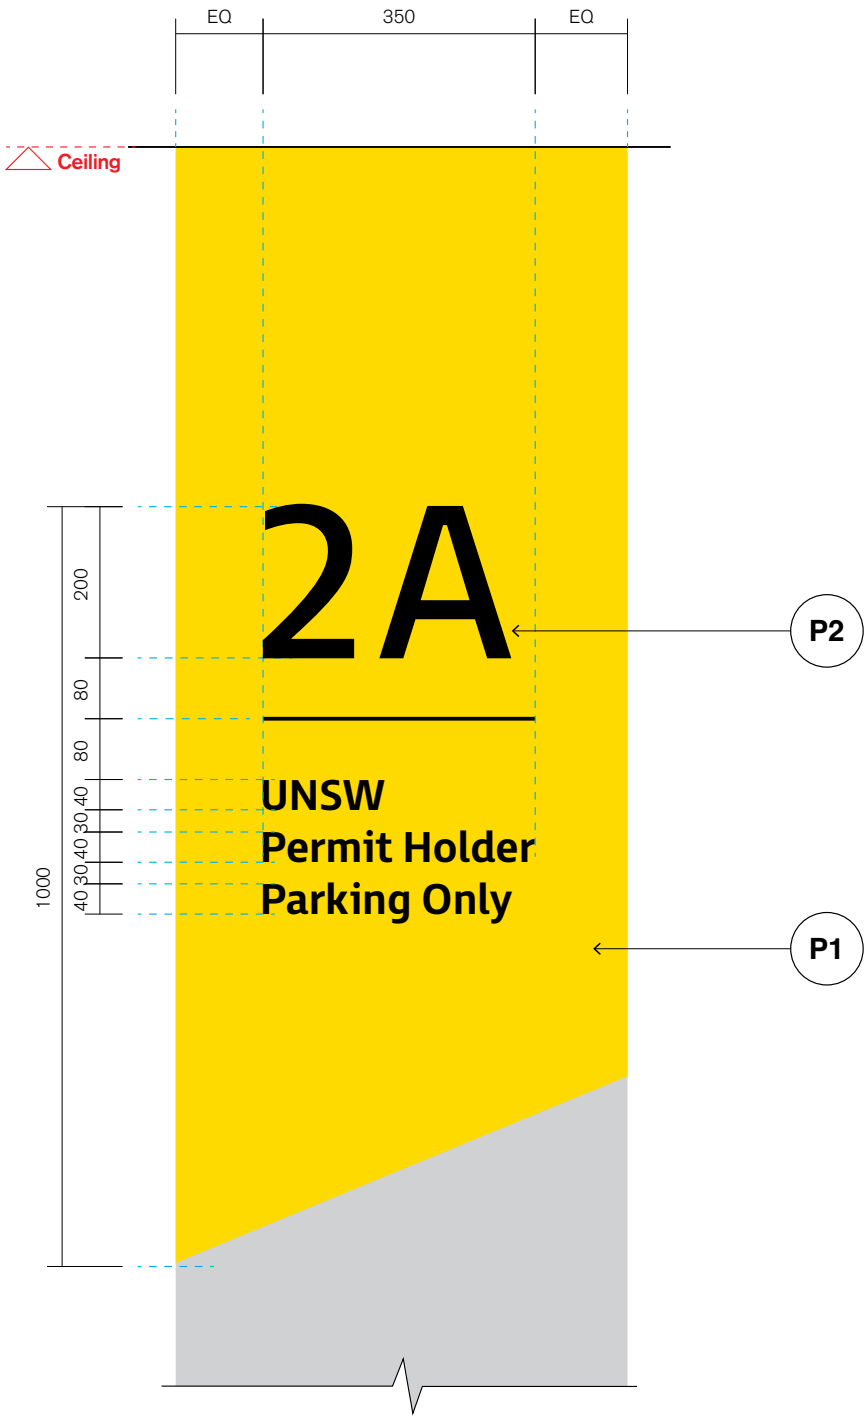

Detail
Scale 1:10

Graphic Layout

Zone Designation
FS Millbank Regular
Alignment: Left
Size: 200mm height
Tracking: 10+, Optical Kerning

Dividing Line
Line weight: 5mm

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning

Construction & Materials


- Materiality Legend**
- P1**

 - P1 mask & spray on column
- P2**


 - P2 mask & spray on column

Application Details

- Refer to: Section 8, Construction Standards, Direct Applied Graphics

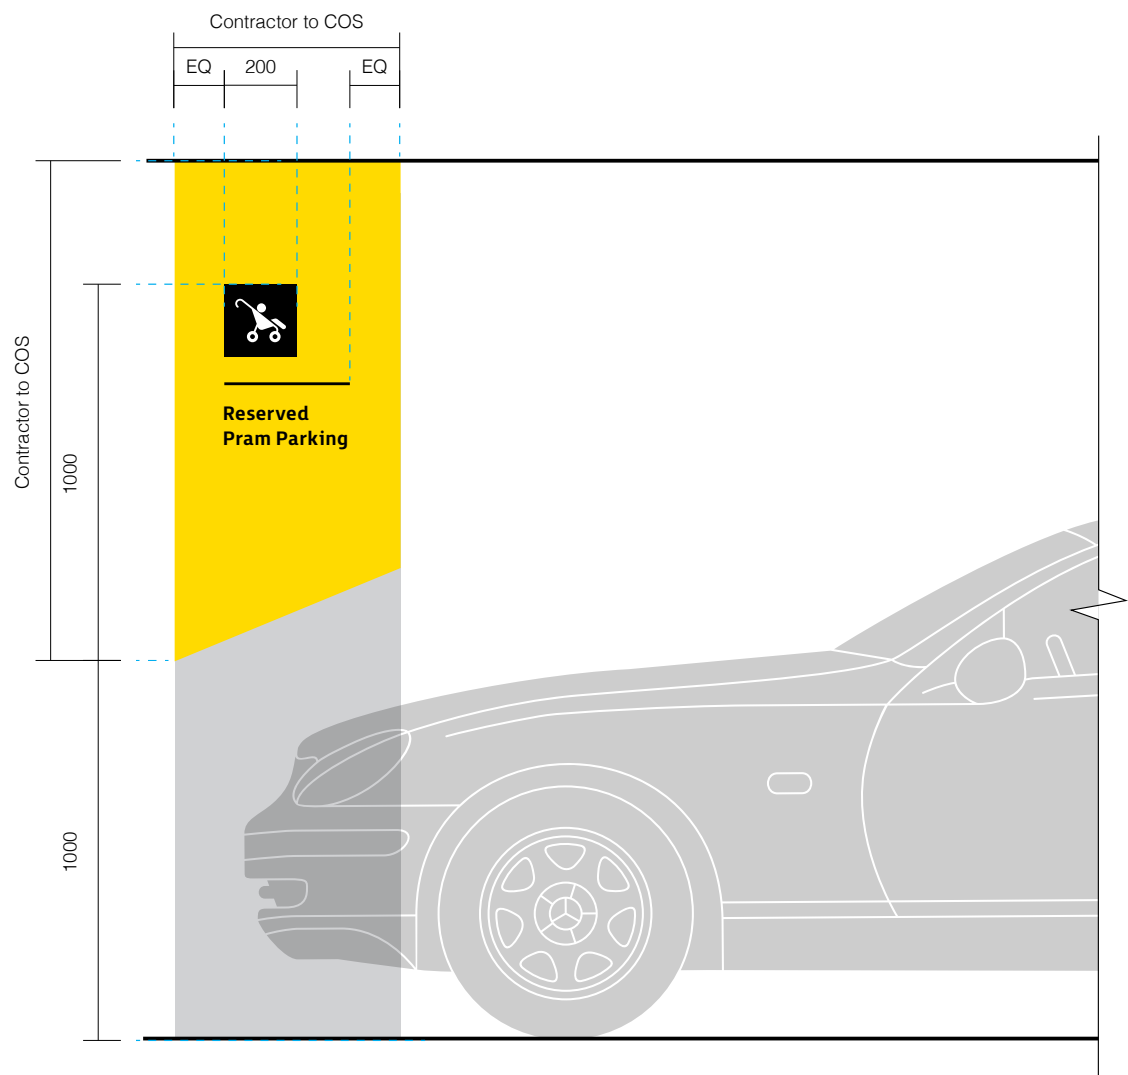

Front Elevation
Scale 1:20

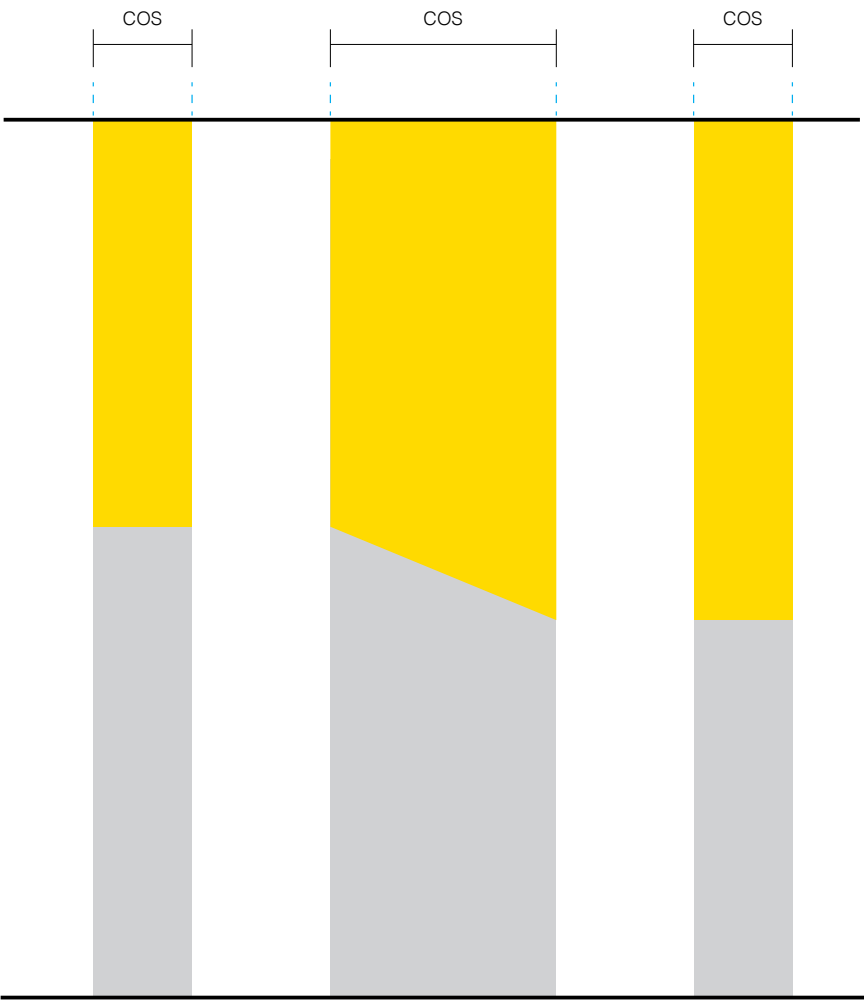

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20

Side Elevation
Scale 1:20

Sign Location

Purpose


Identifies reserved parking zone for vehicular and pedestrian traffic, specific to accessibility and parent parking.

Location


Applied on surface of designated columns facing circulation paths.

Note

- For sign type selection, refer to: Section 5, The Process, Step 3
- For content guidelines, refer to: Section 3, Terminology & Addressing
- For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 21, Maintenance

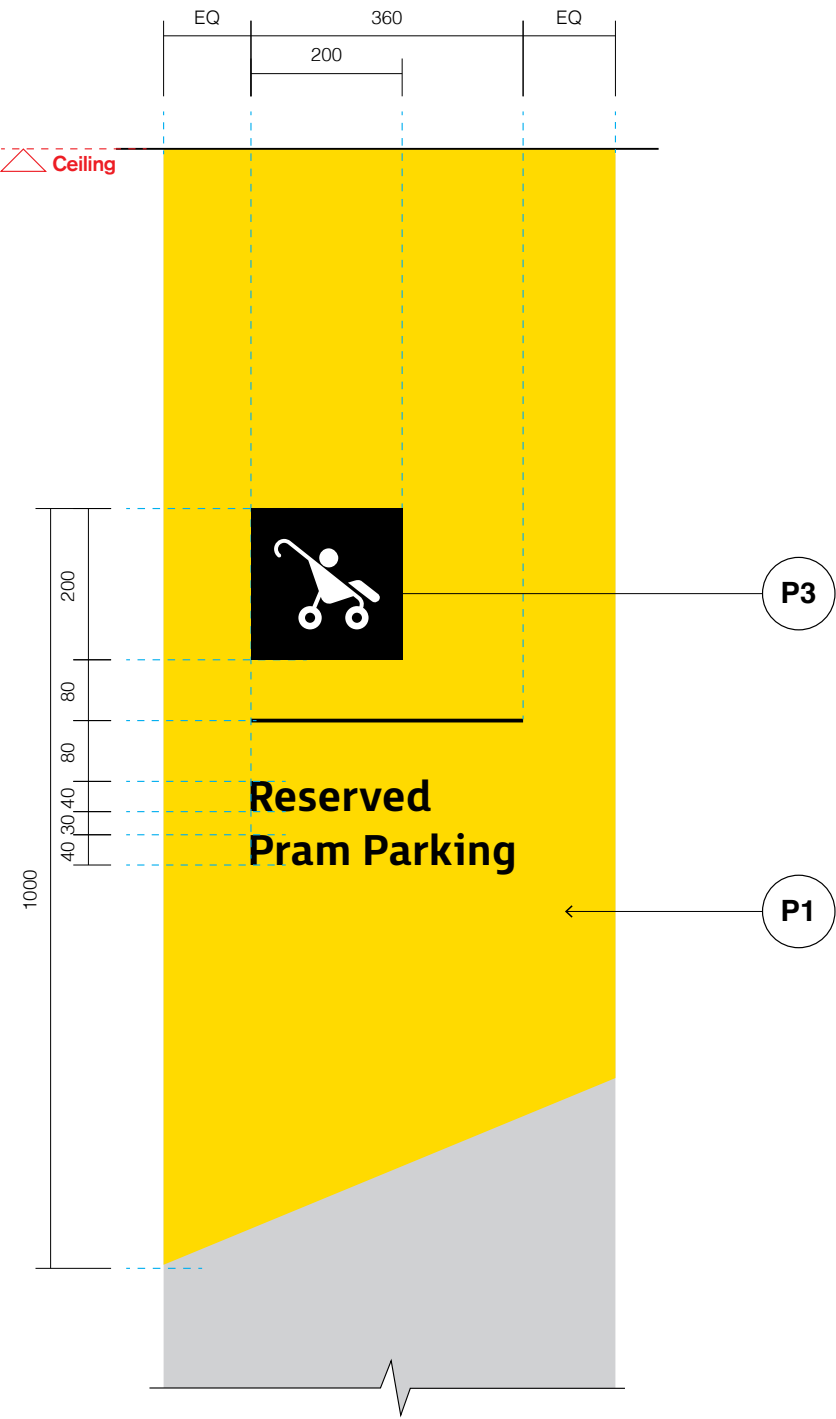

Template 01 - Pictogram & Text
Scale 1:10

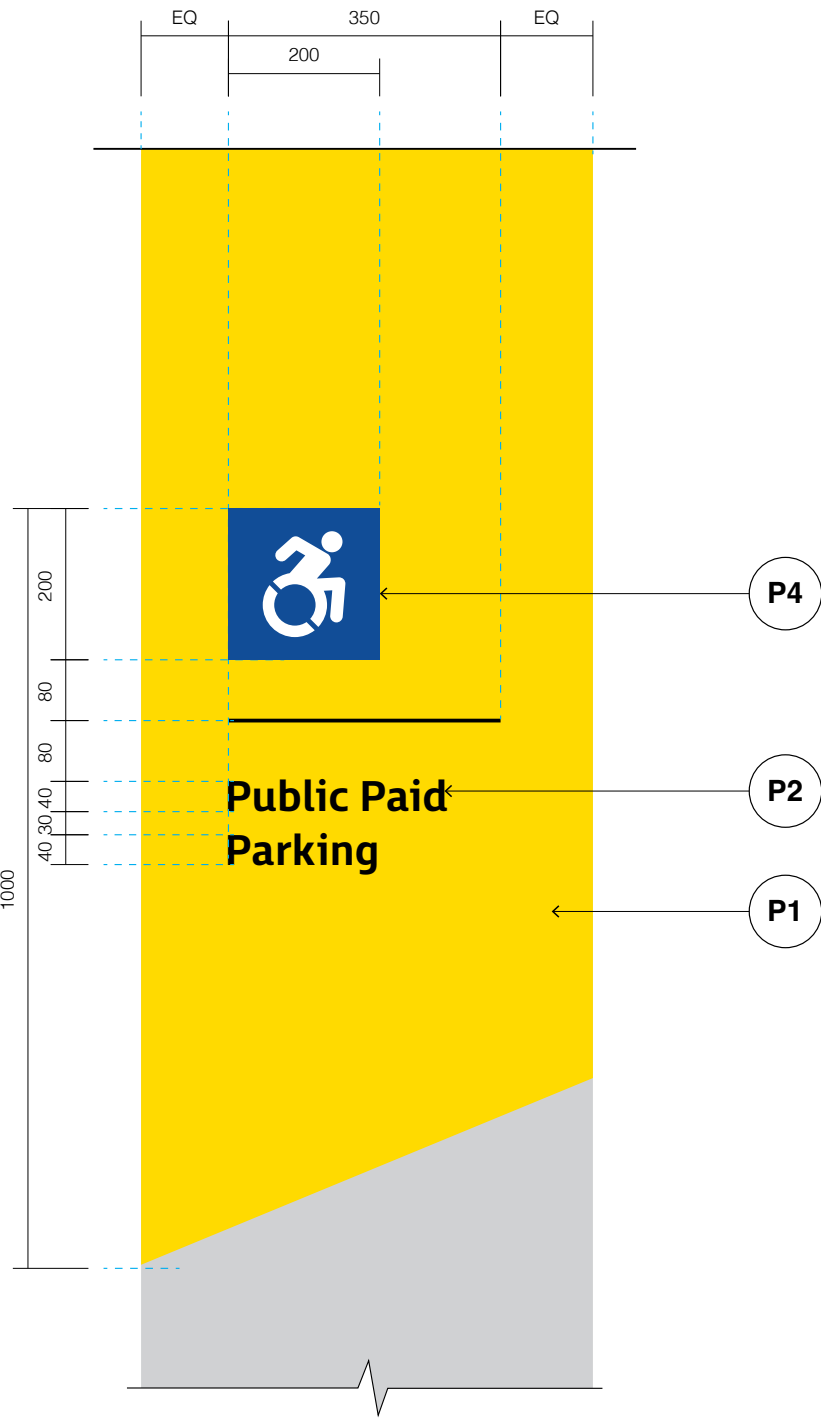

Template 02 - Accessibility
Scale 1:10

Graphic Layout

- Pictograms**
Size: 200mm height
- Dividing Line**
Line weight: 5mm
- Messaging**
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning

Construction & Materials

- Materiality Legend**
- P1**

 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column
- P3**


 - P3 mask & spray on column
- P4**

 - P4 mask & spray on column

- Application Details**
- Refer to: Section 8, Construction Standards, Direct Applied Graphics



Front Elevation
Scale 1:20

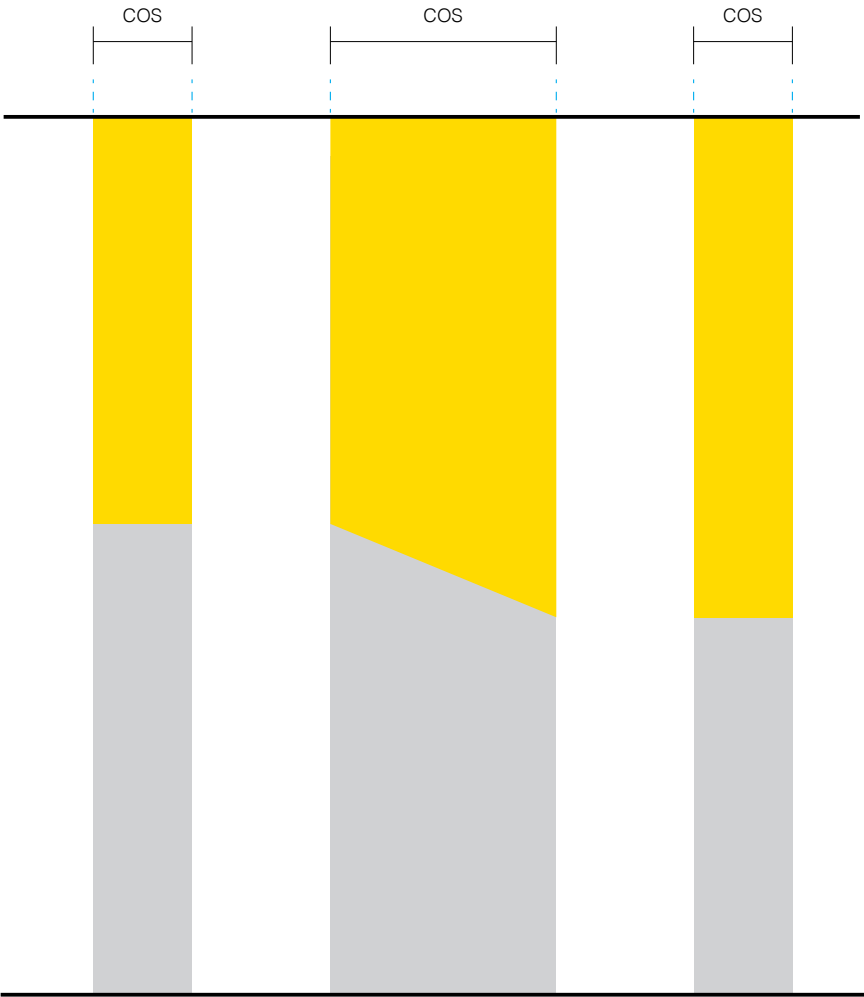

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20


Side Elevation
Scale 1:20

Sign Location


Purpose
Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level.

Location
Applied on surface of designated columns facing circulation paths.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

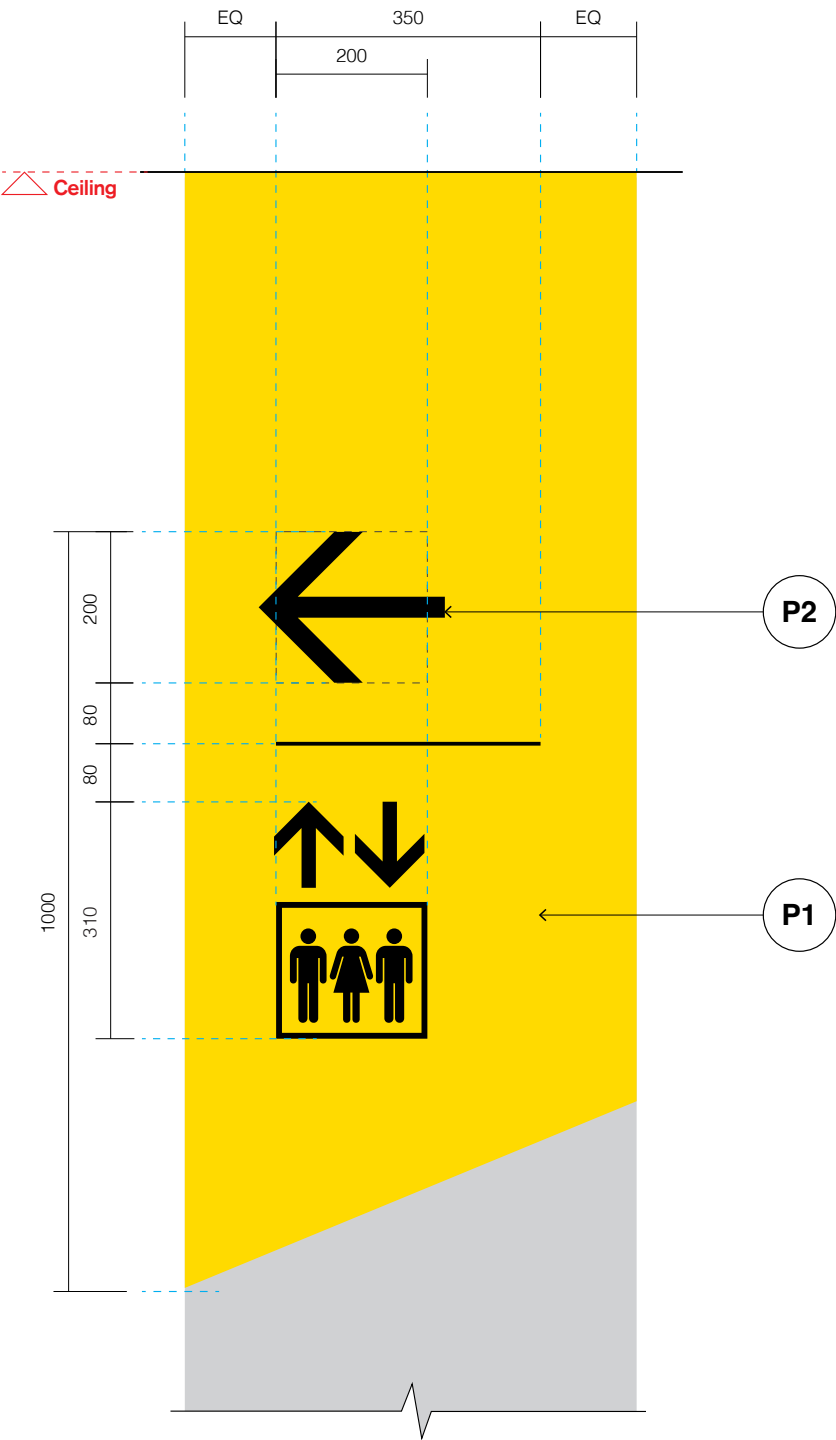

Template 01 - Directional & Pictogram
Scale 1:10

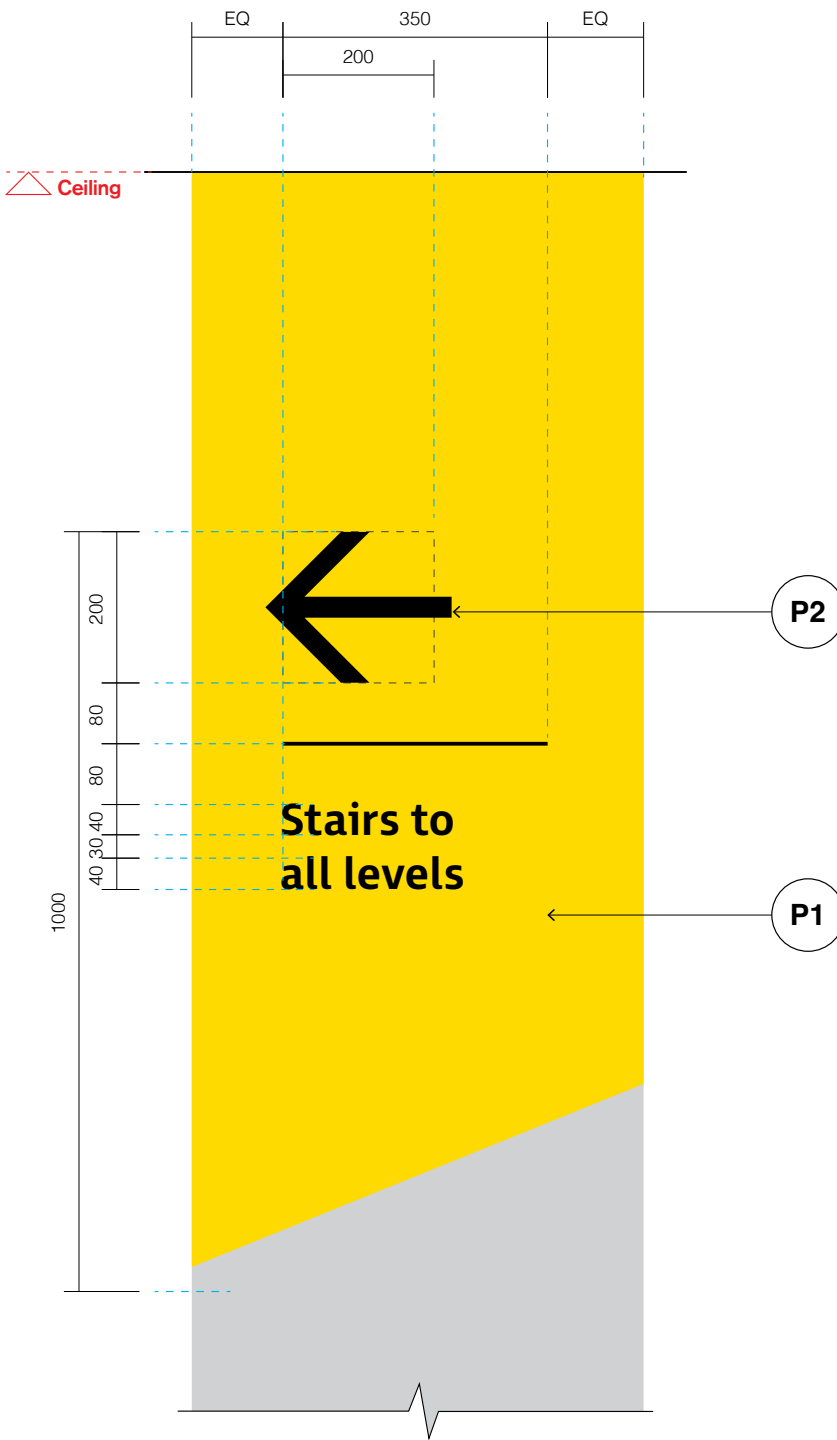

Template 02 - Directional & Text
Scale 1:10

Graphic Layout

Arrows
200mm height

Dividing Line
Line weight: 5mm

Pictograms
200mm width

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 30mm
Tracking: 10+ Optical kerning

Construction & Materials

Materiality Legend


- P1**

 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column

Application Details

- Refer to: Section 8, Construction Standards, Direct Applied Graphics

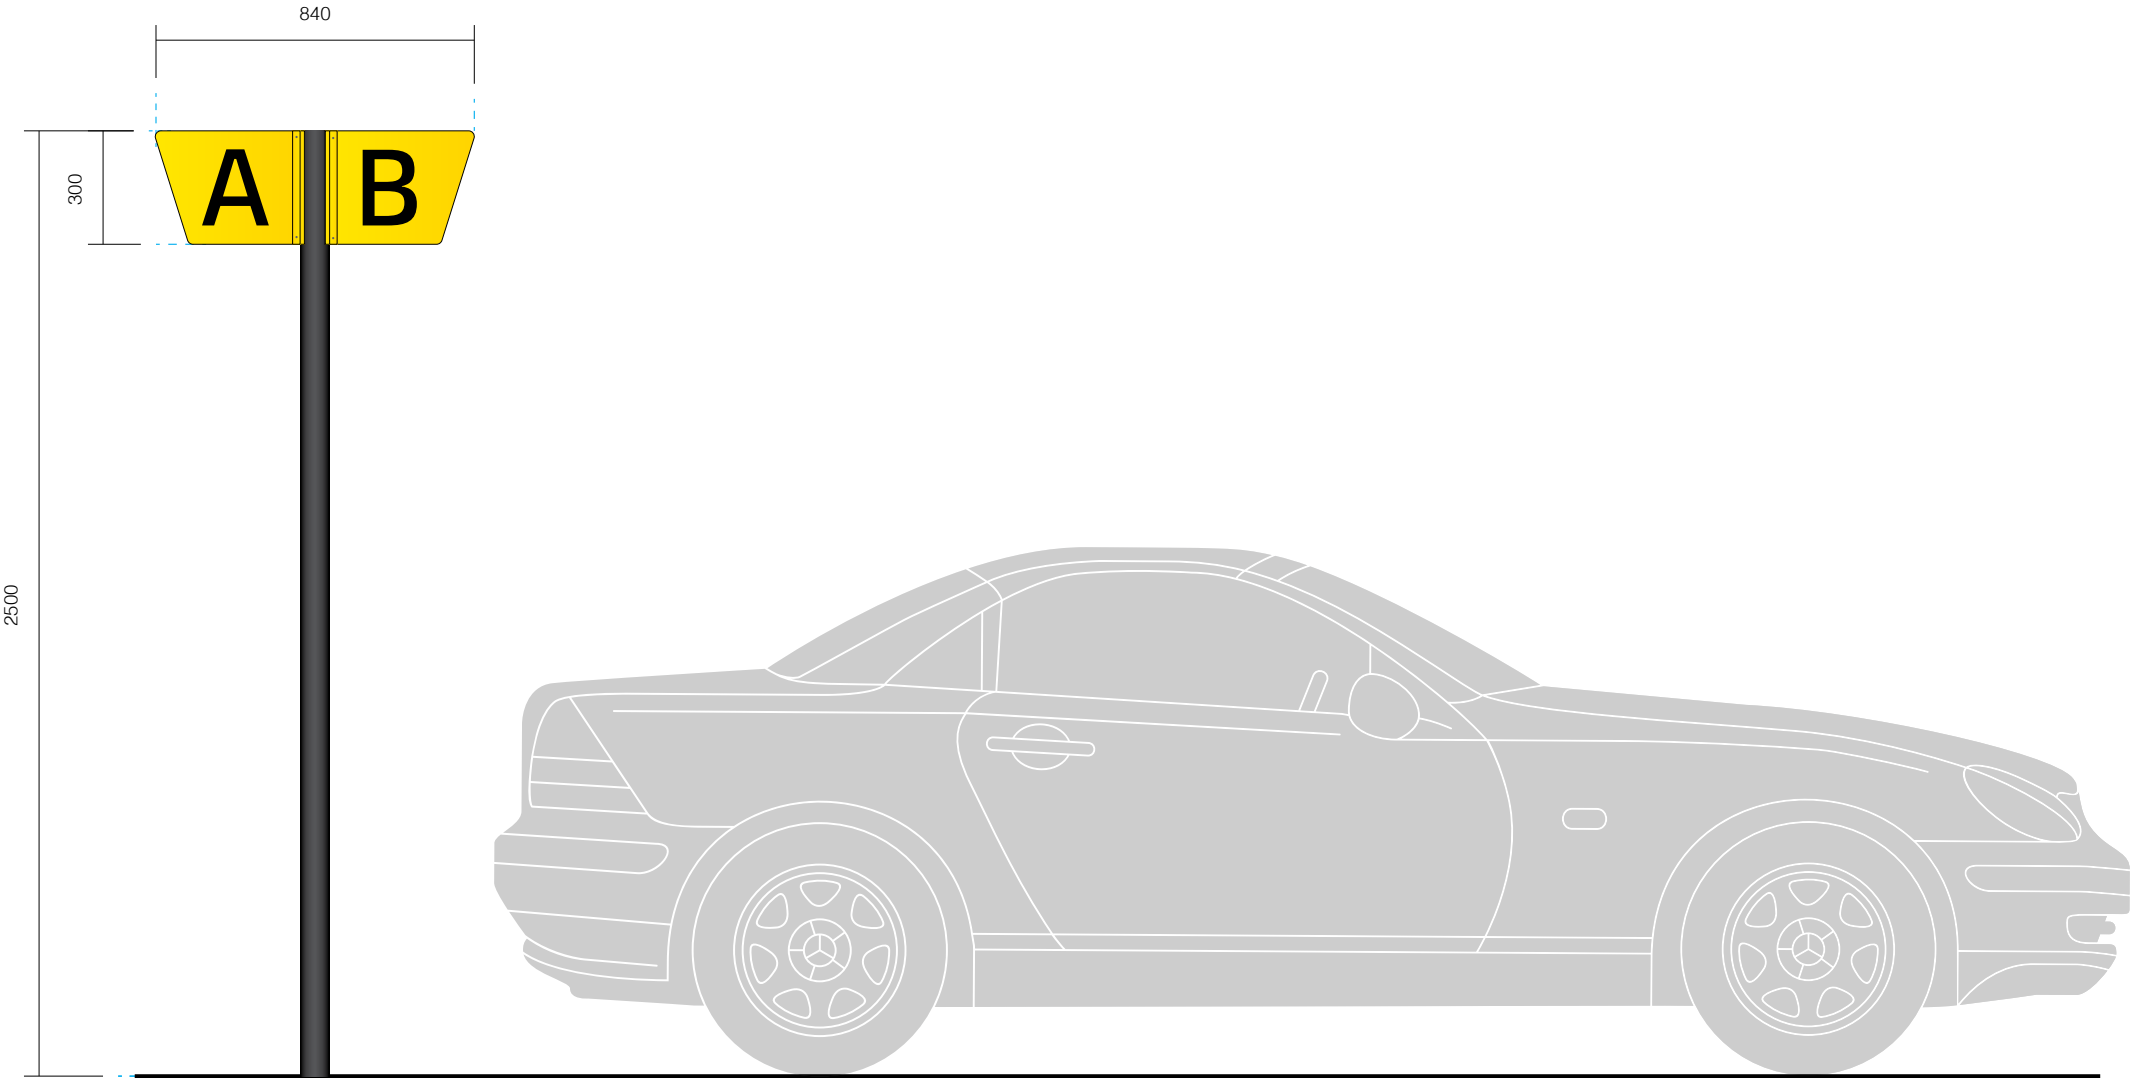


Elevation
Scale 1:20

Sign Location

Purpose
Identifies parking zone ID's on rooftop levels that not do have car park columns.

Location
Located at allocated confirmation points.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

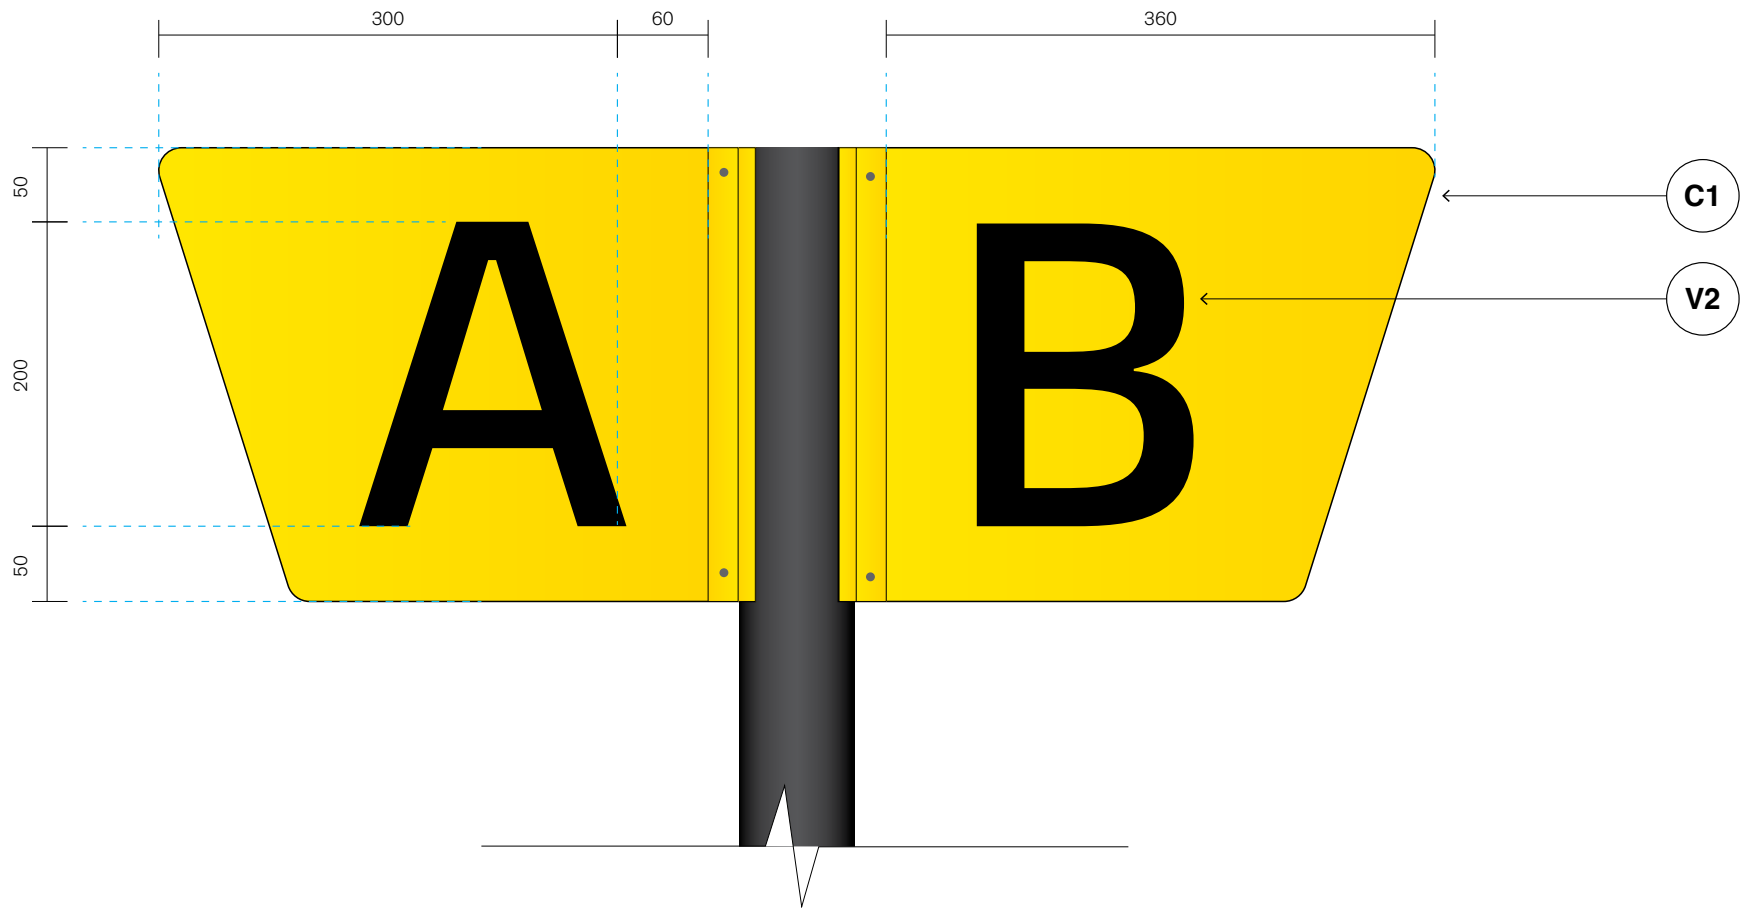

Detail
Scale 1:5

Graphic Layout

Lot Designation
FS Millbank Regular
Alignment: To respond to blade direction
Size: 200mm height

Construction & Materials

Materiality Legend


- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium

Construction Details

- Refer to: Section 8, Construction Standards, Cantilevered Signforms

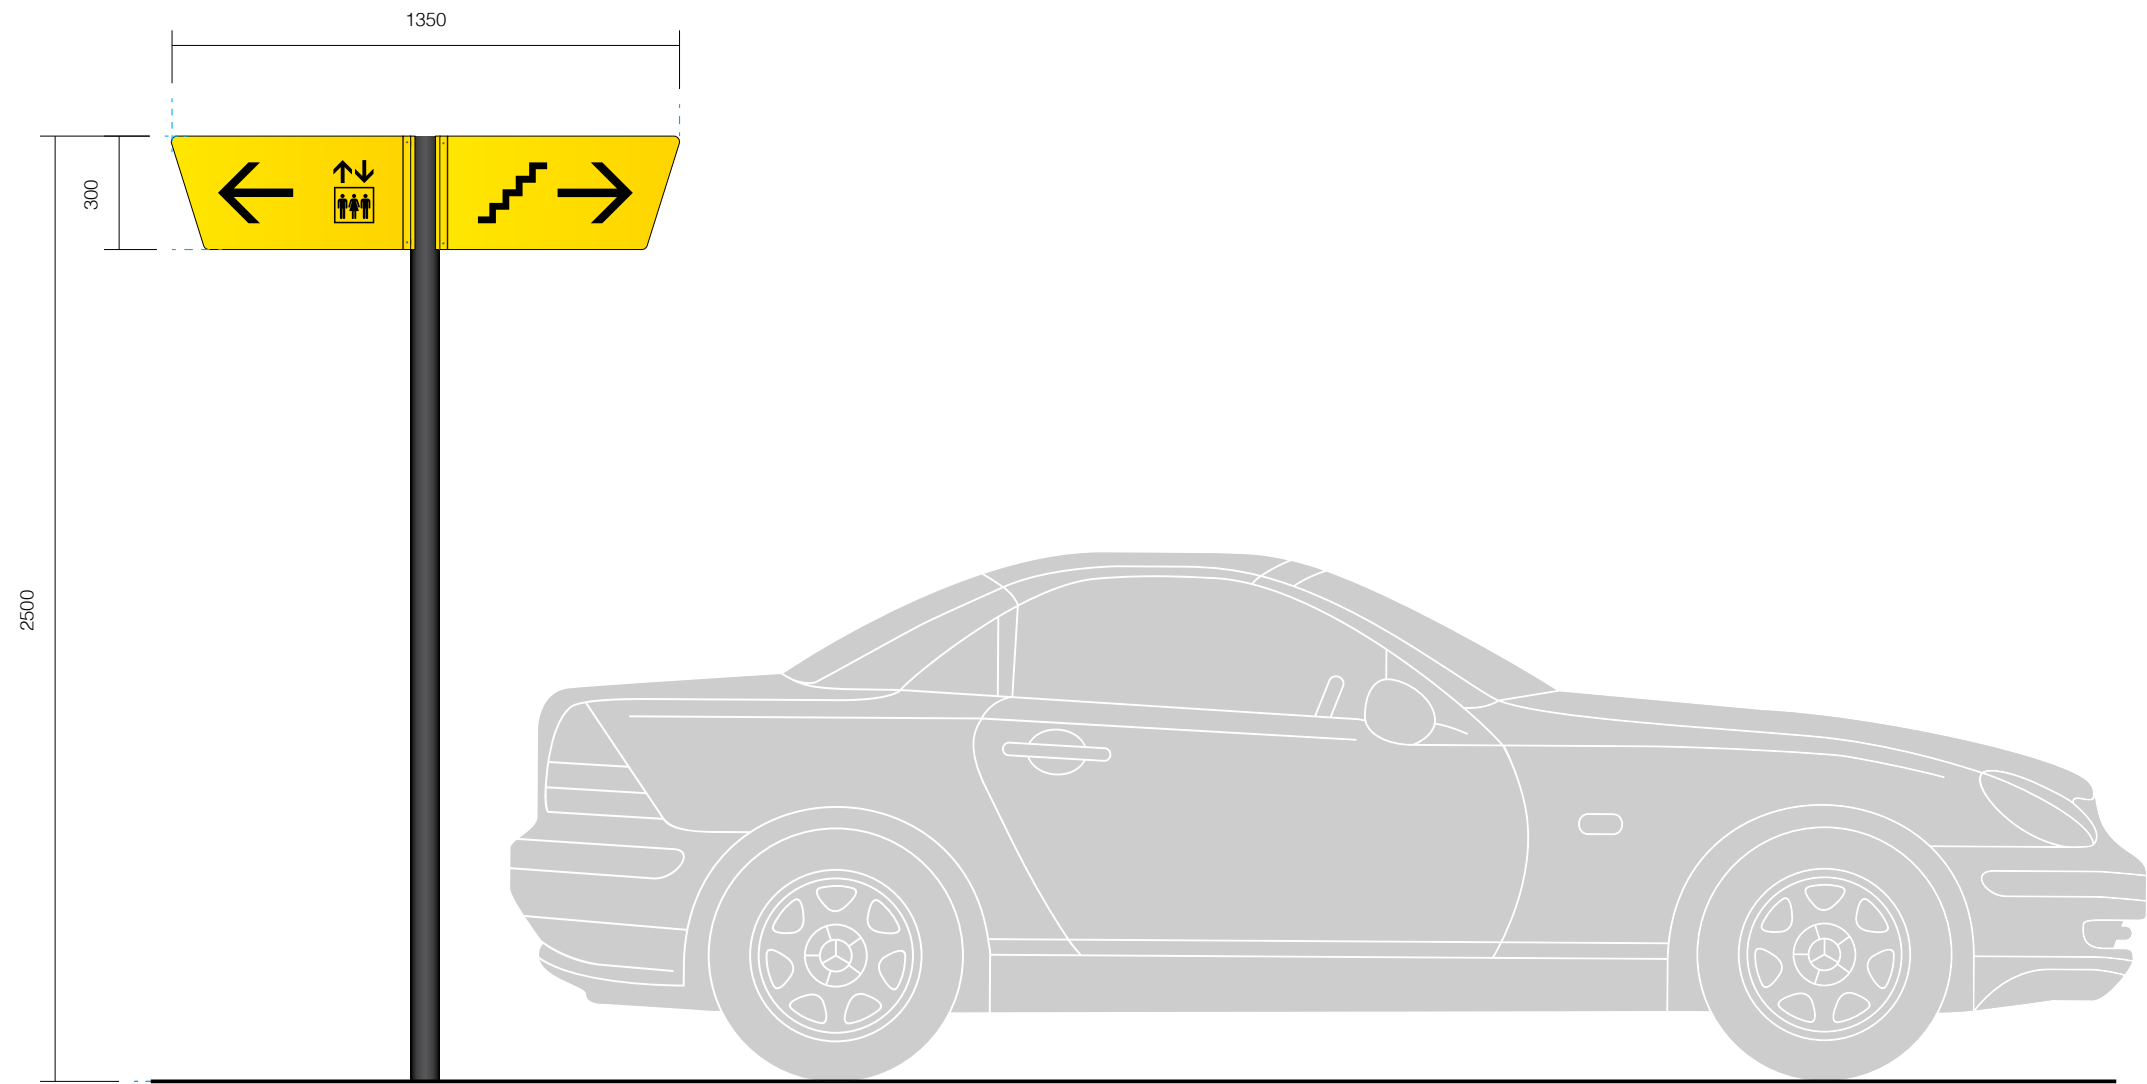


Elevation
Scale 1:20

Sign Location

Purpose
Directs pedestrian traffic at rooftop levels. Refer to Section 3, Terminology & Addressing, Category 11.

Location
Located at major pedestrian decision points at rooftop level.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

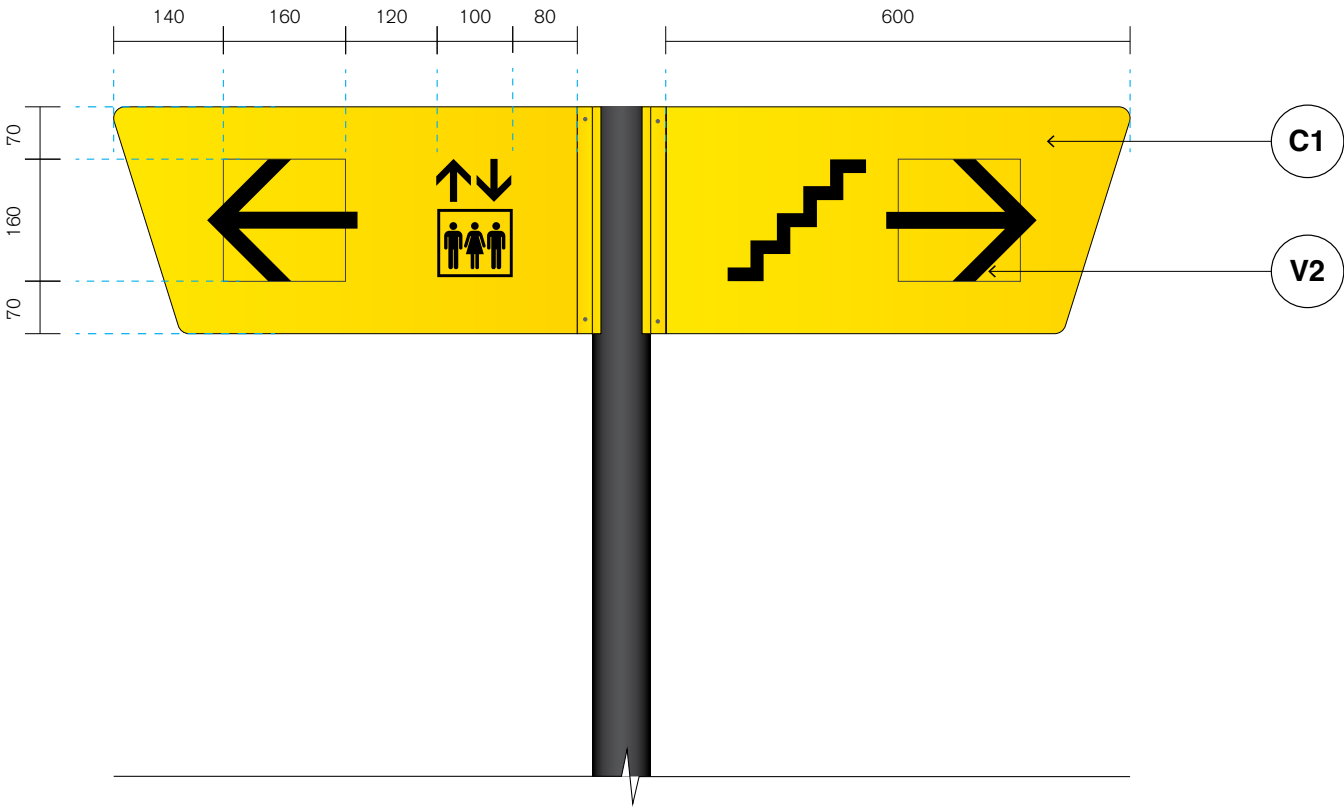

Detail
Scale 1:10

Graphic Layout

Pictogram
Lift & Stair: 160mm height

Arrow
160mm height

Construction & Materials


Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium

Construction Details
• Refer to: Section 8, Construction Standards, Cantilevered Signforms

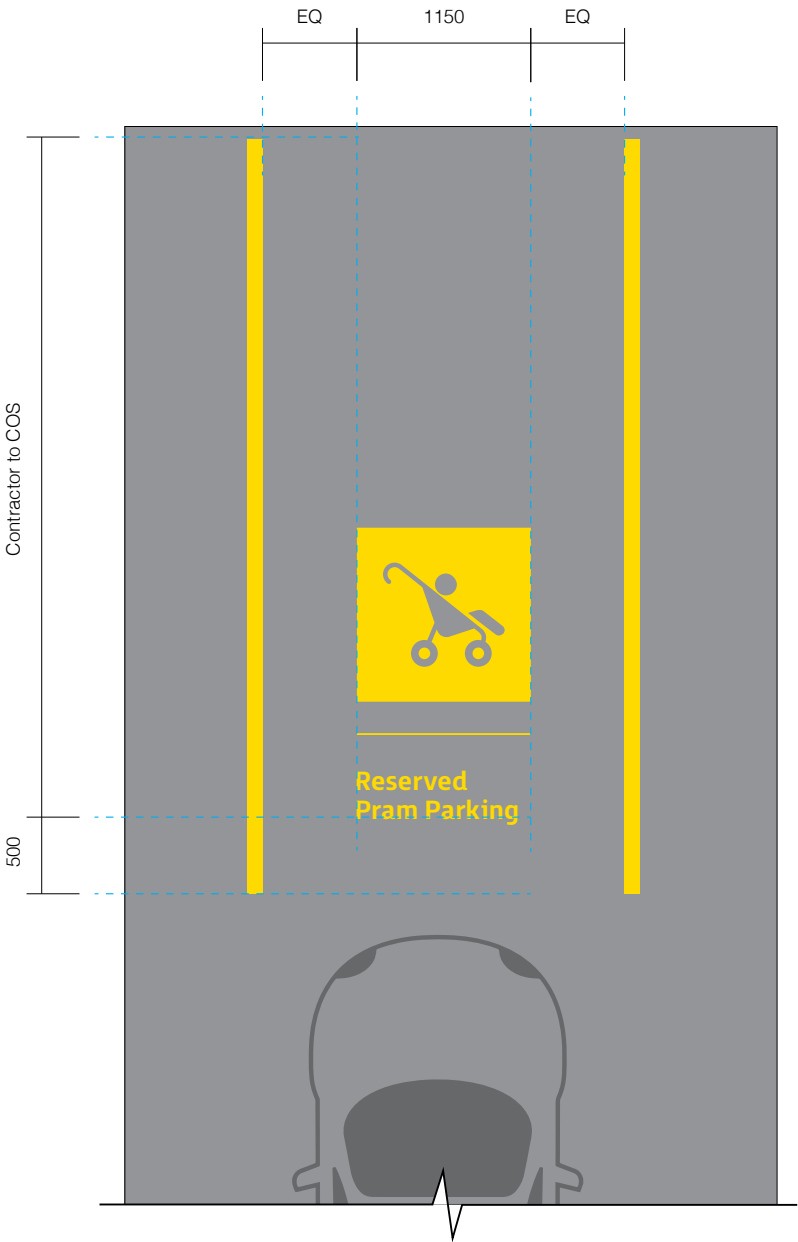

Plan
Scale: 1:50


Sign Location

Purpose
Identifies parking zones for vehicular traffic. Refer to Section 3, Terminology & Addressing, Category 12.


Location
Located at designated parking zones.

Australian Standards
In compliance with AS/NZS 2890.1: 2004, car park floor graphics must have 80-100mm solid lines to distinguish between spaces. Accessibility pictogram must be 1200mm square with white icon in blue square, and be inset 500-600mm from start of space.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance

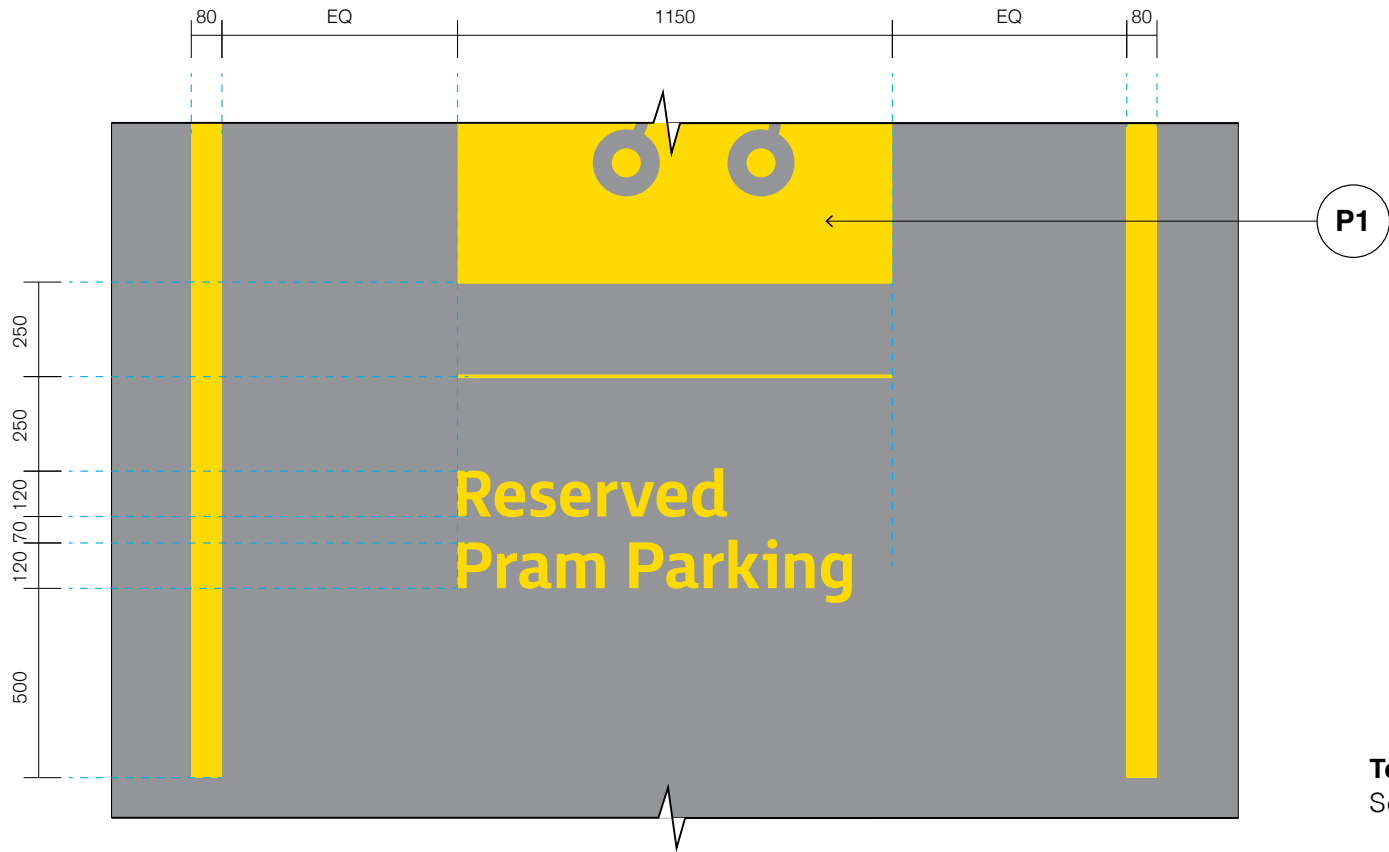

Template 01 - Pictogram & Text
Scale 1:20

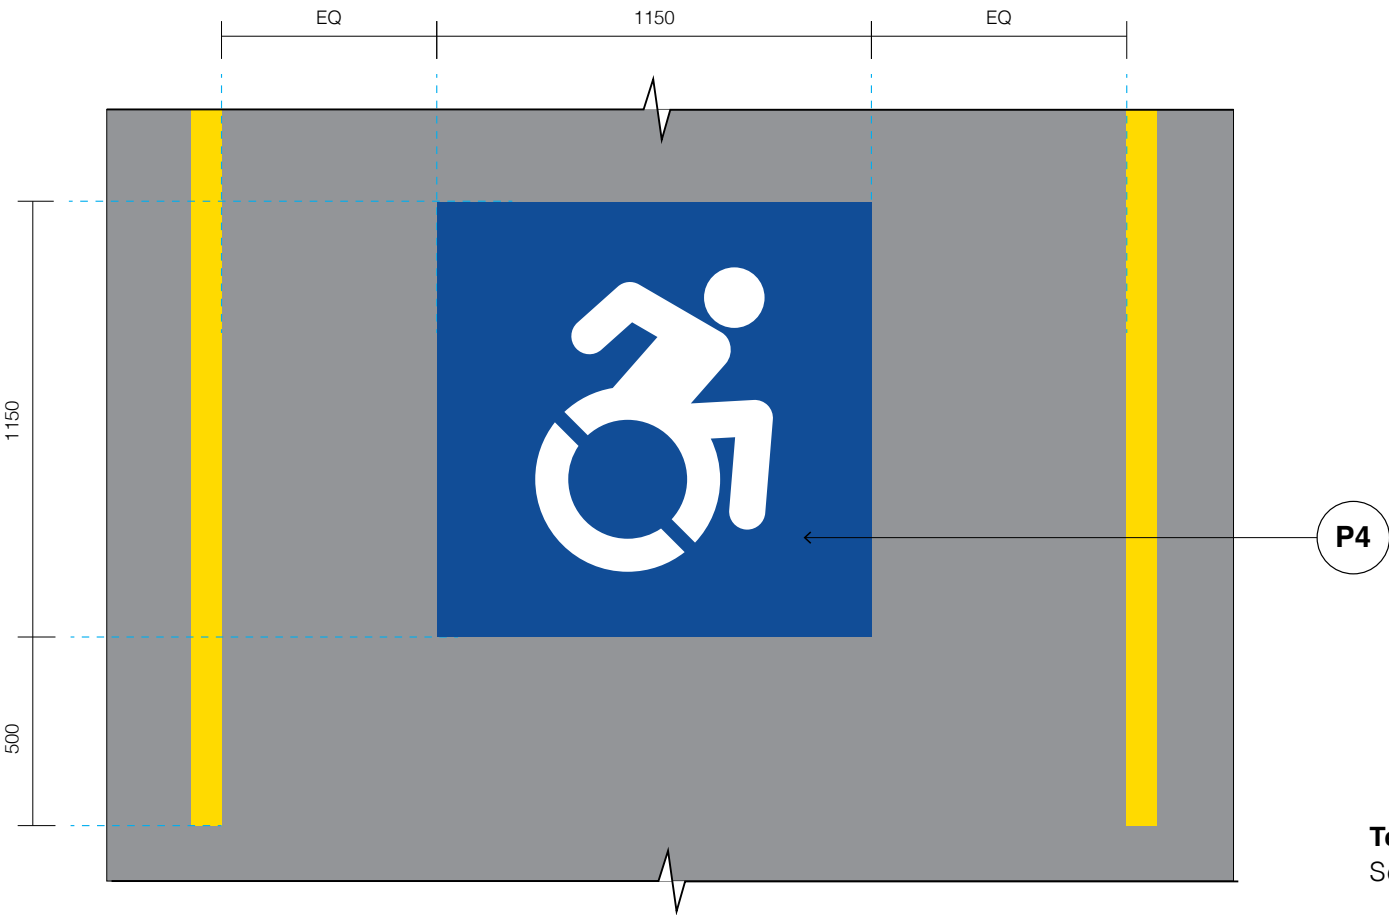

Template 02 - Accessibility
Scale 1:20

Graphic Layout

Pictogram

1150mm width

Dividing Line

Line weight: 5mm

Messaging

FS Millbank Bold

Alignment: Left

Size/ Leading: 120mm, 70mm

Tracking: 10+, Optical Kerning


Construction & Materials

Materiality Legend

- | | | |
|----------------------------|-----------------------------|----------------------------|
| P1 | P3 | P4 |
| • P1 mask & spray on floor | • P3 mask & spray on column | • P4 mask & spray on floor |

Application Details

- Refer to: Section 8, Construction Standards, Direct Applied Graphics

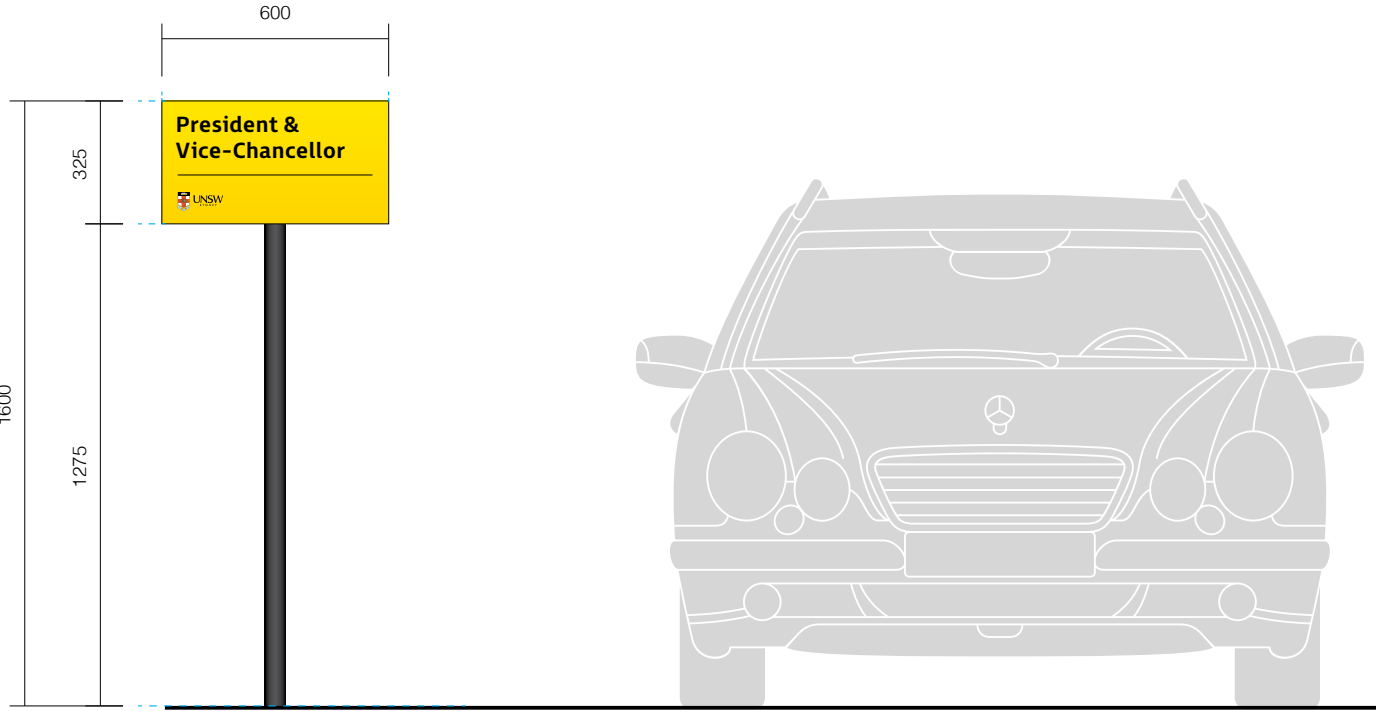

Sign Location

Purpose
Identifies parking zones for authorised users. Refer to Section 3, Terminology & Addressing, Category 12.

Location
Located at designated parking zones.

- Note**
- For sign type selection, refer to: Section 5, The Process, Step 3
 - For content guidelines, refer to: Section 3, Terminology & Addressing
 - For material finishes, refer to: Section 8, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 21, Maintenance



Detail
Scale 1:4

Graphic Layout

- Messaging**
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning
- UNSW logo**
50mm height

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

- Fixing Details**
- Refer to: Section 20, Shop Drawings

For sections 01 - 08, refer to chapter G.1
For sections 13 - 17, refer to chapter G.3
For sections 18 - 23, refer to chapter G.4



UNSW
SYDNEY