

UNSW

Wayfinding and Signage Standards

Revision 7
25 November 2019

Chapter G.2 (Sections 11-19)

For sections 01-10, refer to chapter G.1
For sections 20-24, refer to chapter G.3

Contents

11: Sign Type Library – Page 153

- Sign Types: Hierarchy & Codes
- Sign Type Summary: Identification
- Sign Type Summary: Directional
- Sign Type Summary: Car Park
- Sign Type Summary: Operational
- Sign Type Summary: Statutory
- Sign Type Summary: Temporary & Displays
- Sign Type Summary: Placemaking

12: Identification Series – Page 189

- ID.01 External: Gate Primary Vehicular Totem
- ID.02 External: Gate Secondary Vehicular Totem Family
- ID.03 External: Gate Pedestrian Totem Family
- ID.04 External: Building Facade Sign Family
- ID.05 External: Street Sign
- ID.06 External: Building Entrance Totem
- ID.07 External: Building Entrance Wall Mounted
- ID.08 External: Facility Entrance Wall Mounted
- ID.09 External: Digital Directory Totem
- ID.10 External: Sponsor Plate
- ID.11 Internal: Tenant Directory (Small)
- ID.12 Internal: Tenant Directory (Large)
- ID.13 Internal: Secondary Tenant
- ID.14 Internal: Reception ID
- ID.15 Internal: Lift Directory (Digital)
- ID.16 Internal: Lift Directory (Static)
- ID.17 Internal: Stair Level ID
- ID.18 Internal: Lift Level ID
- ID.19 Internal: Escalator Level ID
- ID.20 Room ID Family
- ID.21 Amenity Blade Family
- ID.22 External: Gate ID Wall Mounted
- ID.23 External: Campus ID Facade Mounted

13: Directional Series – Page 256

- DR.01 External: Vehicular Totem 2400
- DR.02 External: Pedestrian Totem 2400mm
- DR.03 External: Pedestrian Totem 2000mm
- DR.04 External: Access Bollard
- DR.05 Suspended Directional Family
- DR.06 External: Primary Wall Mounted (Large)
- DR.07 External: Primary Wall Mounted (Small)
- DR.08 Internal: Primary Wall Mounted (Large)
- DR.09 Internal: Primary Wall Mounted (Small)
- DR.10 Secondary Wall Mounted (Landscape)
- DR.11 Secondary Wall Mounted (Portrait)
- DR.12 Secondary Wall Mounted (Flag)

14: Car Park Series – Page 292

- CP.01 Entry ID: Vehicular Wall Mounted
- CP.02 Entry ID: Pedestrian Wall Mounted
- CP.03 Entry ID: Bulk Head
- CP.04 Lift ID
- CP.05 Car Park Rules & Pay Meter
- CP.06 Suspended Directional Family
- CP.07 Loading Dock ID
- CP.08 Column: Level ID
- CP.09 Column: Zone ID
- CP.10 Column: Reserved ID
- CP.11 Column: Directional
- CP.12 Pole: Lot ID
- CP.13 Pole: Directional
- CP.14 Floor Graphics
- CP.15 Reserved Parking ID

15: Operational Series – Page 325

- OP.01 Help Point ID Family
- OP.02 General ID Family
- OP.03 Utility ID Family
- OP.04 Drop Box ID Family
- OP.05 Water Refill
- OP.06 Waste Bins

16: Statutory Series – Page 338

- ST.01 Amenity: Braille and Tactile
- ST.02 Fire Door Family
- ST.03 Fire Extinguisher & FHR Family
- ST.04 Regulations Family
- ST.05 Security Warning Family
- ST.06 Hazard & Danger Notices Family
- ST.07 Safety Decal
- ST.09 Exit Signage Family

17: Temporary & Display Series – Page 359

- TD.01 Notice Boards: External Large
- TD.02 Notice Boards: External Small
- TD.03 Notice Boards: Internal Large
- TD.04 Notice Boards: Internal Small
- TD.05 Notice Boards: Digital
- TD.06 A3 & A4 Display Family
- TD.07 Temporary Sign
- TD.08 Construction Hoarding

Contents (continued)

18: Environmental Graphics – Page 376

- EG.01 Privacy Graphic: Low
- EG.02 Privacy Graphic: High

19: Placemaking Series – Page 381

- PI.01 Campus ID – Concept

Section 11.0

Sign Type Library

This section provides a general overview of every single sign type within the UNSW wayfinding family.

Sign Types: Hierarchy & Codes	154
Sign Type Summary: Identification	155
Sign Type Summary: Directional	164
Sign Type Summary: Car Park	169
Sign Type Summary: Operational	175
Sign Type Summary: Statutory	177
Sign Type Summary: Temporary & Display	181
Sign Type Summary: Placemaking	187

Sign Types: Hierarchy & Codes

Sign Type Code

ID.01 06

Sign type Sign number Sign quantity

DR.10.A 13

Sign type Sign number Sub sign type Sign quantity

Sign Number Allocation

DR.04. 15

Directional Series Sign, Access Bollard, Quantity 15

ID.19.B. 03

Identification Series Sign, Room ID Family, Class Room ID, Quantity 3

The UNSW sign coding system has been developed to assist in using the UNSW Signage Manual. Signs have been categorised based on their location and the type of message they convey.

Sign type

The sign type is the first two letters of the sign code and illustrates the primary function of the sign.

- ID** = Identification signs
- DR** = Directional signs
- CP** = Car park signs
- OP** = Operational signs
- ST** = Statutory signs
- TD** = Temporary & Display signs
- EG** = Environmental Graphics
- PL** = Placemaking signs

Different sign types are used in different situations based on factors such as purpose, physical context or significance.

Sign number

A numerical sequence is assigned to each of the sign types, further delineated by these numbers into External and Internal signs. Note: not all sign numbers have been utilised, refer Sign Summary for full listing of numbers.

Sub sign type


An additional letter is added to the code when a sign type has multiple variations.

Sign quantity


An additional number after the sign number is used during the procurement process to quantify signs and specify sign locations. Note: the sign quantity number allocation does not form part of the documentation for the UNSW Signage Manual.

This approach provides a method of differentiating signs and therefore preparing sign location plans, message schedules and bill of quantities to implement a signage program.


Sign Type Summary: Identification

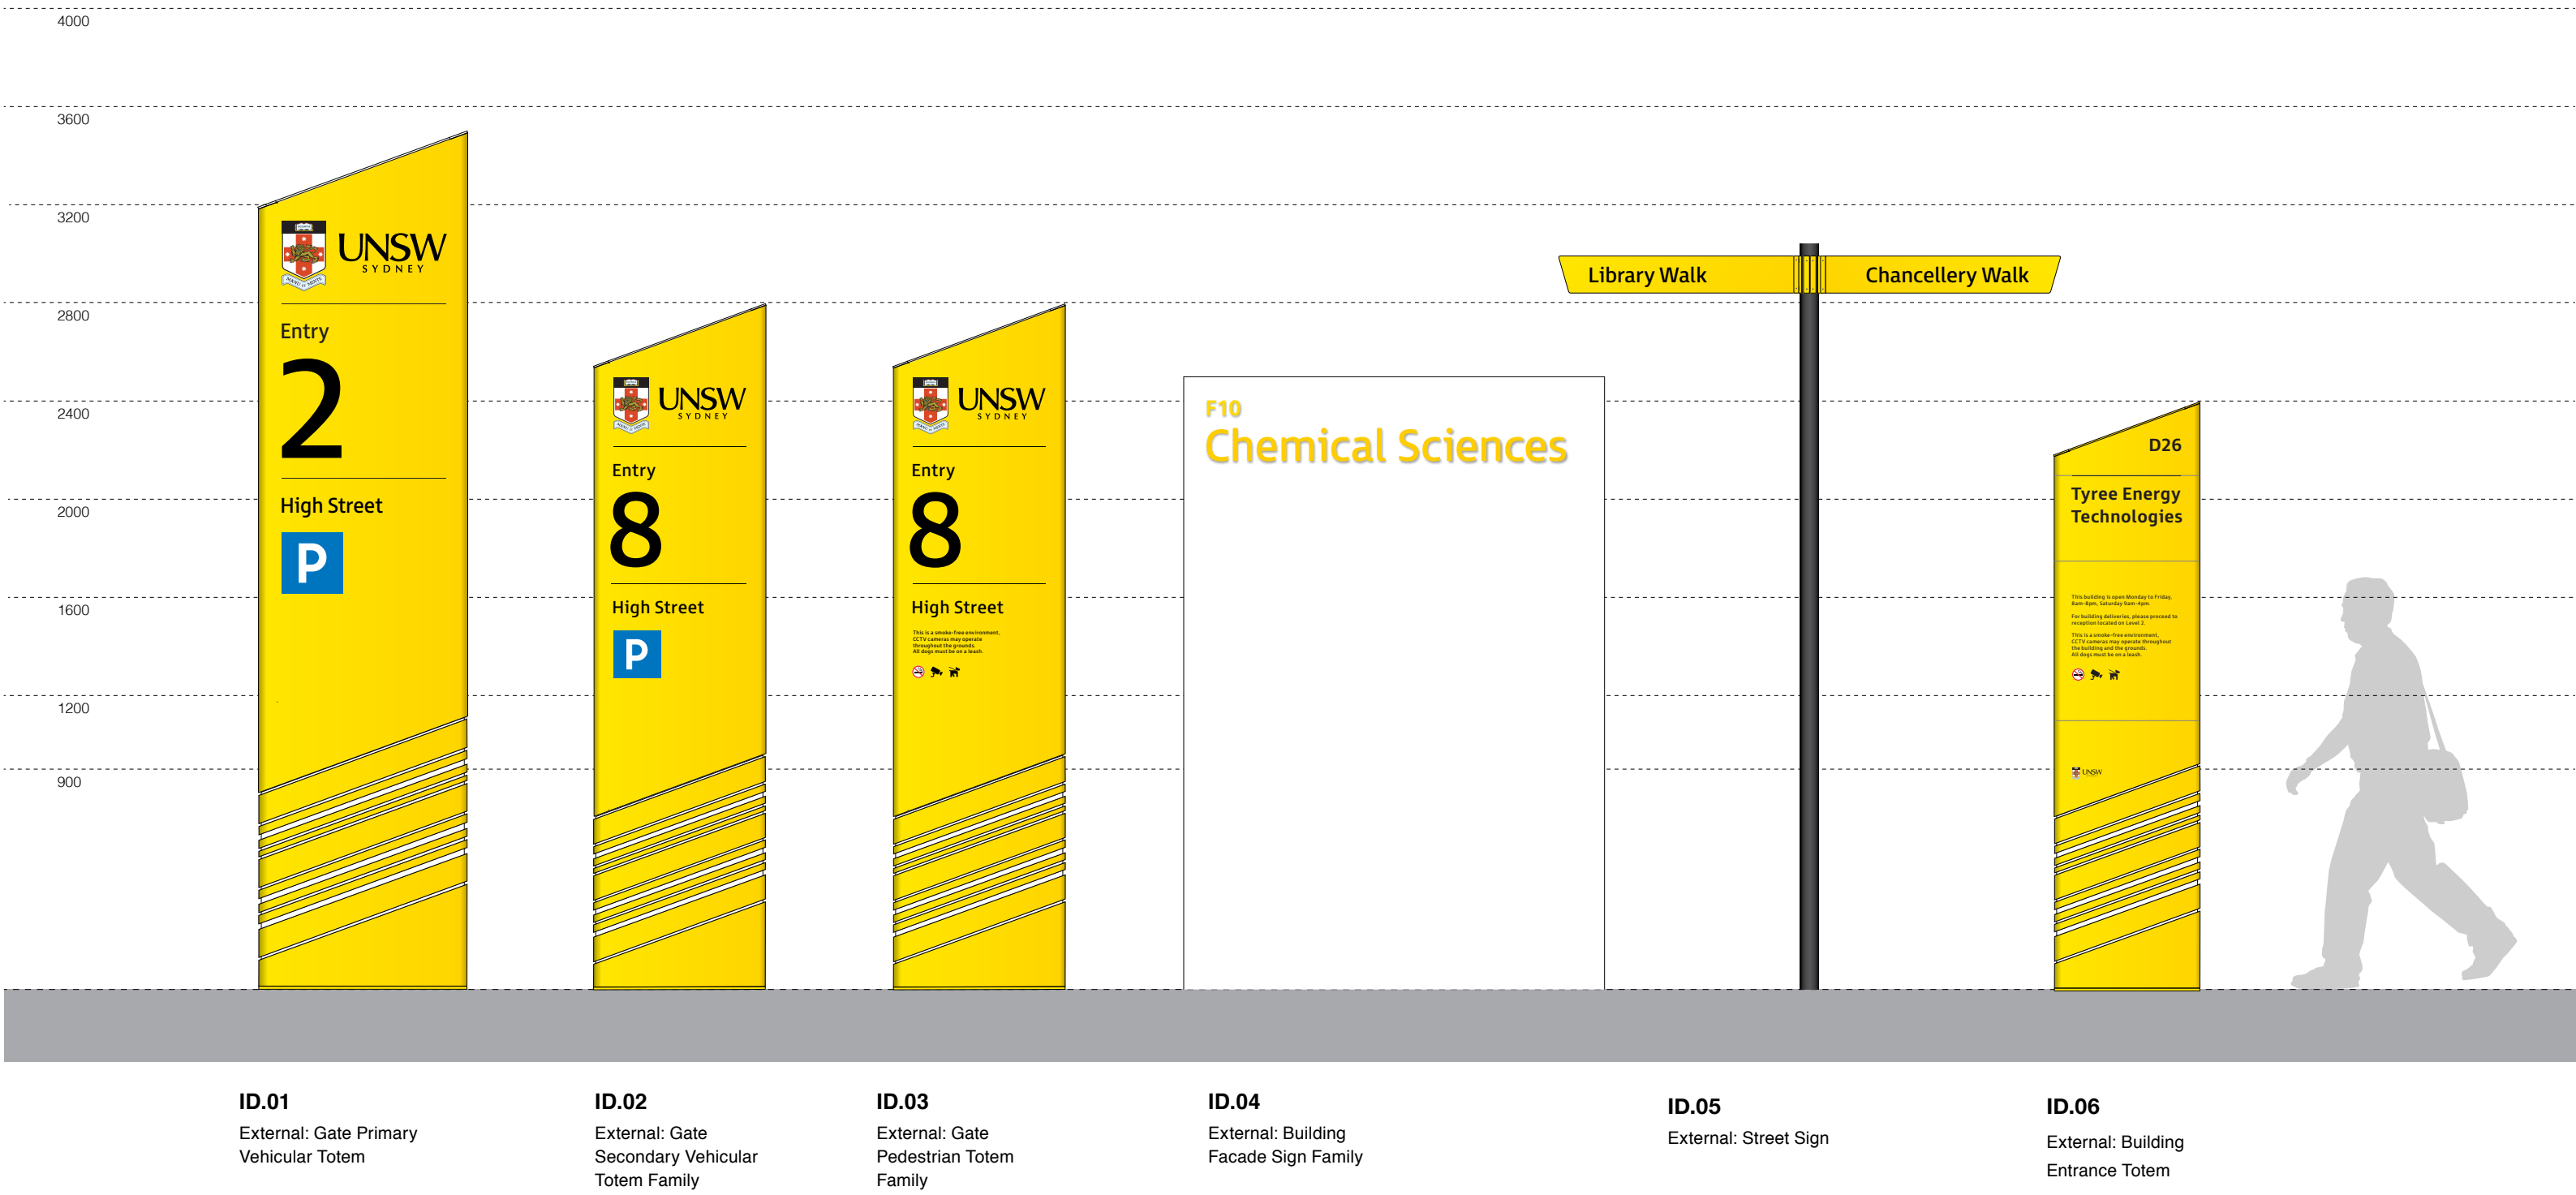


Sign Type Summary: Identification

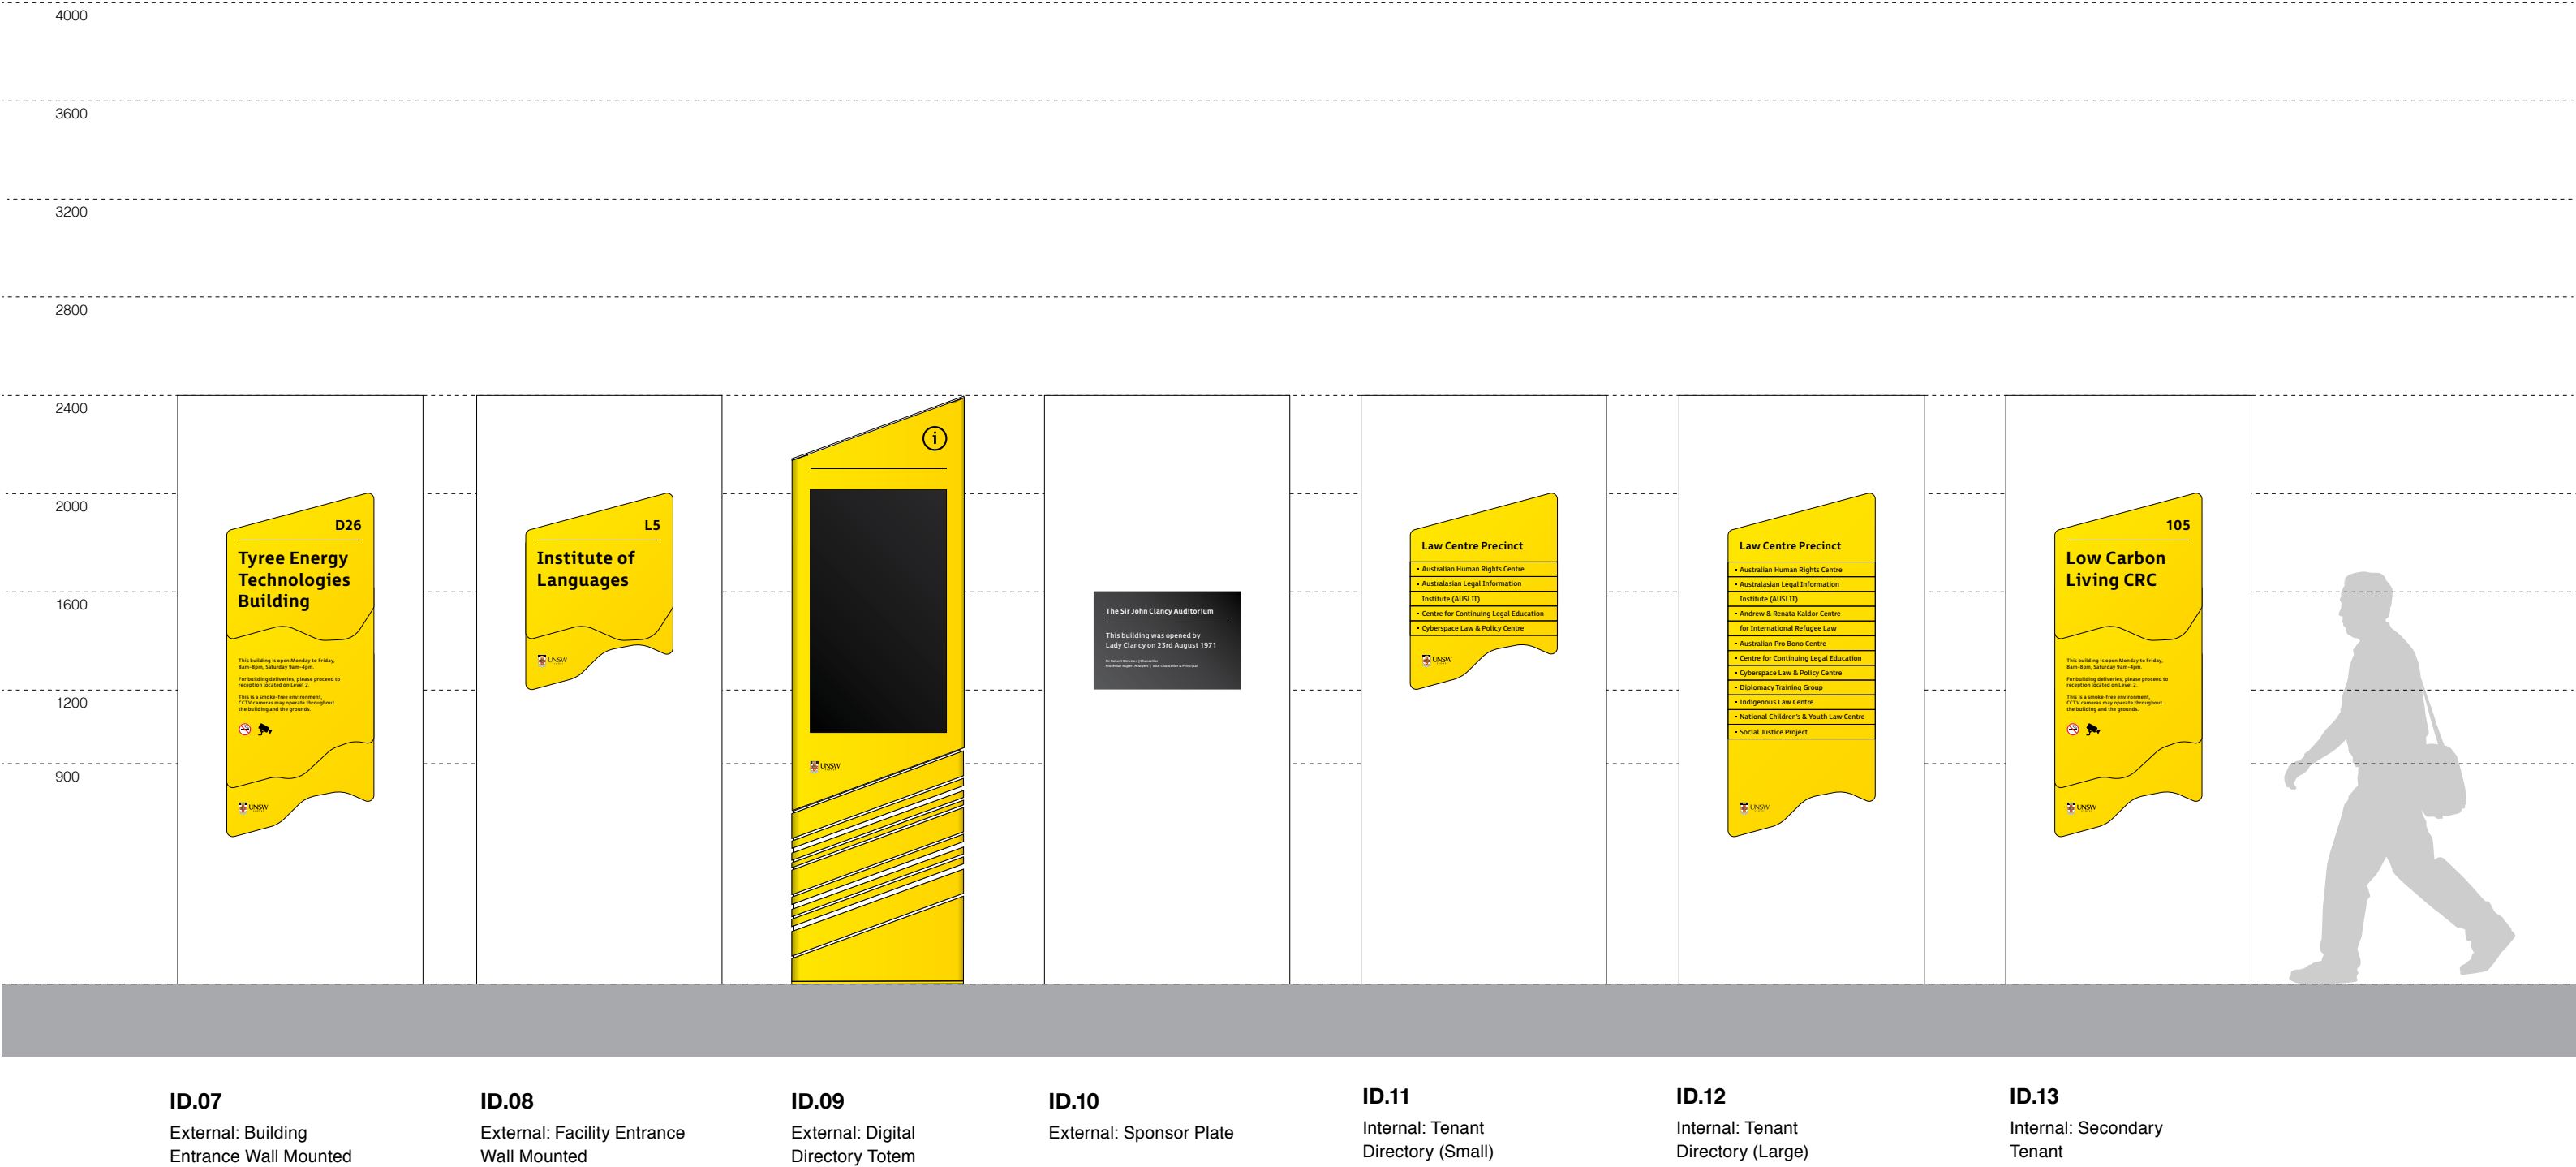

Sign Type Summary: Identification

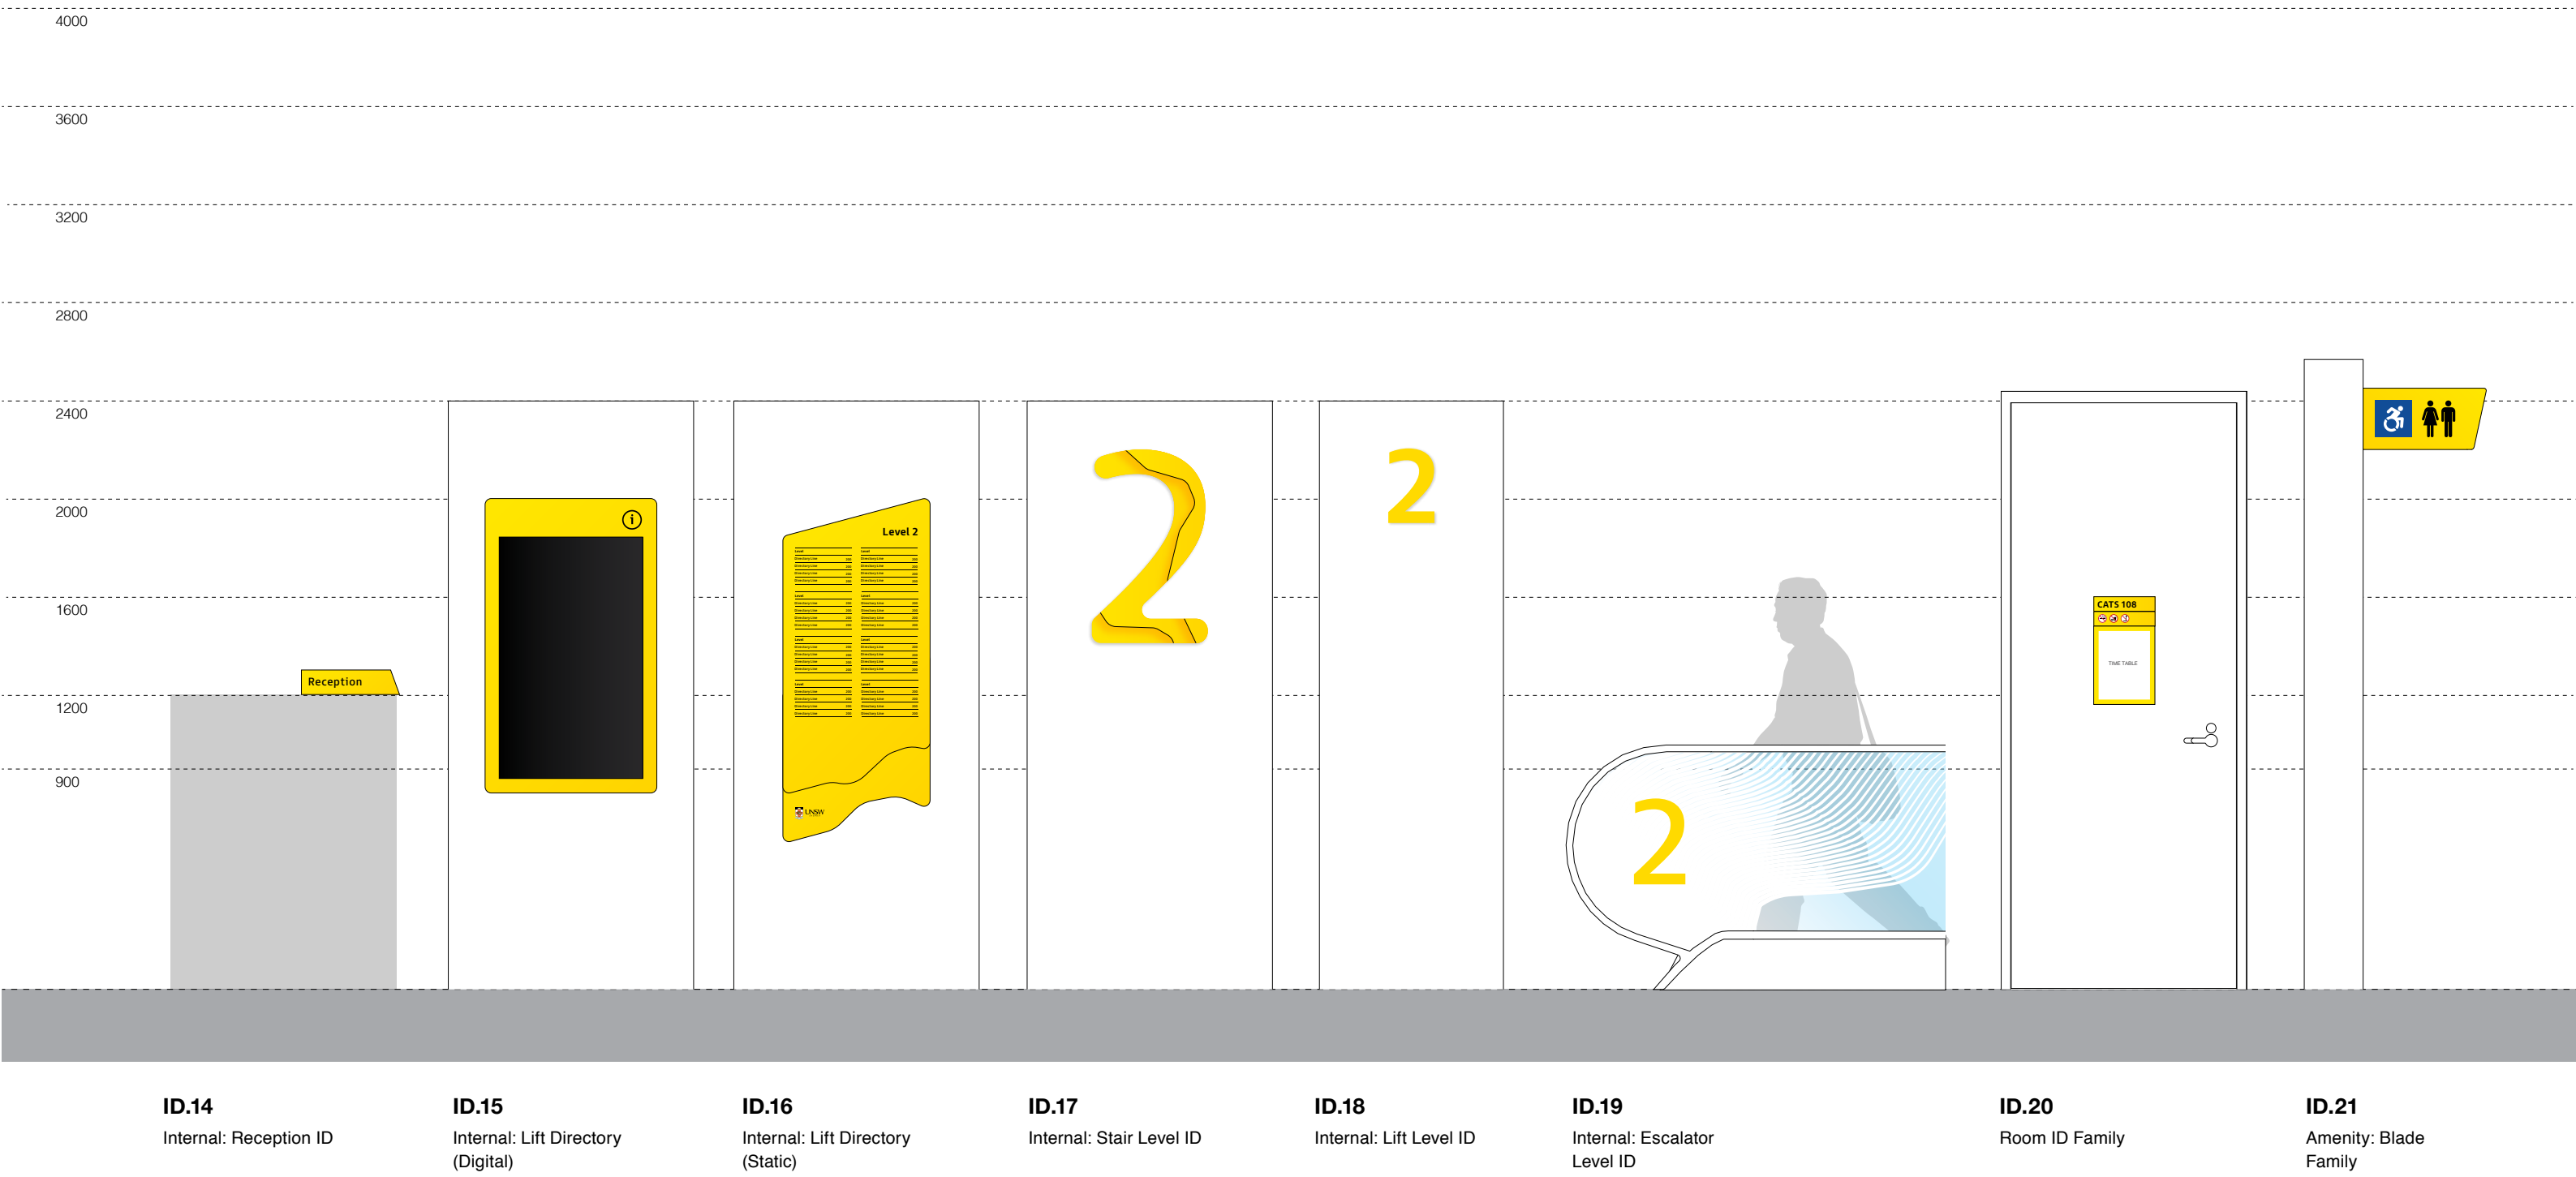



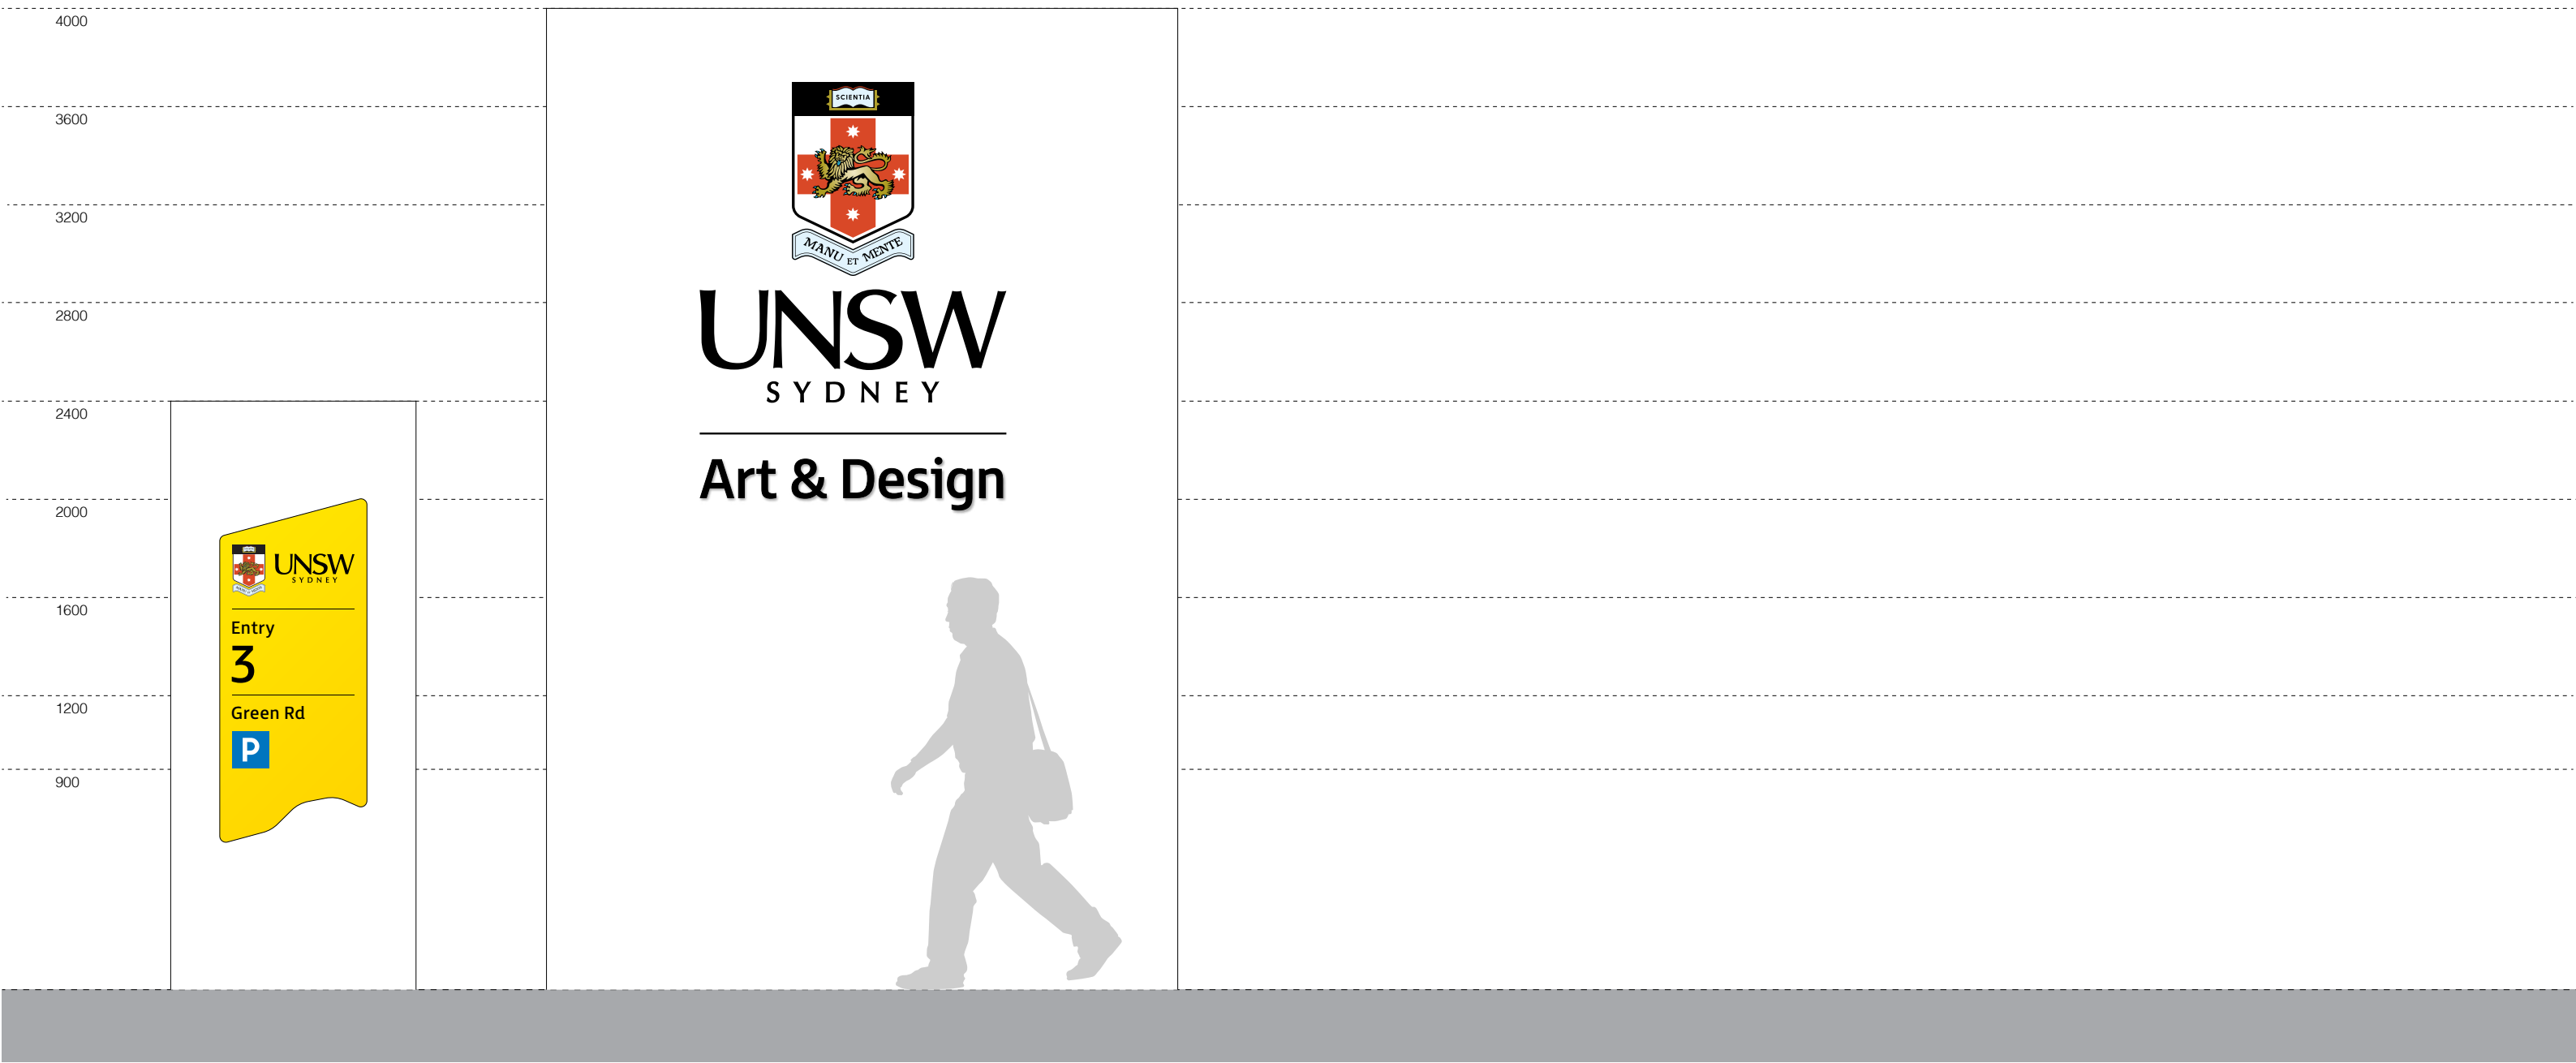






Sign Type Summary: Identification








ID.22
External: Gate ID Wall Mounted

ID.23
External: Campus ID Facade Mounted






Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div><div>ID.01</div><div></div></div>	External: Gate Primary Vehicular Totem	<ul style="list-style-type: none">Identifies major public vehicular entries into the UNSW site	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate numberParking pictogramStreet name	<ul style="list-style-type: none">Primary gate entries at perimeter of site
<div><div>ID.02</div><div></div></div>	External: Gate Secondary Vehicular Totem Family	<ul style="list-style-type: none">Identifies secondary vehicular entries into private or residential car parks and loading docks	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate numberParking pictogramStreet name	<ul style="list-style-type: none">Secondary vehicular gate entries at perimeter of site
<div><div>ID.03</div><div></div></div>	External: Gate Pedestrian Totem Family	<ul style="list-style-type: none">Identifies secondary pedestrian entries into the UNSW site for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate numberStreet nameOperational messaging	<ul style="list-style-type: none">Secondary pedestrian entries at perimeter of site
<div><div>ID.04</div><div></div></div>	External: Building Facade Sign Family	<ul style="list-style-type: none">Identifies major buildings from street level	<ul style="list-style-type: none">Building NameMap code	<ul style="list-style-type: none">Above main entry of major building or at designated facade signage location viewable from major pedestrian circulation routes
<div><div>ID.05</div><div></div></div>	External: Street Sign	<ul style="list-style-type: none">Identifies major street names and external courtyards or parks within UNSW site	<ul style="list-style-type: none">Street name	<ul style="list-style-type: none">At intersections between major UNSW streets






Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ID.06</div> <div></div>	External: Building Entrance Totem	<ul style="list-style-type: none">Identifies entry point or site boundaries of major buildings	<ul style="list-style-type: none">Map codeBuilding nameOperational messaging (open hours etc.)UNSW logo	<ul style="list-style-type: none">Freestanding at intersection of pathway leading into main entry when entrance is not immediately visible.
<div>ID.07</div> <div></div>	External: Building Entrance Wall Mounted	<ul style="list-style-type: none">Identifies entry point or site boundaries of major buildings	<ul style="list-style-type: none">Map codeBuilding nameOperational messaging (open hours etc.)UNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to buildingSolid Wall Mount
<div>ID.08</div> <div></div>	External: Facility Entrance Wall Mounted	<ul style="list-style-type: none">Identifies entry point or site boundaries of internal departments or facilities.	<ul style="list-style-type: none">Map codeFacility nameUNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to departments or facilitiesSolid Wall Mount
<div>ID.09</div> <div></div>	External: Digital Directory Totem	<ul style="list-style-type: none">Directs to main building destinations through the use of a digital map	<ul style="list-style-type: none">Information pictogramDigital screenUNSW logo	<ul style="list-style-type: none">Freestanding at decision points on major external circulation paths, particularly near primary site entry points
<div>ID.10</div> <div></div>	External: Sponsor Plate	<ul style="list-style-type: none">Displays key sponsors of main building	<ul style="list-style-type: none">Building nameKey sponsors	<ul style="list-style-type: none">Located within building thresholds or adjacent to entry points.




Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ID.11</div> <div></div>	Internal: Tenant Directory (Small)	<ul style="list-style-type: none">Identifies main tenants within building	<ul style="list-style-type: none">Sign nameTenant names (Maximum 5)UNSW logo	<ul style="list-style-type: none">On solid wall at corridor or entry to tenant zone within building
<div>ID.12</div> <div></div>	Internal: Tenant Directory (Large)	<ul style="list-style-type: none">Identifies main tenants within building	<ul style="list-style-type: none">Sign nameTenant names (Maximum 12)UNSW logo	<ul style="list-style-type: none">On solid wall at corridor or entry to tenant zone within building
<div>ID.13</div> <div></div>	Internal: Secondary Tenant	<ul style="list-style-type: none">Identifies main tenant within building, along with opening times and operational information	<ul style="list-style-type: none">Room NumberTenant nameOperational messagingUNSW logo	<ul style="list-style-type: none">Left or right of solid door at main and secondary entries to buildingSolid Wall Mount
<div>ID.14</div> <div></div>	Internal: Reception ID	<ul style="list-style-type: none">Identifies reception desk	<ul style="list-style-type: none">Reception name	<ul style="list-style-type: none">Frestanding on table top of reception desk
<div>ID.15</div> <div></div>	Internal: Lift Directory (Digital)	<ul style="list-style-type: none">Directs to main level destinationsIdentifies on floor plan facilities/circulation devices and room numbers for all FOH destinations on that level	<ul style="list-style-type: none">Information pictogramDigital screen	<ul style="list-style-type: none">Applied to solid walls in lift lobby


Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ID.16</div> <div></div>	Internal: Lift Directory (Static)	<ul style="list-style-type: none">• Directs to main level destinations internally	<ul style="list-style-type: none">• Level number• Tenant names• Room numbers• Amenities• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls in lift lobby
<div>ID.17</div> <div></div>	Internal: Stair Level ID	<ul style="list-style-type: none">• Identifies building level at stair landings	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to solid walls adjacent to stair landing when sufficient space is available
<div>ID.18</div> <div></div>	Internal: Lift Level ID	<ul style="list-style-type: none">• Identifies building level at lift entry points	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to solid walls between or directly opposite lifts.
<div>ID.19</div> <div></div>	Internal: Escalator Level ID	<ul style="list-style-type: none">• Identifies building level at escalator landings	<ul style="list-style-type: none">• Level number	<ul style="list-style-type: none">• Applied to glazing of escalator landing
<div>ID.20</div> <div></div>	Room ID Family	<ul style="list-style-type: none">• Identifies room number and name• May also identify:<ul style="list-style-type: none">– Statutory messaging– Assigned time table– Personnel contact details	<ul style="list-style-type: none">• Room number and name• Time table• Statutory/hazard pictograms• Personnel contact list• Braille	<ul style="list-style-type: none">• Applied to outside face of solid doors or walls adjacent to door entries

Sign Type Summary: Identification

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div><div>ID.21</div><div></div></div>	Amenity Blade Family	<ul style="list-style-type: none">Identifies entry point for typical amenities	<ul style="list-style-type: none">Amenity pictogram	<ul style="list-style-type: none">Cantilevered from solid walls in path of travel at confirmation or decision points leading to amenity entry point
<div><div>ID.22</div><div></div></div>	External: Gate ID Wall Mounted	<ul style="list-style-type: none">Identifies entries into the UNSW site for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)Gate numberParking pictogram (if required)Street nameOperational messaging (if required)	<ul style="list-style-type: none">Primary gate entries at perimeter of site where a totem is unable to be placed
<div><div>ID.23</div><div></div></div>	External: Campus ID Facade Mounted	<ul style="list-style-type: none">Identifies campus site boundaries for primary or secondary campuses.	<ul style="list-style-type: none">UNSW logoCampus name (if required)	<ul style="list-style-type: none">Mounted on site boundary walls

Sign Type Summary: Directional

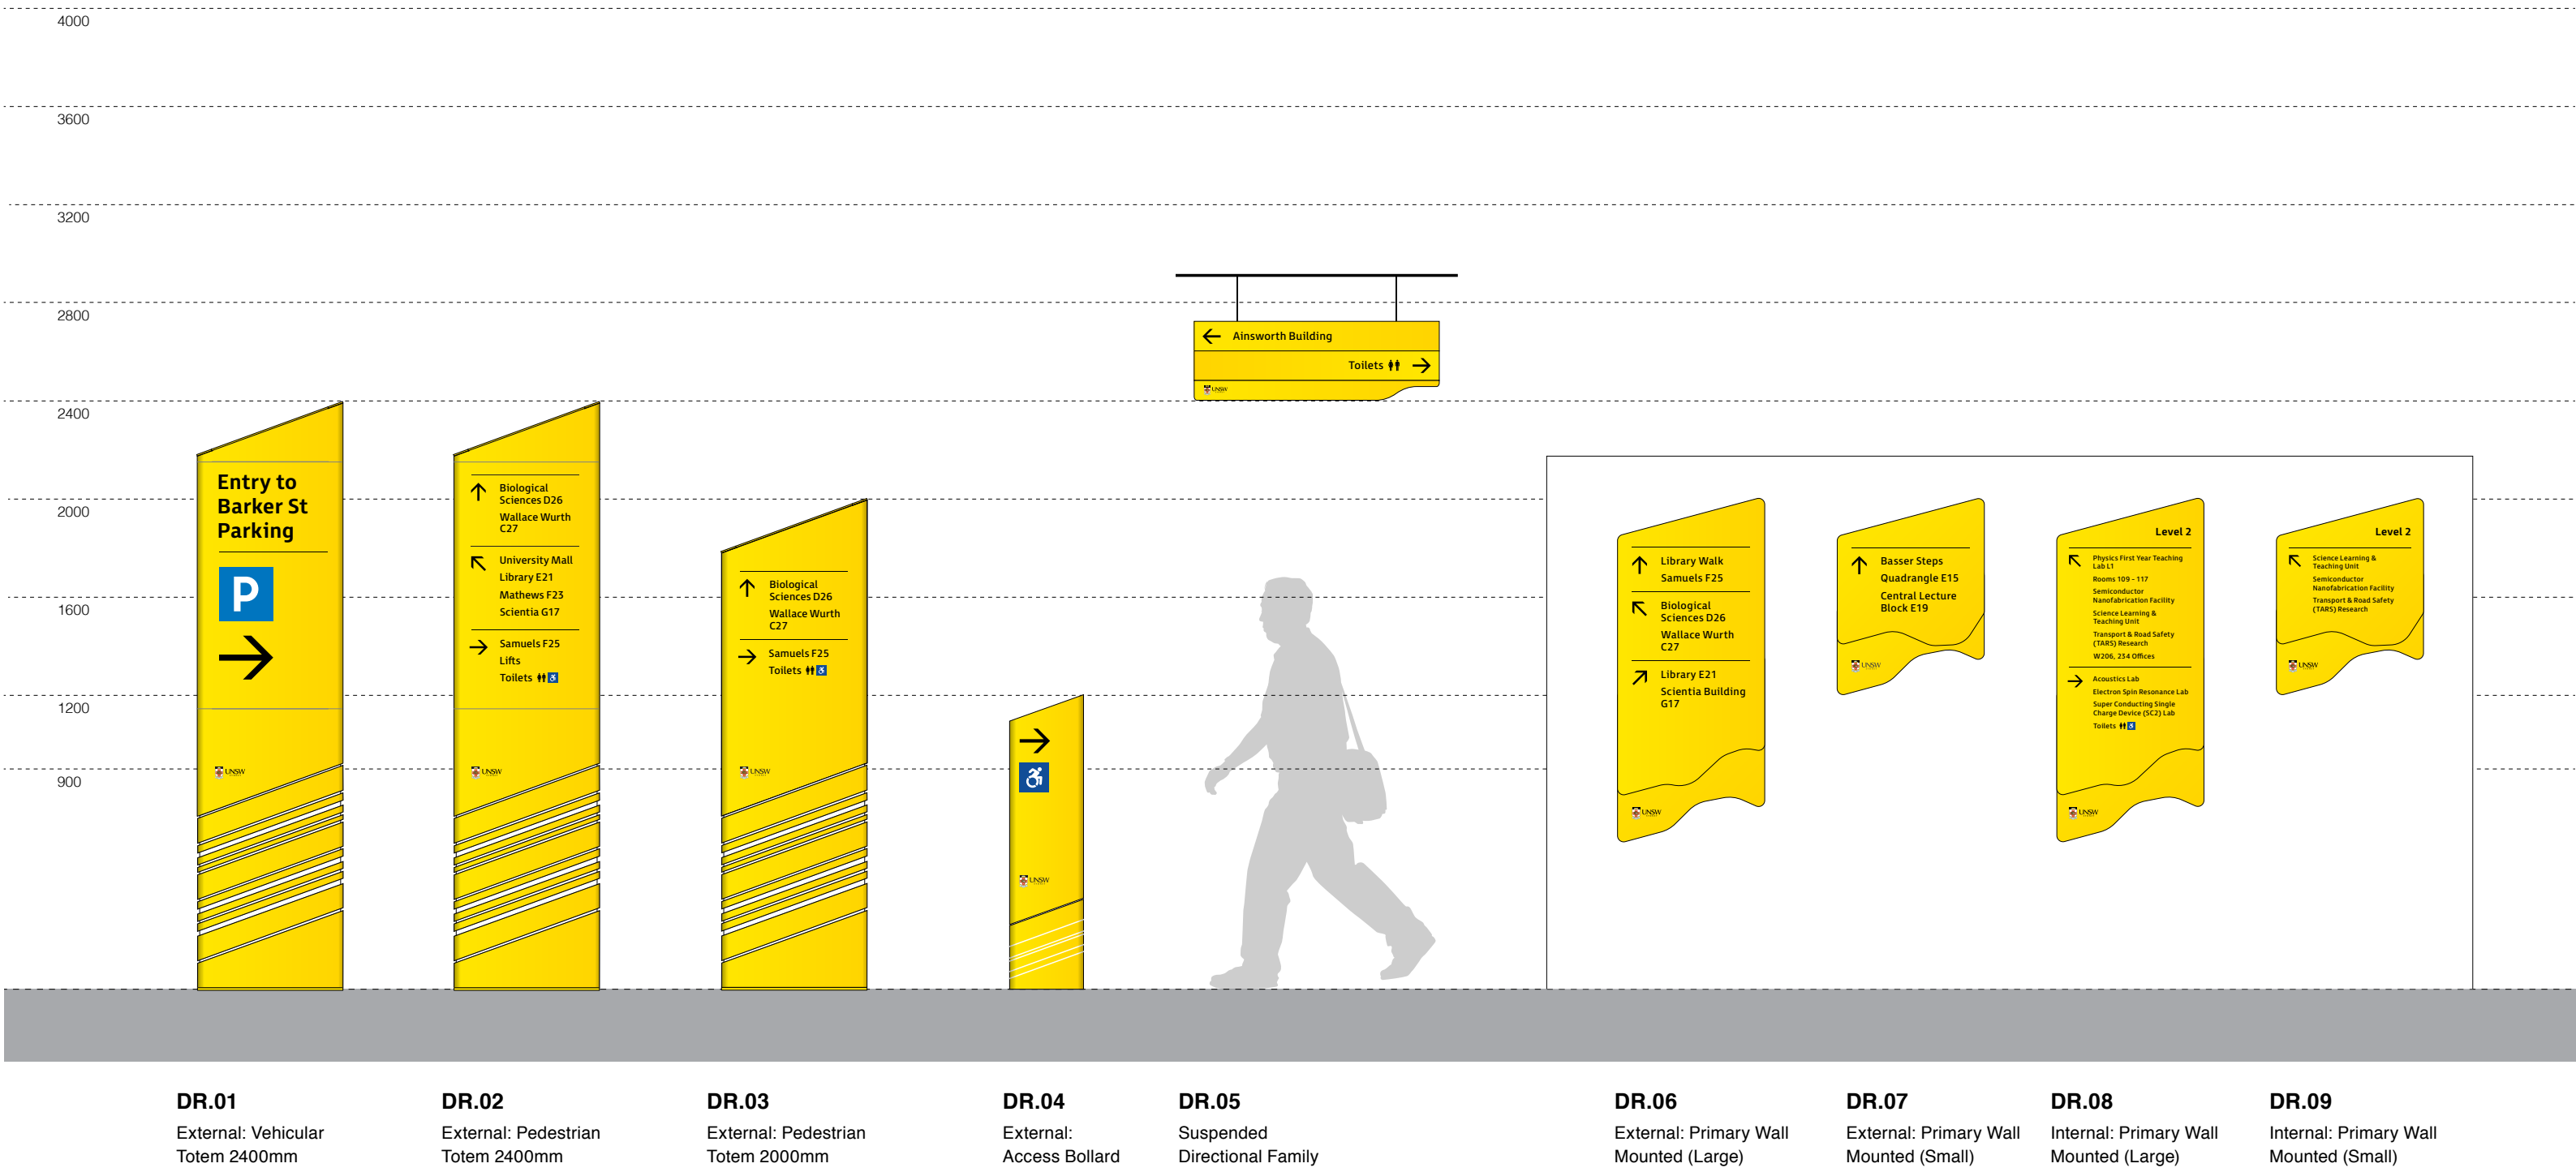

Sign Type Summary: Directional








DR.10
Secondary
Wall Mounted
(Landscape)






DR.11
Secondary
Wall Mounted
(Portrait)

DR.12
Secondary
Wall Mounted
(Flag)



Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.01</div> <div></div>	External: Vehicular Totem 2400mm	<ul style="list-style-type: none">• Directs vehicular traffic to major site destinations, particularly parking stations	<ul style="list-style-type: none">• Messaging• Parking Pictogram• Arrow• UNSW logo	<ul style="list-style-type: none">• Located at decision points on major external vehicular circulation paths
<div>DR.02</div> <div></div>	External: Pedestrian Totem 2400mm	<ul style="list-style-type: none">• Directs pedestrian traffic to major site destinations	<ul style="list-style-type: none">• Arrows• Destination names (10 max.)• Pictograms• UNSW logo• Double-sided	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths
<div>DR.03</div> <div></div>	External: Pedestrian Totem 2000mm	<ul style="list-style-type: none">• Directs pedestrian traffic to major site destinations	<ul style="list-style-type: none">• Arrows• Destination names (5 max.)• Pictograms• UNSW logo• Double-sided	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths
<div>DR.04</div> <div></div>	External: Access Bollard	<ul style="list-style-type: none">• Directs pedestrians to accessibility routes	<ul style="list-style-type: none">• Arrow• Accessibility pictogram• UNSW logo• Double-sided	<ul style="list-style-type: none">• Located at decision points on major external pedestrian circulation paths indicating accessible travel paths and circulation
<div>DR.05</div> <div></div>	Suspended Directional Family	<ul style="list-style-type: none">• Directs to main destinations at an external and internal level	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms• UNSW logo• Double-sided	<ul style="list-style-type: none">• Suspended along circulation corridors at confirmation and decision points. Message content to be applied to both sides, with directions to various destinations as required by the circulation pattern.


Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.06</div> <div></div>	External: Primary Directional Wall Mounted (Large)	<ul style="list-style-type: none">• Directs pedestrians to main destinations from an external area via multiple directions	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.07</div> <div></div>	External: Primary Directional Wall Mounted (Small)	<ul style="list-style-type: none">• Directs pedestrians to main destinations at an external level via a single direction	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.08</div> <div></div>	Internal: Primary Directional Wall Mounted (Large)	<ul style="list-style-type: none">• Directs to main destinations at an internal level via multiple directions	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.09</div> <div></div>	Internal: Primary Directional Wall Mounted (Small)	<ul style="list-style-type: none">• Directs to main destinations at an internal level via a single direction	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms• UNSW logo	<ul style="list-style-type: none">• Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.
<div>DR.10</div> <div></div>	Secondary Wall Mounted (Landscape)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms	<ul style="list-style-type: none">• Applied to solid walls along circulation route when confirmation is required due to length/complexity of route


Sign Type Summary: Directional

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>DR.11</div> <div></div>	Secondary Wall Mounted (Portrait)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Arrows• Destination names• Pictograms	<ul style="list-style-type: none">• Applied to solid walls or columns along circulation route when confirmation is required due to length/complexity of route
<div>DR.12</div> <div></div>	Secondary Wall Mounted (Flag)	<ul style="list-style-type: none">• Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope	<ul style="list-style-type: none">• Destination names• Pictograms	<ul style="list-style-type: none">• Mounted on solid walls or columns along circulation route when confirmation is required due to length/complexity of route


Sign Type Summary: Car Park

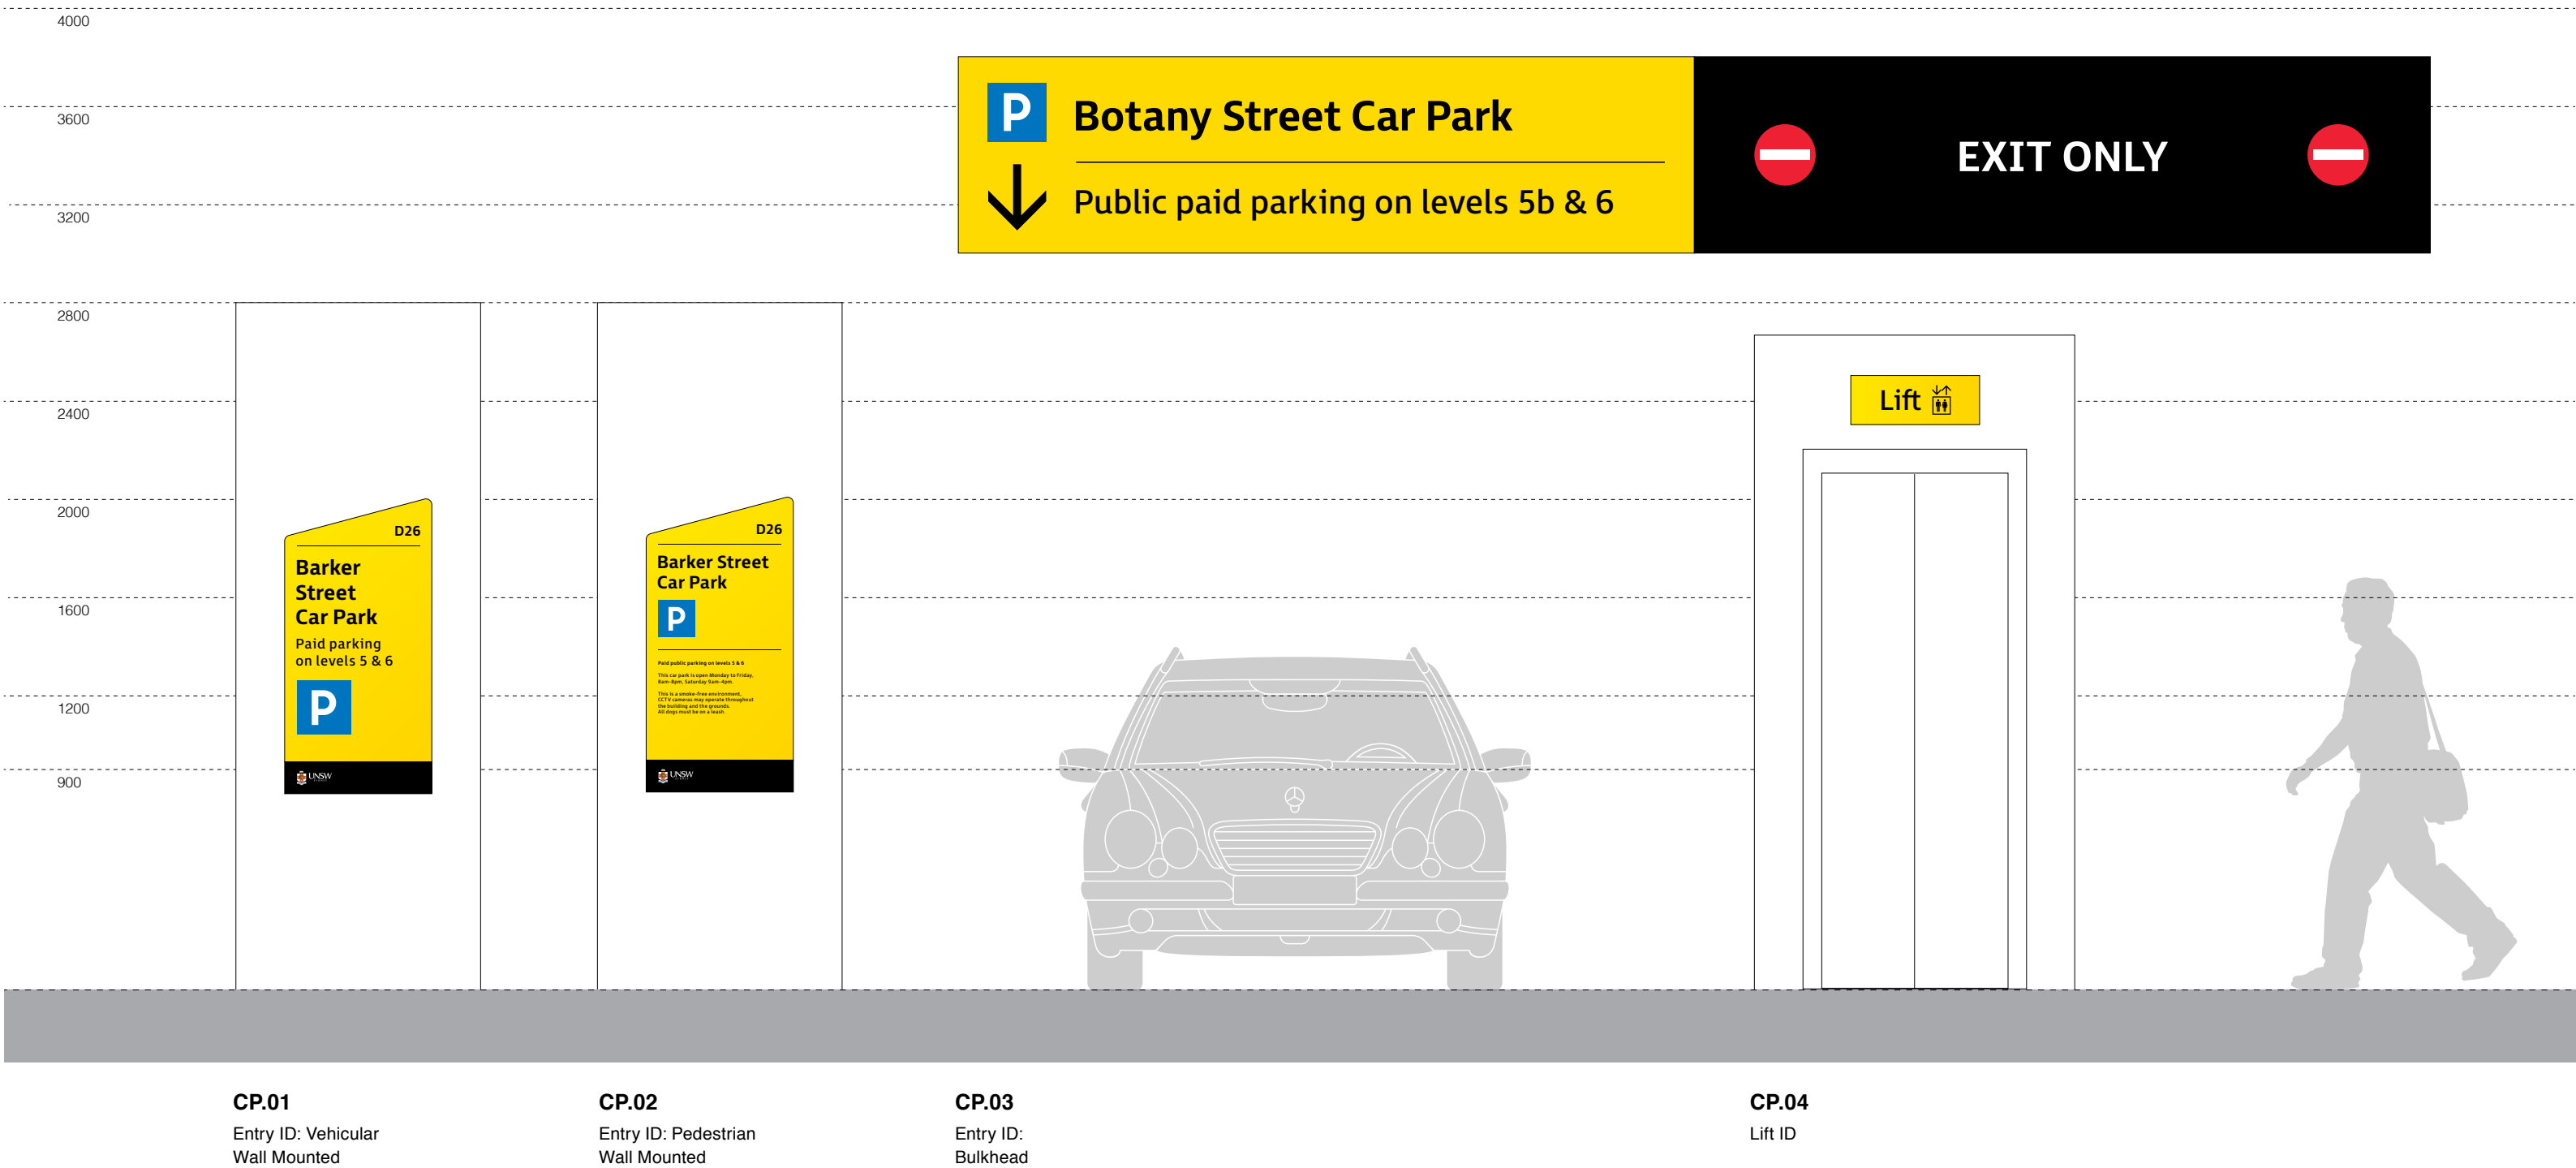

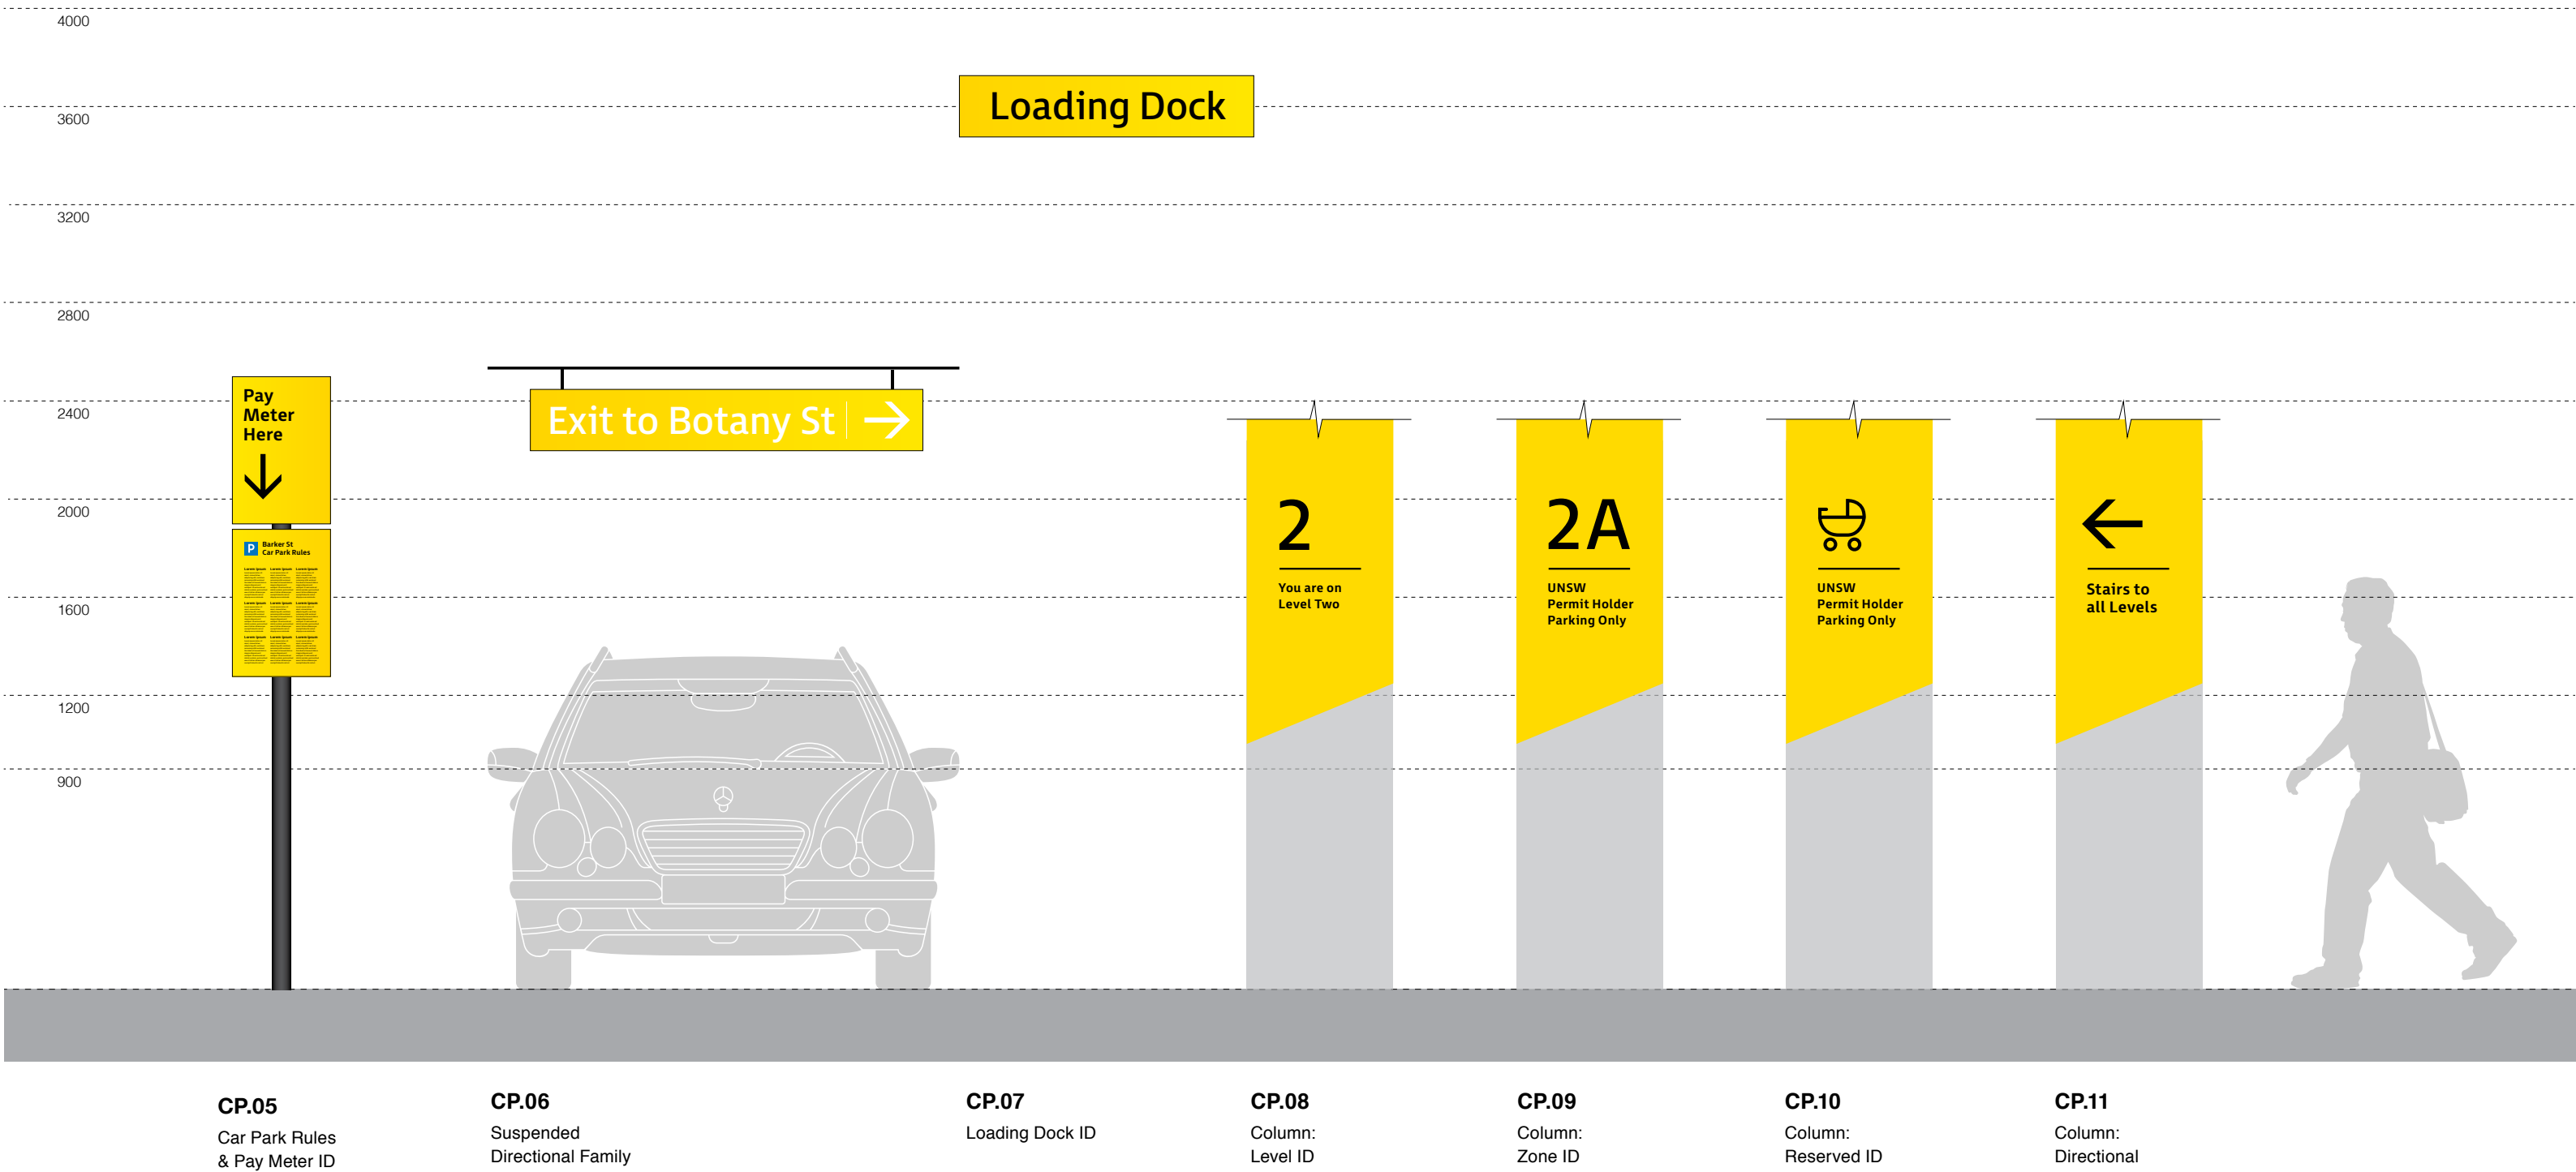




Sign Type Summary: Car Park

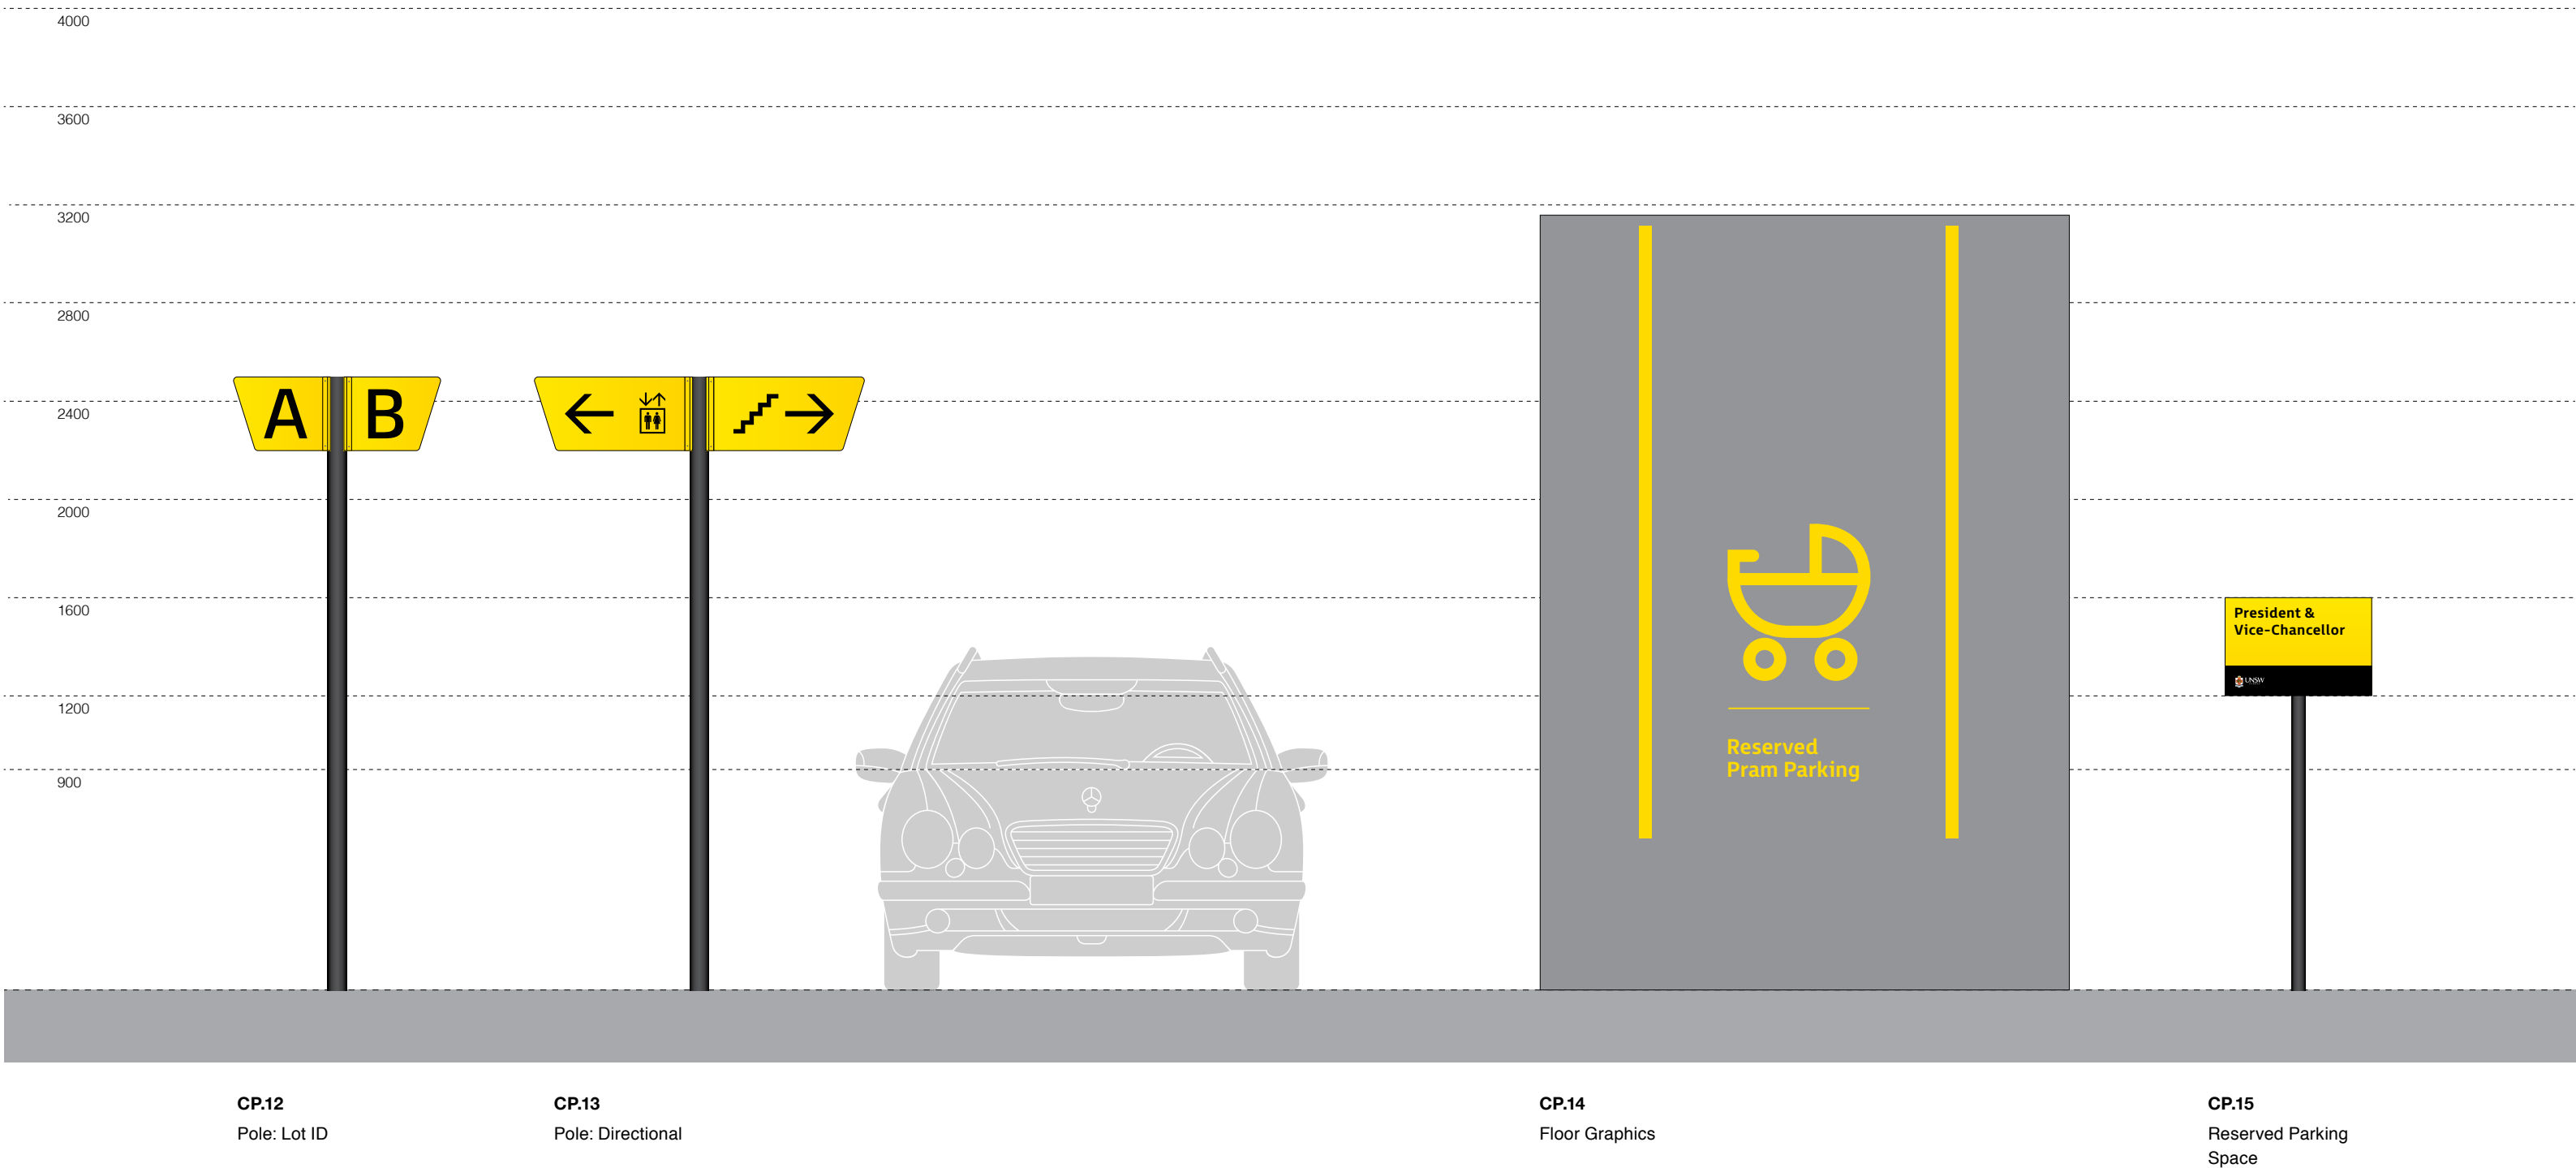






Sign Type Summary: Car Park








Sign Type Summary: Car Park

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.01</div> <div></div>	Entry ID: Vehicular Wall Mounted	<ul style="list-style-type: none">• Confirms car park entry point for vehicular traffic from a viewing distance of at least 20m	<ul style="list-style-type: none">• Car park name• Parking pictogram• Messaging• UNSW logo	<ul style="list-style-type: none">• Located at vehicular entry points at car parks
<div>CP.02</div> <div></div>	Entry ID: Pedestrian	<ul style="list-style-type: none">• Confirms car park entry point for pedestrian traffic	<ul style="list-style-type: none">• Car park name• Parking pictogram• Messaging• UNSW logo	<ul style="list-style-type: none">• Located at pedestrian entry points at car parks
<div>CP.03</div> <div></div>	Entry ID: Bulk Head	<ul style="list-style-type: none">• Confirms car park entry point for vehicular traffic from a viewing distance of at least 160m	<ul style="list-style-type: none">• Destination names• Pictograms• Double-sided• UNSW logo	<ul style="list-style-type: none">• Mounted at bulk head of major car park entries
<div>CP.04</div> <div></div>	Lift ID	<ul style="list-style-type: none">• Identifies lifts for pedestrian traffic within car parks	<ul style="list-style-type: none">• Lift identification	<ul style="list-style-type: none">• Mounted above lift entries
<div>CP.05</div> <div></div>	Car Park Rules & Pay Meter	<ul style="list-style-type: none">• Identifies pay meter and rules of parking space	<ul style="list-style-type: none">• Pay meter identification• Car park rules	<ul style="list-style-type: none">• Mounted above pay meter

Sign Type Summary: Car Park


Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.06</div> <div></div>	Suspended Directional Family	<ul style="list-style-type: none">• Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level	<ul style="list-style-type: none">• Arrow• Messaging	<ul style="list-style-type: none">• Suspended at major vehicular decision points
<div>CP.07</div> <div></div>	Loading Dock ID	<ul style="list-style-type: none">• Identifies Loading Dock area for vehicular traffic	<ul style="list-style-type: none">• Loading Dock ID	<ul style="list-style-type: none">• Applied above loading dock entry at bulk head
<div>CP.08</div> <div></div>	Column: Level ID	<ul style="list-style-type: none">• Identifies car park level for vehicular and pedestrian traffic	<ul style="list-style-type: none">• Car park level number and name	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths
<div>CP.09</div> <div></div>	Column: Zone ID	<ul style="list-style-type: none">• Identifies parking zone ID for vehicular and pedestrian traffic	<ul style="list-style-type: none">• Zone code• Zone name	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths
<div>CP.10</div> <div></div>	Column: Reserved ID	<ul style="list-style-type: none">• Identifies reserved parking zone for vehicular and pedestrian traffic, specific to accessibility and parent parking	<ul style="list-style-type: none">• Pram / Accessibility Pictogram• Message	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths

Sign Type Summary: Car Park


Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>CP.11</div> <div></div>	Column: Directional	<ul style="list-style-type: none">• Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level	<ul style="list-style-type: none">• Arrow• Destination name	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths
<div>CP.12</div> <div></div>	Pole: Lot ID	<ul style="list-style-type: none">• Identifies parking zone ID's on rooftop levels that do not have car park columns	<ul style="list-style-type: none">• Zone code	<ul style="list-style-type: none">• Located at allocated confirmation points
<div>CP.13</div> <div></div>	Pole: Directional	<ul style="list-style-type: none">• Directs pedestrian traffic at rooftop levels	<ul style="list-style-type: none">• Applied on surface of designated columns facing circulation paths	<ul style="list-style-type: none">• Located at major pedestrian decision points at rooftop level
<div>CP.14</div> <div></div>	Floor Graphics	<ul style="list-style-type: none">• Identifies parking zones for vehicular traffic	<ul style="list-style-type: none">• Pram/ Accessibility Pictogram• Message	<ul style="list-style-type: none">• Located at designated parking bays
<div>CP.15</div> <div></div>	Reserved Parking ID	<ul style="list-style-type: none">• Identifies exclusive parking zones within the campus for authorised use	<ul style="list-style-type: none">• Title of Authorised User	<ul style="list-style-type: none">• Located at designated parking bays

Sign Type Summary: Operational


4000
3600
3200
2800
2400
2000
1600
1200
900

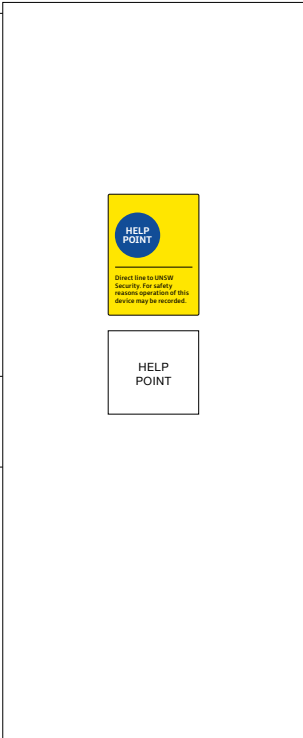


OP.01
Help Point ID Family

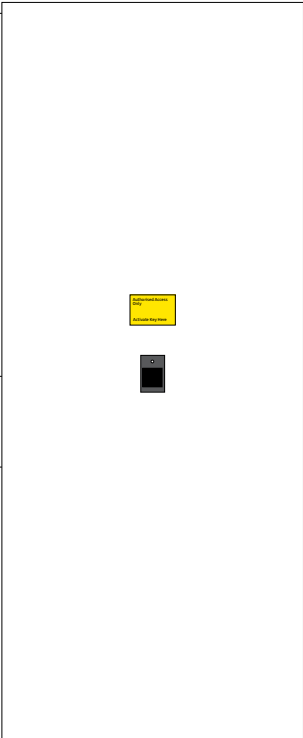


OP.02
General ID Family




OP.03
Utility ID Family

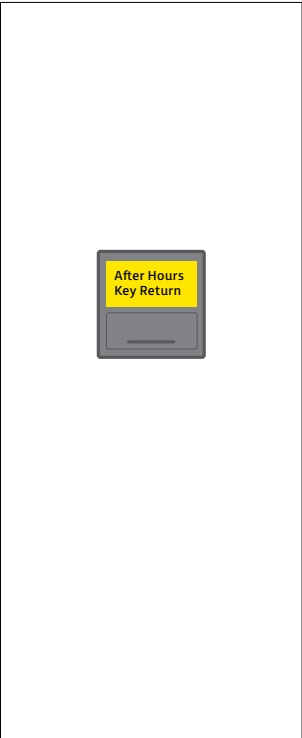

OP.04
Dropbox ID Family




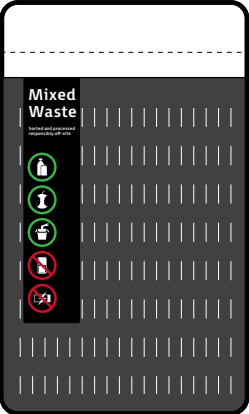



OP.05
Water Refill Station




OP.06
Waste Bin




Sign Type Summary: Operational

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>OP.01</div> <div></div>	Help Point ID Family	<ul style="list-style-type: none">Identifies help point locations	<ul style="list-style-type: none">Help Point pictogramTextDirectional arrow	<ul style="list-style-type: none">Located above designated Help Point intercoms
<div>OP.02</div> <div></div>	General ID Family	<ul style="list-style-type: none">Provide operational/ regulatory information	<ul style="list-style-type: none">TextRegulatory Information	<ul style="list-style-type: none">Applied on solid wall where appropriate
<div>OP.03</div> <div></div>	Utility ID Family	<ul style="list-style-type: none">Identifies staff/ students utilities at kitchenettes, stationery rooms and print areas	<ul style="list-style-type: none">PictogramsText	<ul style="list-style-type: none">Applied on solid wall, glazing, cupboard leaf or drawer front where appropriate
<div>OP.04</div> <div></div>	Dropbox ID Family	<ul style="list-style-type: none">Identifies student drop boxes	<ul style="list-style-type: none">Text	<ul style="list-style-type: none">Applied to drop box openings
<div>OP.05</div> <div></div>	Water Refill	<ul style="list-style-type: none">Identifies water refill station	<ul style="list-style-type: none">TextIllustration	<ul style="list-style-type: none">Integrated with water refill station





Sign Type Summary: Operational

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
OP.06	Waste Bin	<ul style="list-style-type: none">Identifies waste bin unit and what types of waste are suitable and unsuitable to be disposed of	<ul style="list-style-type: none">Waste BinTextPictograms	<ul style="list-style-type: none">Applied on front face of campus waste bins
				

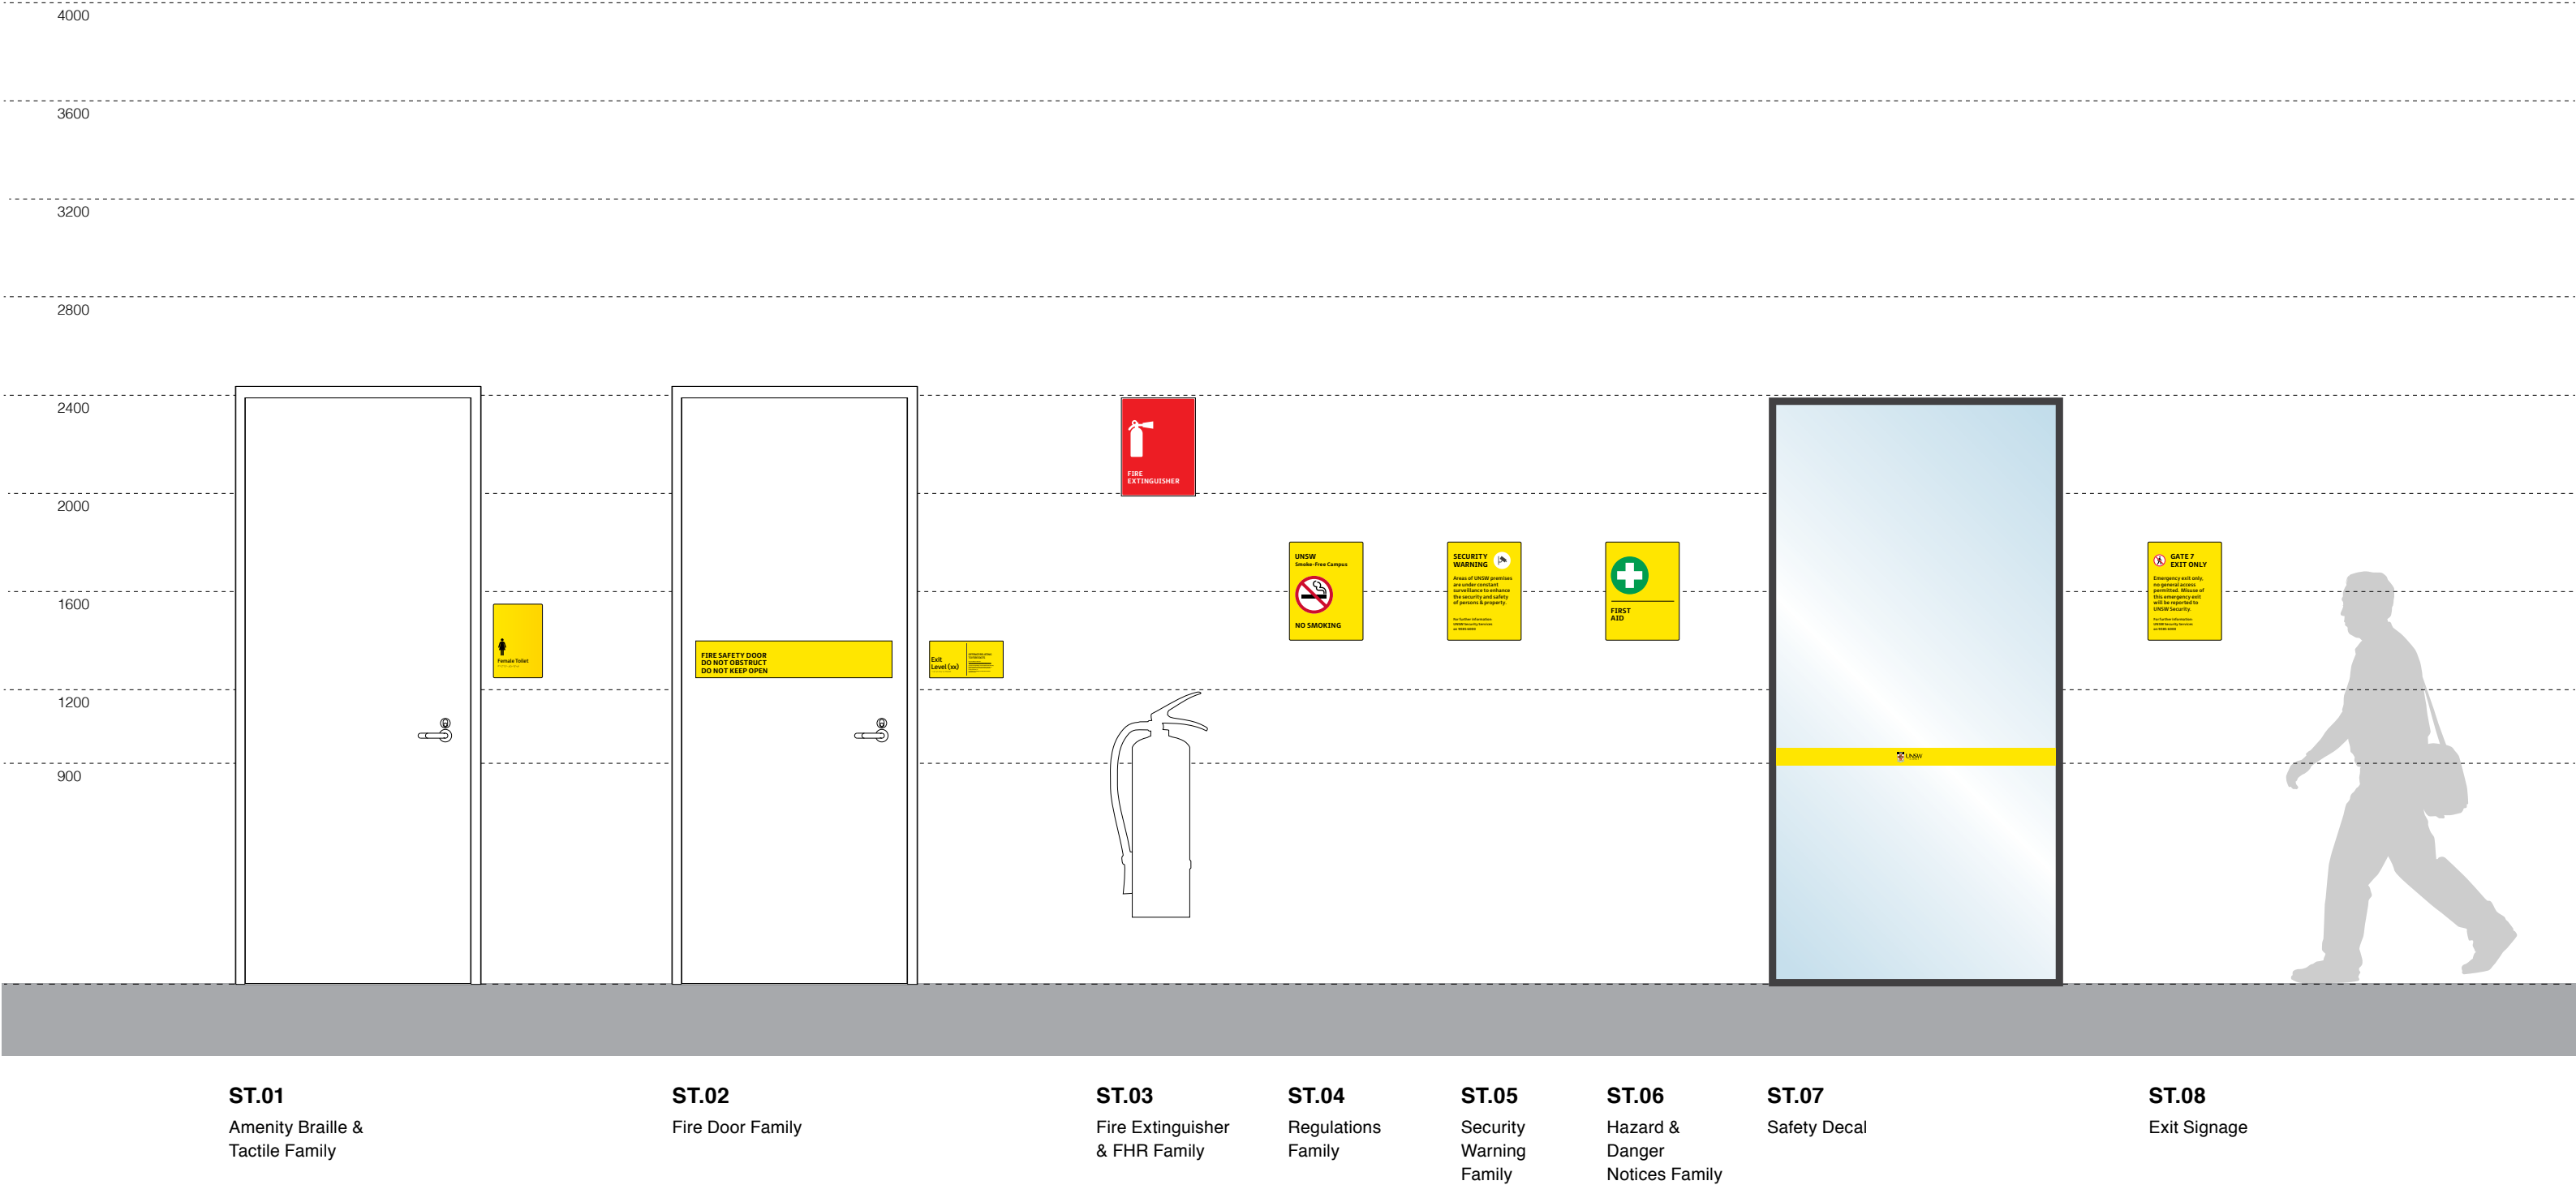



Sign Type Summary: Statutory



Sign Type Summary: Statutory


Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ST.01</div> <div></div>	Amenity Braille & Tactile Family	<ul style="list-style-type: none">To identify a toilet facilityProvide accessibility into amenities for vision impaired students/staff/visitors	<ul style="list-style-type: none">PictogramTextBraille	<ul style="list-style-type: none">Applied to solid walls as per statutory requirements
<div>ST.02</div> <div></div>	Fire Door Family	<ul style="list-style-type: none">To identify room function and or room occupants for BOH destinations and to meet statutory regulations.	<ul style="list-style-type: none">Text	<ul style="list-style-type: none">For room identification/ operational signs to be applied to front of solid doors, on latch-side and/or both doors as required.For Exit operational instructions (Offences Relating to Fire Exits) to be located as required by Clause 183 of NSW Environmental Planning & Assessment Regulation 2000. To be installed in a conspicuous position adjacent to a door way providing access to (but not within) a fire isolated stairway, passageway or ramp. Underside of panel to align with underside of adjacent room identification panel, set out as indicated adjacent.
<div>ST.03</div> <div></div>	Fire Extinguisher & FHR Family	<ul style="list-style-type: none">To identify key fire equipment, facilities and to meet statutory regulations.	<ul style="list-style-type: none">TextPictogram	<ul style="list-style-type: none">Above or adjacent to a fire hose reel, extinguisher in a recess, cavity or an obscure location. Signs shall be positioned so as to be clearly visible to persons approaching the fire hose reel location.
<div>ST.04</div> <div></div>	Regulations Family	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information	<ul style="list-style-type: none">TextPictograms	<ul style="list-style-type: none">Applied to solid walls or glazing as per statutory requirements

Sign Type Summary: Statutory


Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>ST.05</div> <div></div>	Security Warning Family	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information specific to security	<ul style="list-style-type: none">TextPictogram	<ul style="list-style-type: none">Applied to solid walls or glazing where appropriate
<div>ST.06</div> <div></div>	Hazard and Danger Notices Family	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information for areas that contain hazardous substances or machinery that have immediate physical or chemical effects, such as fire, explosion, corrosion and poisoning, affecting property, the environment or people.	<ul style="list-style-type: none">TextPictogramsRegulation colour	<ul style="list-style-type: none">Applied to solid walls or glazing as per statutory requirements
<div>ST.07</div> <div></div>	Safety Decal	<ul style="list-style-type: none">Provide contrast for glazing as per statutory requirements	<ul style="list-style-type: none">UNSW logo	<ul style="list-style-type: none">On glazed areas walls and doors, as per statutory requirements
<div>ST.08</div> <div></div>	Exit Signage	<ul style="list-style-type: none">Identifies or provides statutory/ regulatory information specific to campus exi	<ul style="list-style-type: none">TextPictograms	<ul style="list-style-type: none">Applied to solid walls, glazing or mounted on gates where appropriate

Sign Type Summary: Temporary & Display

4000
3600
3200
2800
2400
2000
1600
1200
900

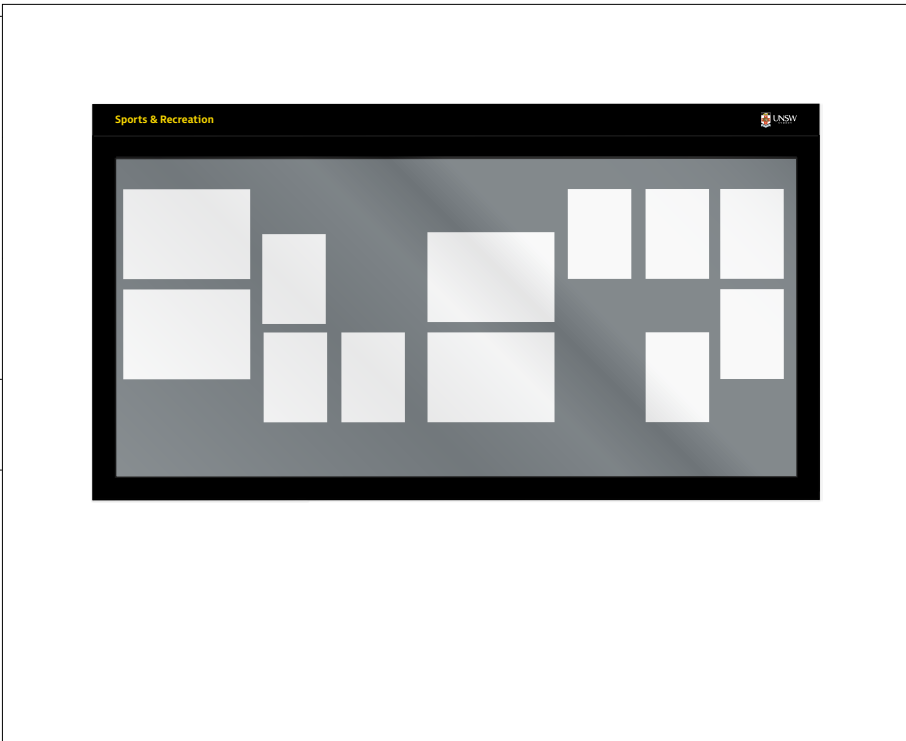

TD.01
Notice Boards:
External Large

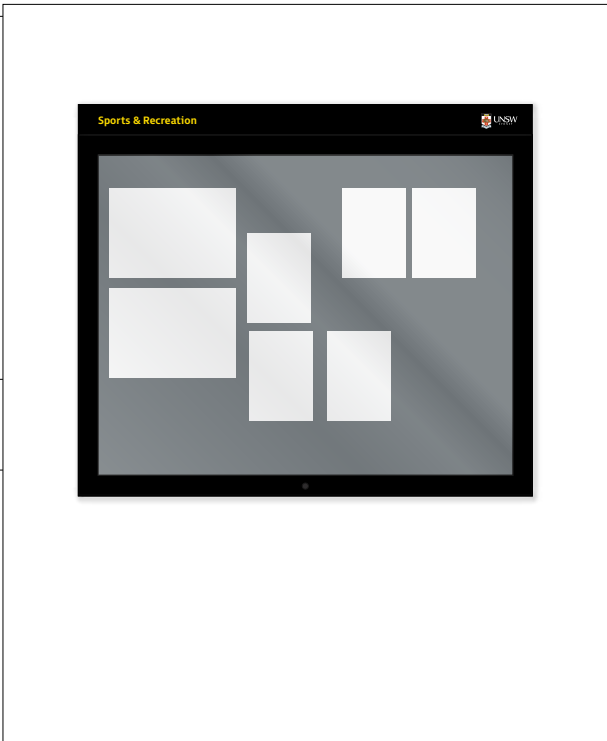


TD.02
Notice Boards:
External Small





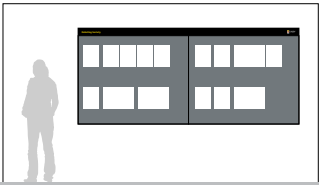


TD.03
Notice Boards:
Internal Large



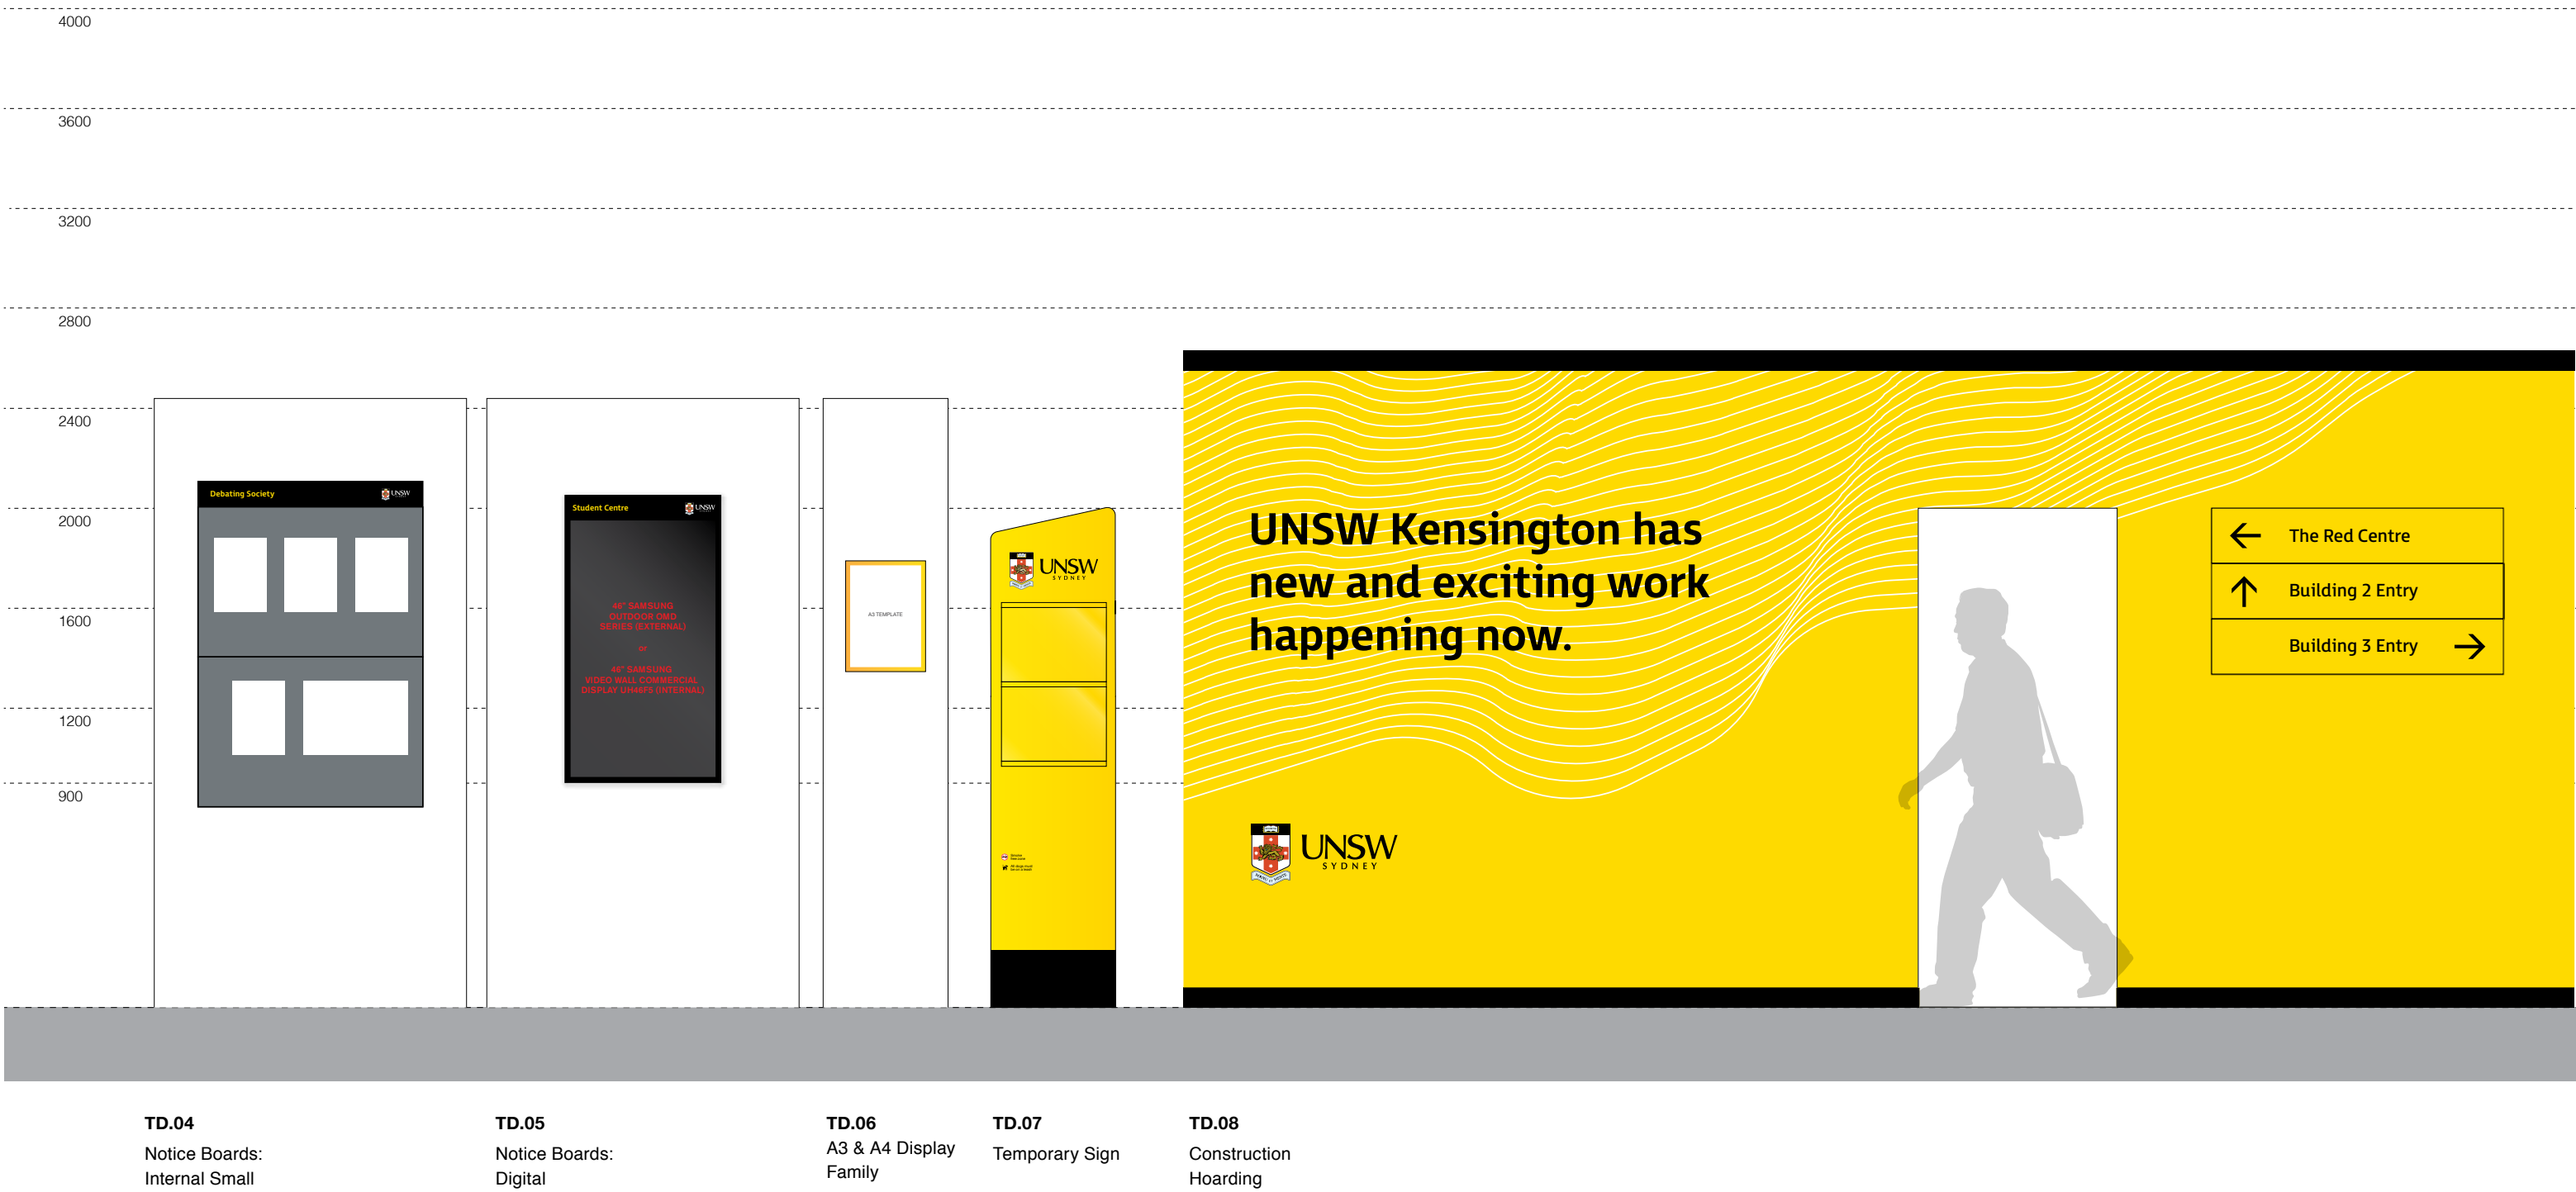


Sign Type Summary: Temporary & Display

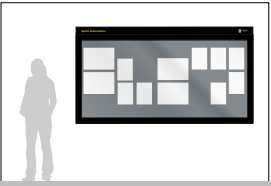


Sign Type Summary: Temporary & Display

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>TD.01</div> <div></div>	Notice Boards: External Large	<ul style="list-style-type: none">Provides system in an external environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.02</div> <div></div>	Notice Boards: External Small	<ul style="list-style-type: none">Provides system in an external environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.03</div> <div></div>	Notice Boards: Internal Large	<ul style="list-style-type: none">Provides system in an interior environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.04</div> <div></div>	Notice Boards: Internal Small	<ul style="list-style-type: none">Provides system in an interior environment to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoPin board for printed material	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed
<div>TD.05</div> <div></div>	Notice Boards: Digital	<ul style="list-style-type: none">Provides digital system to display information for students and visitors updated on a monthly basis	<ul style="list-style-type: none">Location IDUNSW logoDigital Screen	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as needed

Sign Type Summary: Temporary & Display

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>TD.06</div> <div></div>	A3 & A4 Display Family	<ul style="list-style-type: none">To display A3 and A4 print outs supplied by students and staff.	<ul style="list-style-type: none">A3 and A4 print outs supplied by students and staff	<ul style="list-style-type: none">Applied to solid wall outside teaching rooms and other places as required
<div>TD.07</div> <div></div>	Temporary Sign	<ul style="list-style-type: none">To display A3 prints out supplied by students or staff for special events	<ul style="list-style-type: none">A3 and A4 print outs supplied by students and staffUNSW logo	<ul style="list-style-type: none">Freestanding outside buildings with events
<div>TD.08</div> <div></div>	Construction Hoarding	<ul style="list-style-type: none">To display temporary directional messaging and visual content	<ul style="list-style-type: none">ArrowsDirectional messagingBuilding renders or photographyGraphic patternUNSW logo	<ul style="list-style-type: none">Applied to hoarding walls at major decision points



Sign Type Summary: Environmental Graphics

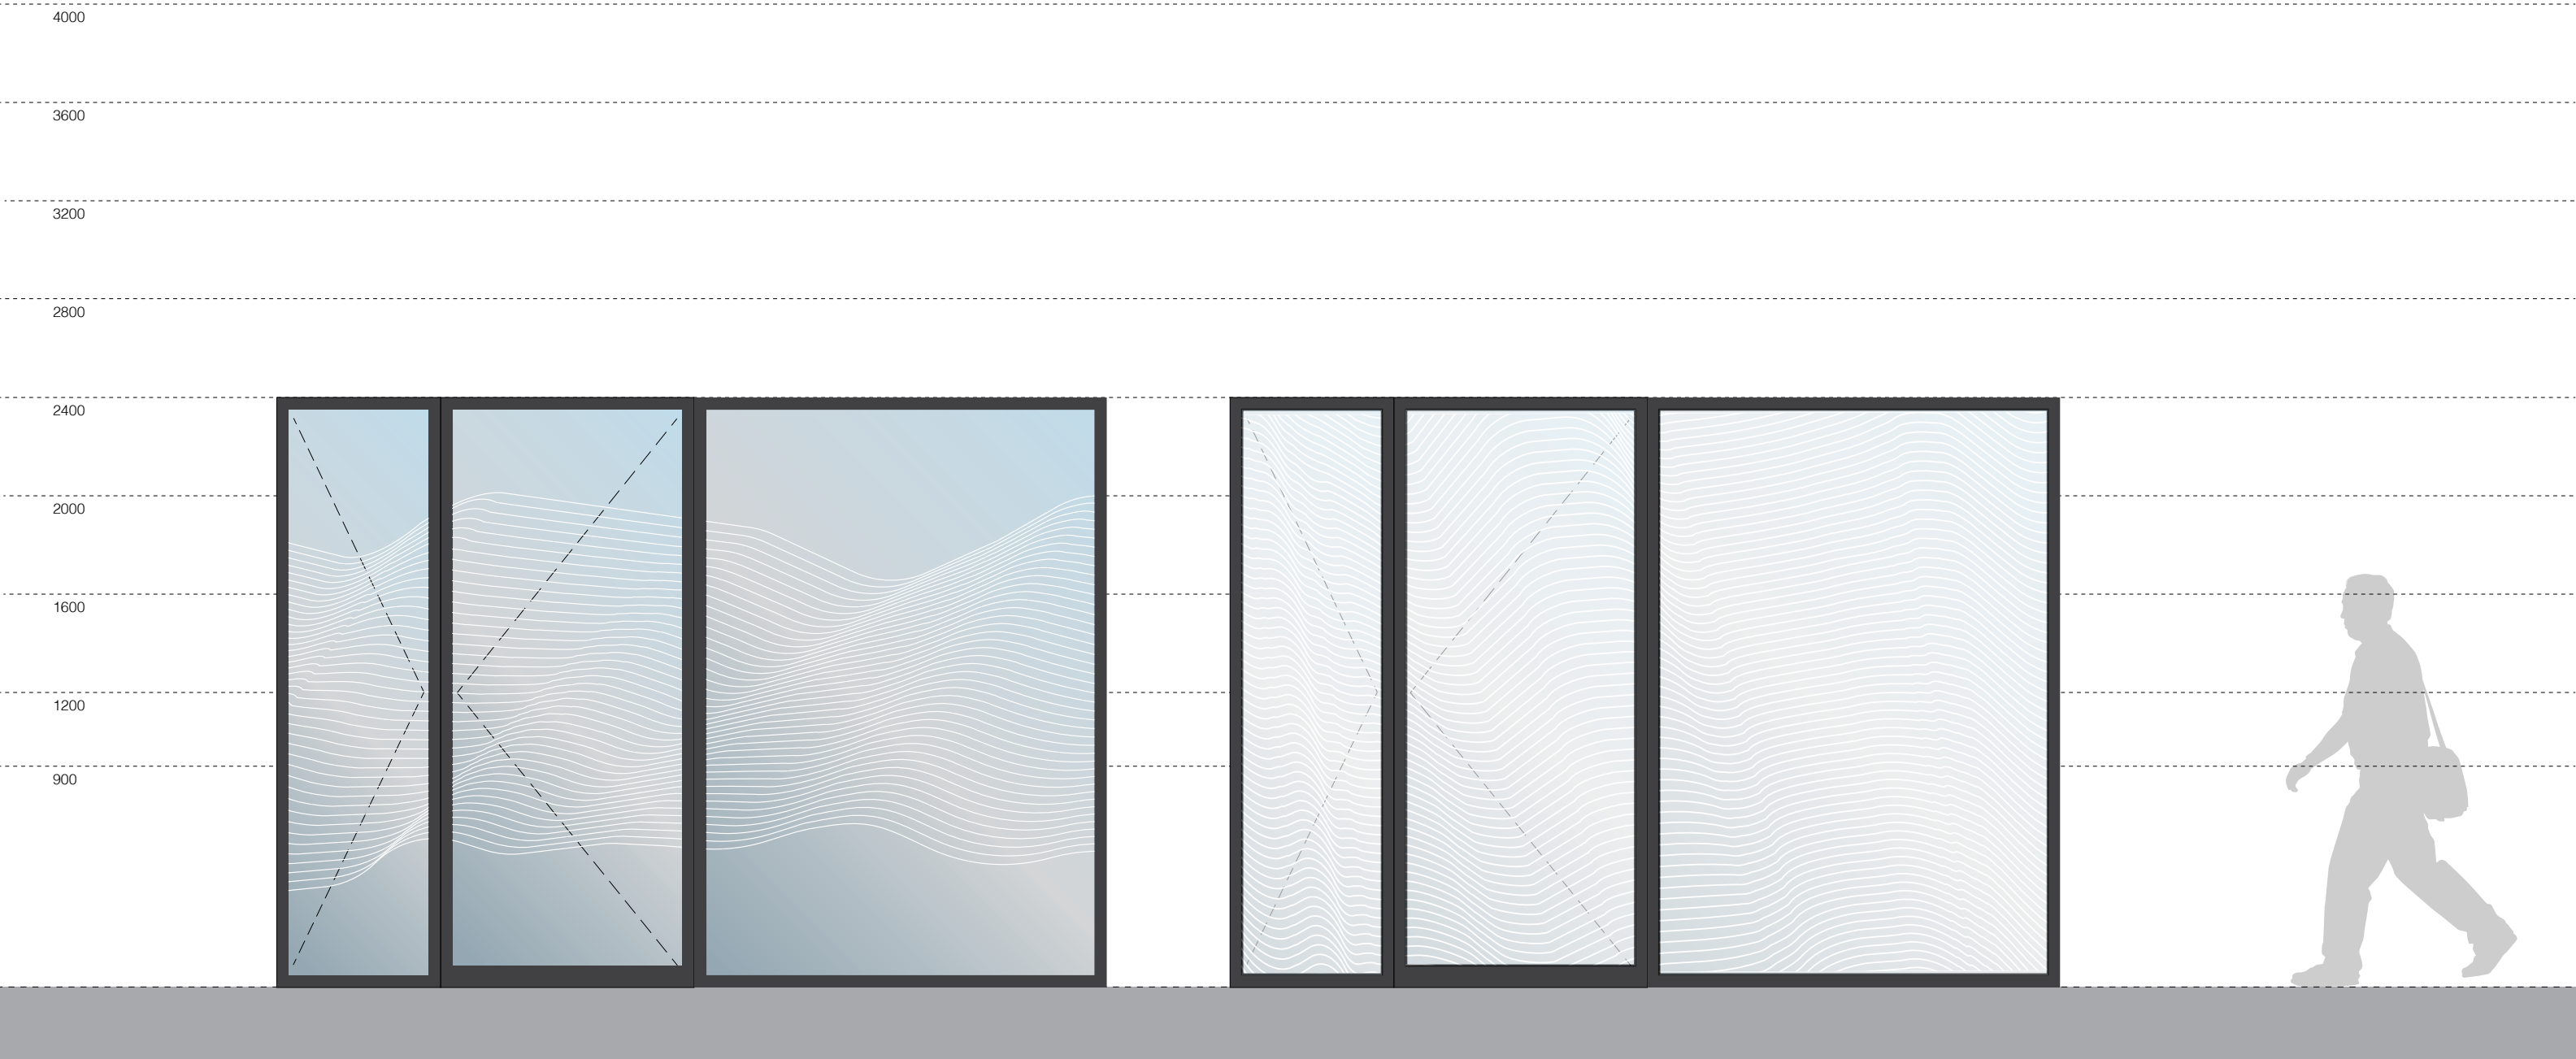

EG.01
Privacy Graphics:
Low Privacy

EG.02
Privacy Graphics:
High Privacy

Sign Type Summary: Environmental Graphics

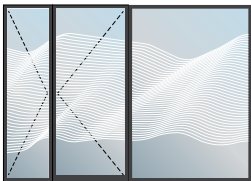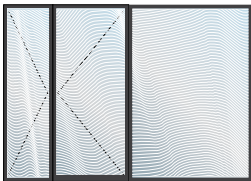Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
<div>EG.01</div> <div></div>	Privacy Graphics: Low Privacy	<ul style="list-style-type: none">Provides low visual privacy from outside pedestrian traffic	<ul style="list-style-type: none">Graphic pattern	<ul style="list-style-type: none">Applied to internal face of glazing
<div>EG.02</div> <div></div>	Privacy Graphics: High Privacy	<ul style="list-style-type: none">Provides high visual privacy from outside pedestrian traffic	<ul style="list-style-type: none">Graphic pattern	<ul style="list-style-type: none">Applied to internal face of glazing

Sign Type Summary: Placemaking



PL.01
Campus ID - Concept

Sign Type Summary: Placemaking

Sign Code	Sign Name	Sign Purpose	Indicative Sign Content	Sign Location
PL.01	Campus ID – Concept	<ul style="list-style-type: none">To identify the UNSW site at perimeter level and provide back drop for photography during graduation ceremonies.	<ul style="list-style-type: none">UNSW Logo	<ul style="list-style-type: none">UNSW logo allocated at spaces around the campus perimeter intended for placemaking activation and main entry identification and at buildings specific for graduation ceremonies.




Section

12.0

Identification Series

This section documents all the identification signs of the system including specifications for both external and internal signs.

ID.01 External: Gate Primary Vehicular Totem	190	ID.11 Internal: Tenant Directory (Small)	222	ID.21 Amenity Blade Family	247
ID.02 External: Gate Secondary Vehicular Totem Family	194	ID.12 Internal: Tenant Directory (Large)	224	ID.22 External: Gate ID Wall Mounted	250
ID.02 External: Gate Pedestrian Totem Family	198	ID.13 Internal: Secondary Tenant	226	ID.23 External: Campus ID Facade Mounted	254
ID.04 External: Building Facade Sign Family	203	ID.14 Internal: Reception ID	228		
ID.05 External: Street Sign	205	ID.15 Internal: Lift Directory (Digital)	230		
ID.06 External: Building Entrance Totem	209	ID.16 Internal: Lift Directory (Static)	232		
ID.07 External: Building Entrance Wall Mounted	213	ID.17 Internal: Stair Level ID	235		
ID.08 External: Facility Entrance Wall Mounted	216	ID.18 Internal: Lift Level ID	237		
ID.09 External: Digital Directory Totem	218	ID.19 Internal: Escalator Level ID	239		
ID.10 External: Sponsor Plate	220	ID.20 Room ID Family	242		

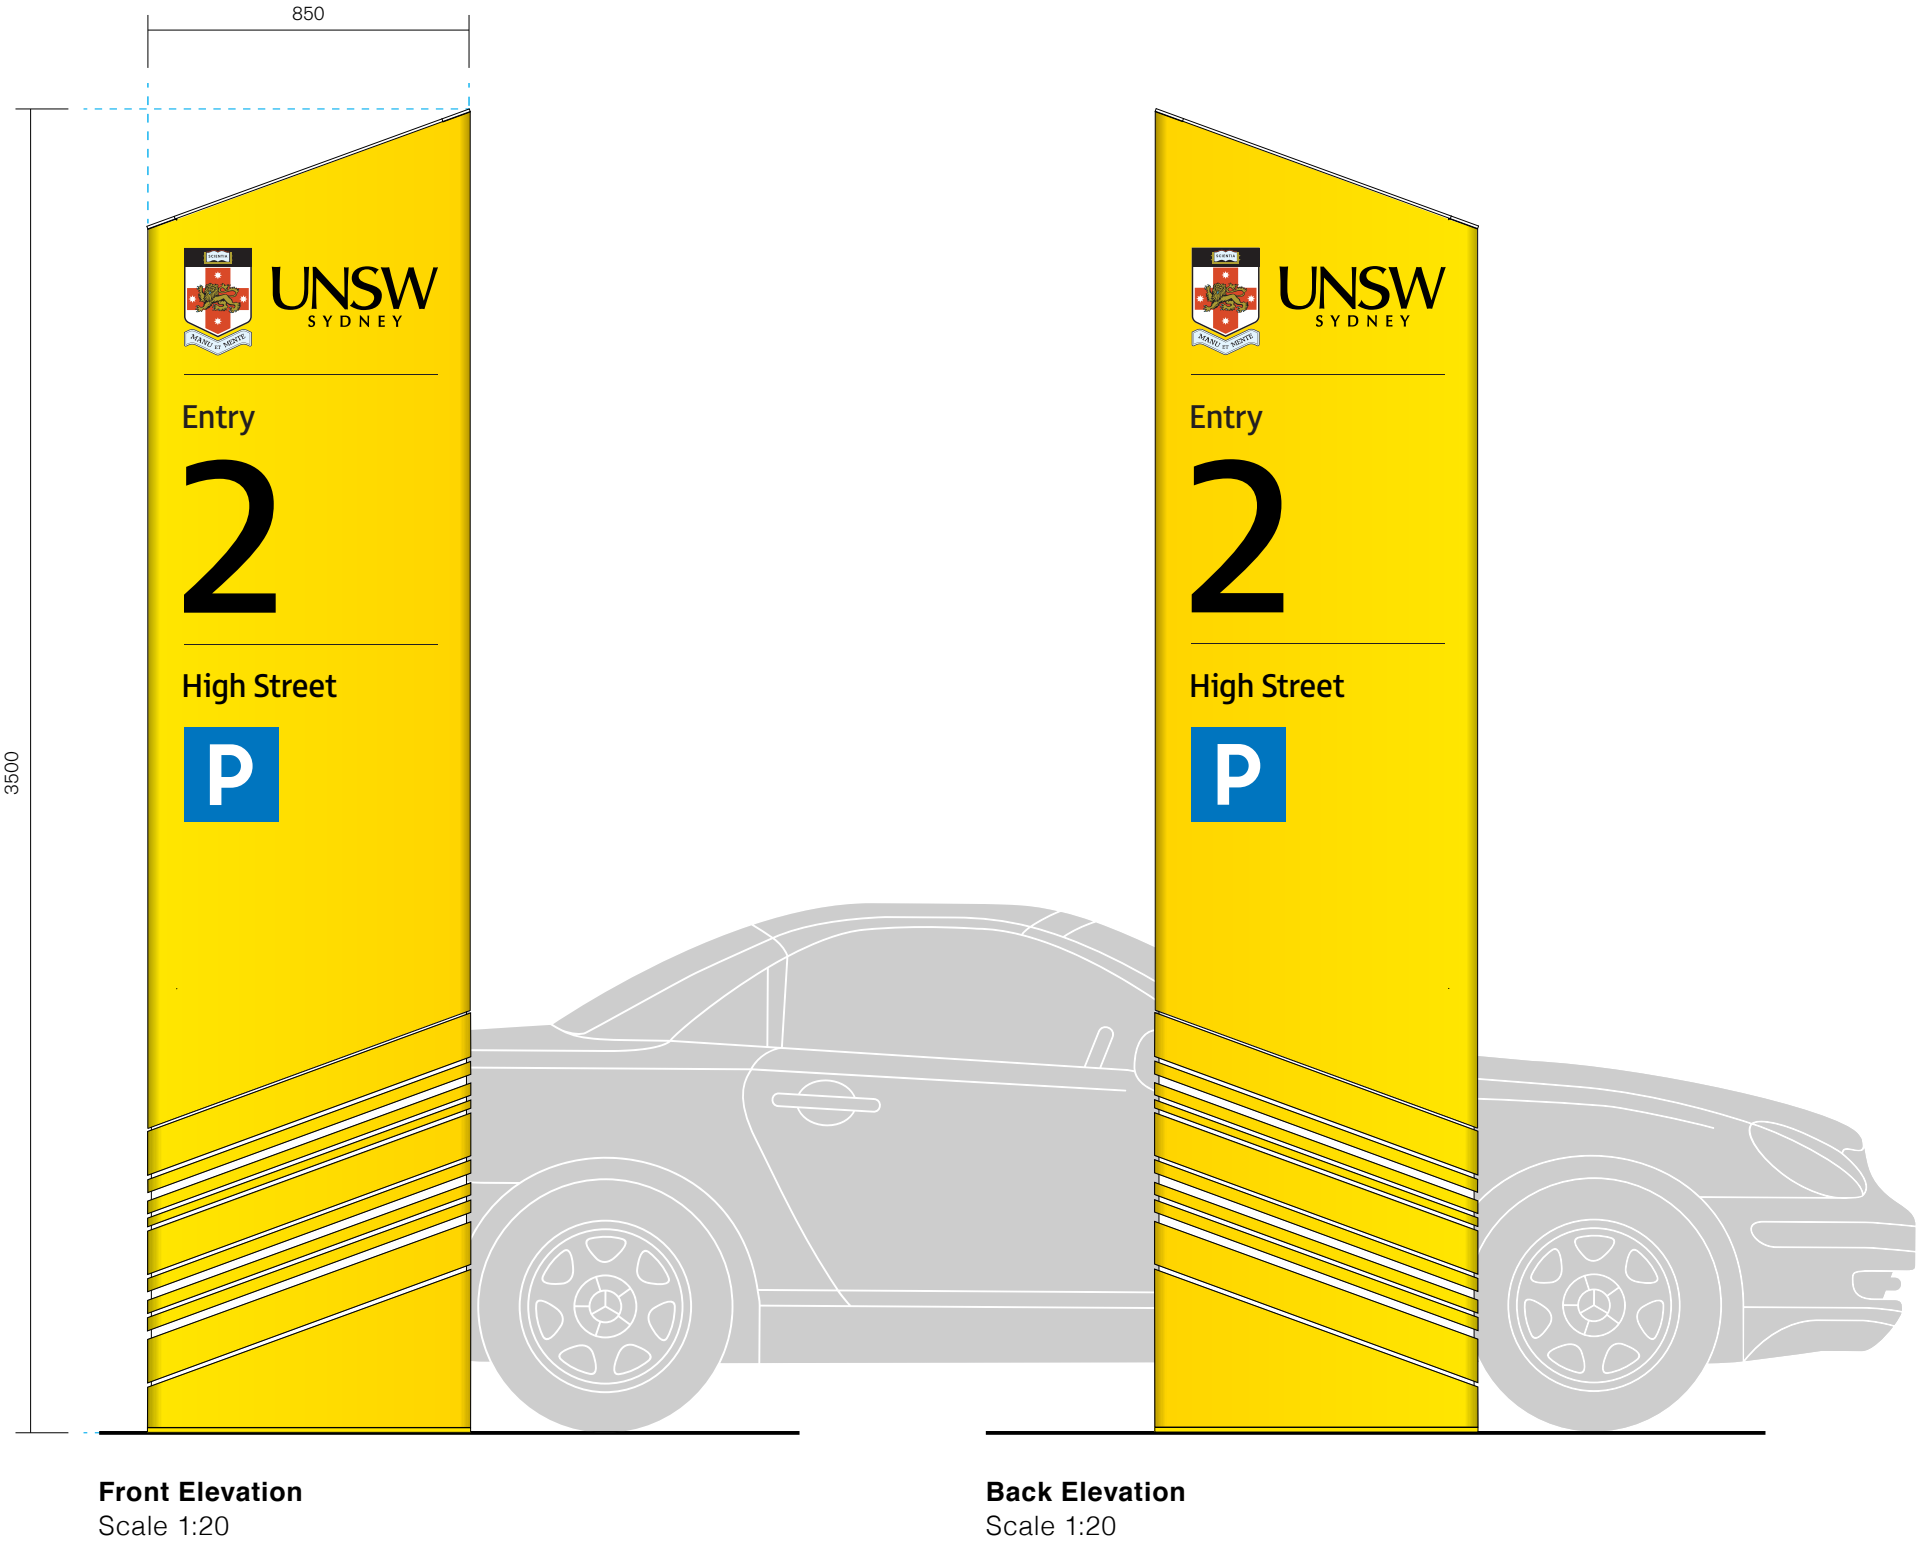

Sign Location

Purpose

Identifies major public vehicular entries into the UNSW site. Refer to Section 3, Addressing & Terminology, Category 2.

Location


Positioned at primary public gate entries at perimeter of site, integrated into landscaping or directly at curbs of vehicular intersection nodes. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for primary vehicular gate locations.

Illumination

Project Design Team to evaluate and test in-ground lighting to illuminate Gate Entry Number and sculptural base of totem.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

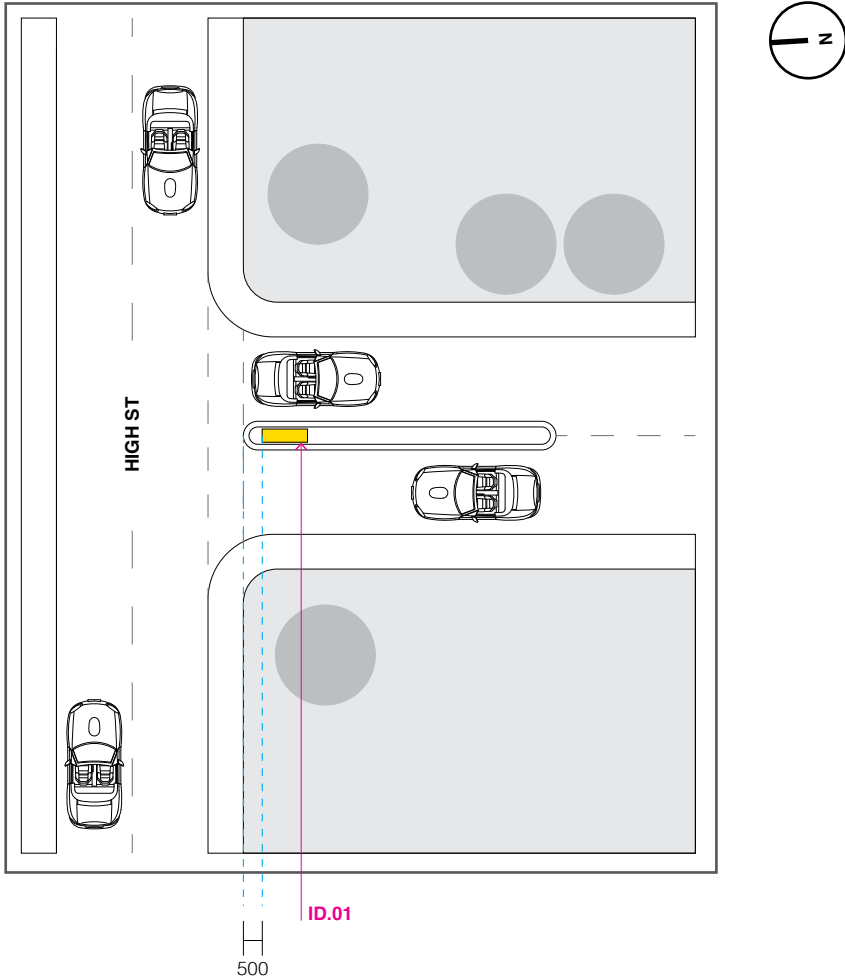

01 Public Vehicular Entry
Gate 2 High Street
Scale 1:200


Positioning

Positioning Guide
Primary vehicular totems are to be placed within traffic islands located at each primary entry gate. This provides equal visibility for vehicles approaching from both directions, as well as pedestrians in the vicinity.

Totems should be positioned at 500mm from edge of island with consideration to large vehicle turning distances.

Refer to plan 01 for insitu positioning at a primary vehicular entry.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

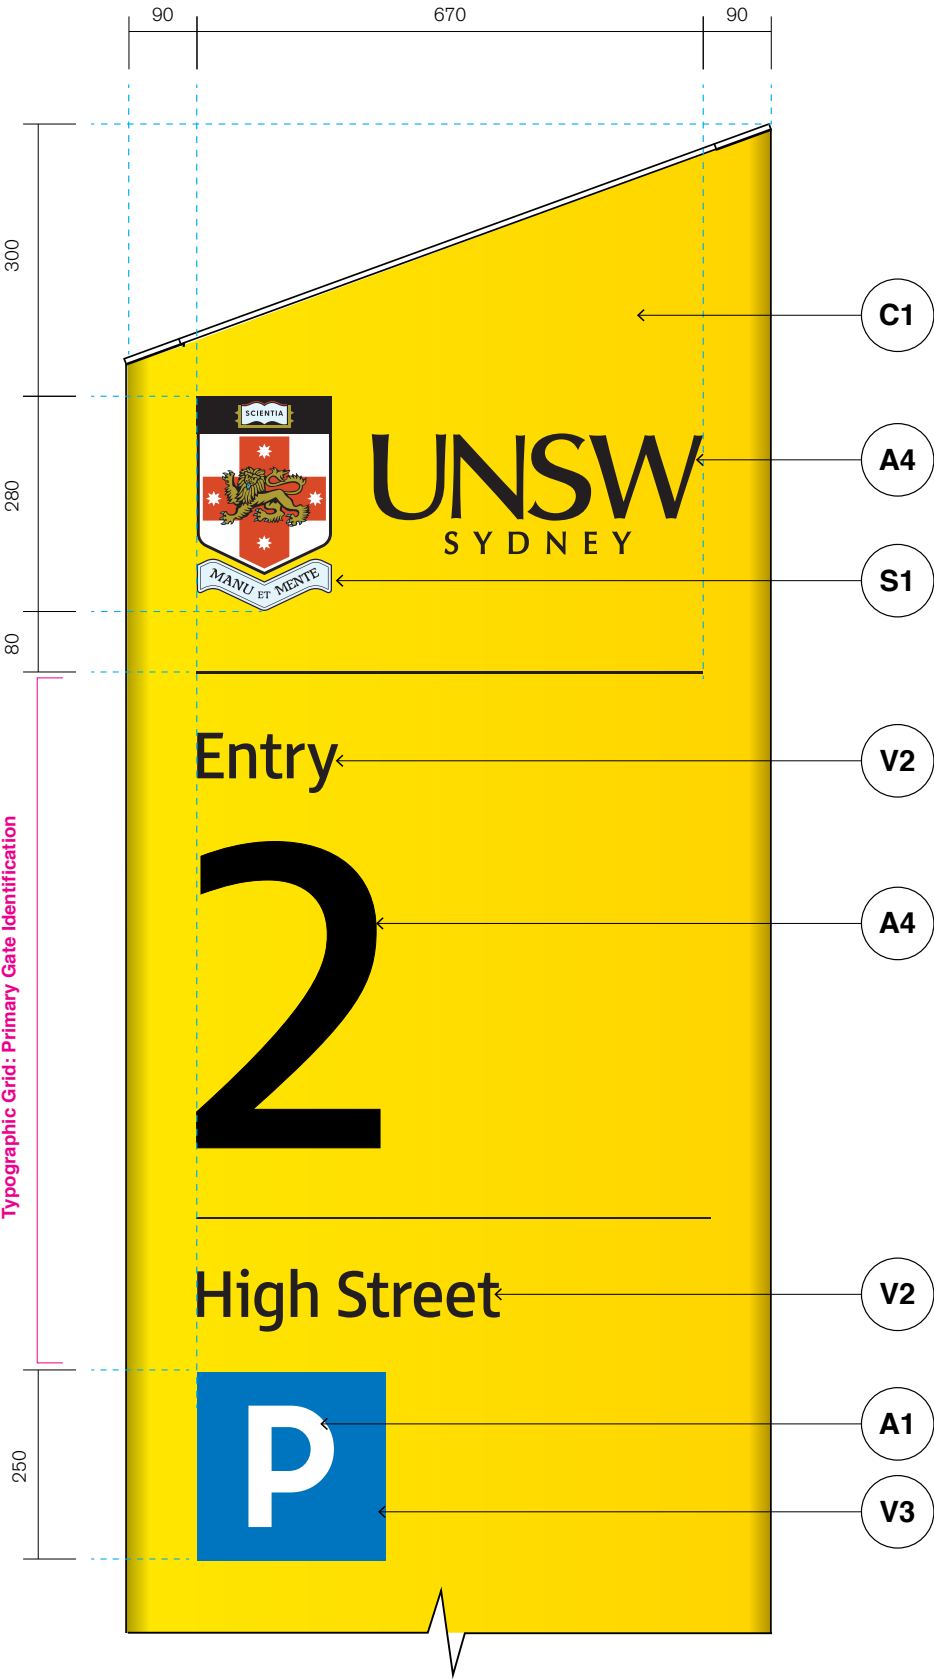

Detail
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Large Gate Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Back
Double sided messaging with exact same content.

Construction & Materials

Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | A4
• A4 finish for illumination | S1
• S1 print on 10mm aluminium |
| V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium | A1
• A1 finish for illumination |
| A4
• A4 finish for illumination | | |

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.




01 Gate Primary Vehicular Totem (day time view)
Gate 11 Botany Street



02 Gate Primary Vehicular Totem (night time view)
Gate 11 Botany Street



03 Existing Sign
Gate 11 Botany Street

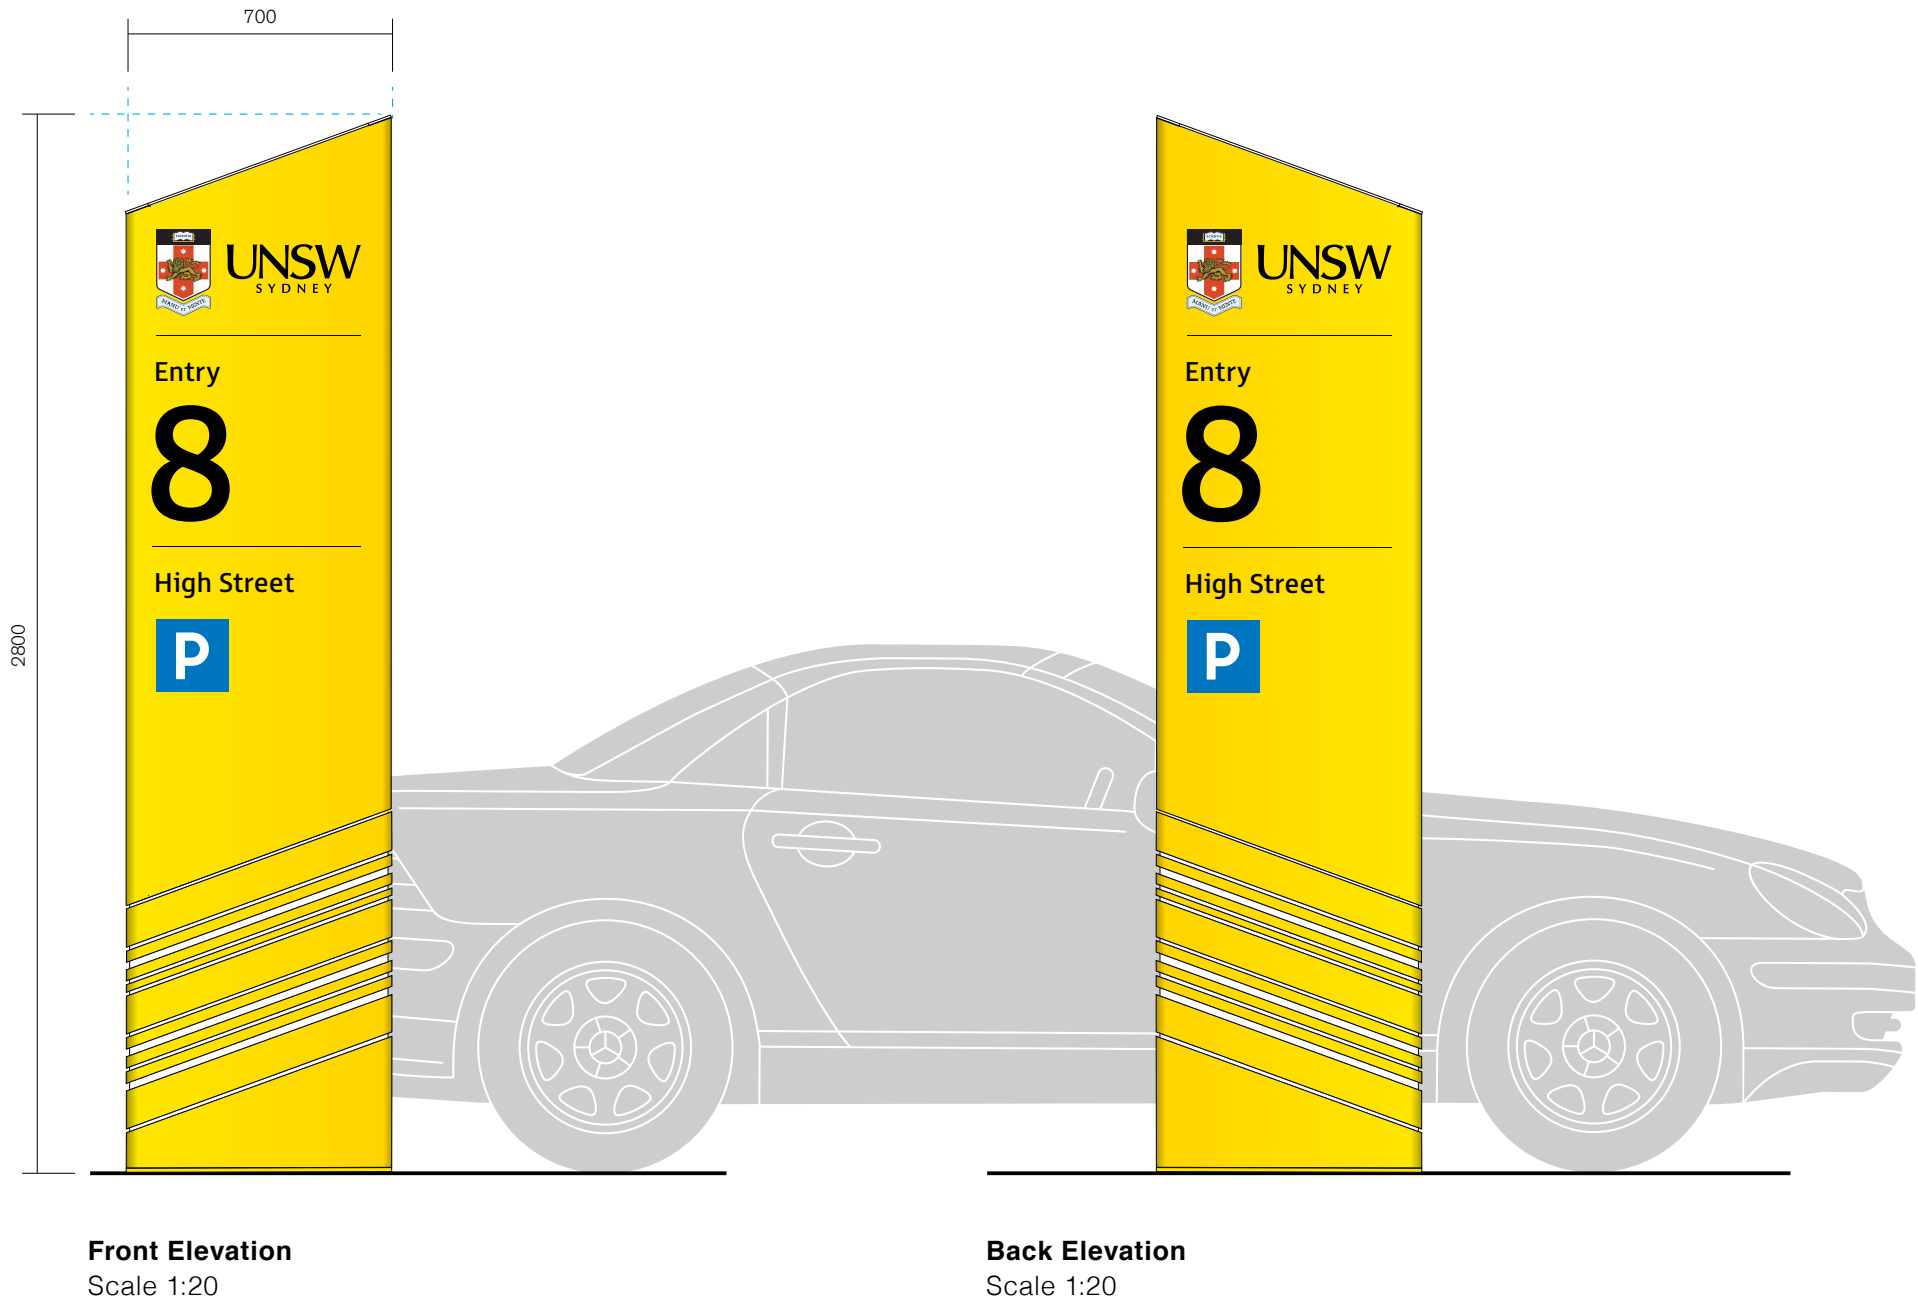


Sign Location

Purpose
Identifies secondary vehicular entries into the UNSW site. Refer to Section 3, Addressing & Terminology, Category 2.


Location
Positioned at secondary gate entries at perimeter of site, integrated into landscaping or directly at curbs of vehicular intersection nodes. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for secondary vehicular gate locations.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate Gate Entry Number and sculptural base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

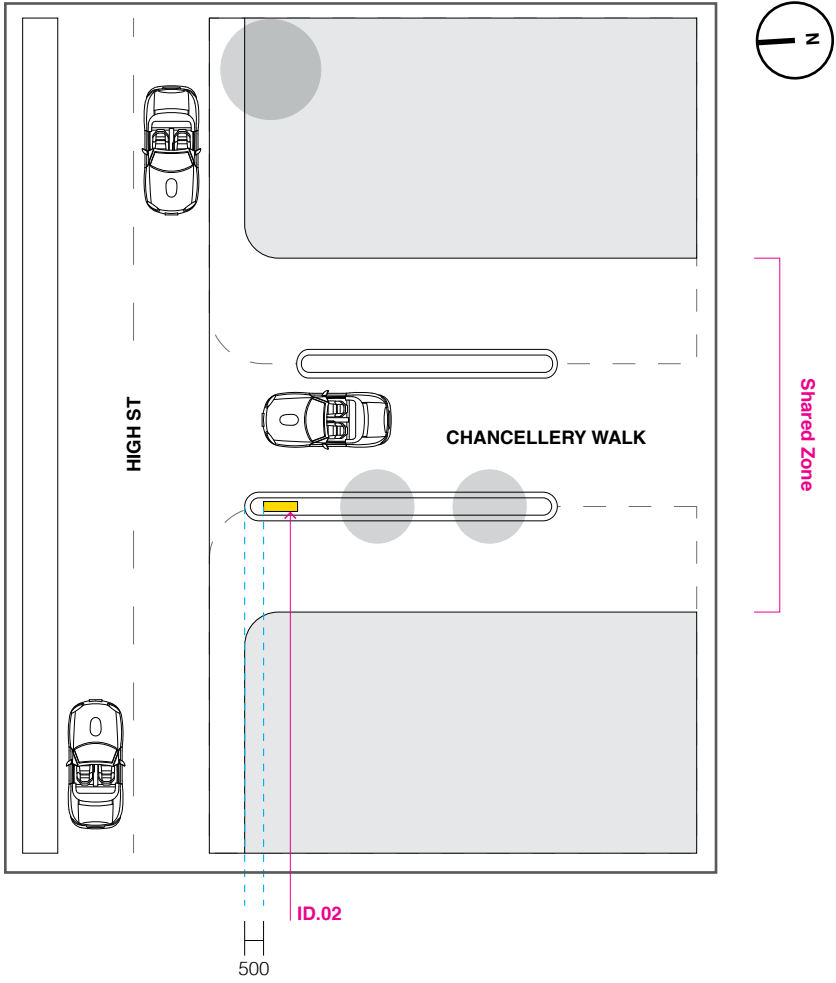

01 Secondary Vehicular Entry -
Gate 9 High Street
Scale 1:200

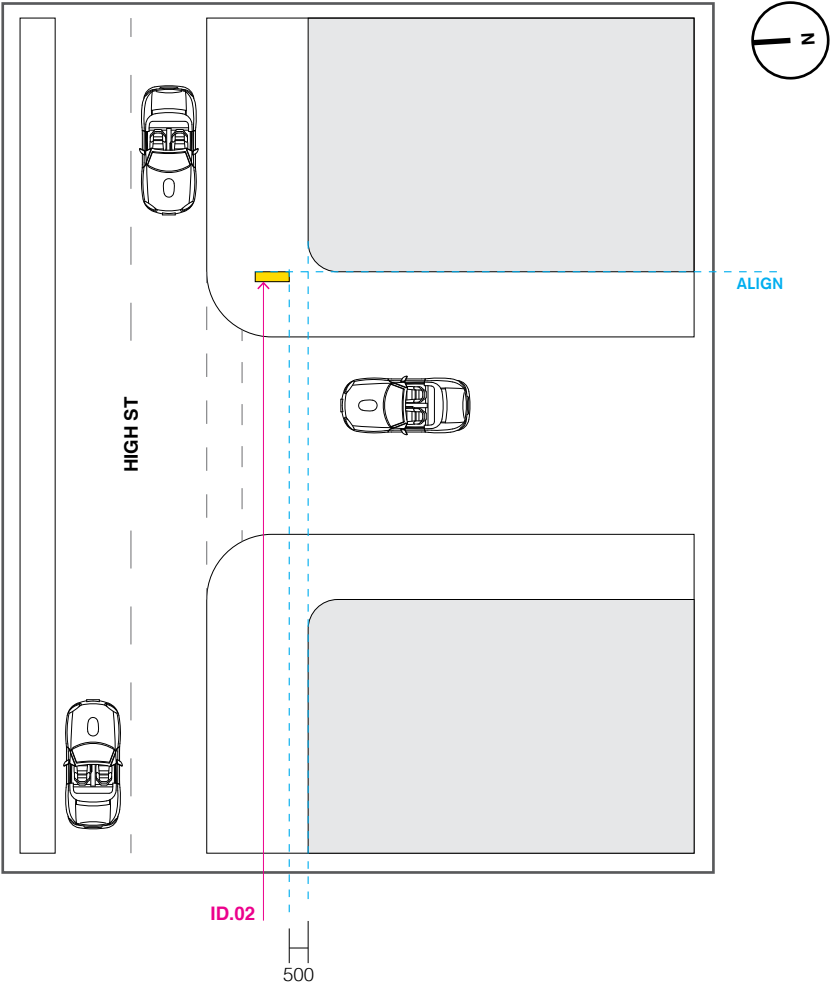

02 Secondary Vehicular Entry -
Gate 5 High Street
Scale 1:200

Positioning

Positioning Guide

Secondary vehicular totems are to be placed within traffic islands located at each secondary entry gate. This provides equal visibility for vehicles approaching from both directions, as well as pedestrians in the vicinity.


Totems should be positioned at 500mm from edge of island with consideration to large vehicle turning distances.

Refer to plan 01 for insitu positioning on a traffic island at a secondary vehicular entry.

Refer to plan 02 for insitu positioning on a curb at a secondary vehicular entry.

Note

- For wayfinding placement principles, refer to: Section 4, User Journeys

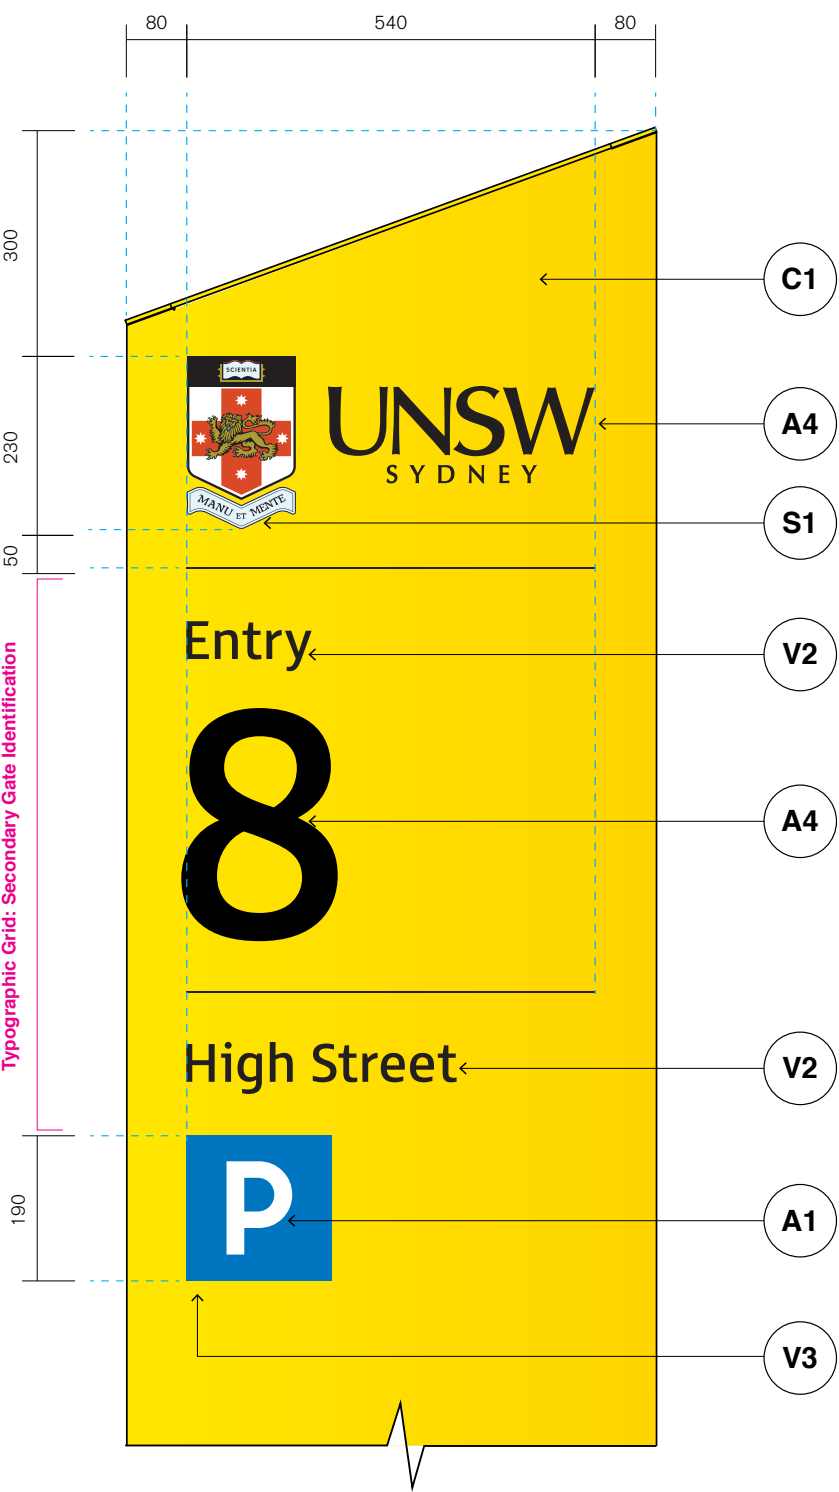

ID.02a - Detail
Scale 1:10



ID.02b - Detail
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Small Gate Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm


Back
Double sided messaging with exact same content.

Construction & Materials

Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | A4
• A4 finish for illumination | S1
• S1 print on 10mm aluminium |
| V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium | A1
• A1 finish for illumination |
| A4
• A4 finish for illumination | | |

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms

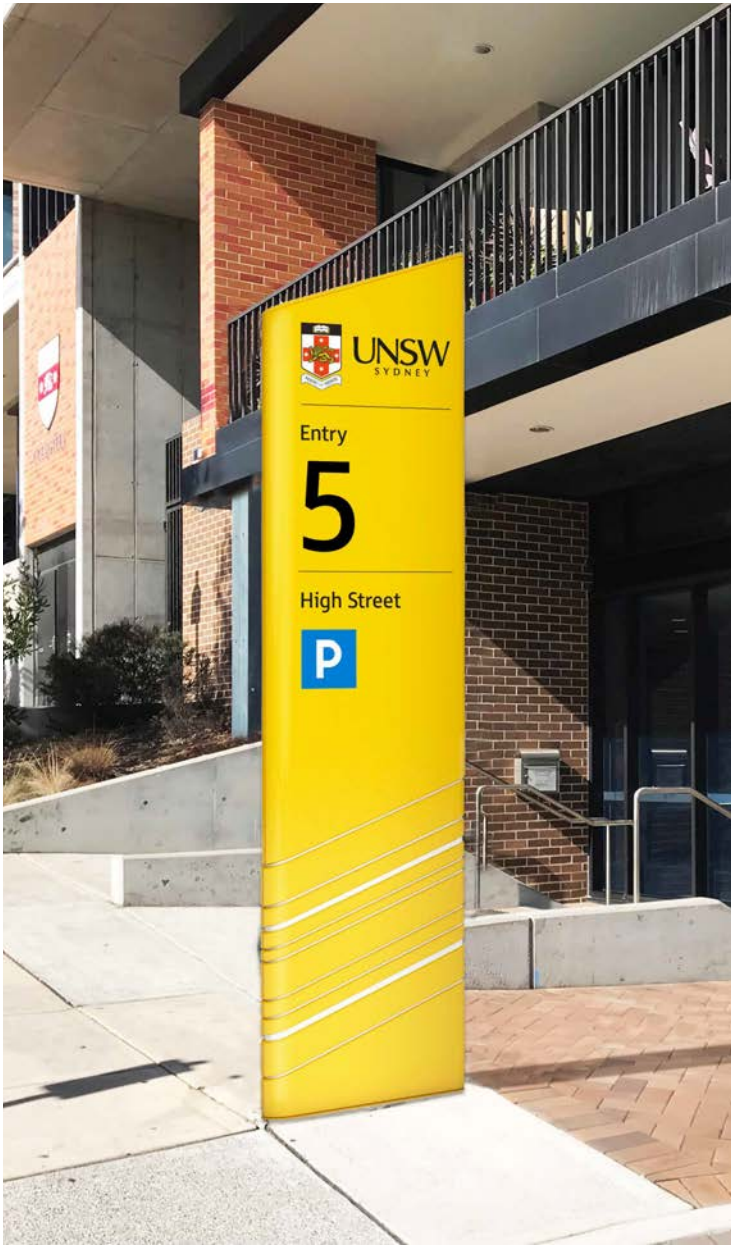

01 Gate Secondary Vehicular Totem (day time view)
Gate 5 High Street



02 Gate Secondary Vehicular Totem (night time view)
Gate 5 High Street



03 Existing Sign
Gate 5 High Street

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.




Sign Location

Purpose
Identifies pedestrian entries into the UNSW site. Refer to Section 3, Addressing & Terminology, Category 2

Location
Positioned at secondary pedestrian entries at perimeter of site, integrated into or aligned with landscaping at intersection nodes of internal and external pathways. Refer to Section 2, Wayfinding Strategy, Campus Perimeter & Entry Numbering for pedestrian gate locations.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate Gate Entry Number and sculptural base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

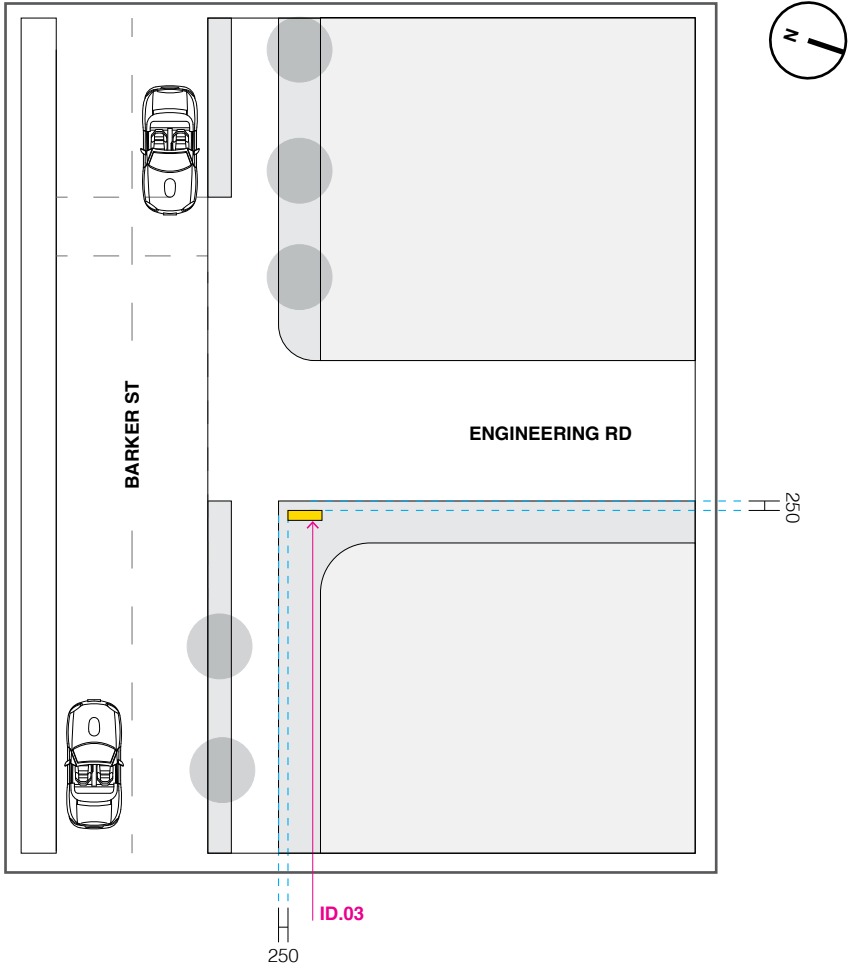

01 Pedestrian Entry
Gate 13 Barker Street
Scale 1:200


Positioning

Positioning Guide
Pedestrian entry totems are to be placed adjacent to or within landscape features at pedestrian entry gates. This provides equal visibility for pedestrians approaching from both directions, as well as vehicles in the vicinity.

Totems are to be placed 250mm from or aligned to landscape edges. In the case of those adjacent to landscape elements, totems should not impede foot traffic.

Refer to plan 01 for insitu positioning at a pedestrian entry.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

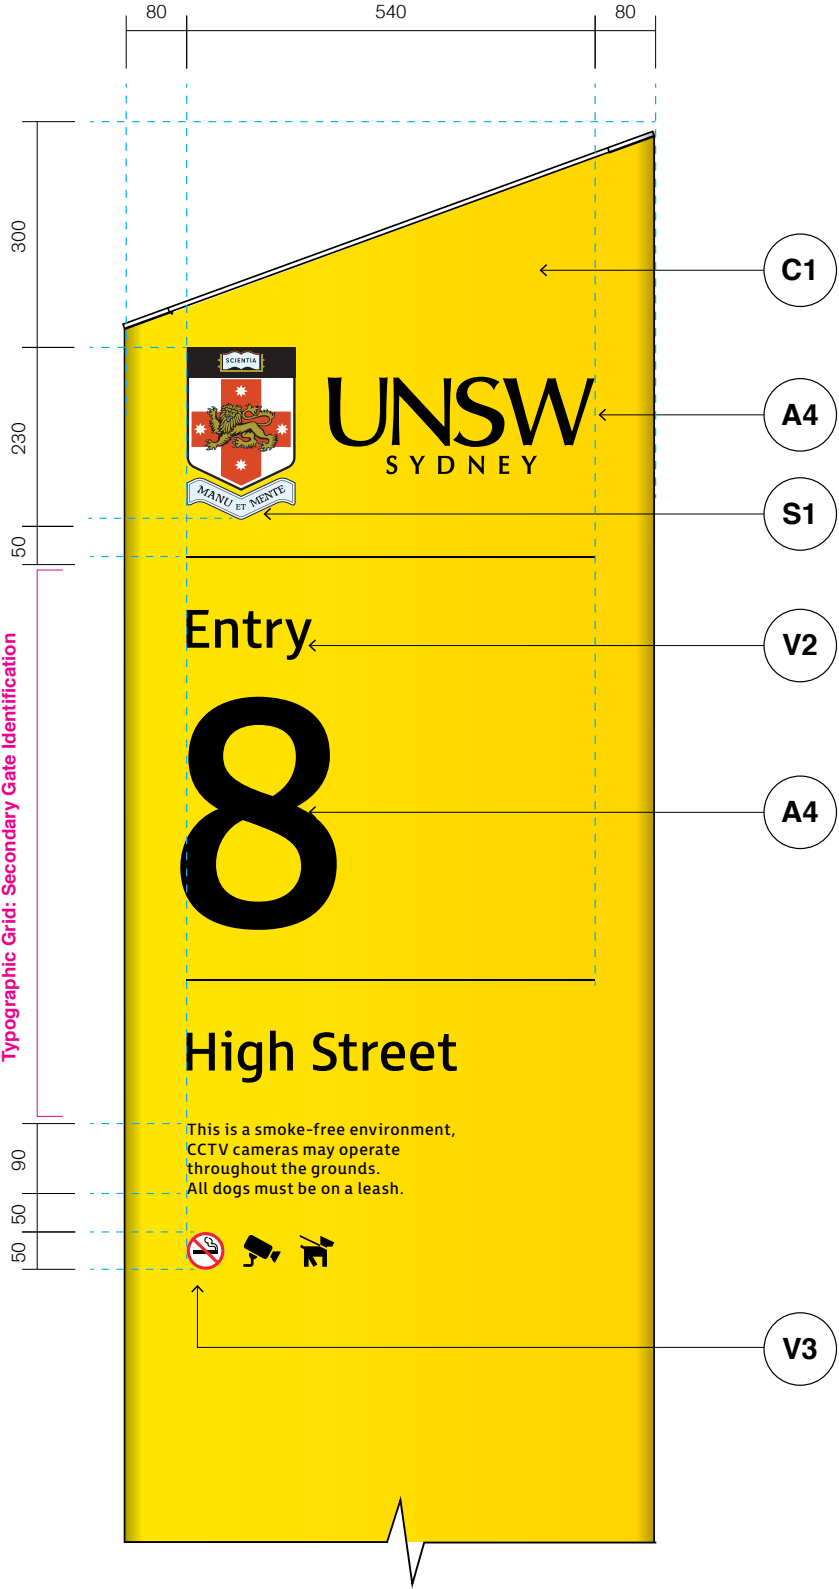

ID.03a - Main Campus
Scale 1:10



Statutory Messaging
Scale 1:5

Graphic Layout

Typographic Grid – Identification
Small Gate Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
No Smoking, CCTV & Dogs on Leash: 50mm diameter.


Back
Double sided messaging with exact same content.

Construction & Materials

Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | A4
• A4 finish for illumination | S1
• S1 print on 10mm aluminium |
| V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium | A4
• A4 finish for illumination |

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms

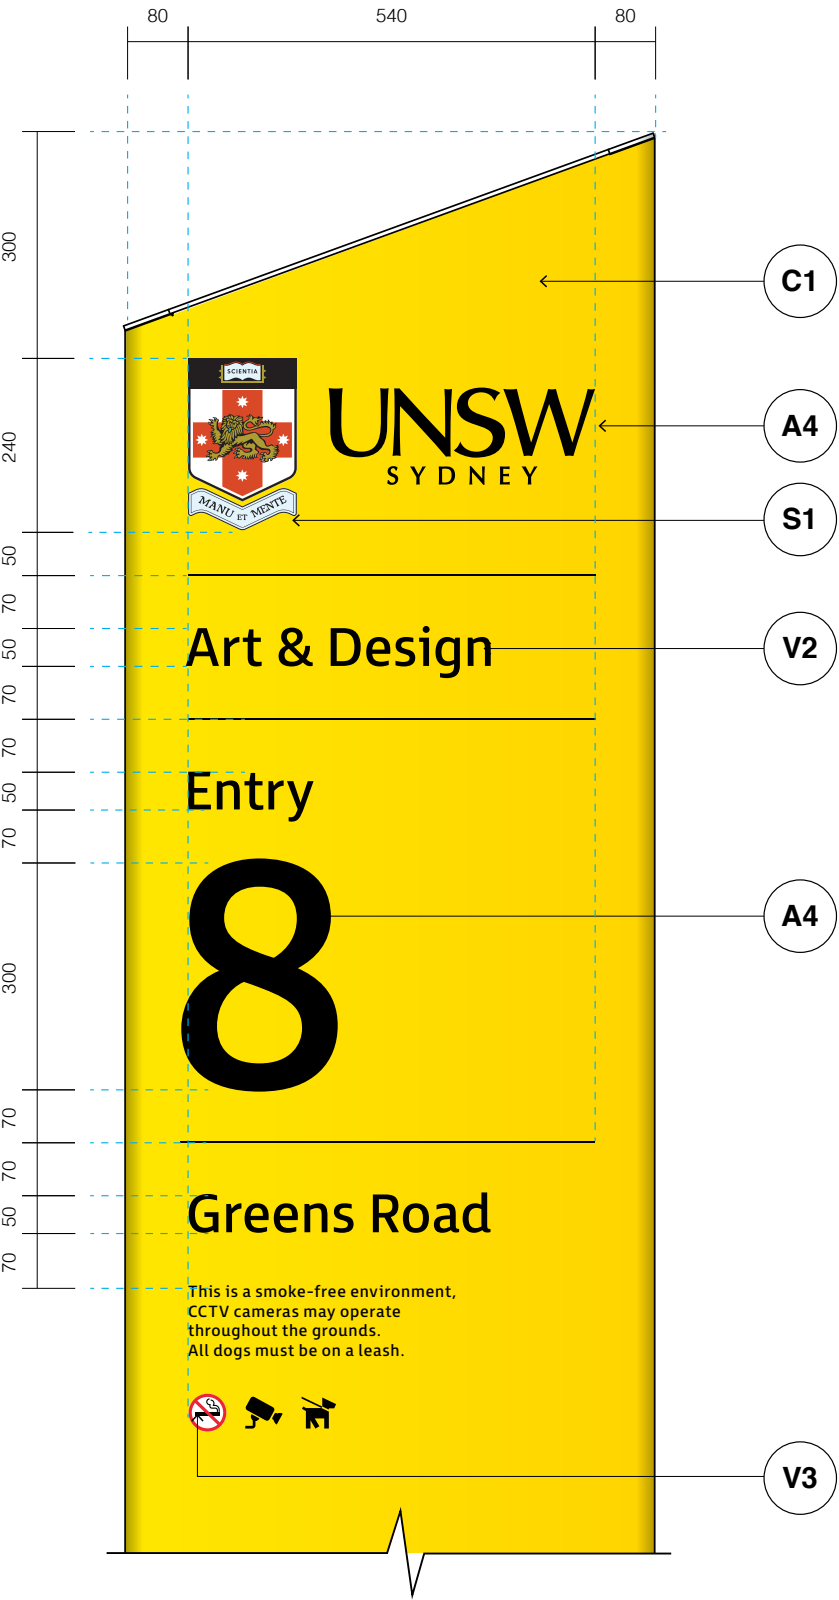

ID.03b - Secondary Campus
Scale 1:10



Graphic Layout

- Typographic Grid – Identification**
Small Gate Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.
- Dividing Line**
Line weight: 2mm
- Statutory Content**
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning
- Pictograms**
No Smoking, CCTV & Dogs on Leash: 50mm diameter.
- Back**
Double sided messaging with exact same content.

Construction & Materials

Materiality Legend		
C1 <ul style="list-style-type: none">C1 finish on 3mm aluminium	A4 <ul style="list-style-type: none">A4 finish for illumination	S1 <ul style="list-style-type: none">S1 print on 10mm aluminium
V2 <ul style="list-style-type: none">V2 applied on top of aluminium	V3 <ul style="list-style-type: none">V3 print applied on top of aluminium	A4 <ul style="list-style-type: none">A4 finish for illumination

- Construction Details**
 - Refer to: Section 10, Construction Standards, Totem Signforms



01 Gate Pedestrian Totem (day time view)
Gate 13 Barker Street



02 Gate Pedestrian Totem (night time view)
Gate 13 Barker Street




03 Existing Sign
Gate 13 Barker Street


Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy..

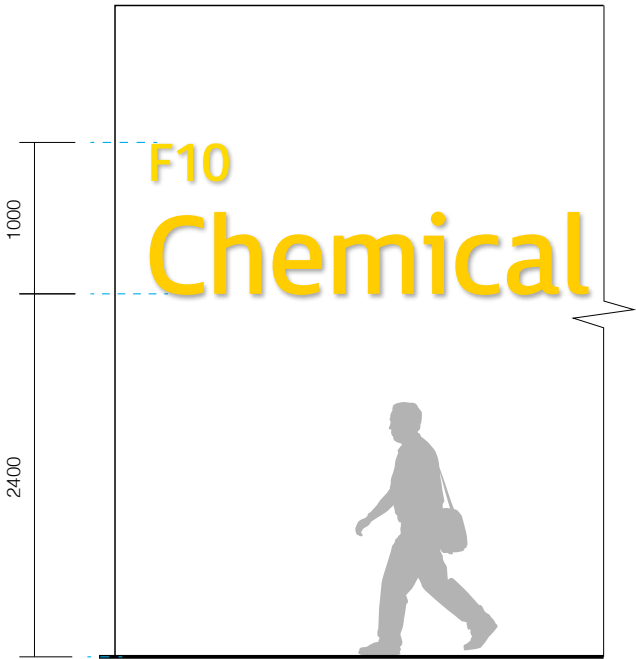


ID.04a Elevation - Building facade
Scale 1:50

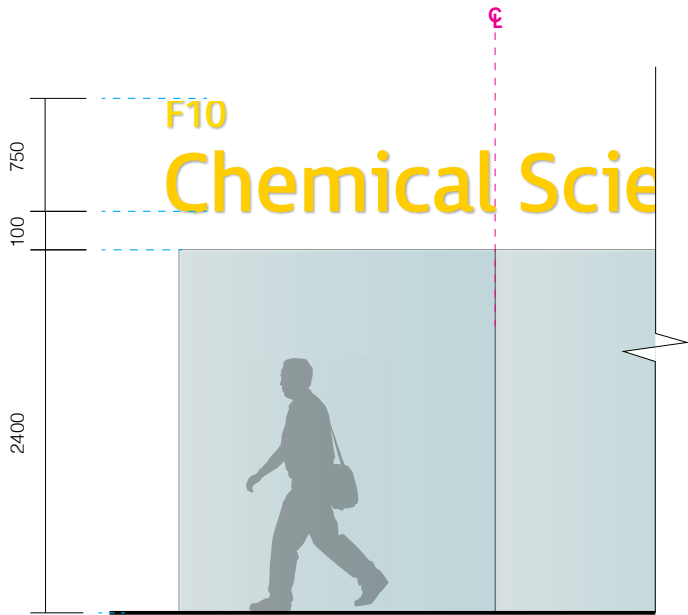


ID.04b Elevation - Bulkhead (>750mm height)
Centre sign to entrance
Scale 1:50

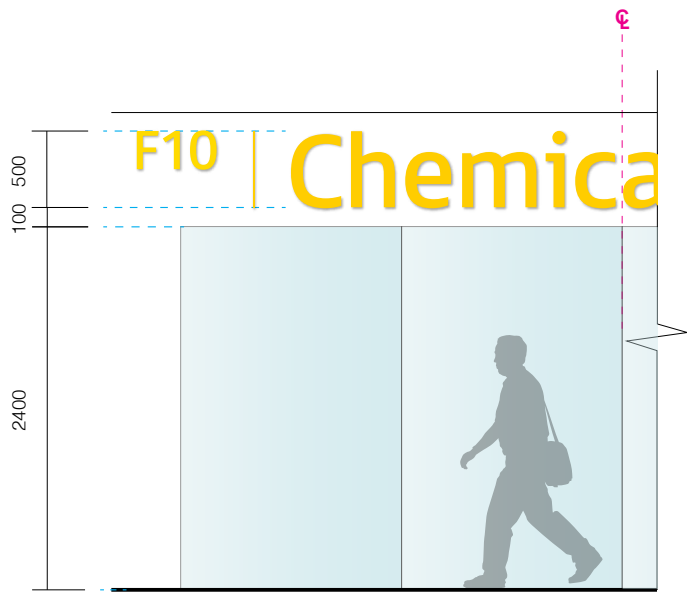

ID.04c Elevation - Bulkhead (<750mm height)
Centre sign to entrance
Scale 1:50

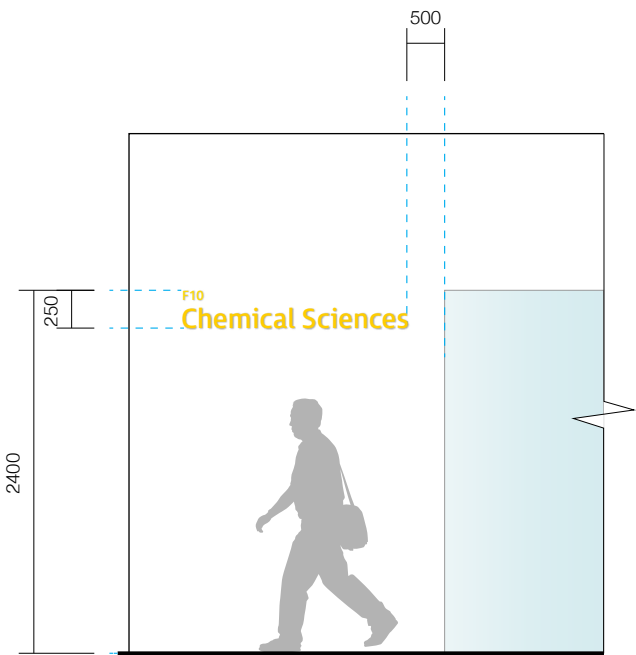

ID.04d Elevation - Next to entrance
Scale 1:50

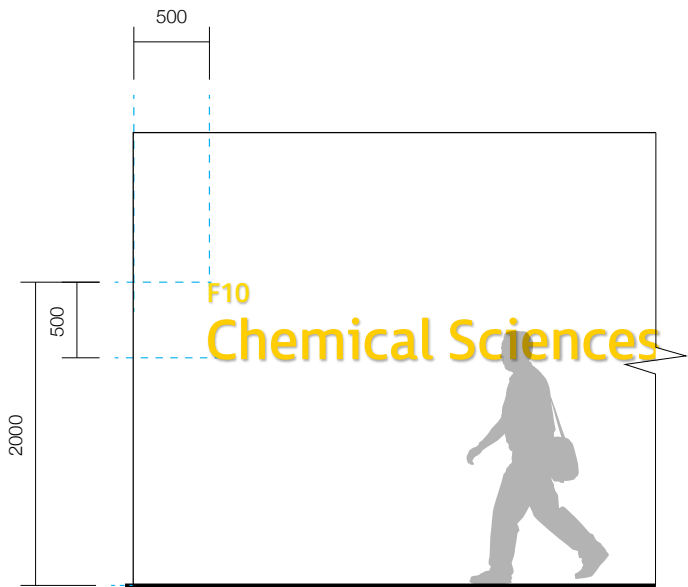

ID.04e Elevation - Standard height wall
Scale 1:50

Sign Location

Purpose

Identifies major buildings entries from street level. Refer to Section 3, Addressing & Terminology, Category 5 & 6.

Location

Positioned above main entry of major building or at designated facade signage locations viewable from major pedestrian circulation routes.

ID.04c sign is only to be implemented when bulkhead head is below 750mm.

Illumination

Project Design Team to evaluate and test facade lighting to illuminate Gate Entry Number, unless ambient lighting creates sufficient visibility of the sign.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance




ID.04a Detail - 1000mm high sign
Scale 1:20



ID.04b Detail - 750mm high sign
Scale 1:20



ID.04d Detail - 500mm high sign
Scale 1:20

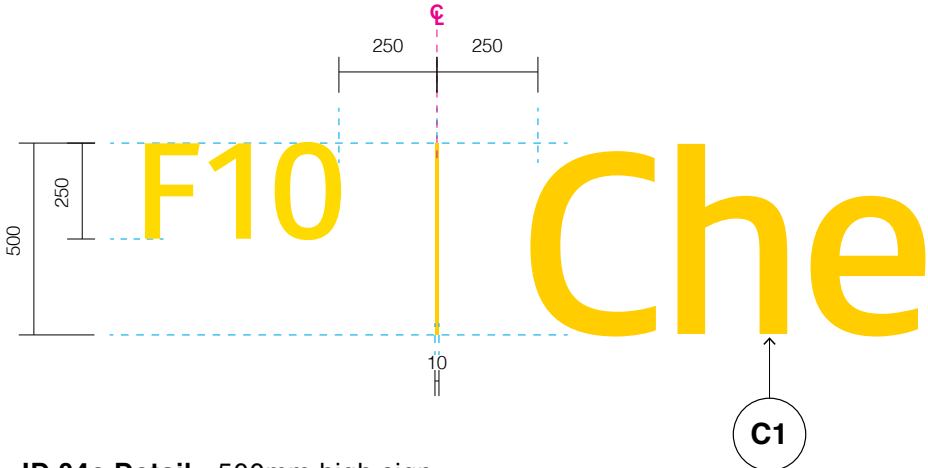

ID.04c Detail - 500mm high sign
Scale 1:20



ID.04e Detail - 250mm high sign
Scale 1:20

Graphic Layout

Building Name
Building name always paired with its corresponding map code. Refer to Section 3, Addressing & Terminology, Category 5 and 6.

Alignment
Left Aligned

Size
Dependant on the size of area of sign location.

Tracking
10+, Optical

Construction & Materials

Materiality Legend

- C1**
• C1 finish on 10mm aluminium

Construction Details
• Refer to: Section 22, Shop Drawings




01 Building Facade Sign
Main Library



02 Existing Sign
Main Library

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

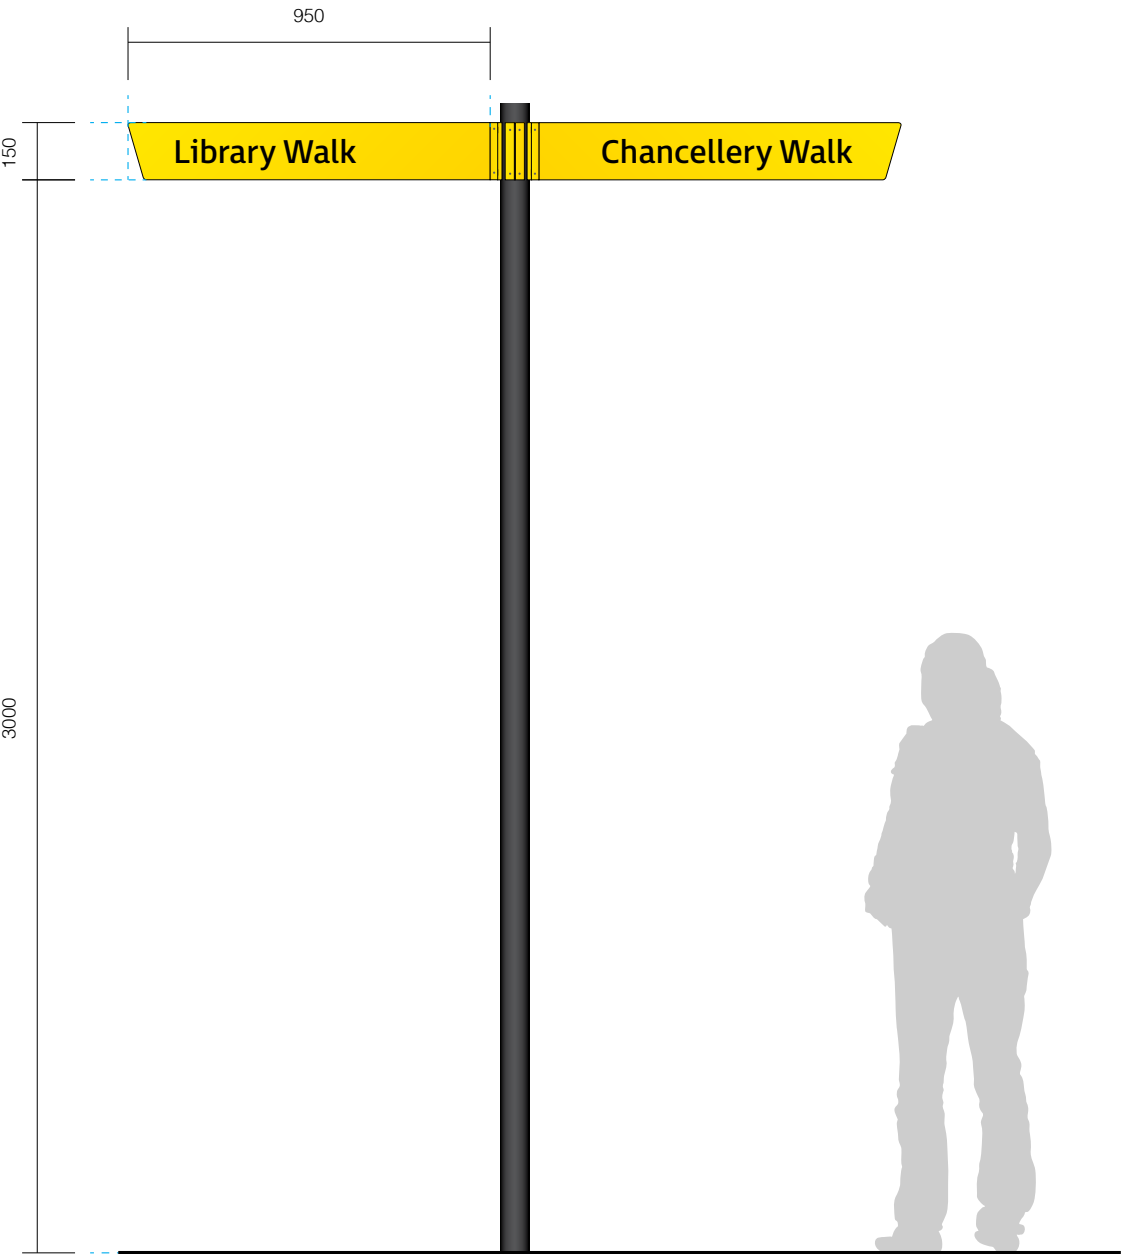


Elevation
Scale 1:20

Sign Location


Purpose
Confirms major named pedestrian pathways and directs pedestrians to external areas e.g. quadrangles or lawns. Refer to Section 3, Addressing & Terminology, Categories 3 and 5

Location
Positioned at intersections between major UNSW streets and walkways.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

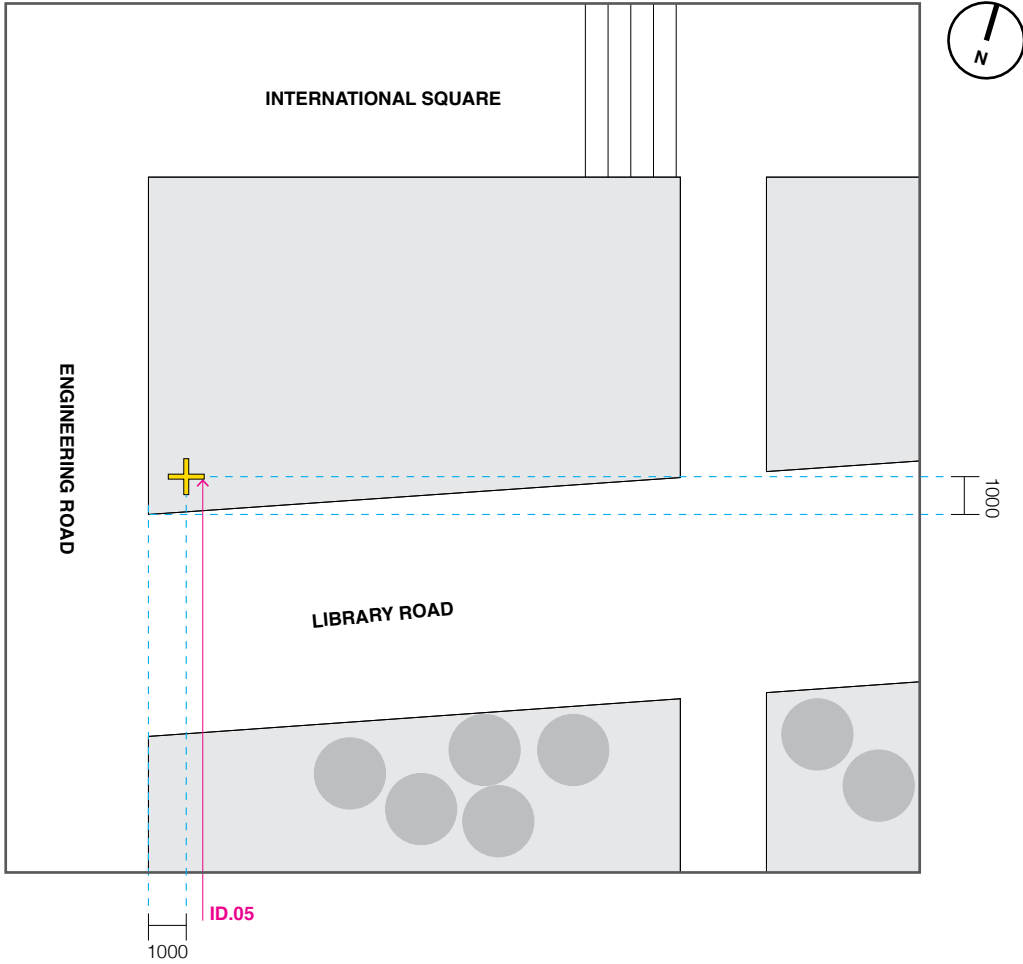

01 Intersection of streets
ANZAC Parade Entry
Scale 1:200

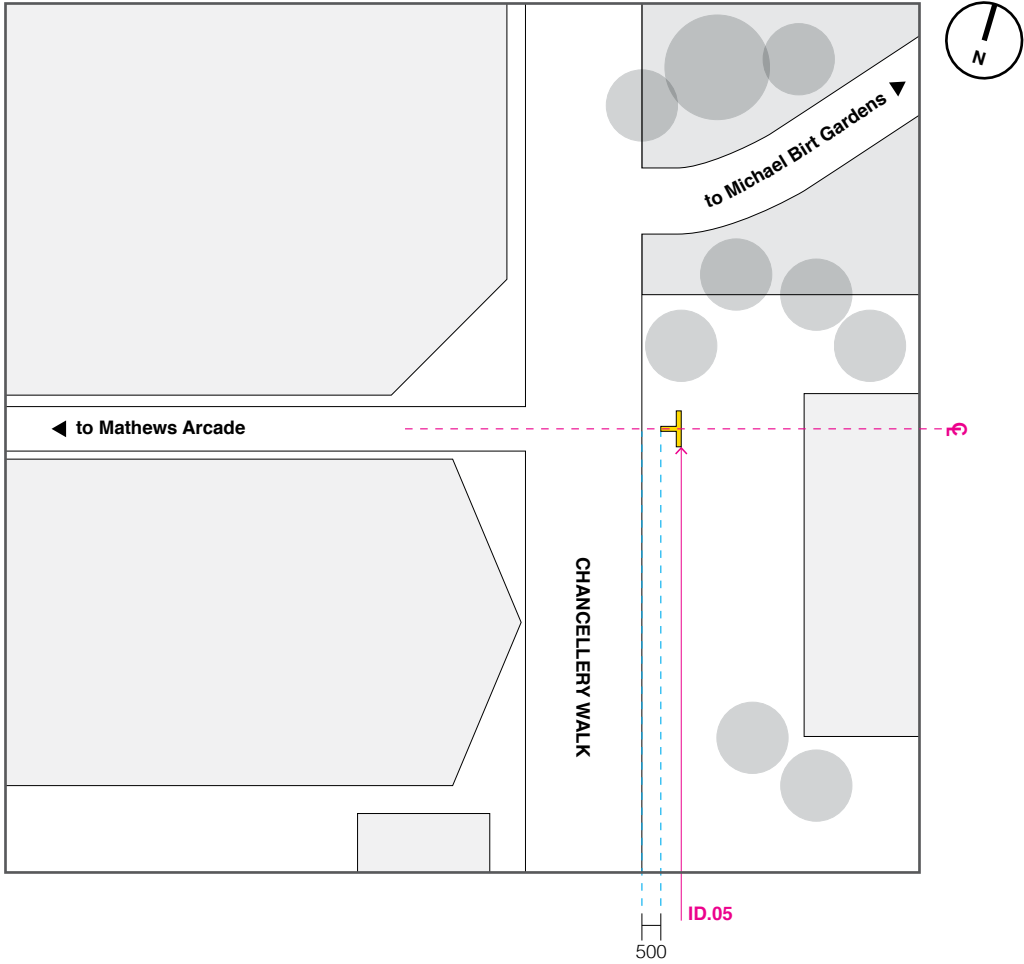

02 Intersection of streets and external locations
Gate 13 Barker Street
Scale 1:200


Positioning

Positioning Guide
Street signs are to be placed within landscape features adjacent to or parallel to circulation routes that lead to major walkways. They can be used to identify named streets, or to direct to external locations within campus e.g. the Quadrangle.


Street sign are to be positioned aligned to landscape edges. When at a corner, poles should be 1000mm from either edge. When parallel to a straight path, they should be 500mm from the pathway edge and centered to intersecting pathways.

Refer to plan 01 for insitu positioning at an intersection corner and plan 02 for insitu positioning at a parallel pathway. Plan 02 also identifies possible external locations that could be named on the sign.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

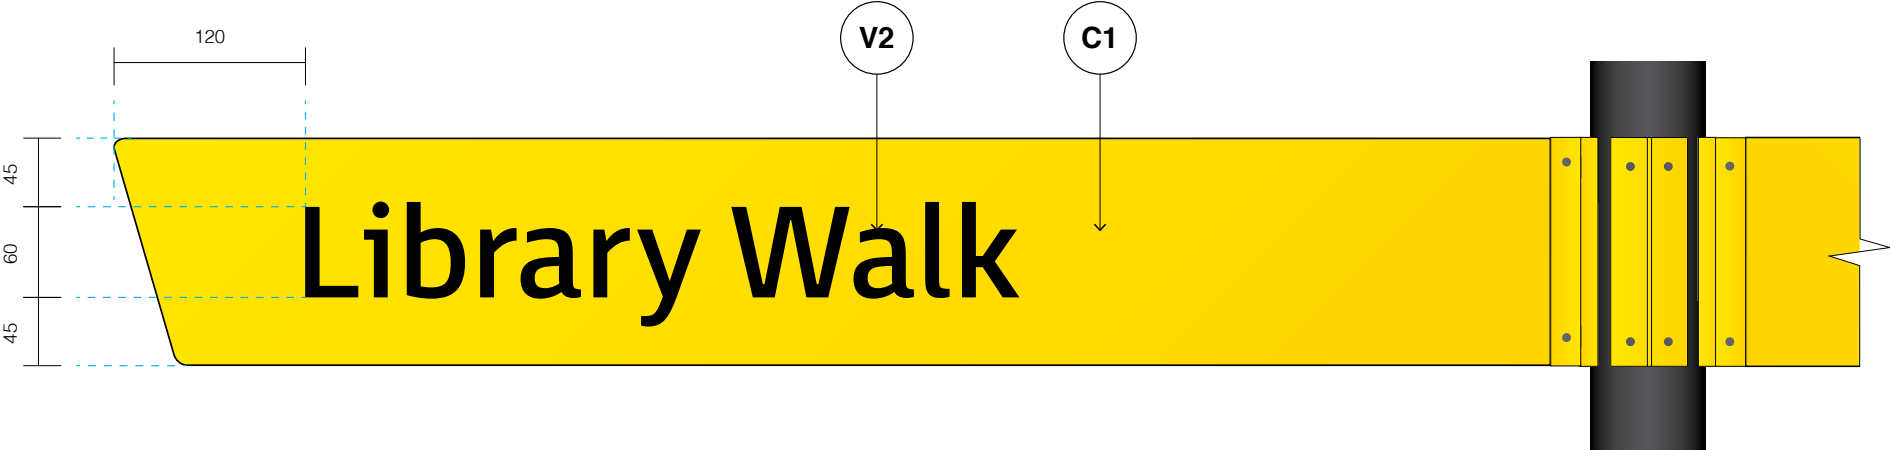

Template 01 - Left Panel
Scale 1:5

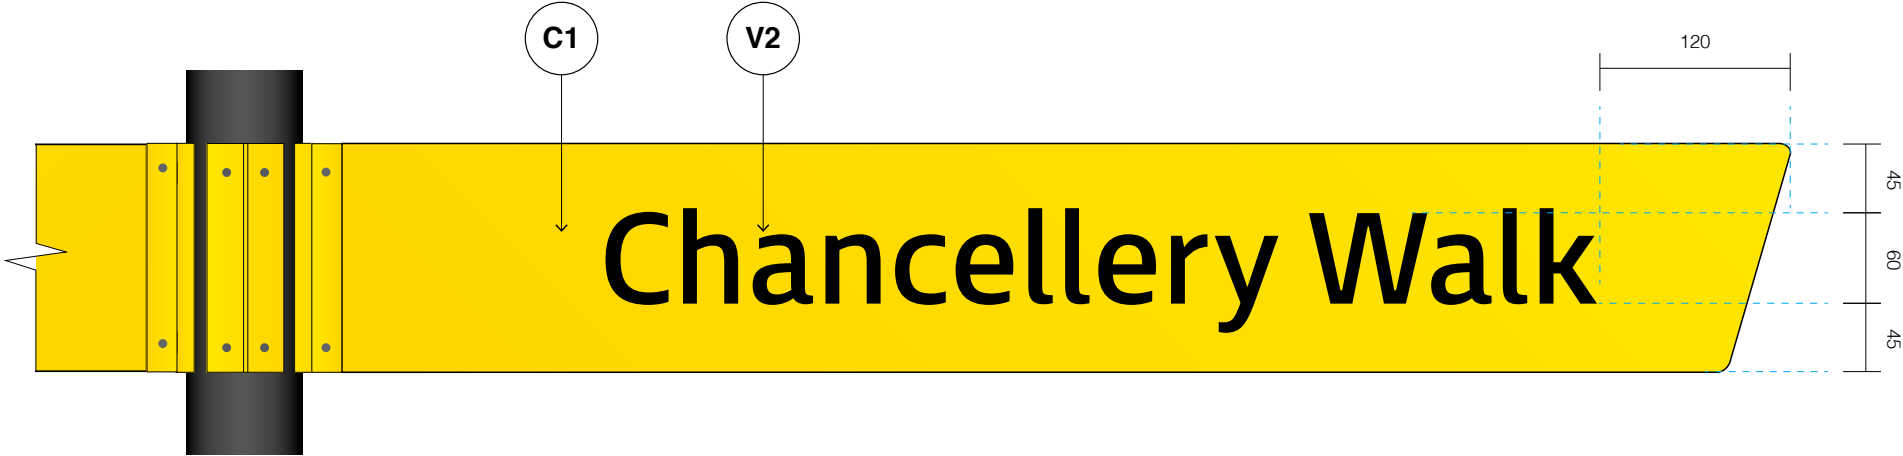

Template 02 - Right Panel
Scale 1:5

Graphic Layout

Street/ Walkway Name
FS Millbank Regular

Alignment
Alignment – Front face: Left, Rear face: Right

Size
60mm


Tracking
10+, Optical Kerning

Construction & Materials


Materiality Legend

- | | |
|------------------------------|---|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 finish applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Cantilevered Signforms

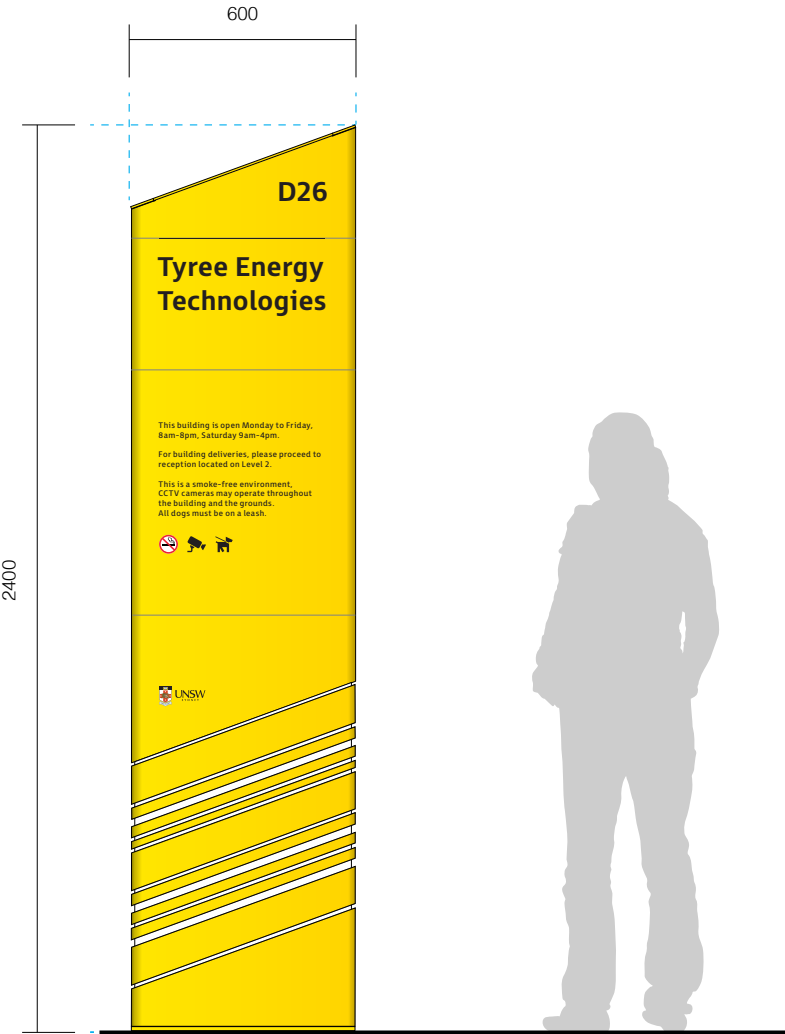

Front Elevation
Scale 1:20

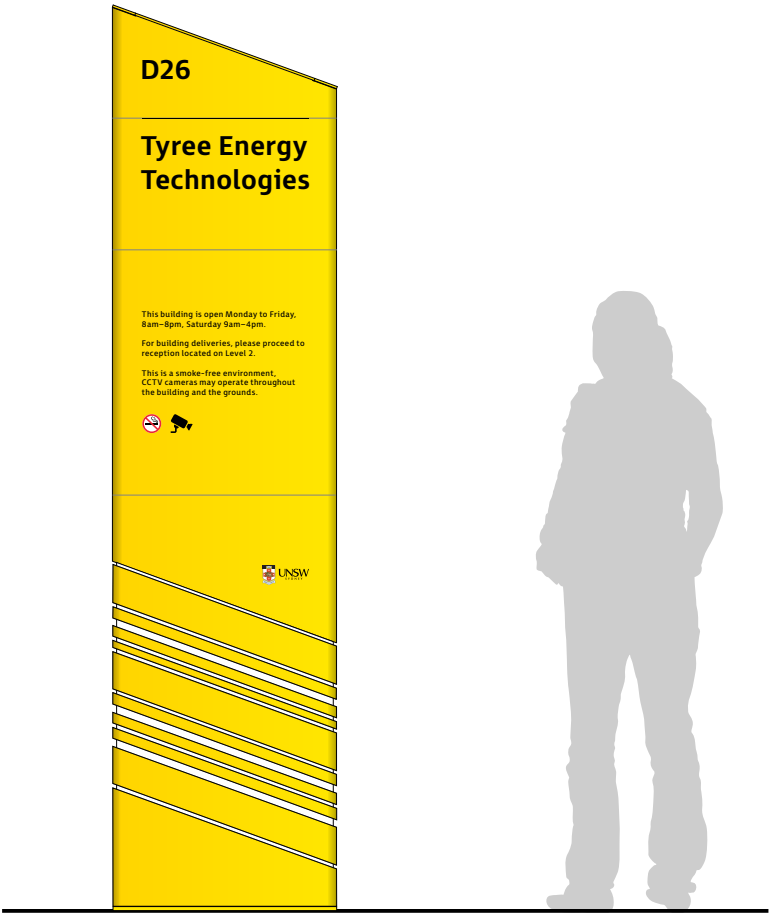

Back Elevation
Scale 1:20


Sign Location

Purpose
Identifies entry point or site boundaries of major buildings when they cannot be identified visually from primary circulation path. Refer to Section 3, Addressing & Terminology, Category 2.


Location
Freestanding at intersection of immediate pathway leading into main entry with main circulation route.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate sculptural base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

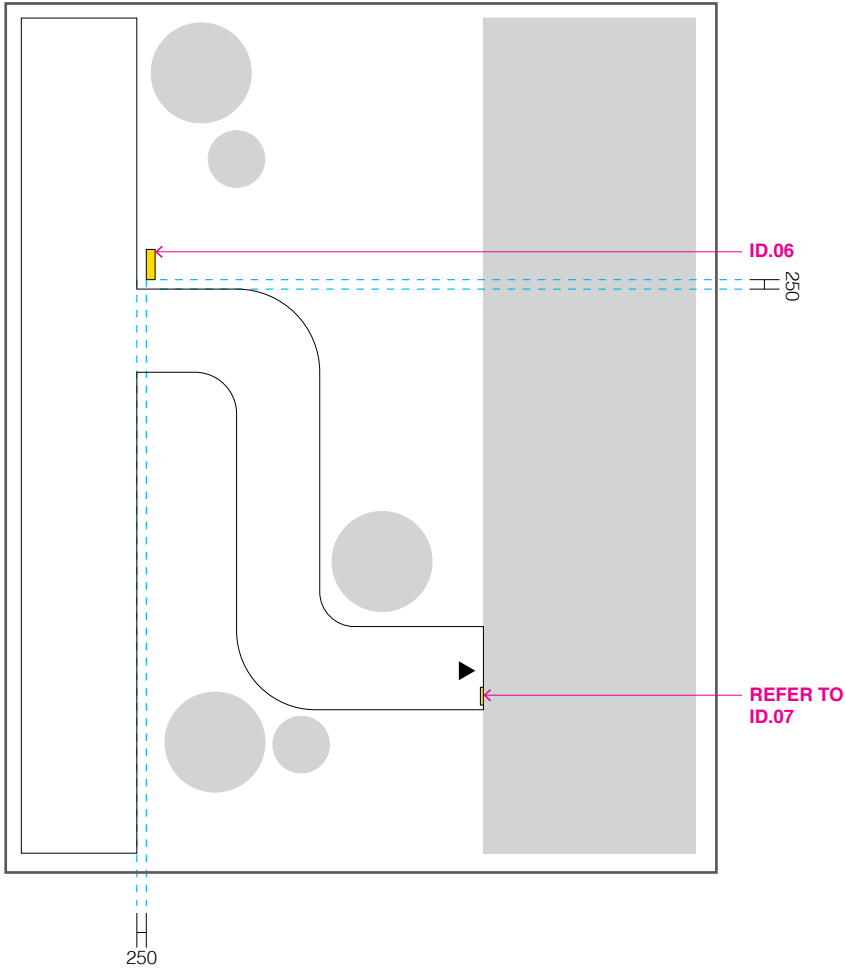

01 Building Entrance
Scale 1:200

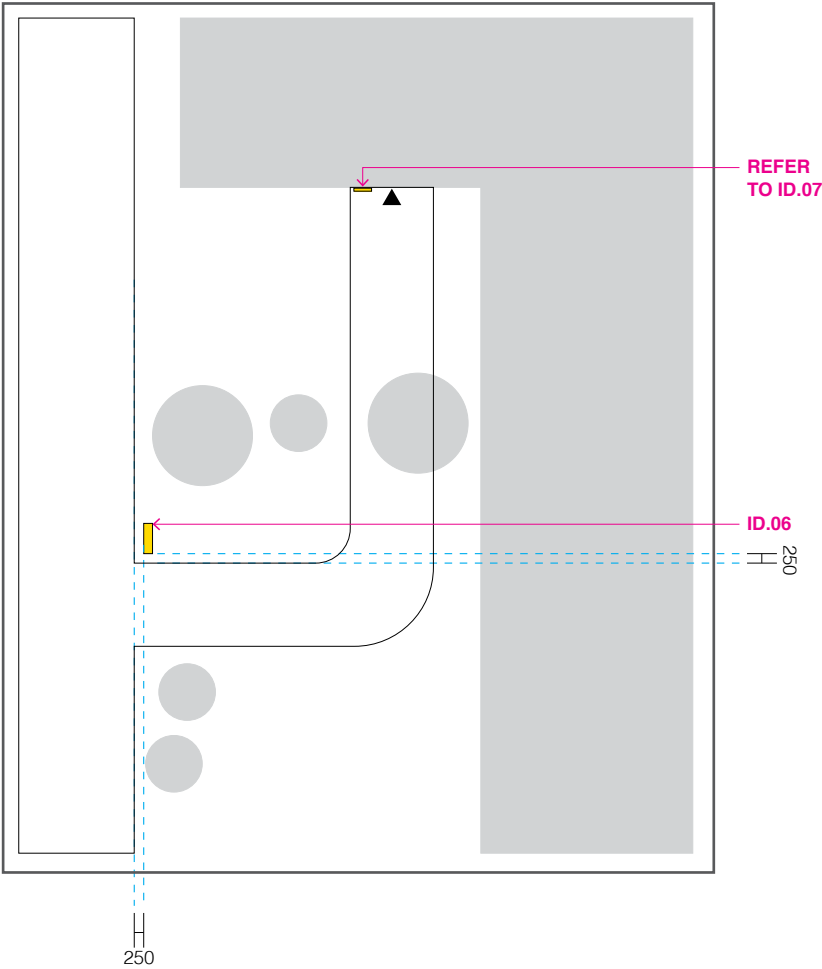

02 Building Entrance
Scale 1:200



Positioning

Positioning Guide
Building entrance totems are to be used when building entrances are not visually identifiable from pedestrian circulation routes. Consideration should be given to the number of totems along a circulation route, and wall-mounted signage should be chosen instead when possible.

Totems are to be aligned to pathways, 250mm from edges, at the site boundaries or entry paths to buildings.

Refer to plans 01 and 02 for insitu positioning for building entrance totems.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

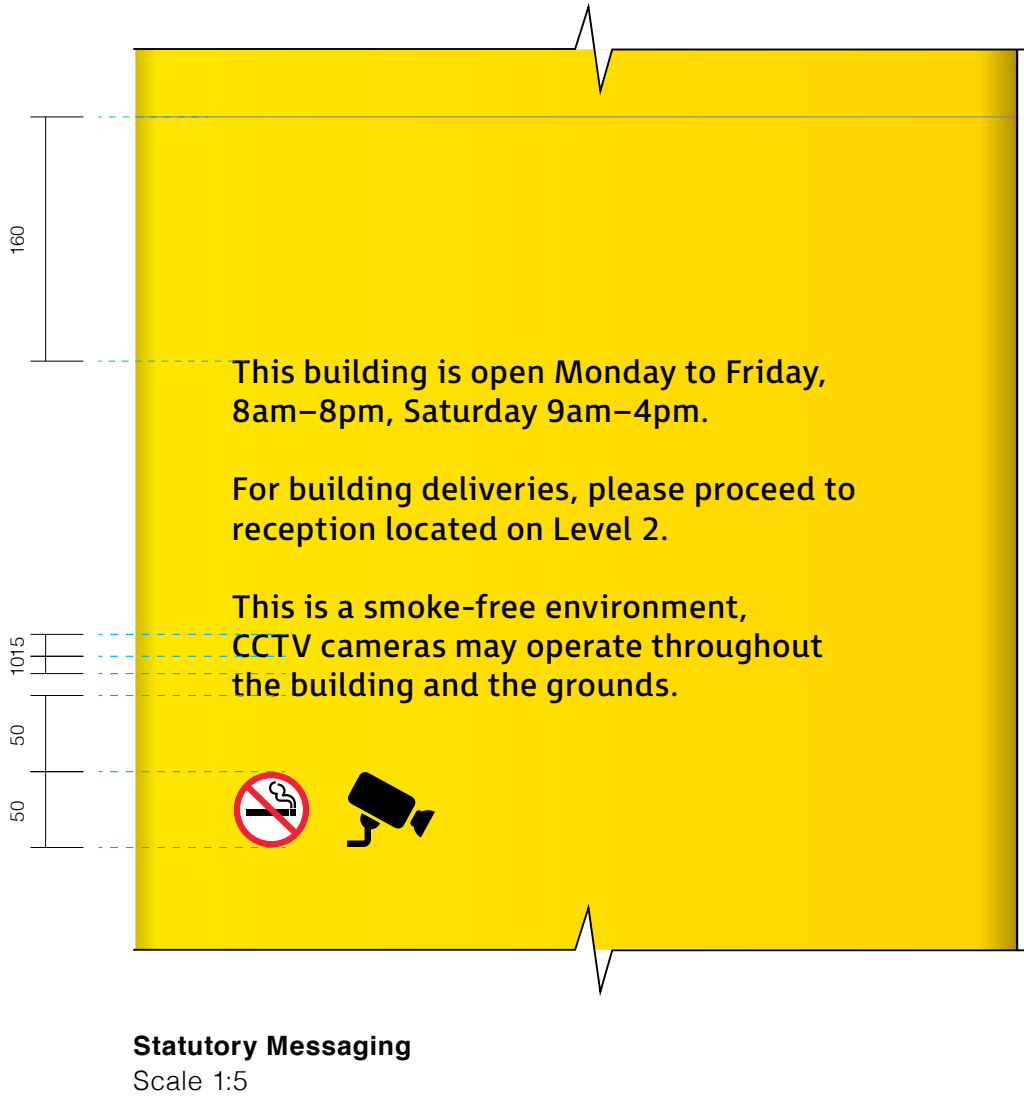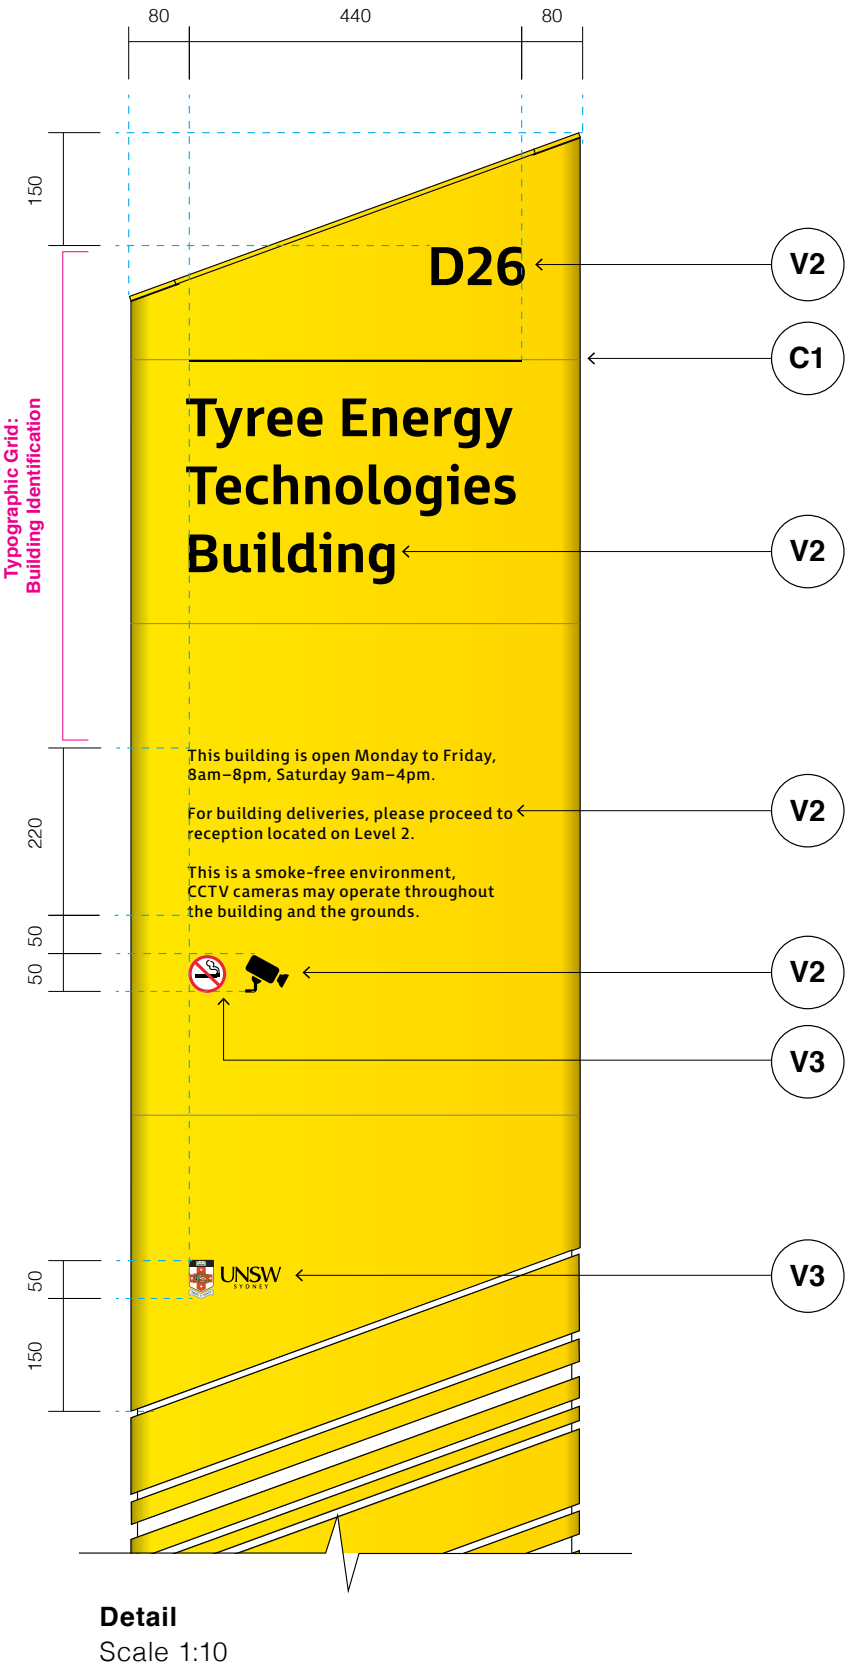

Graphic Layout

Typographic Grid – Identification
Building Identification Totem Layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
No Smoking, CCTV: 50mm diameter.

UNSW logo
50mm height

Back
Double sided messaging with exact same content only when totem is located perpendicular to circulation path.

Construction & Materials

Materiality Legend

- | | | |
|---|---|---|
| C1
• C1 finish on 3mm aluminium | V2
• V2 applied on top of aluminium | V3
• V3 print applied on top of aluminium |
|---|---|---|

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms



01 Building Entrance Totem
Ainsworth Building




02 Existing Totem
Ainsworth Building

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.



Elevation - Beside entrance
Scale 1:25

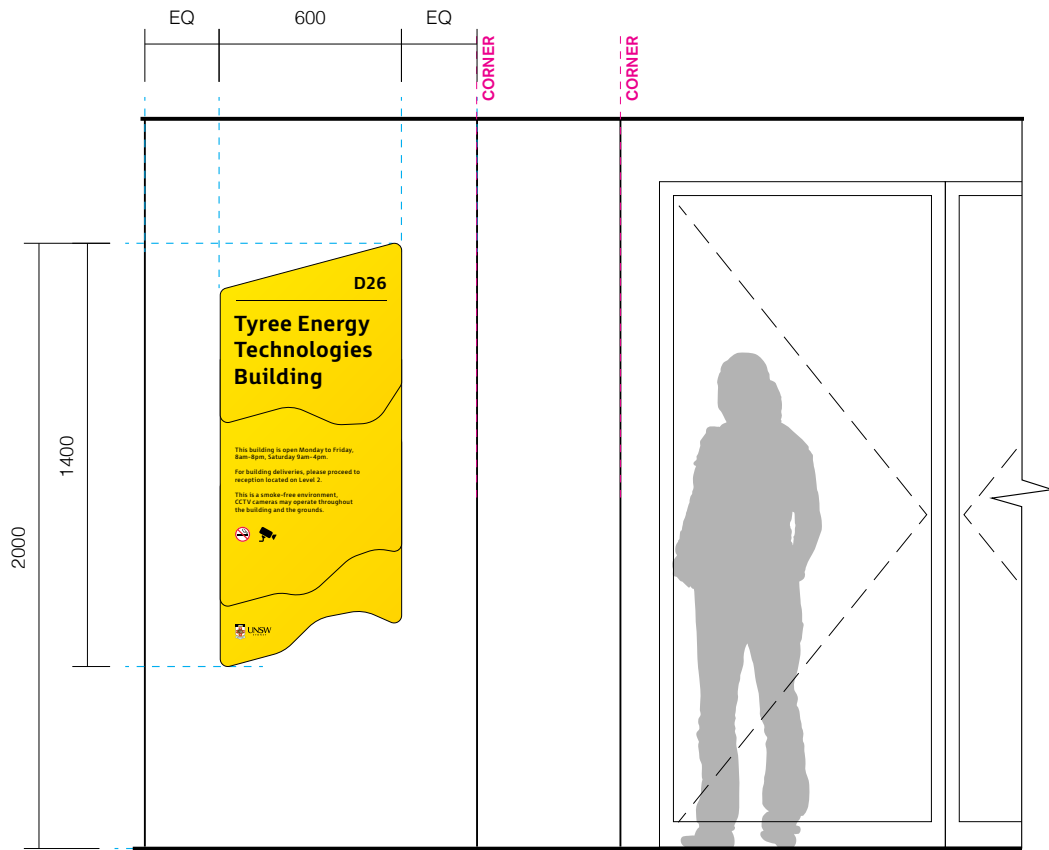



Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies entry point or site boundaries of major buildings. Refer to Section 3, Addressing & Terminology, Category 2.

Location
Wall mounted at left or right of building entry point.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

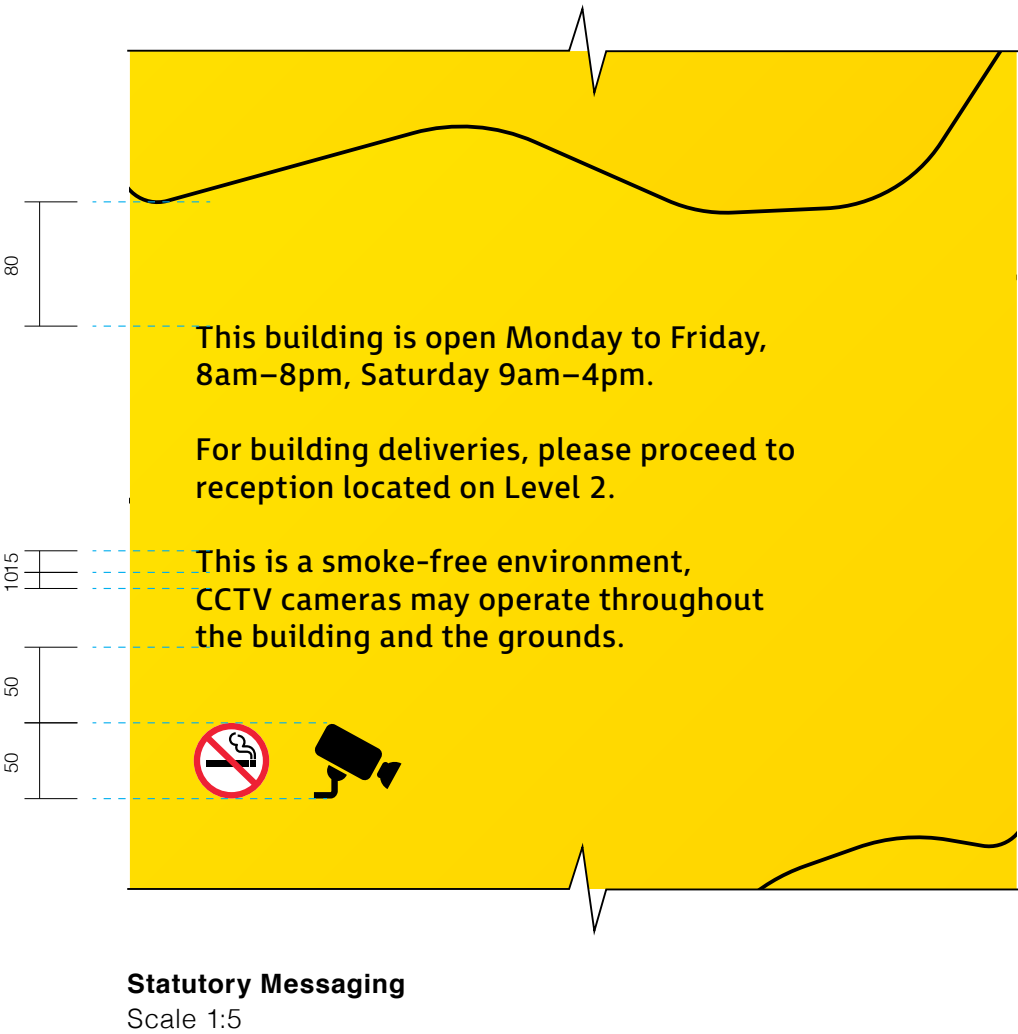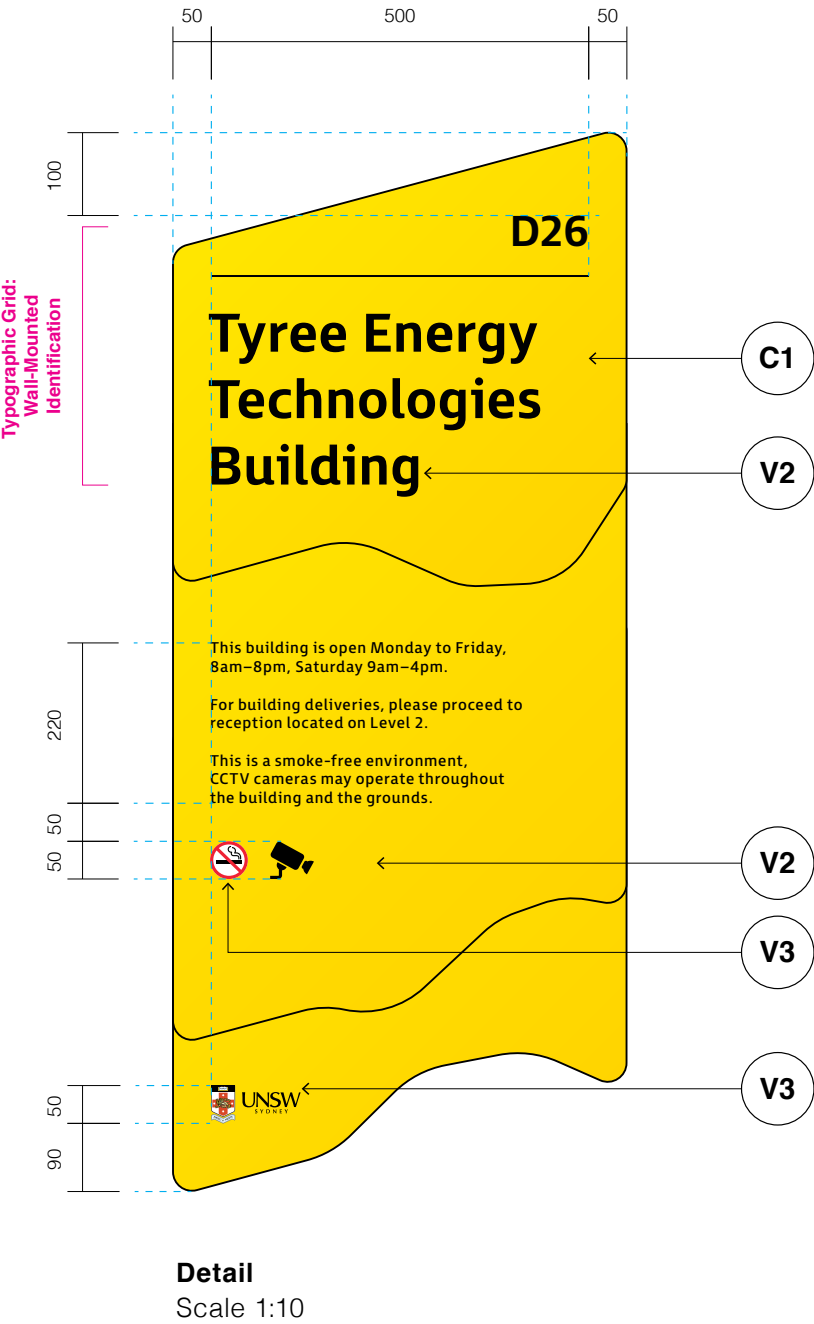

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Mount Layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
No Smoking, CCTV: 50mm diameter.

UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 10, Construction Standards, Layered Panel Signforms




01 Building Entrance ID
Mathews Building




02 Existing Sign
Mathews Building

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

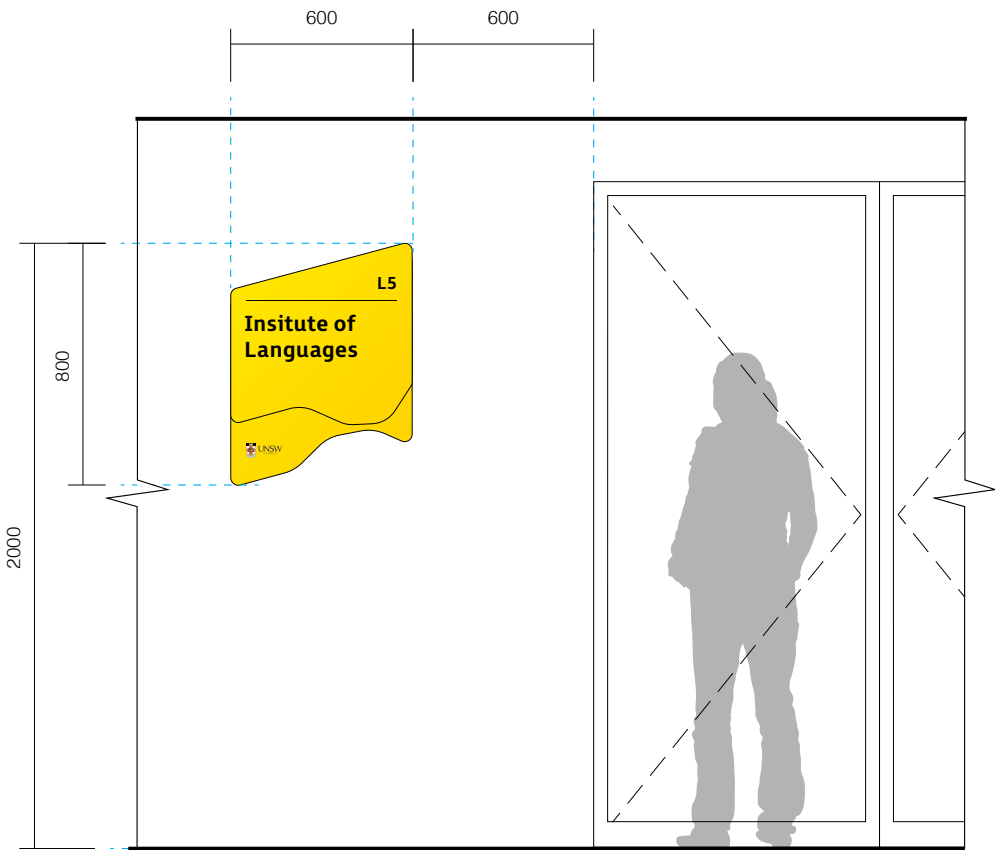

Elevation - Beside entrance
Scale 1:25

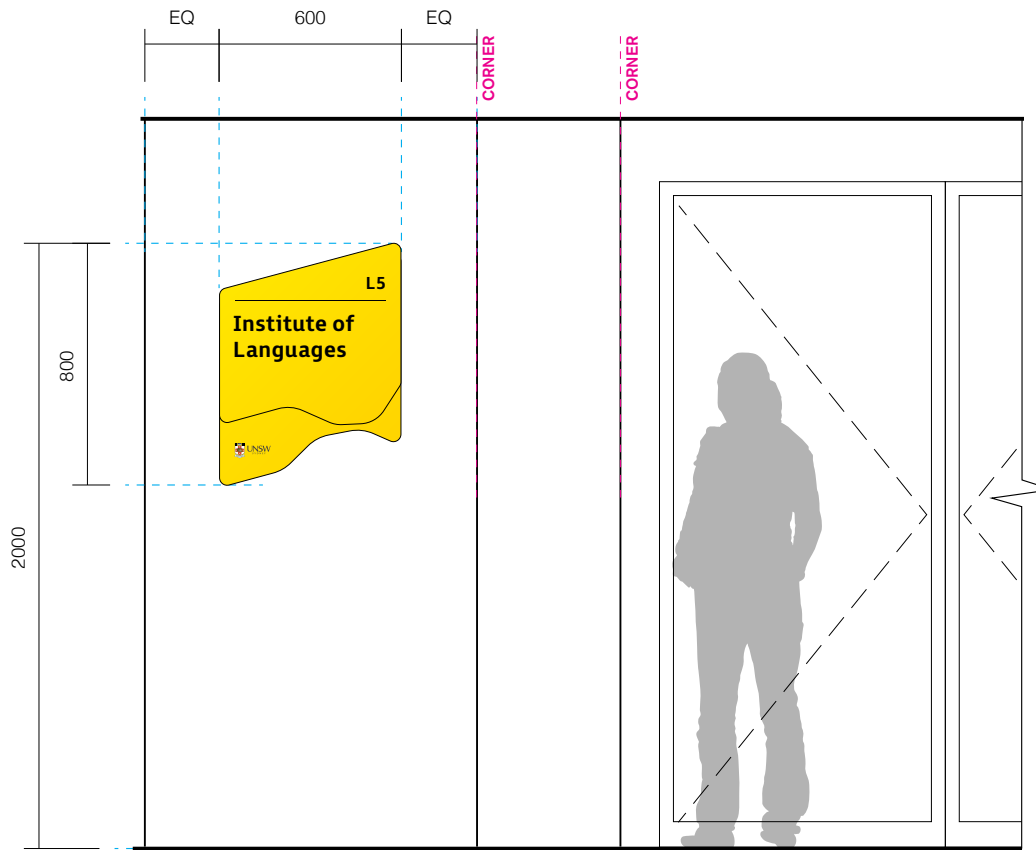


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies entry point of minor buildings and facilities.
Refer to Section 3, Addressing & Terminology, Category 6, 7, 8 ,9.

Location
Wall mounted at left or right of building or facility entry solid door.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

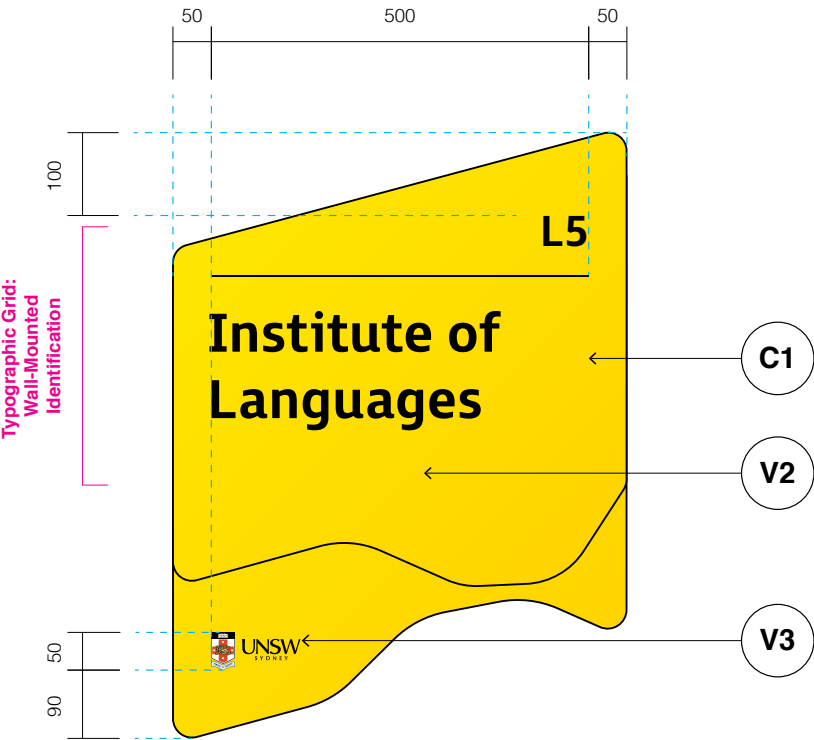

Detail
Scale 1:10

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Mount Layout.
Refer to Section 9, Graphic Standards,
Typographic Grids.

Dividing Line
Line weight: 2mm


UNSW logo
50mm height

Construction & Materials

Materiality Legend


- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

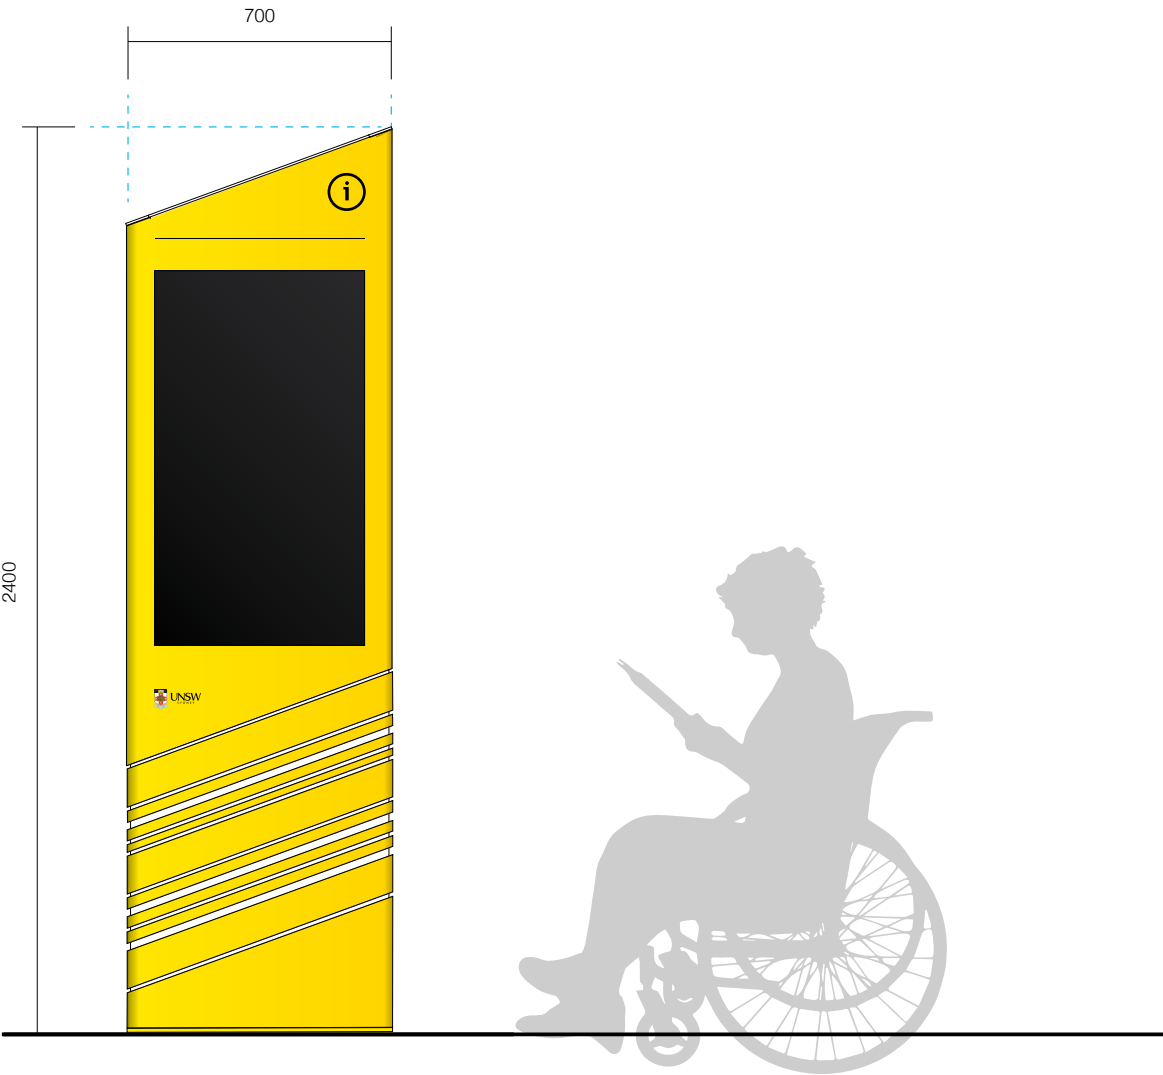

Front Elevation
Scale 1:20

Note
Totem height is based on the understanding that interactive screen elements would not sit above an accessible height of 1600mm, and all screen elements above this would not be interactive.

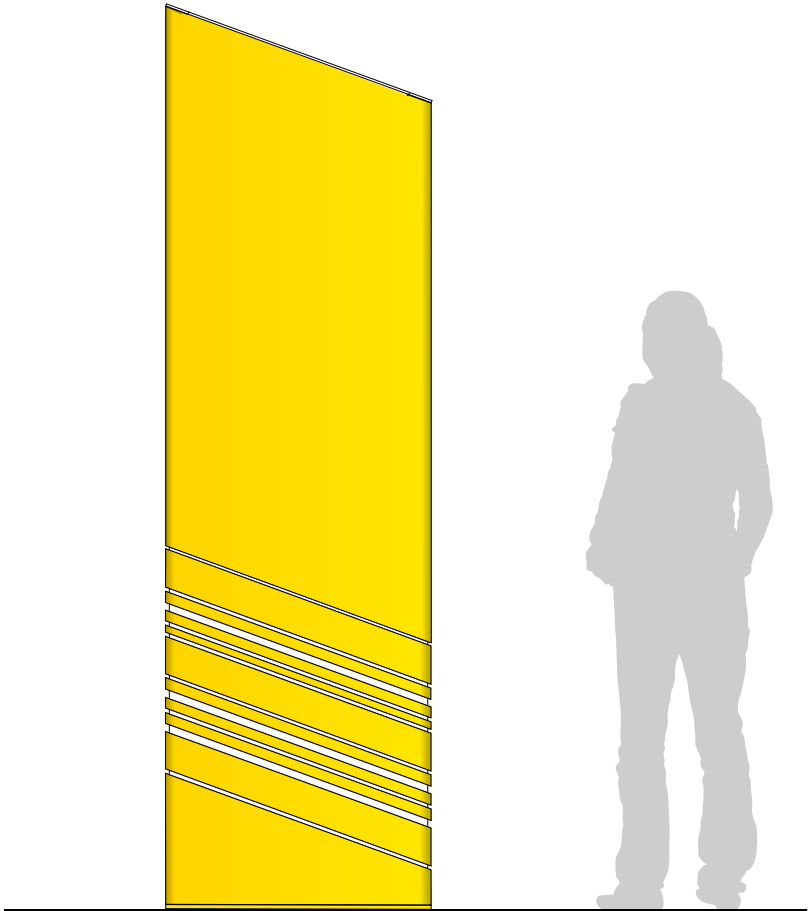

Back Elevation
Scale 1:20


Sign Location

Purpose
Directs to main building destinations. Refer to Section 3, Addressing & Terminology, Category 5, 6, 7, 8.

Location
Freestanding at decision points on major external circulation paths.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate sculptural base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

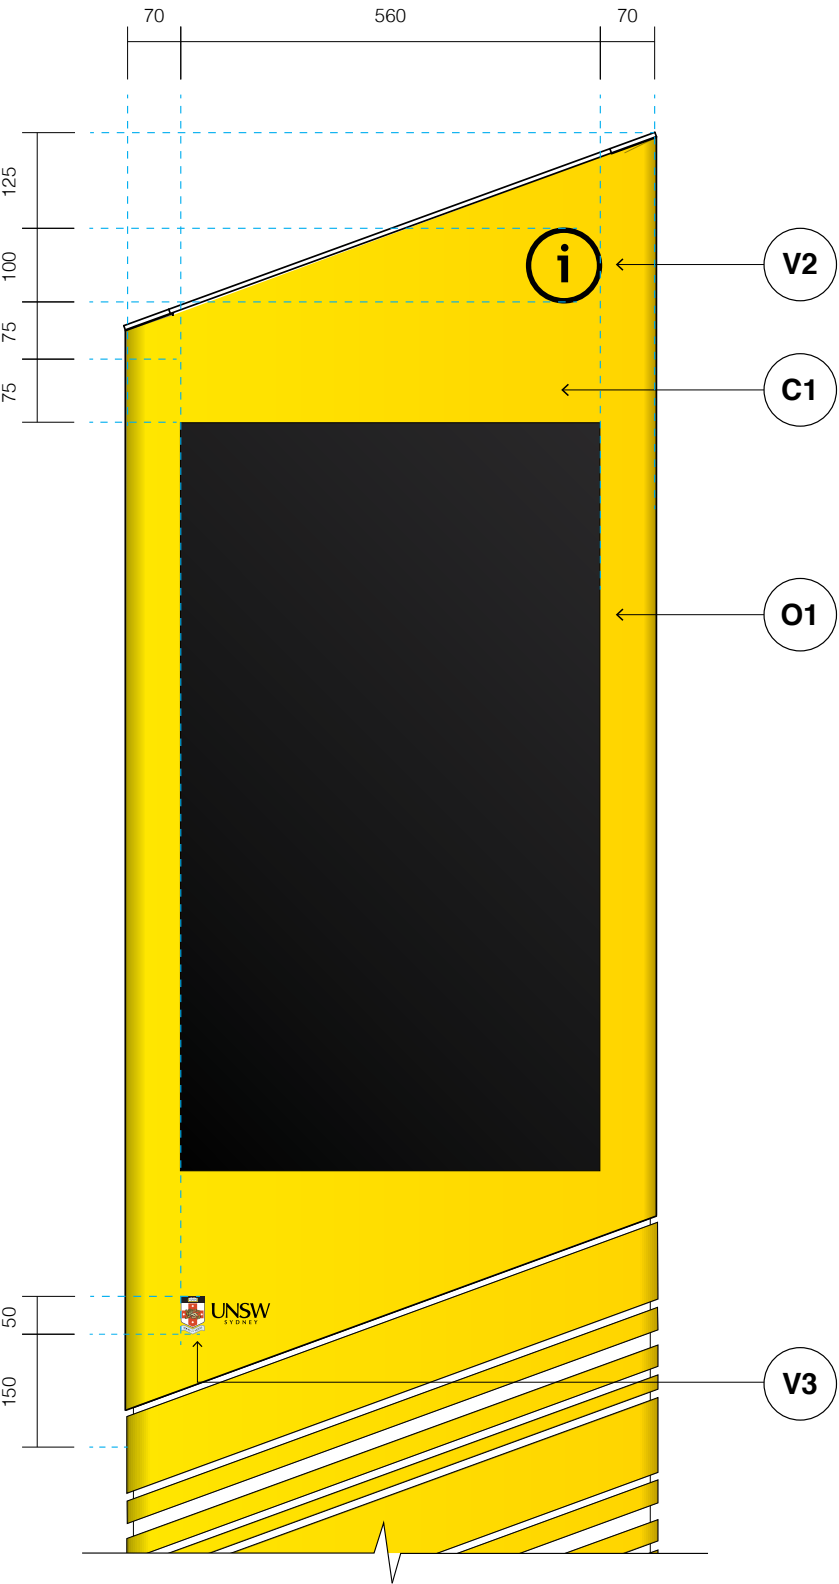

Detail
Scale 1:10


Graphic Layout

- Pictogram**
Information pictogram: 100 diameter.
Refer to Section 9, Graphic Standards, Pictogram Suite.
- Dividing Line**
Line weight: 2mm
- Digital Screen**
LG 43" TA3E Touch Screen Monitor (portrait)
- UNSW logo**
50mm height


Construction & Materials

- Materiality Legend**
- C1**
 - C1 finish on 3mm aluminium
 - V2**
 - V2 applied on top of aluminium
 - V3**
 - V3 print applied on top of aluminium
 - O1**
 - Digital Touch Screen

- Construction Details**
- Refer to: Section 10, Construction Standards, Totem Signforms and Digital Signforms

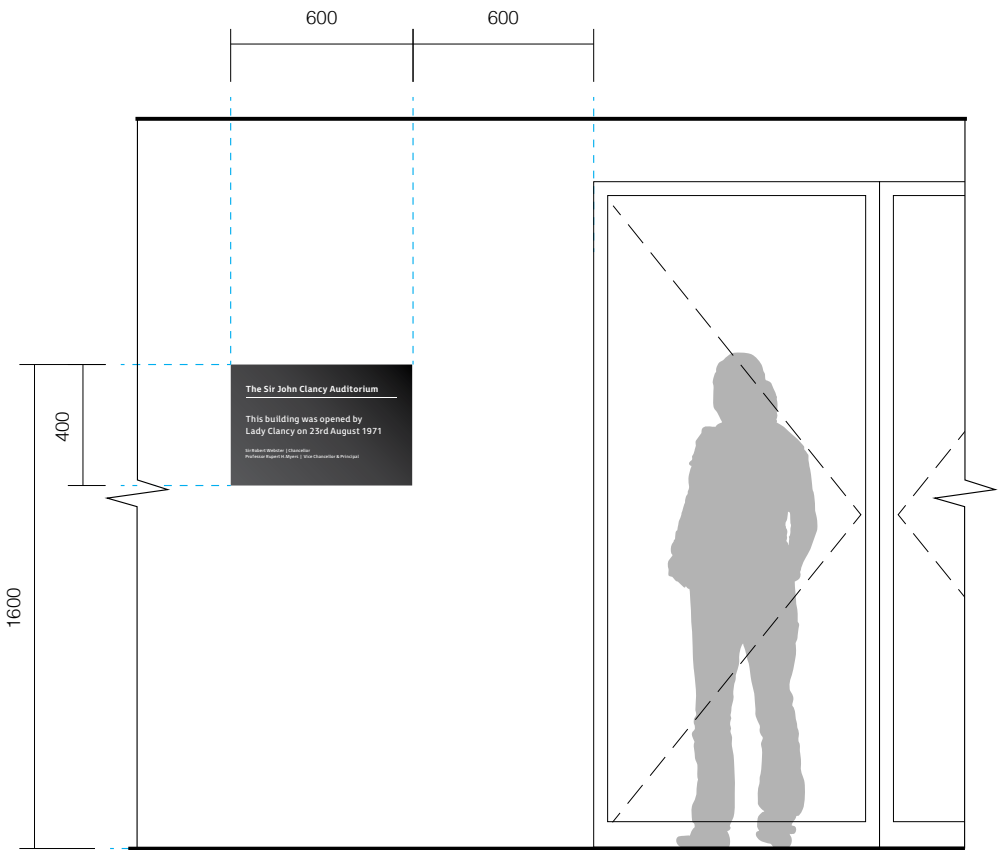

Elevation - Beside entrance
Scale 1:25

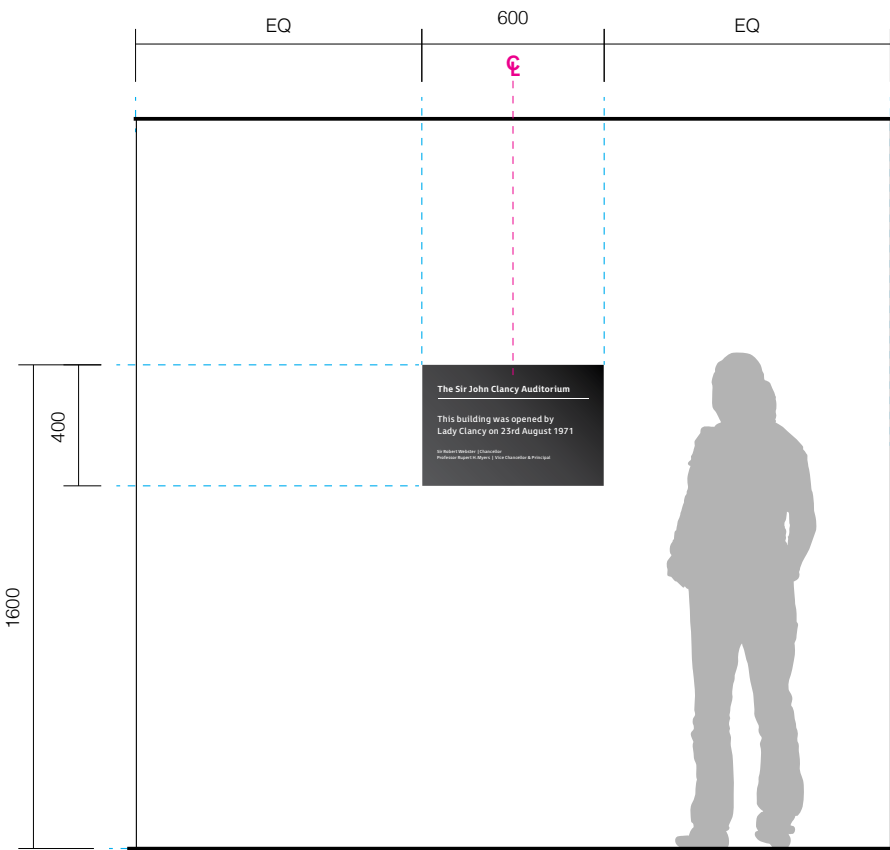


Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose
Displays key sponsors of main building

Location
Located at building entrance, adjacent to or below building identification signage.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

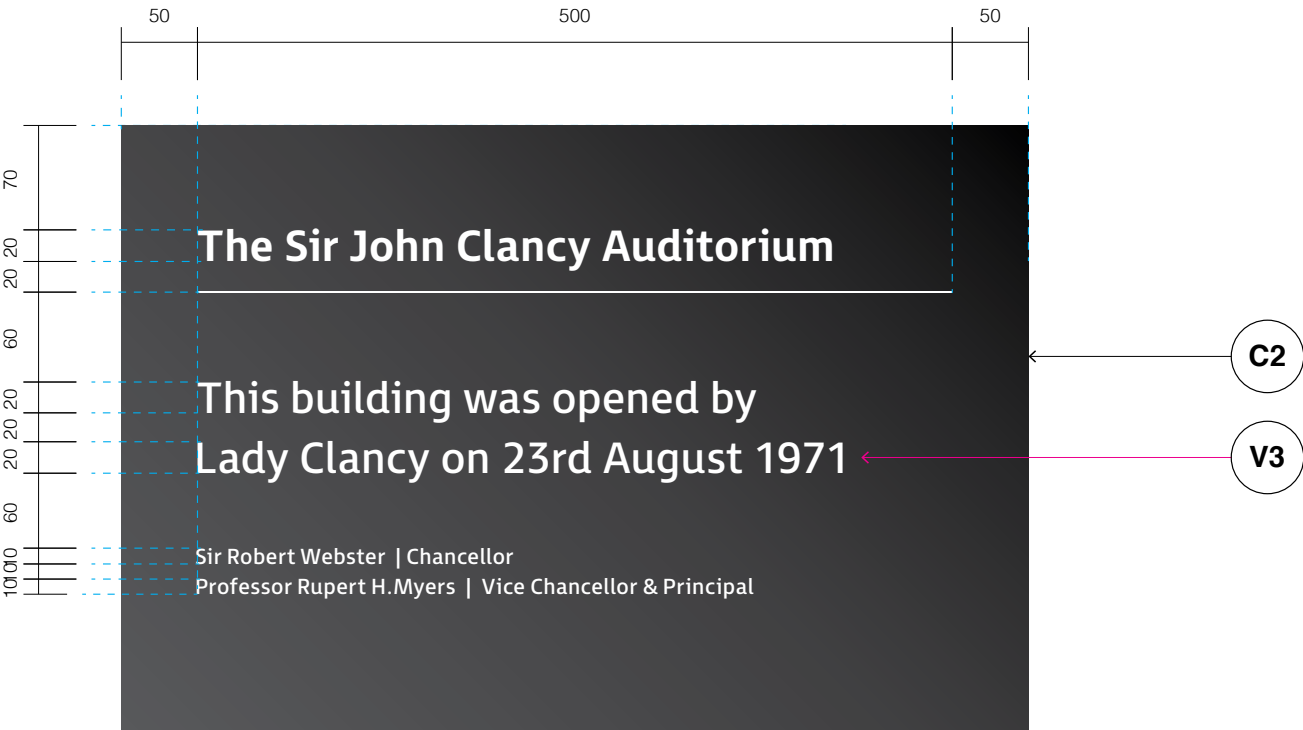

Detail
Scale 1:5

Graphic Layout

Building Name
FS Millbank Bold

Sponsor Messaging
FS Millbank Regular

Dividing Line
Line weight: 2mm

Alignment
Left alignment

Size/ Leading
20mm main body, 10mm footer text

Tracking
10+, Optical kerning

Construction & Materials


Materiality Legend

- C2


 - C2 finish on 3mm aluminium
- V3

 - V3 applied on top of aluminium

- Fixing Details**
- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

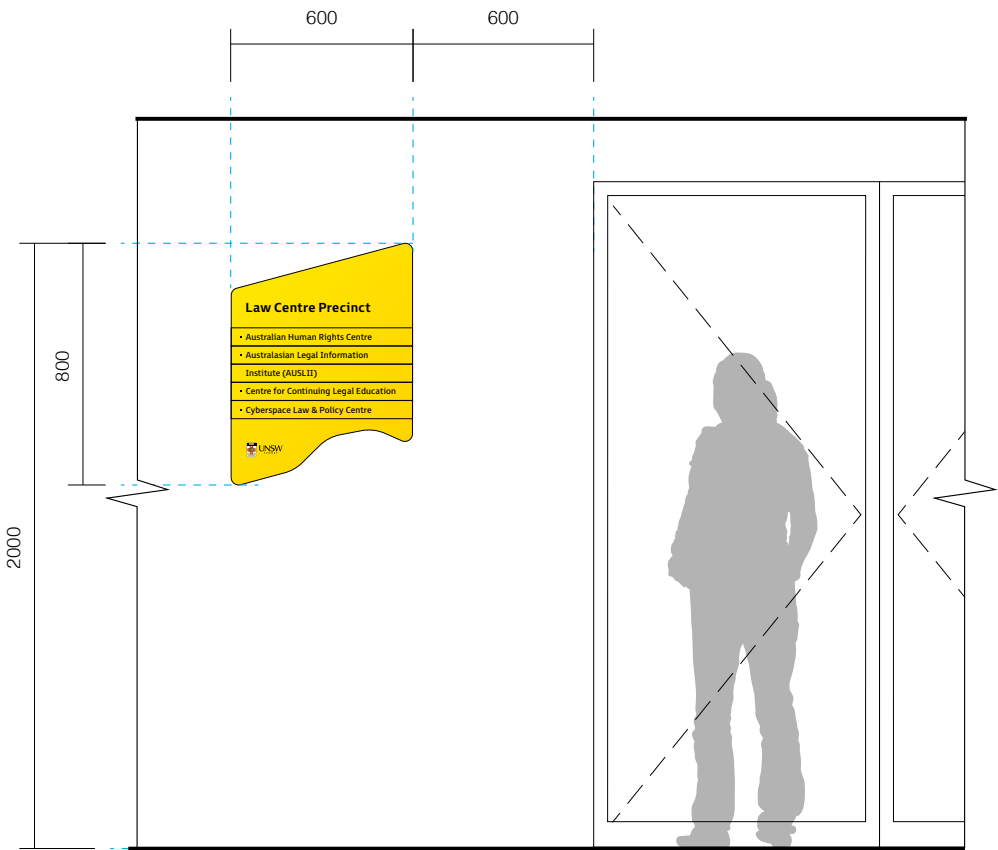

Elevation - Beside entrance
Scale 1:25

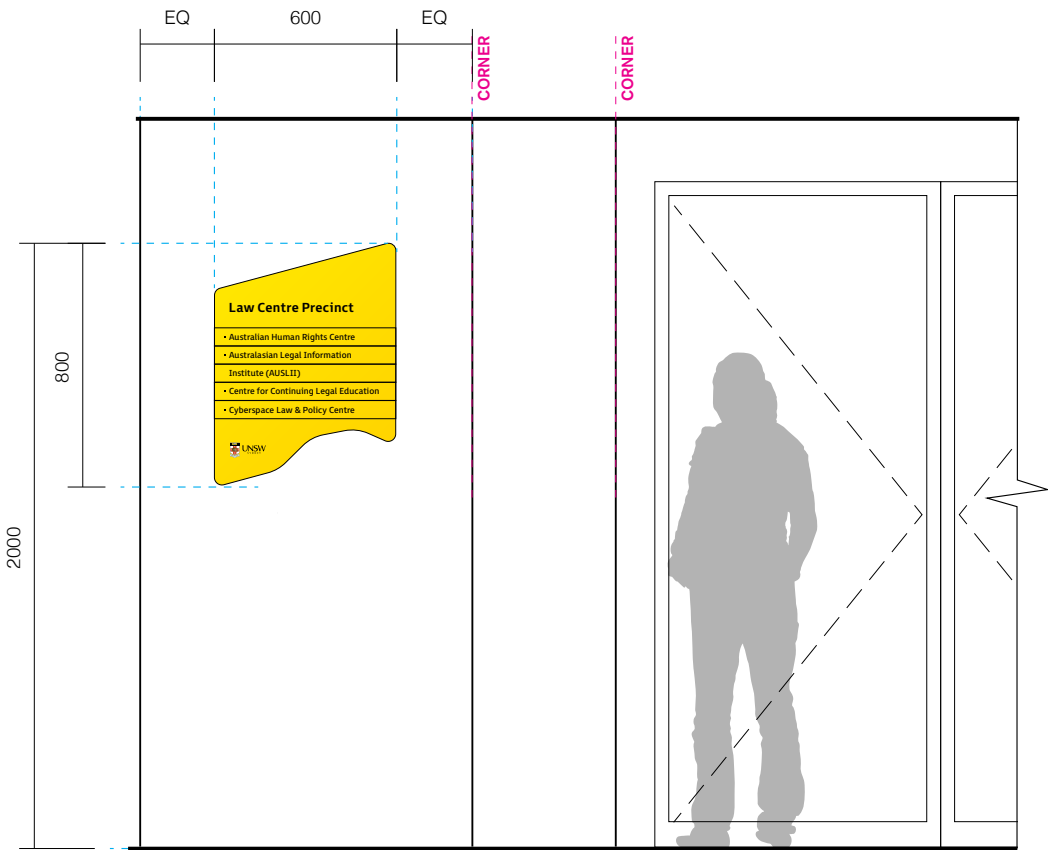


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies main tenants within building

Location
On solid wall at corridor or entry to tenant zone within building

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

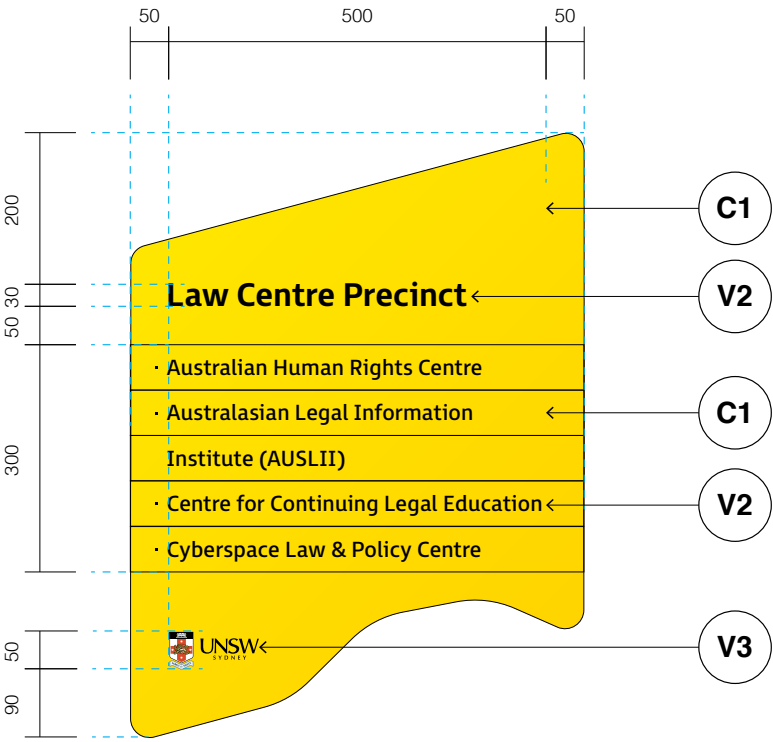

Detail
Scale 1:10



Directory Messaging
Scale 1:5

Graphic Layout

Precinct ID
FS Millbank Bold
Alignment: Left
Size/ Leading: 30mm, 50mm
Tracking: 10+, Optical kerning

Level Directory Tenants
FS Millbank Regular
Alignment: Left
Size: 20mm
Tracking: 10+, Optical kerning
One line of text per slat, up to 5 slats


UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

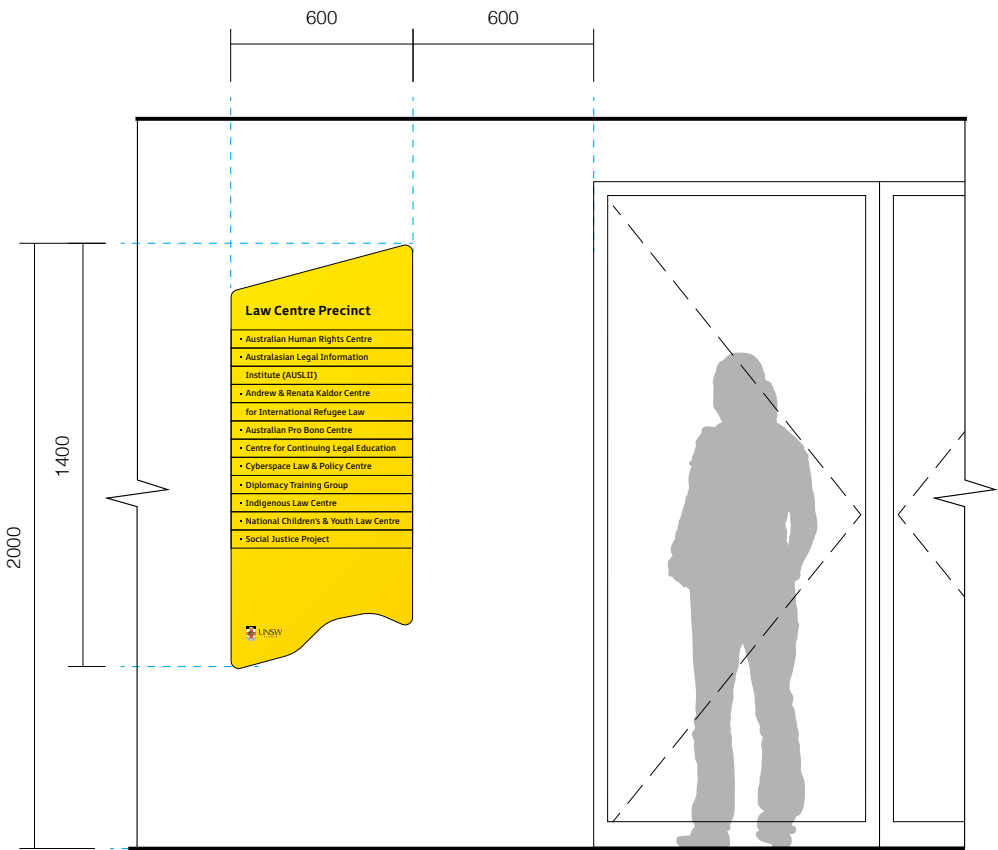

Elevation - Beside entrance
Scale 1:25

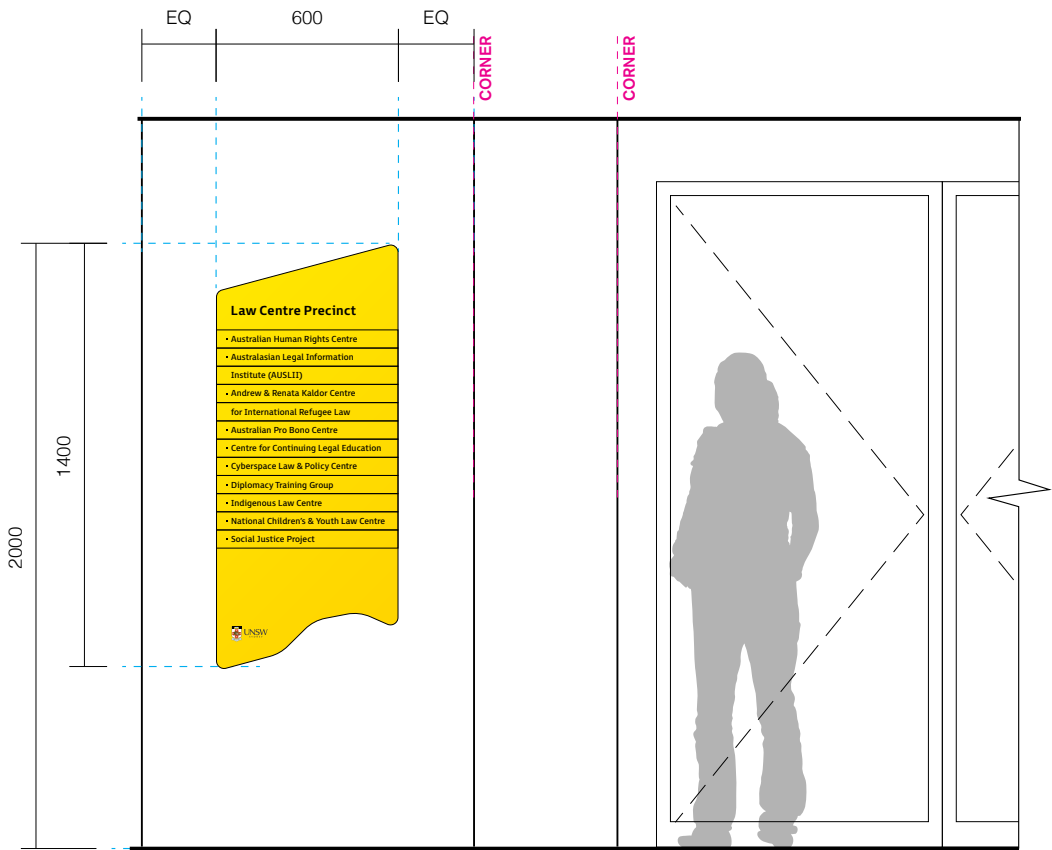


Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies main tenants within building

Location
On solid wall at corridor or entry to tenant zone within building

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

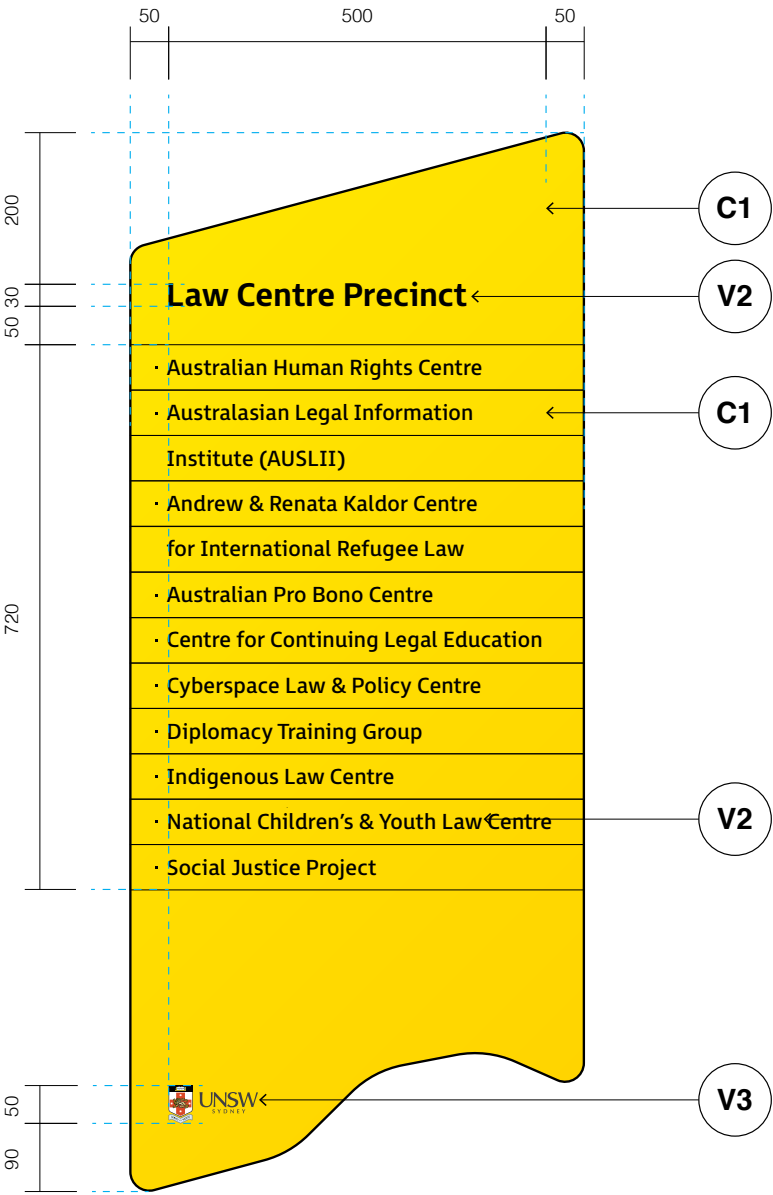

Detail
Scale 1:10



Directory Messaging
Scale 1:5

Graphic Layout

Precinct ID
FS Millbank Bold
Alignment: Left
Size/ Leading: 30mm, 50mm
Tracking: 10+, Optical kerning

Level Directory Tenants
FS Millbank Regular
Alignment: Left
Size: 20mm
Tracking: 10+, Optical kerning
One line of text per slat, up to 12 slats

UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms



Elevation - Beside entrance
Scale 1:25

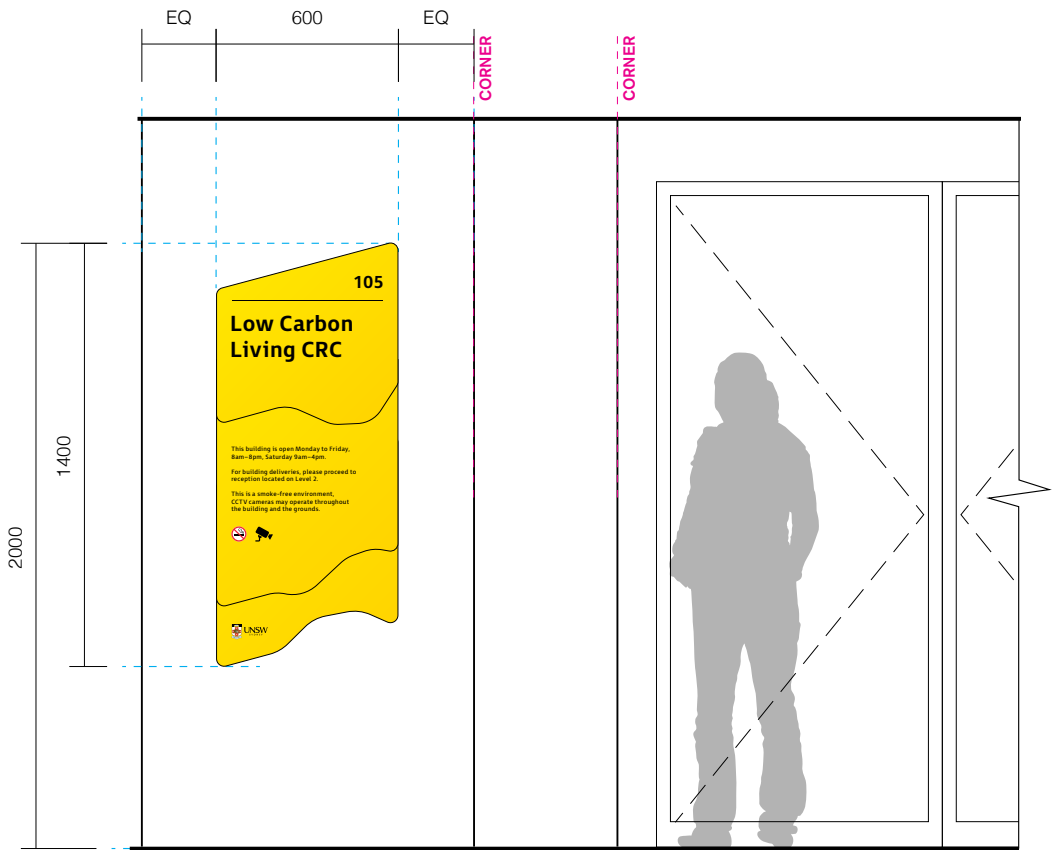



Elevation - Adjacent wall to entrance
Scale 1:25

Sign Location

Purpose
Identifies main tenant within building, along with opening times and statutory information.

Location
Wall mounted at left or right of solid door, or at intersection of immediate pathway leading into main entry.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

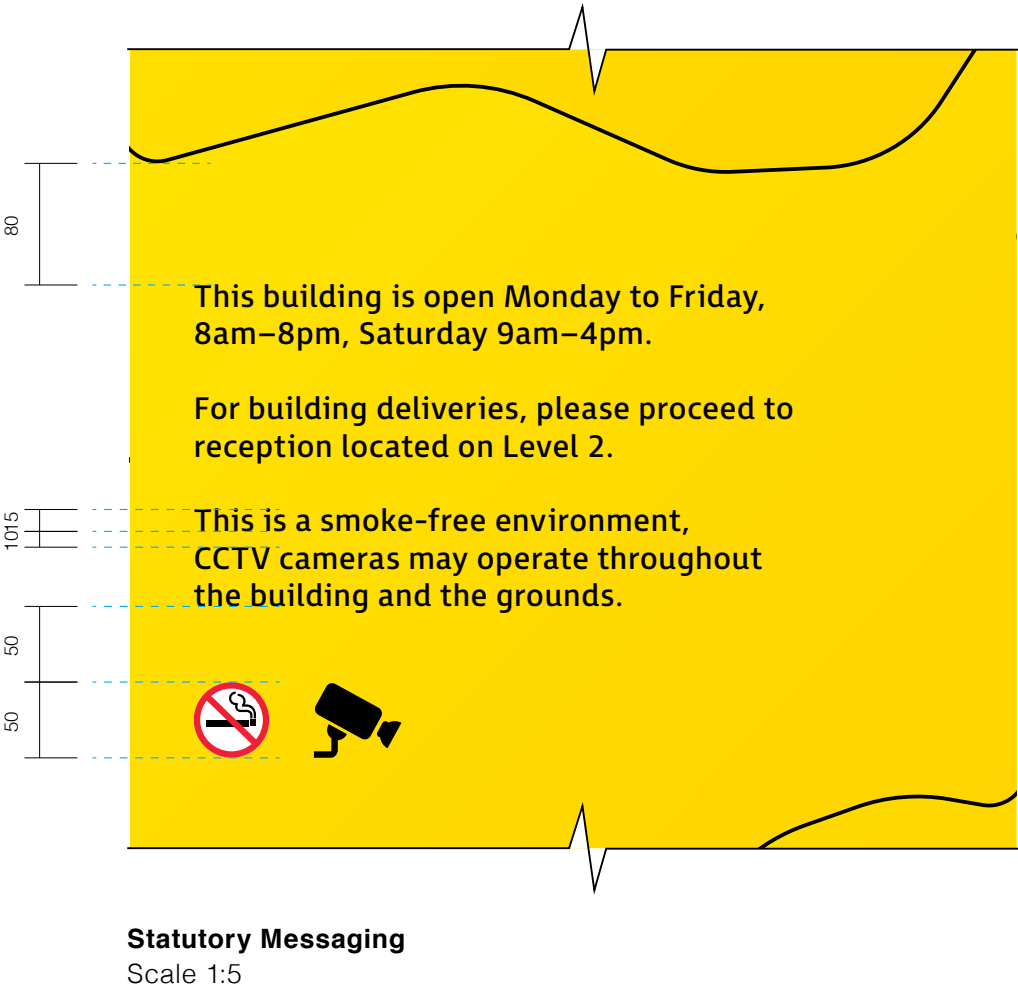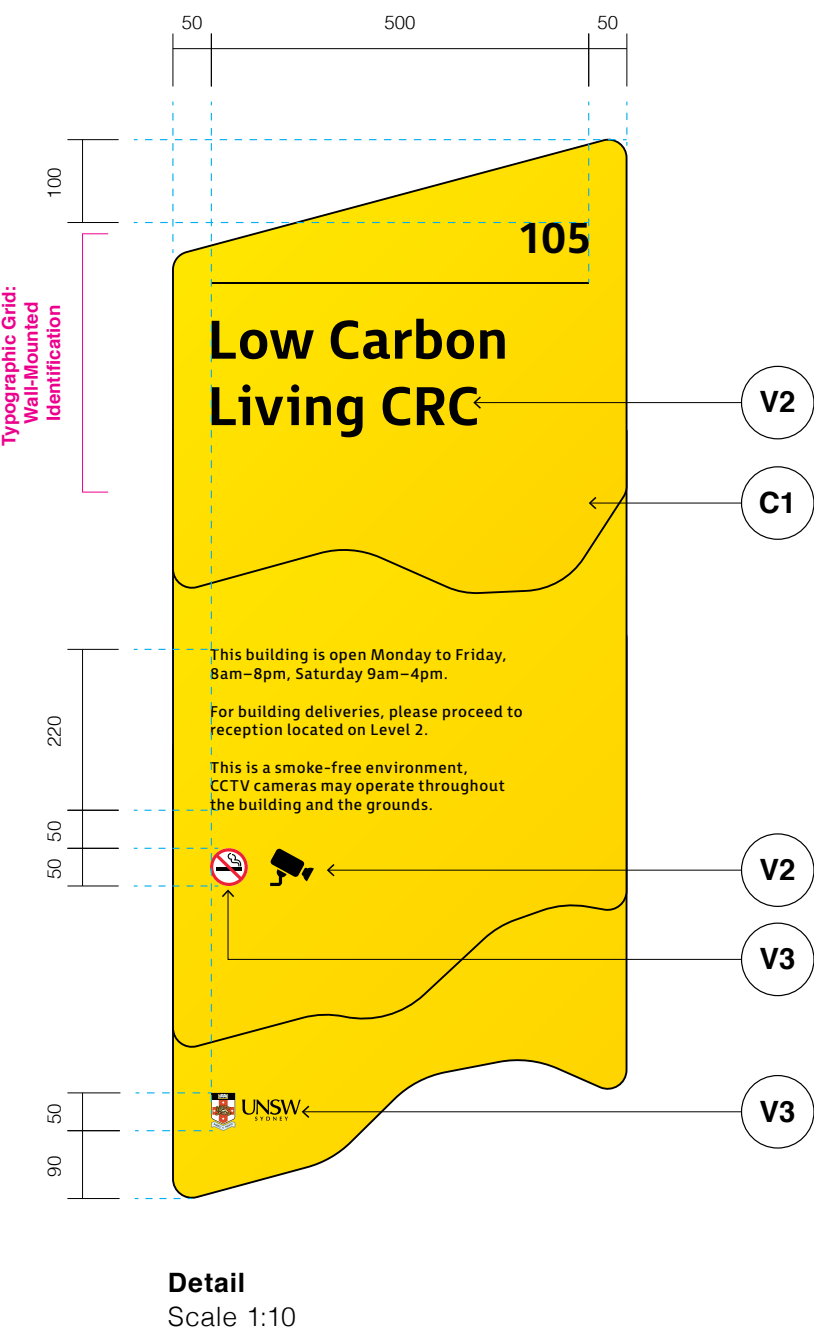

Graphic Layout

Typographic Grid – Identification
Building Identification Wall Mount Layout. Refer to Section 9, Graphic Standards, Typographic Grids,

Dividing Line
Line weight: 2mm

Statutory Content
Alignment: Left
Size/Leading: 15mm, 10mm
Tracking: 10+, Optical kerning

Pictograms
No Smoking, CCTV: 50mm diameter

UNSW logo
50mm height


Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 10, Construction Standards, Layered Panel Signforms

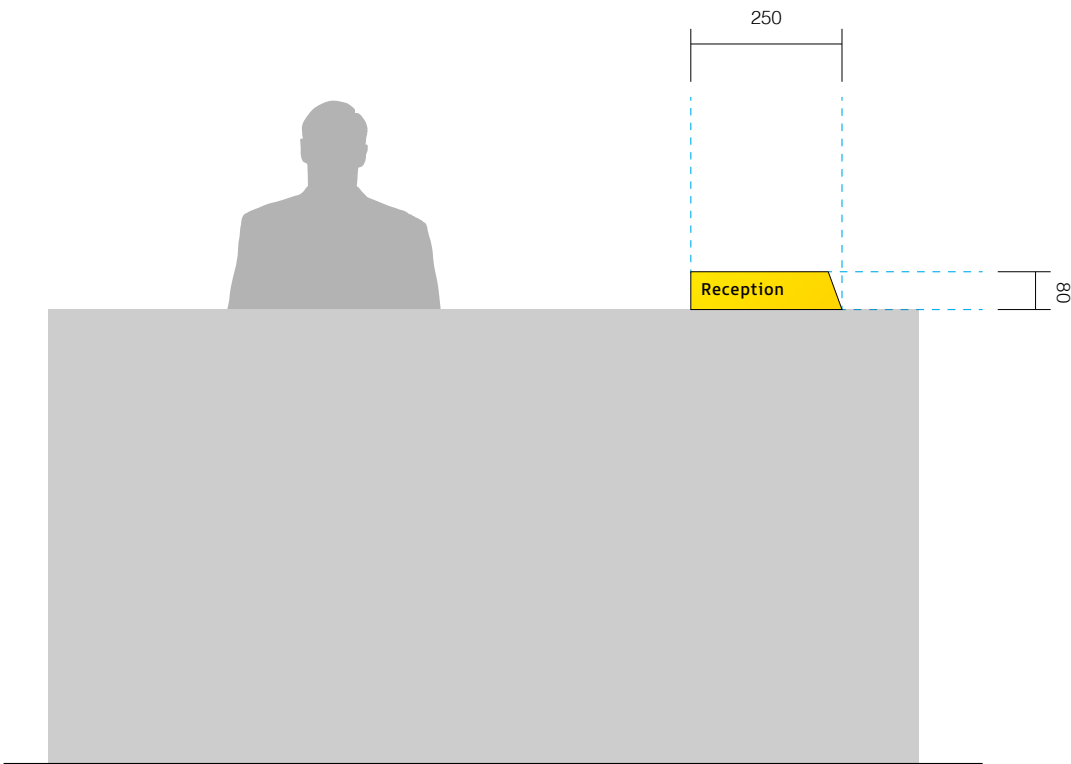


Elevation
Scale 1:20

Sign Location

Purpose
Identifies reception desk for pedestrian visitors, staff and students

Location
Freestanding on table top of reception desk.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

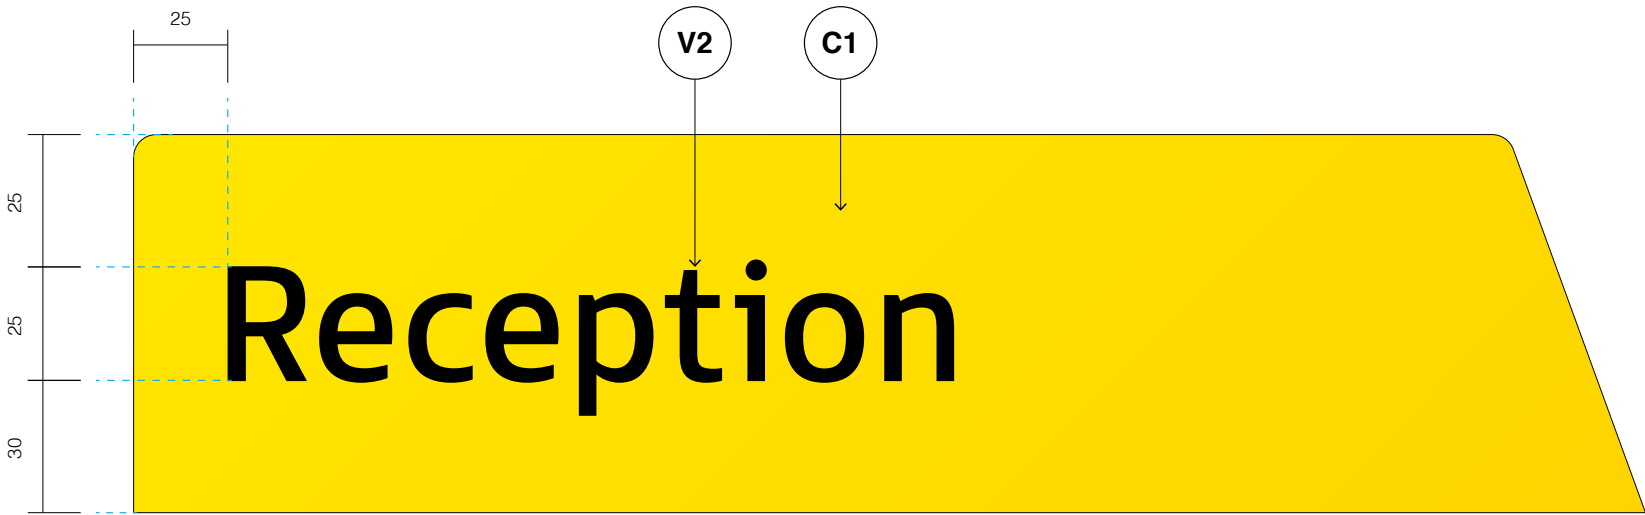

Detail
Scale 1:2

Graphic Layout

Reception Identification
FS Millbank Regular

Alignment
Left aligned

Size
25mm

Tracking
10+, Optical Kerning

Construction & Materials


Materiality Legend

- C1**


 - C1 finish on 3mm aluminium
- V2**

 - V2 finish applied on top of aluminium

Construction Details
• Refer to: Section 22, Shop Drawings

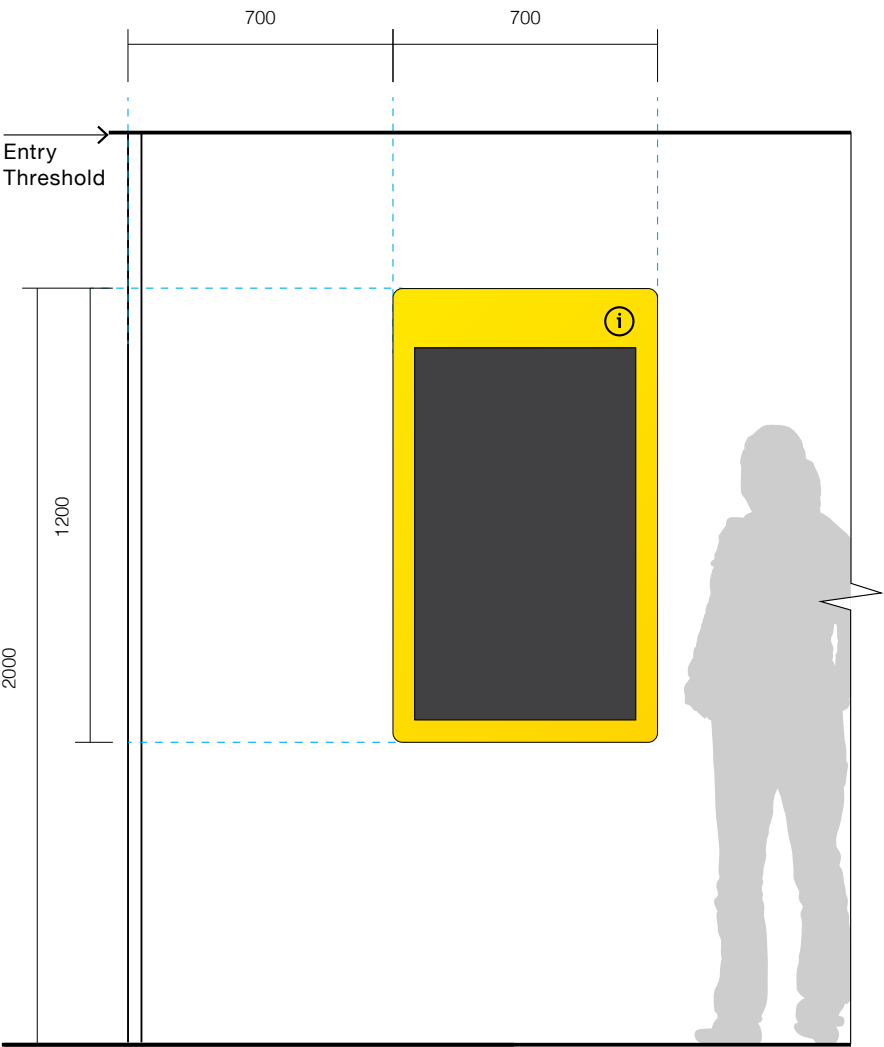

Elevation - Adjacent to threshold
Scale 1:20

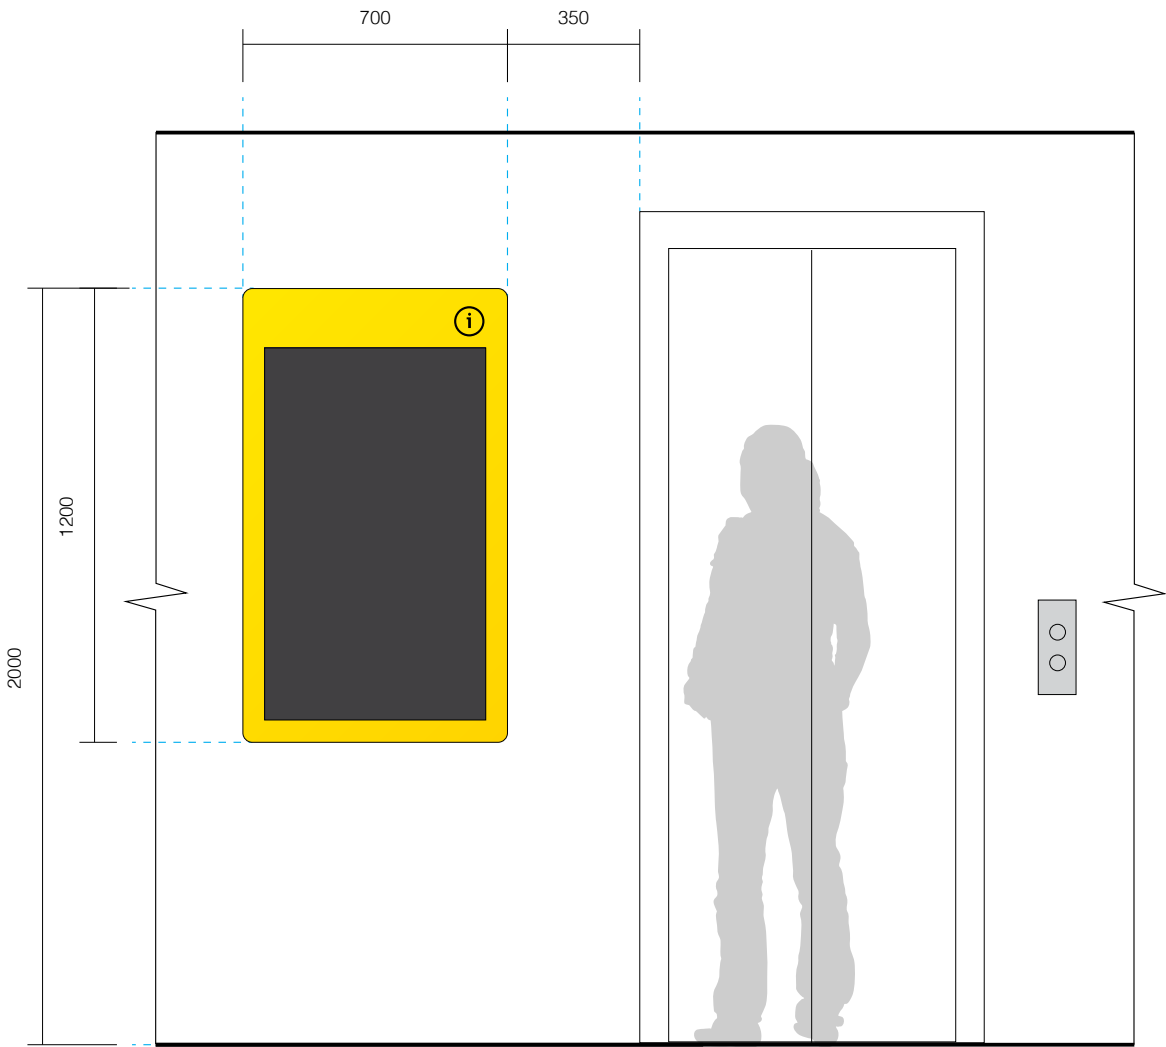


Elevation - Beside lift
Scale 1:20

Sign Location

Purpose
Directs to main level destinations and identifies on floor plan facilities/circulation devices and room numbers for all FOH destinations on that level.

Location
Applied to solid walls in lift lobby

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

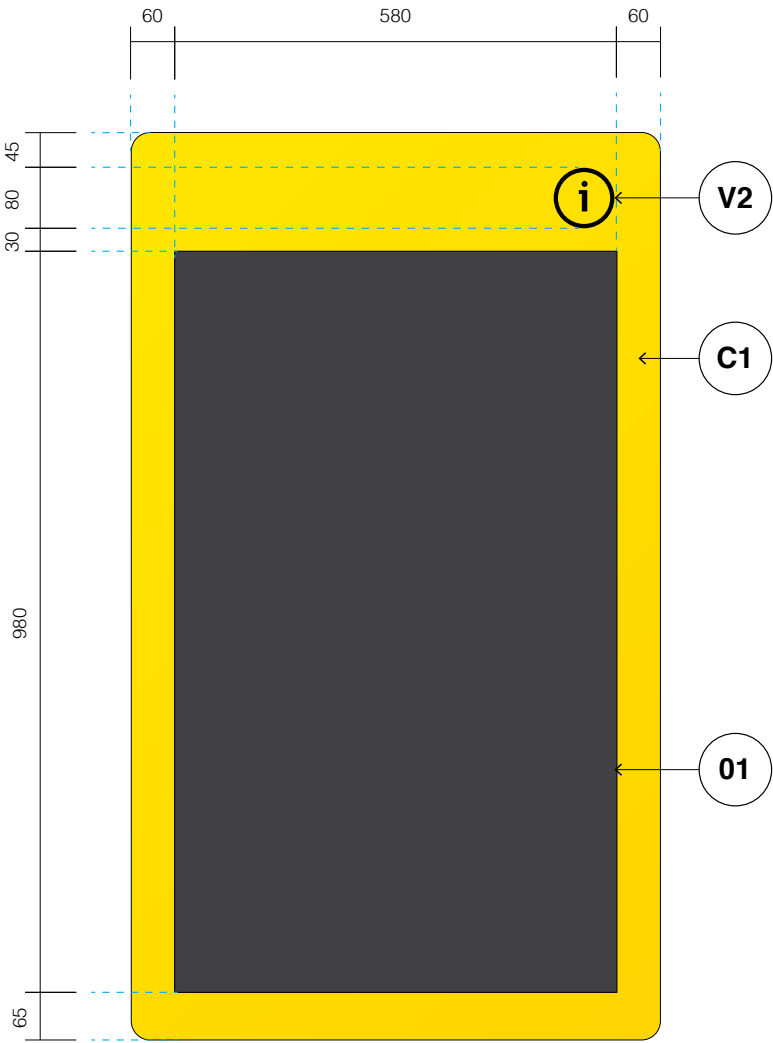

Detail
Scale 1:10

Graphic Layout

Pictogram
Information pictogram: 100 diameter
Refer to Section 9, Graphic Standards, Pictogram Suite.


Digital Screen
LG 43" TA3E Touch Screen Monitor (portrait)

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|------------------------|
| C1 | V2 | 01 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • Digital Touch Screen |

Construction Details
• Refer to: Section 10, Construction Standards, Digital Signforms

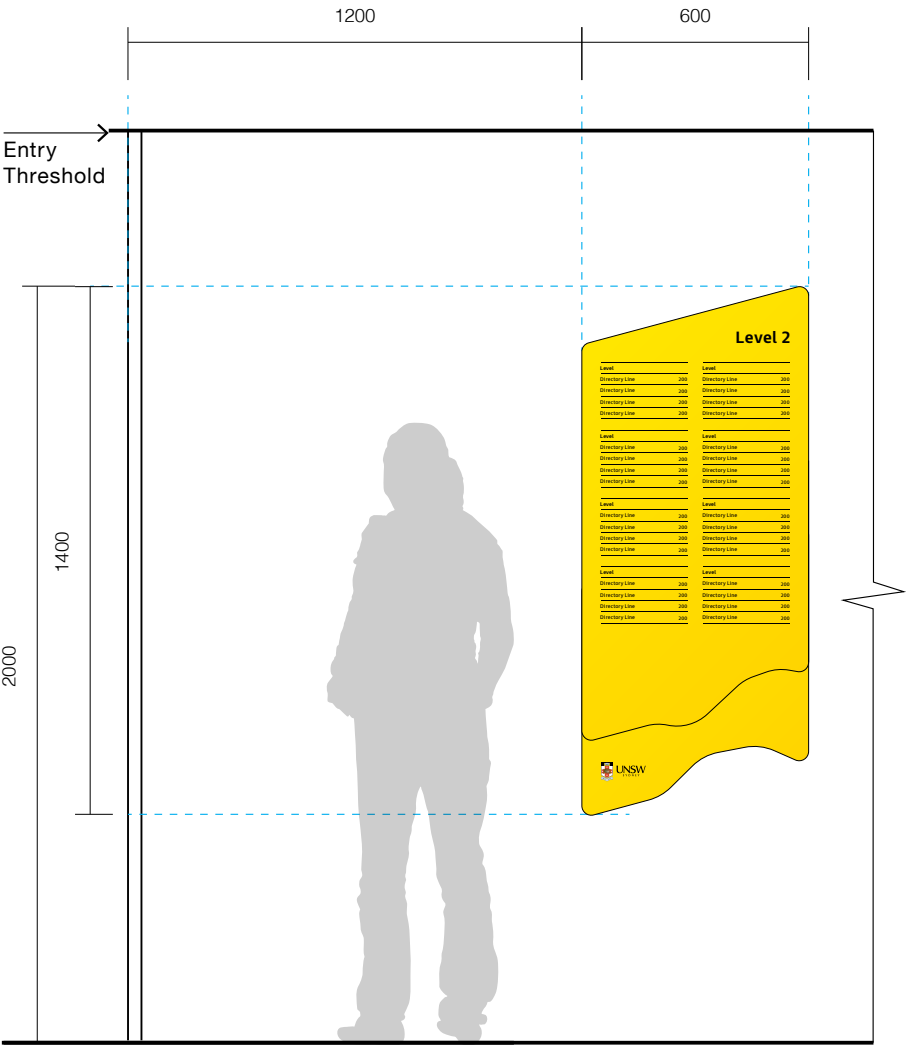

Elevation - Adjacent to threshold
Scale 1:20

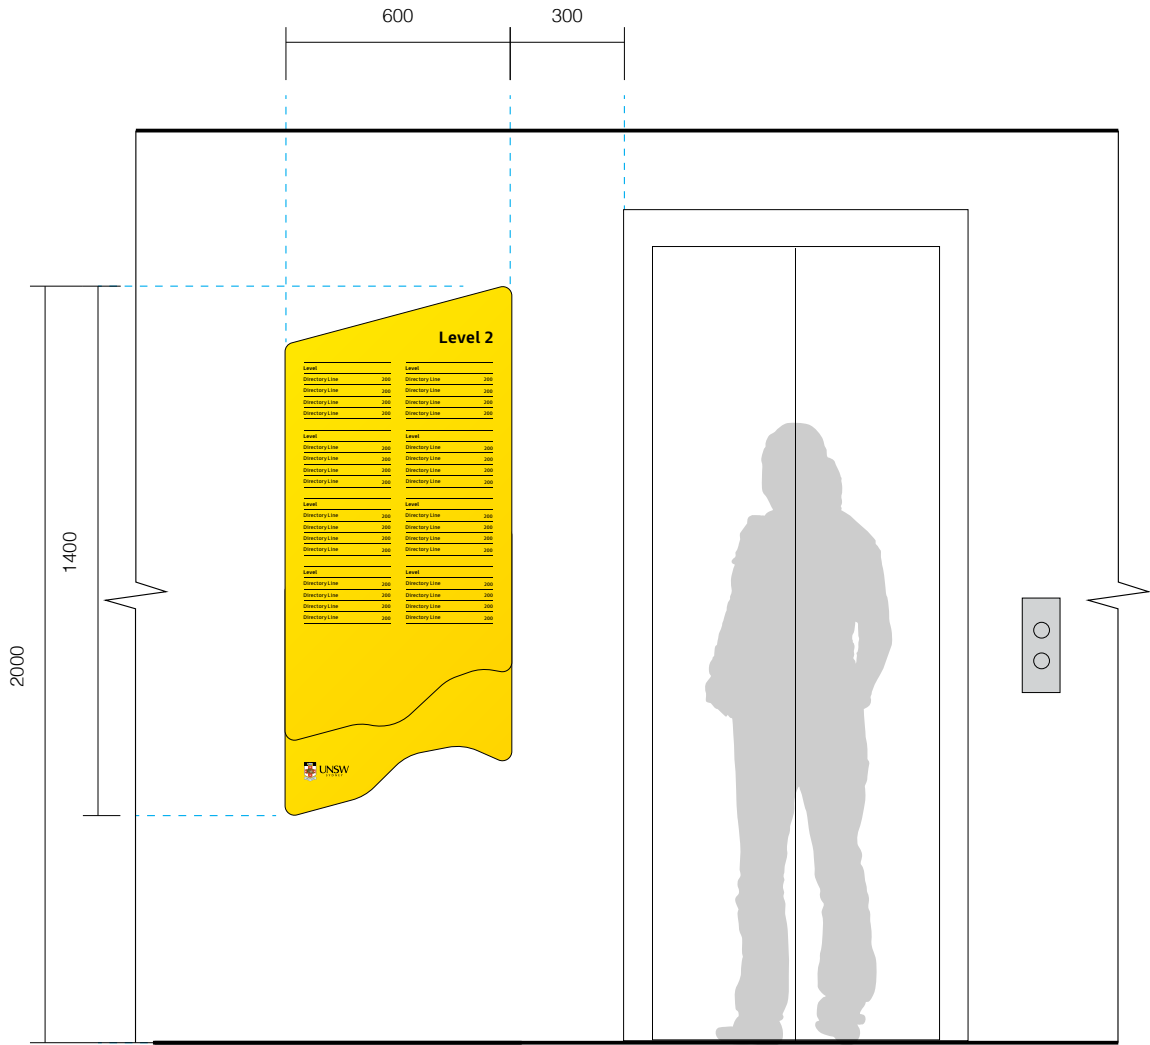



Elevation - Adjacent to lift
Scale 1:20

Sign Location

Purpose
Directs to main level destinations internally.

Location
Applied to solid walls in lift lobby.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

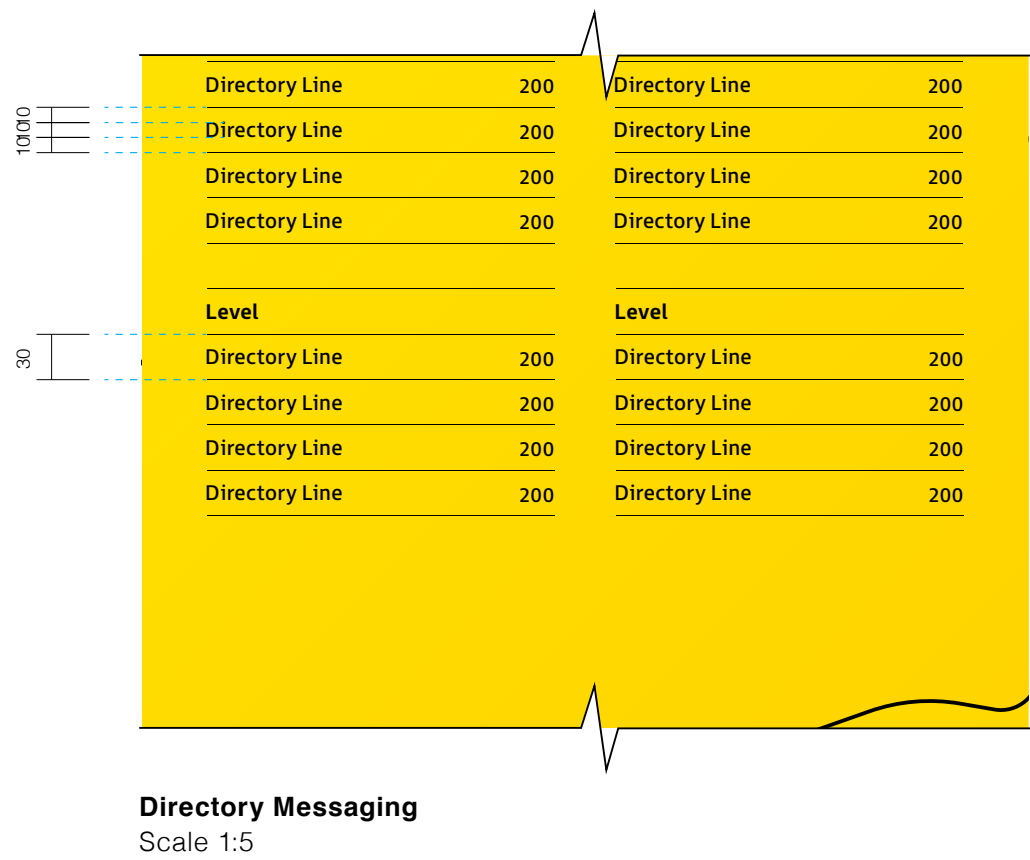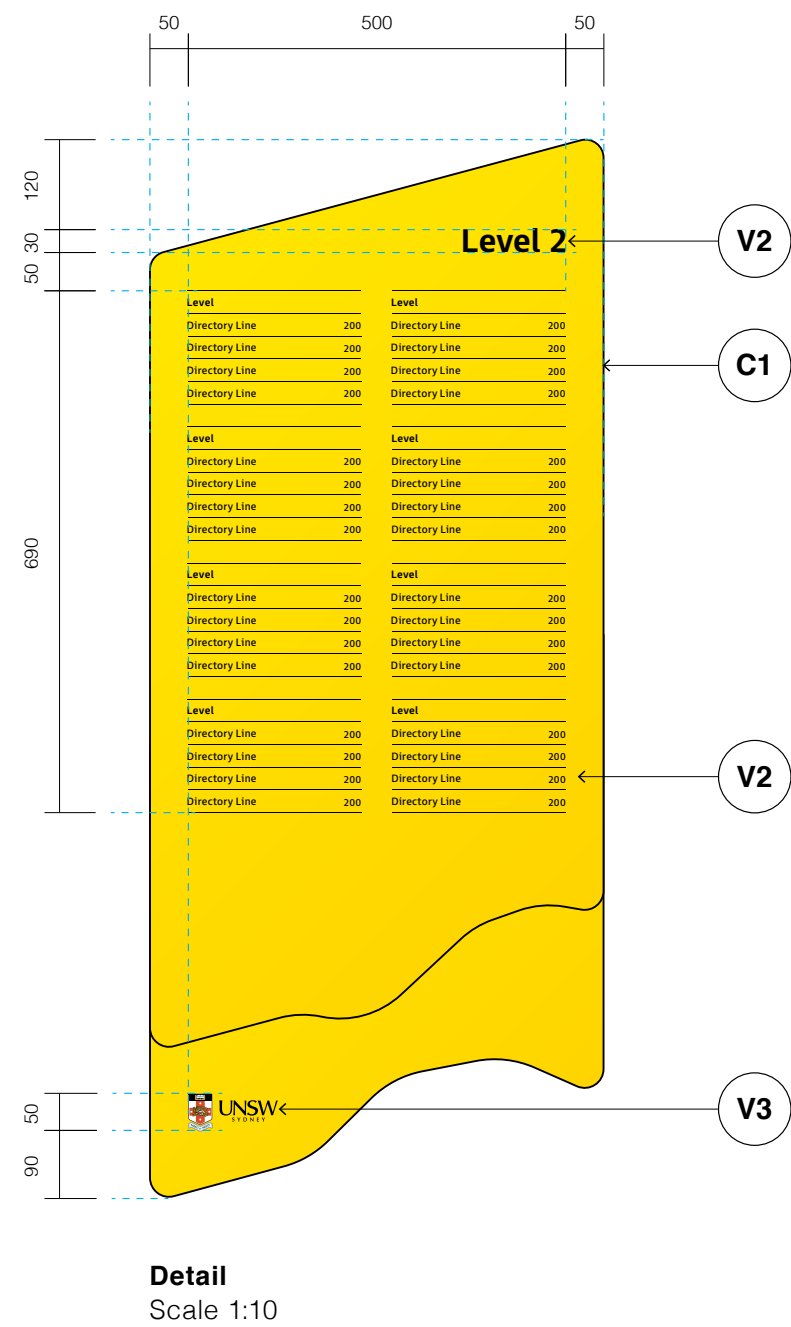

Graphic Layout

Level ID
FS Millbank Bold
Alignment: Right
Size/ Leading: 40mm, 40mm
Tracking: 10+, Optical kerning

Level Directory Content
FS Millbank Regular
Columns: Max 2
Alignment: Tenant name; Left, Room number; Right
Size/Leading: 10mm, 10mm
Tracking: 10+, Optical kerning
Dividing line weight: 1mm

UNSW logo
50mm height


Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium

Construction Details

- Refer to: Section 10, Construction Standards, Layered Panel Signforms

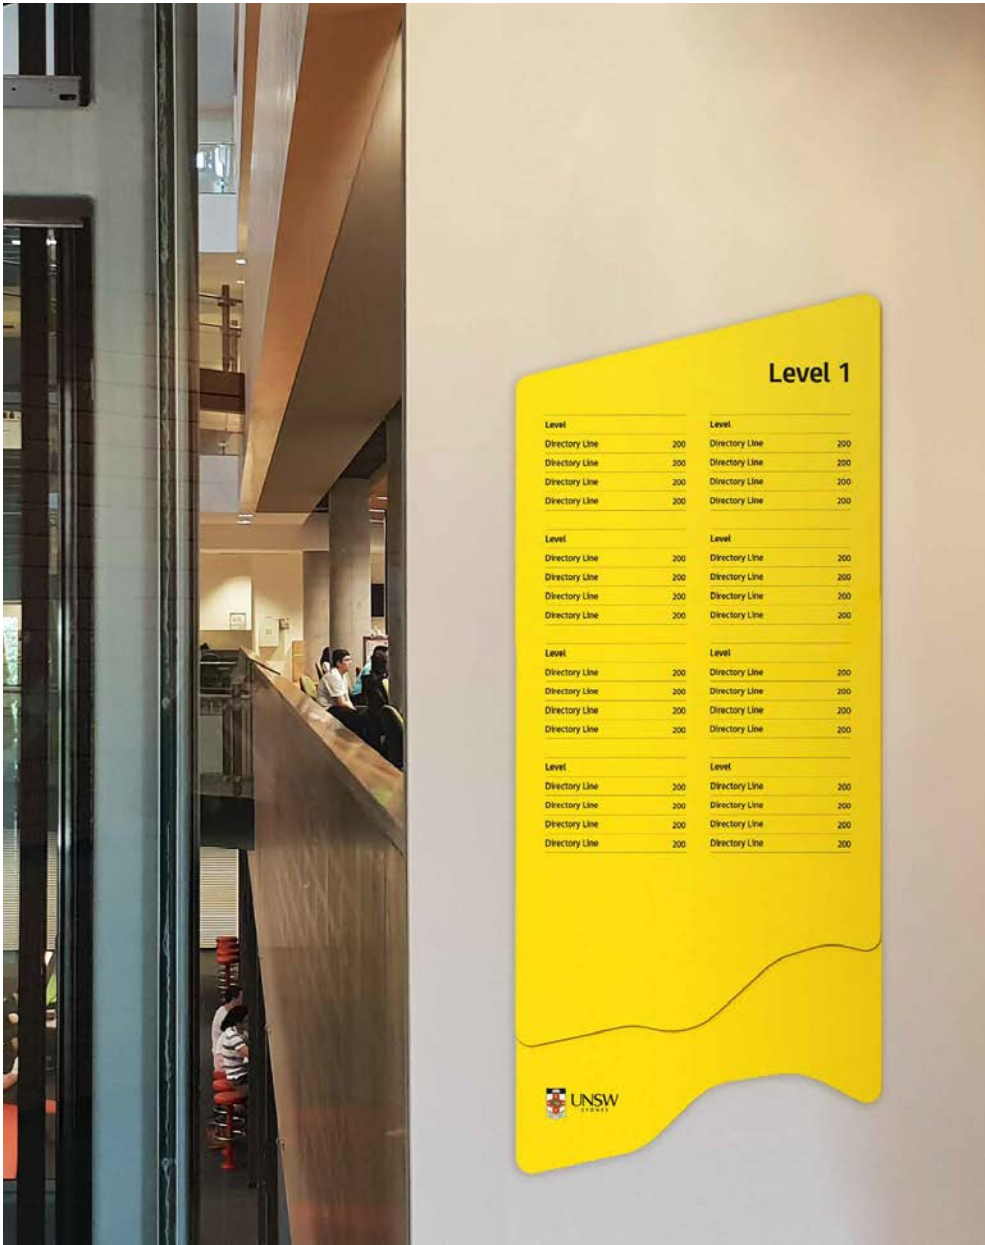


01 Lift Directory
Tyree Energies Technologies



02 Existing Sign
Tyree Energies Technologies

Insitu Comparison


Note
The images shown are indicative of sign location and are to be used as a guide only.

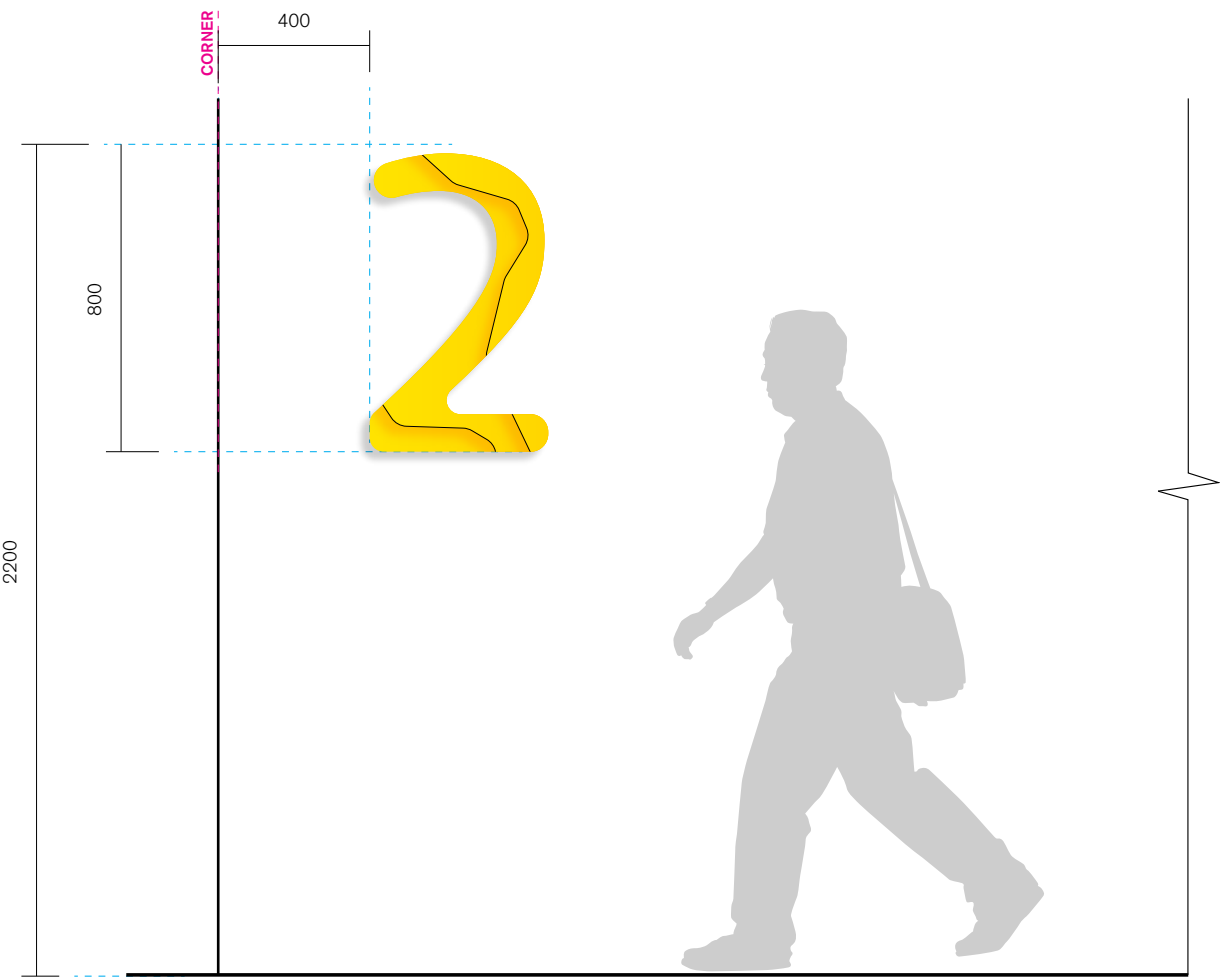


Elevation – Wall Corner
Scale 1:20



Elevation – Side
Scale 1:20

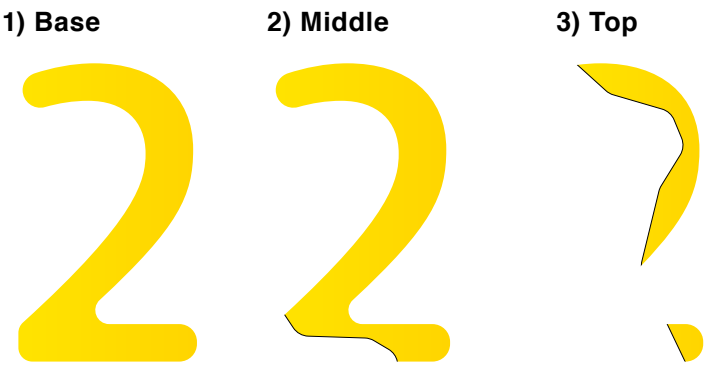

Detail – Level ID Deconstruction
Scale 1:20

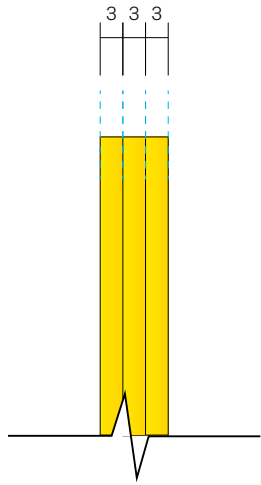


Detail
Scale 1:1

Sign Location

Purpose
Identifies building level at stair landings.


Location
Applied to solid walls adjacent to stair landing.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

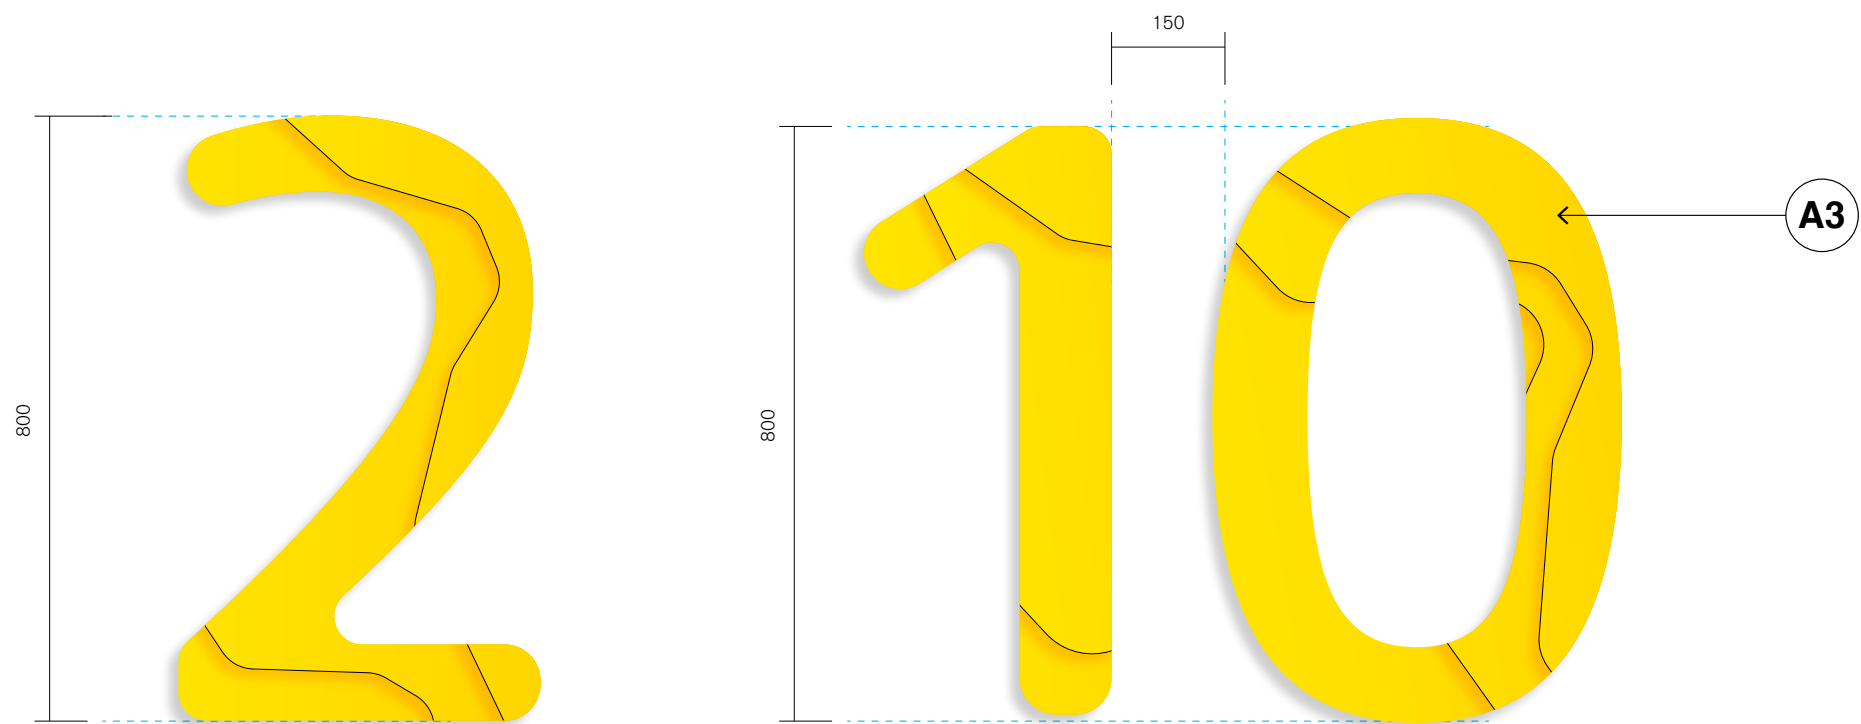

Level ID - Single Digit Detail
Scale 1:10

Level ID - Double Digit Detail
Scale 1:10

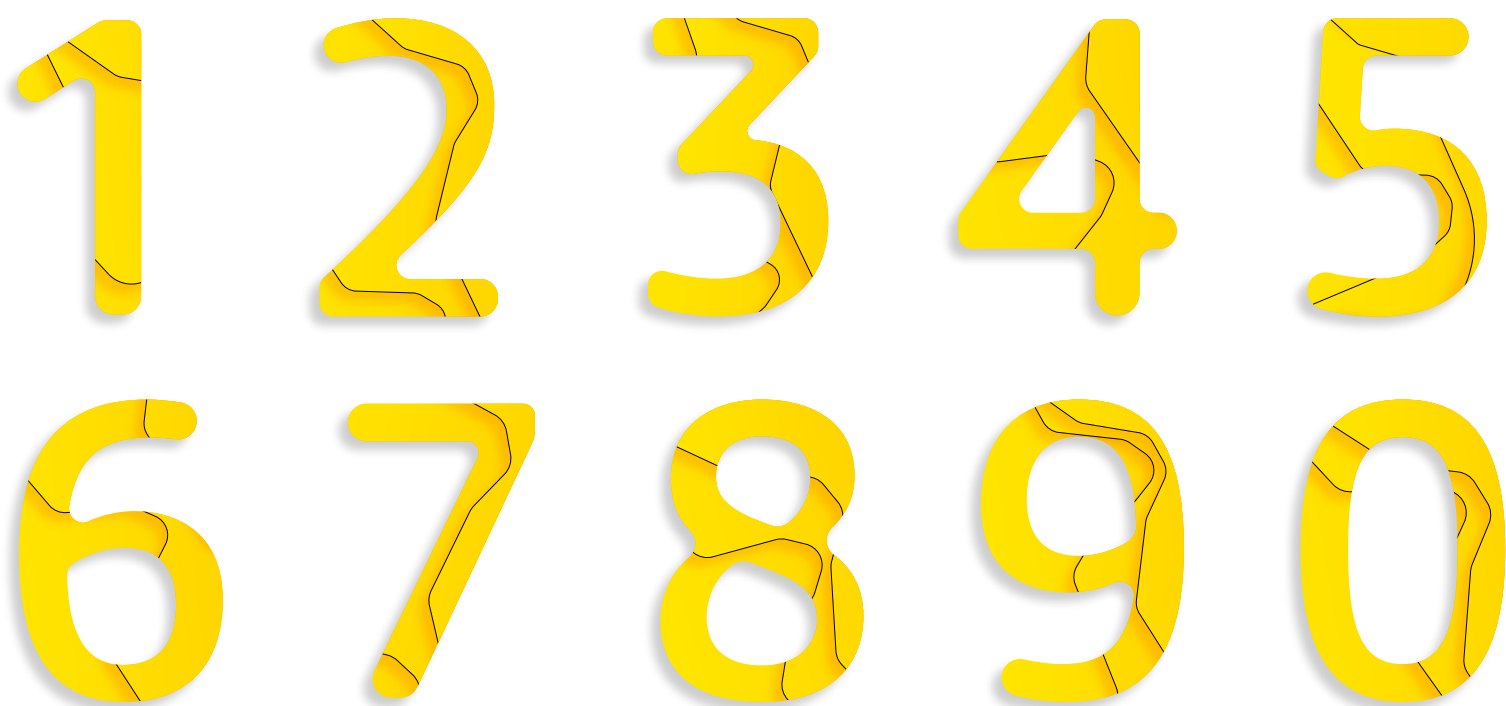

Level ID Family
Scale 1:20

Graphic Layout

Level ID
Customised FS Millbank, refer to Section 22, Shop Drawings


Size
800mm

Construction & Materials


Materiality Legend

- A3**
- A3 5mm thk acrylic

Construction Details
Refer to: Section 22, Shop Drawings

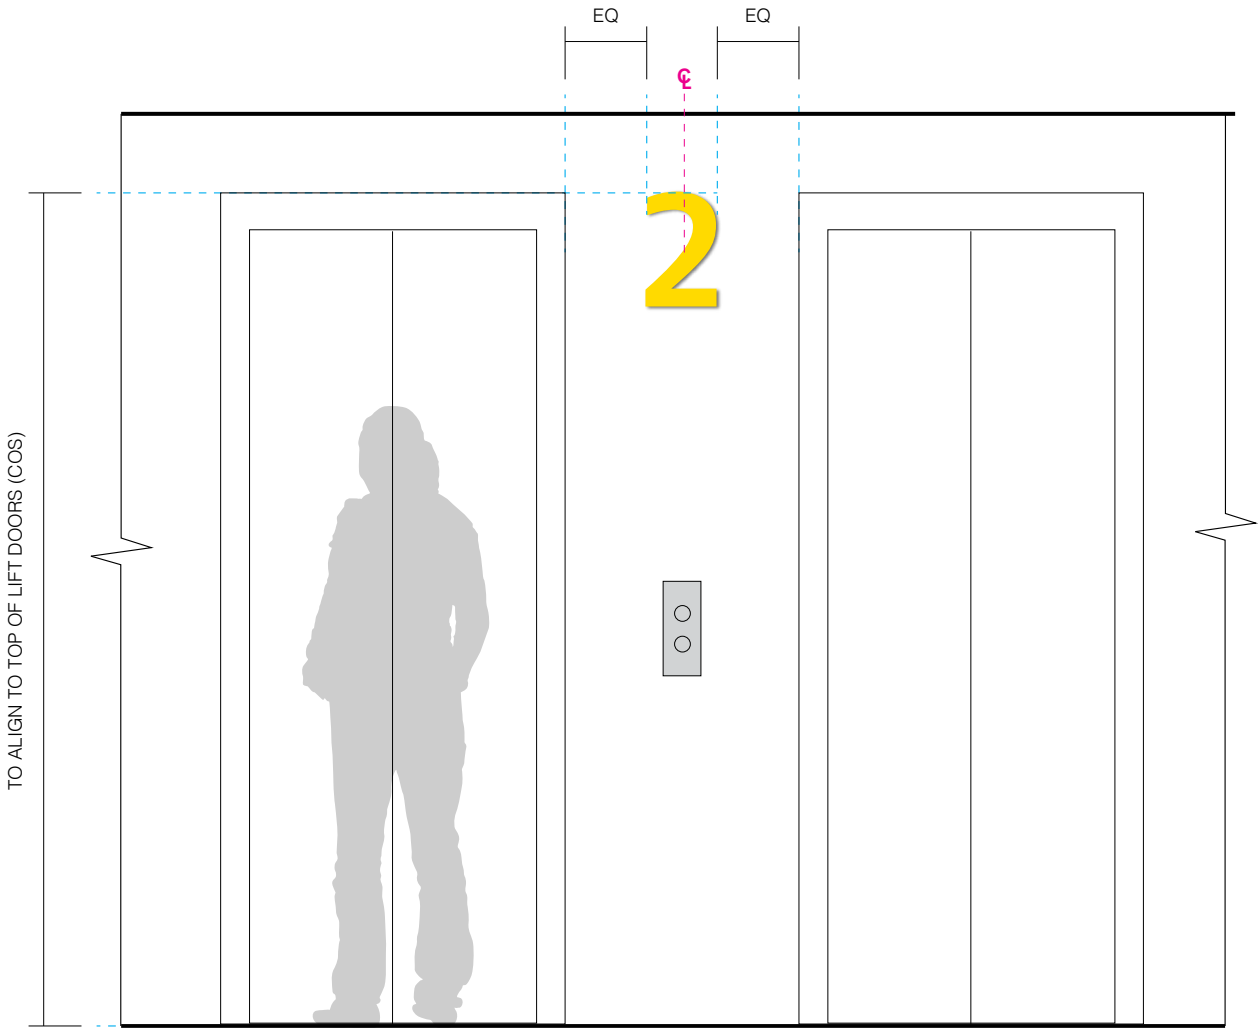

Elevation - Multiple lifts
Scale 1:20

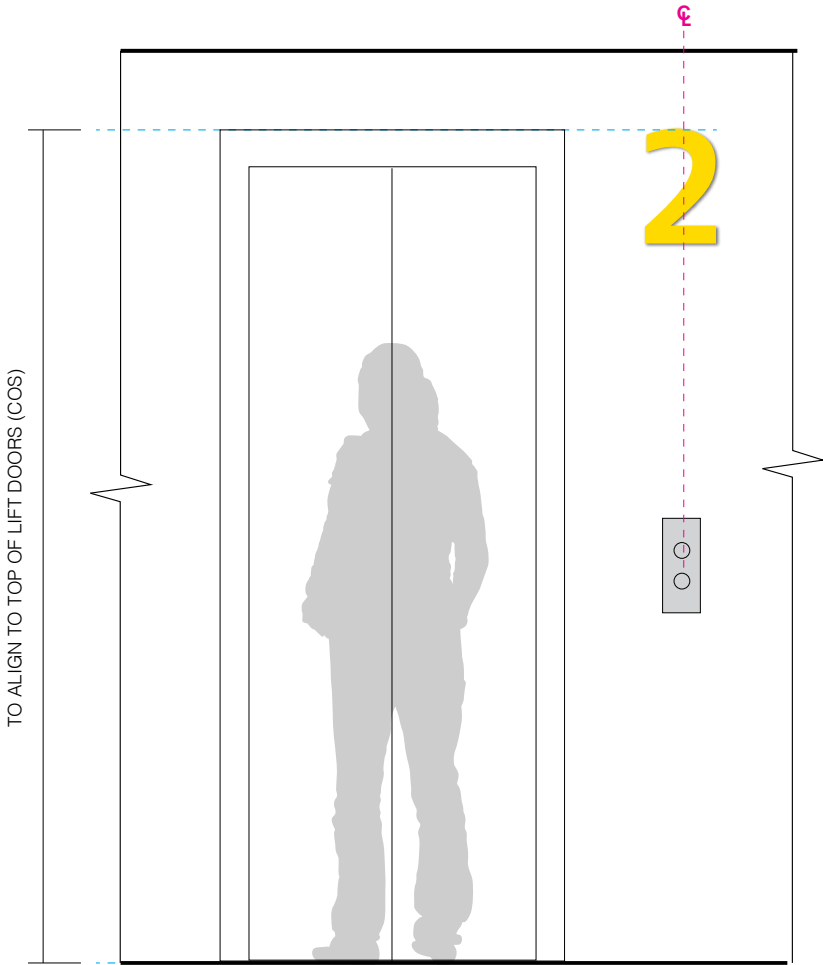


Elevation - Single lift
Scale 1:20

Sign Location

Purpose
Identifies building level at lift lobbies.

Location
Applied to solid walls above lift core button.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

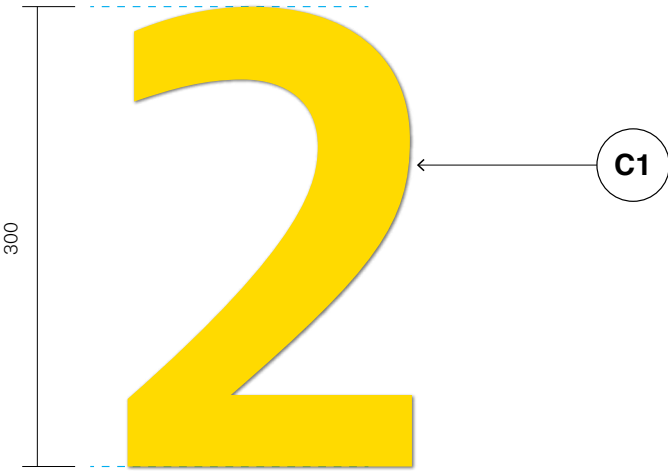

Detail - Single number
Scale 1:4



Detail - Multiple numbers
Scale 1:4

Graphic Layout

Level ID
FS Millbank Bold

Size
300mm

Construction & Materials


Materiality Legend

- C1


 - C1 finish on 3mm aluminium

Construction Details

- Refer to: Section 22, Shop Drawings

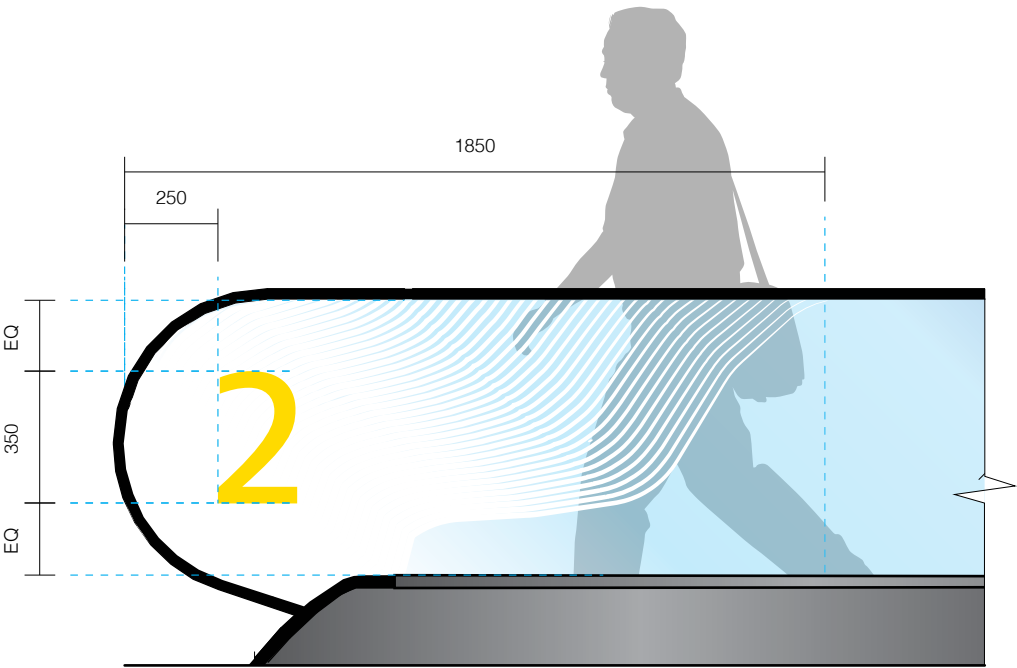

Front Elevation
Scale 1:20

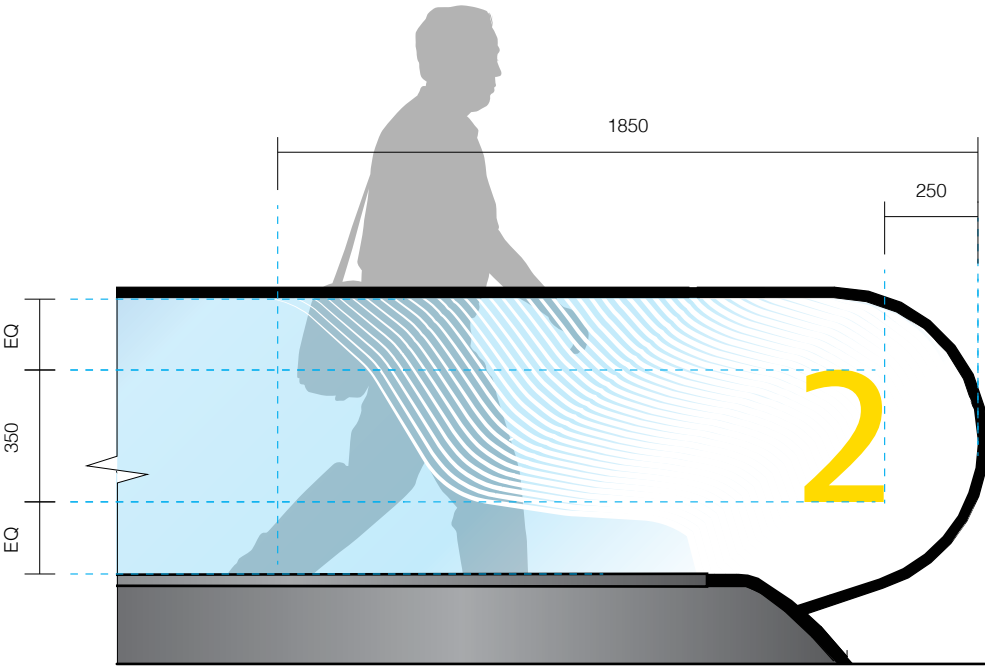


Rear Elevation
Scale 1:20

Sign Location

Purpose
Identifies building level at escalator landings.

Location
Applied to inside face of glazing of escalator landing.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

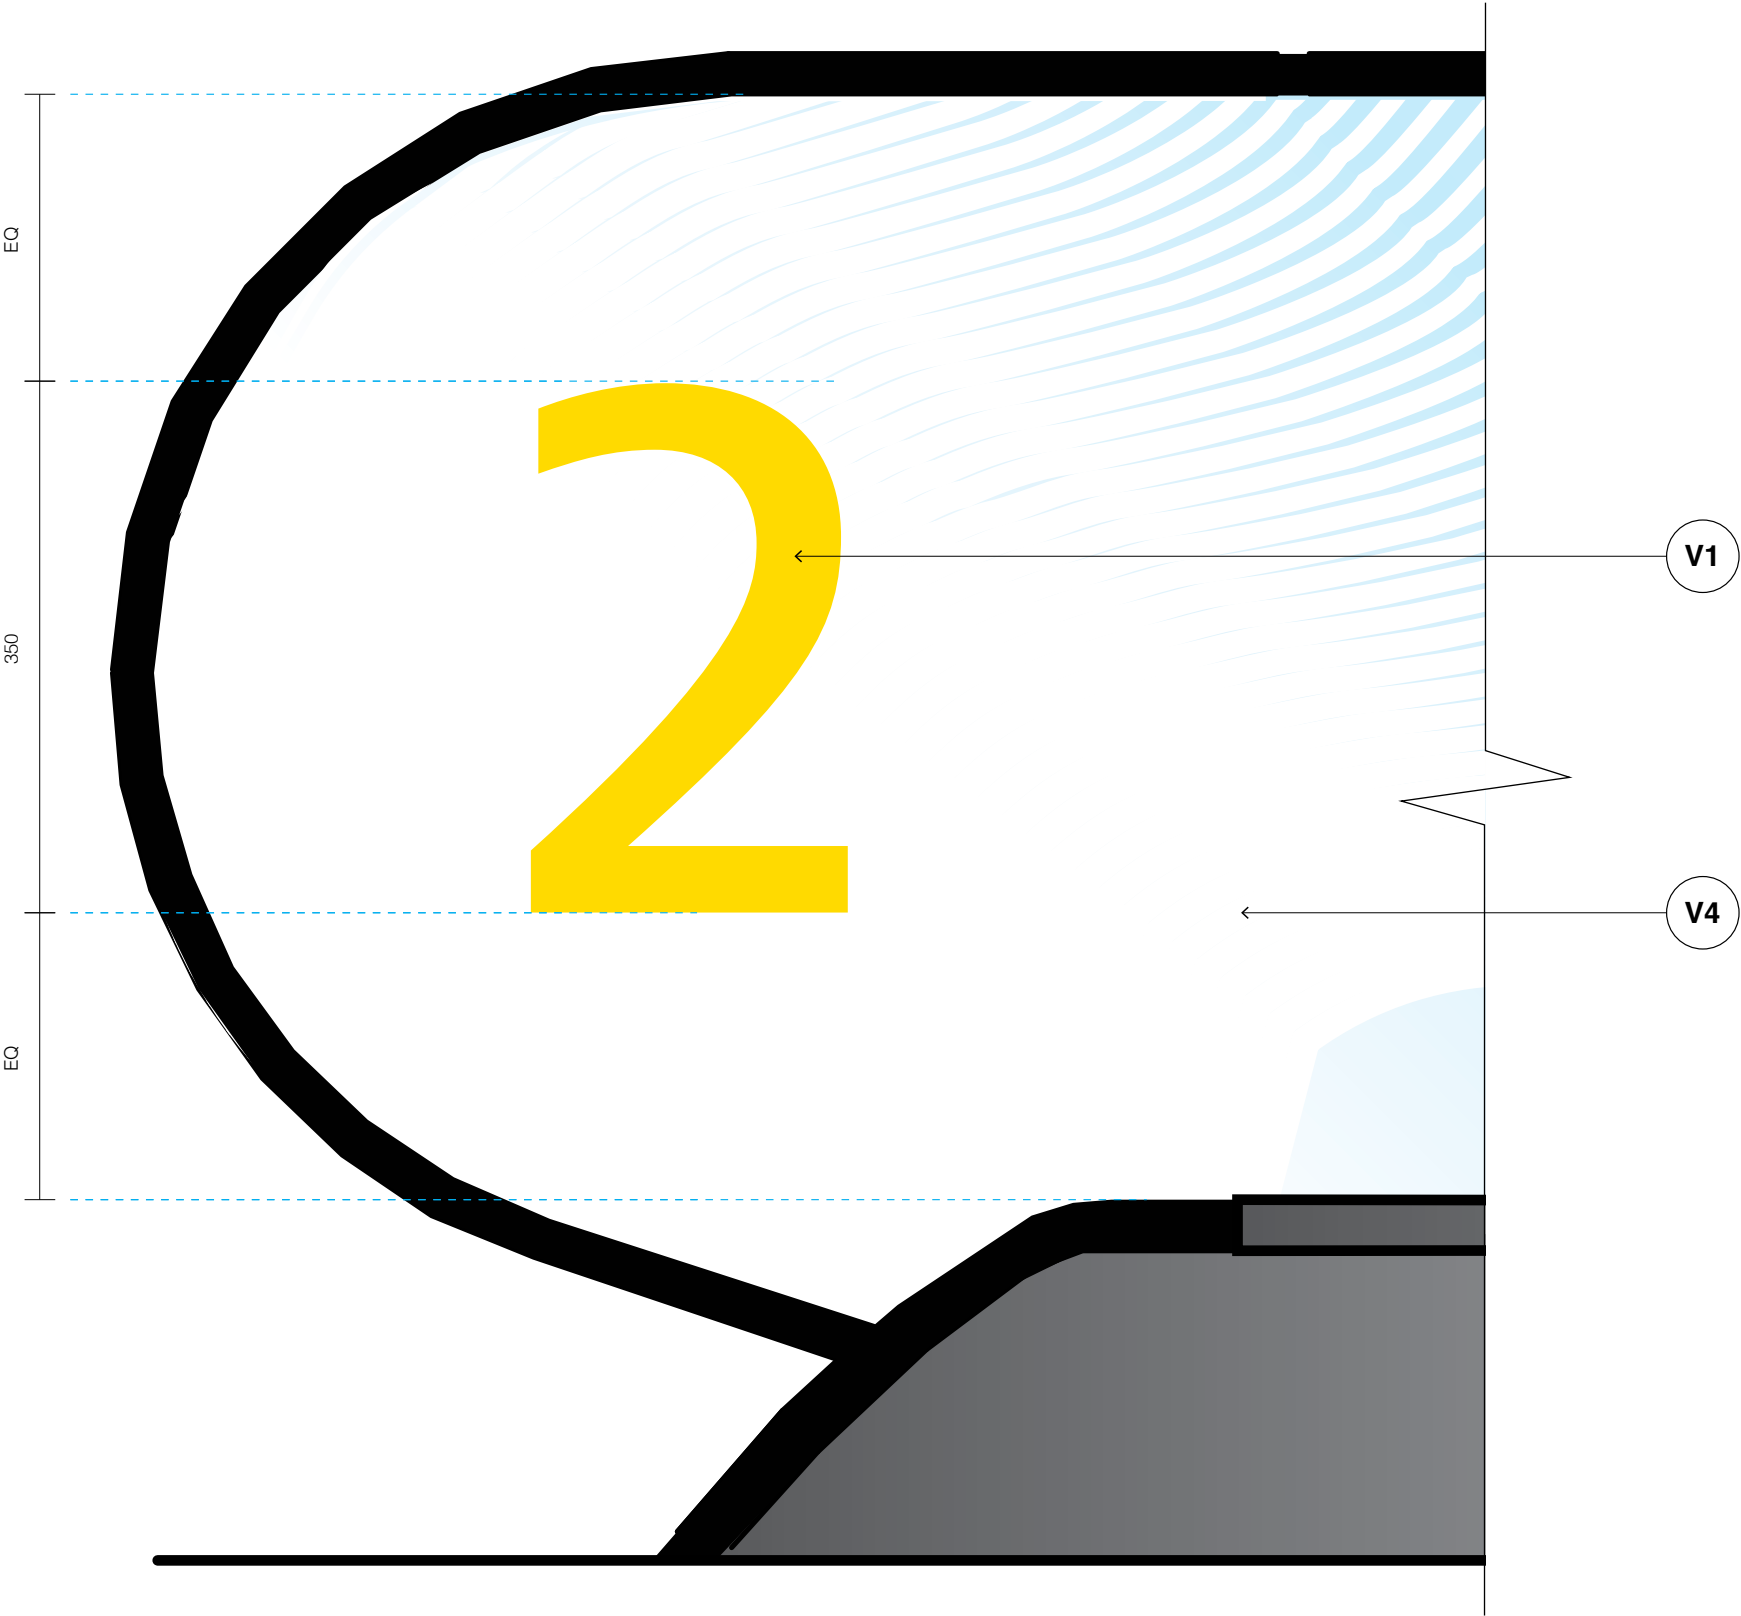

Graphic Layout

Level ID
FS Millbank Regular

Size
800mm

Construction & Materials

Materiality Legend

- | | |
|---------------------------------|---------------------------------|
| V1 | V4 |
| • V1 print applied onto glazing | • V4 print applied onto glazing |

- Construction Details**
- Refer to: Section 10, Construction Standards, Direct Applied Graphics




01 Escalator Level ID
Law Building




02 Existing Escalator
Law Building

Insitu Comparison


Note
The images shown are indicative of sign location and are to be used as a guide only.

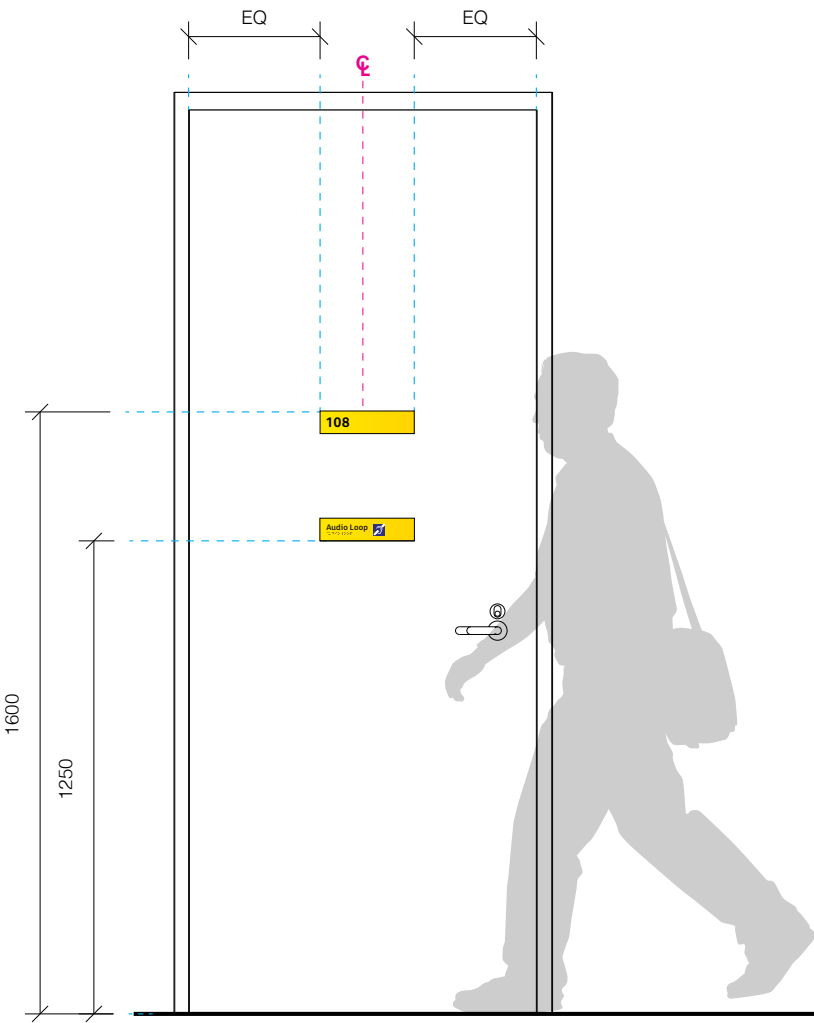

Elevation: Door, single panel
Scale 1:20

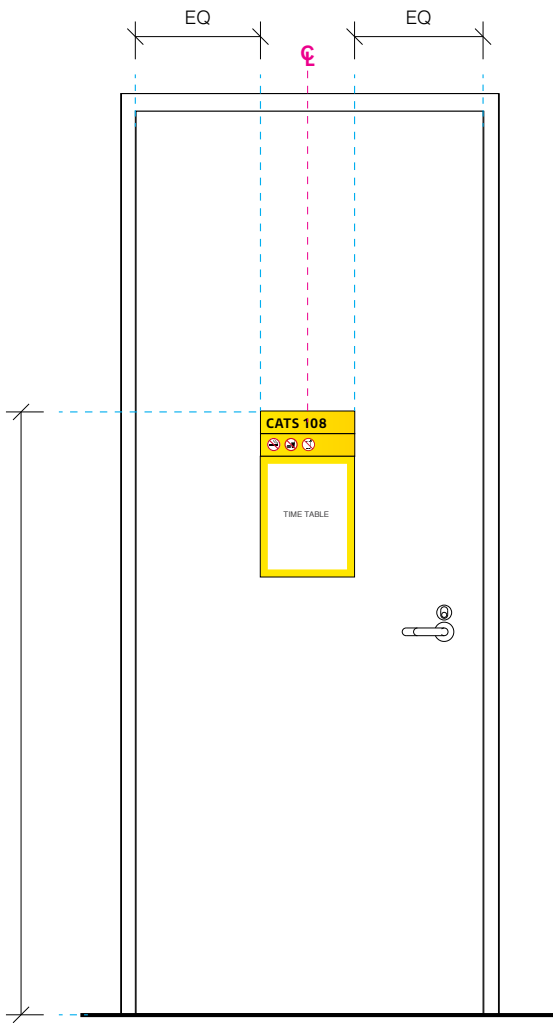

Elevation: Door, multiple panels
Scale 1:20

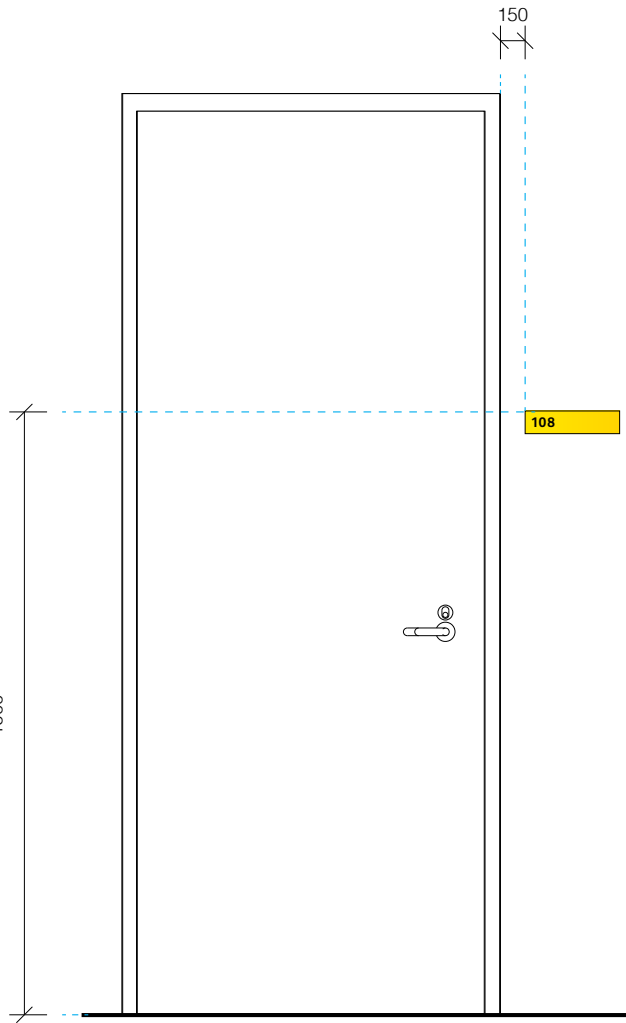

Elevation: Adjacent to door
Scale 1:20

Sign Location

Purpose


Modular panel system, that allows identification of room number with additional information if required. May also identify statutory messaging, assigned time table and personnel contact details.

Location

Applied to outside face of solid doors or walls adjacent to door entries building.

Note


- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

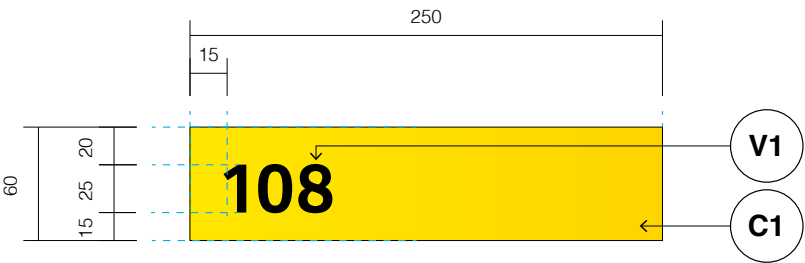


Number Panel -
CATS, Utility, General Room ID
Scale 1:4




Name Panel 1 -
Utility, Learning & Facility Room Names
Scale 1:4

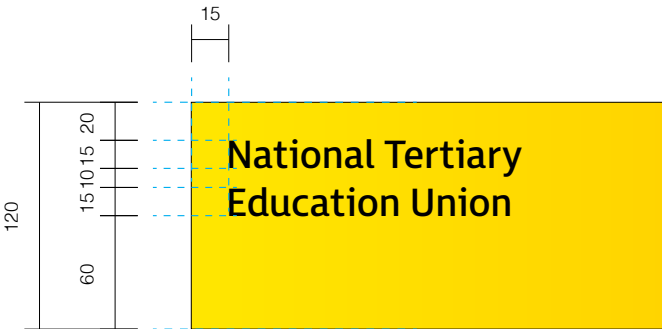


Name Panel 2 -
Utility, Learning & Facility Room Names
Scale 1:4

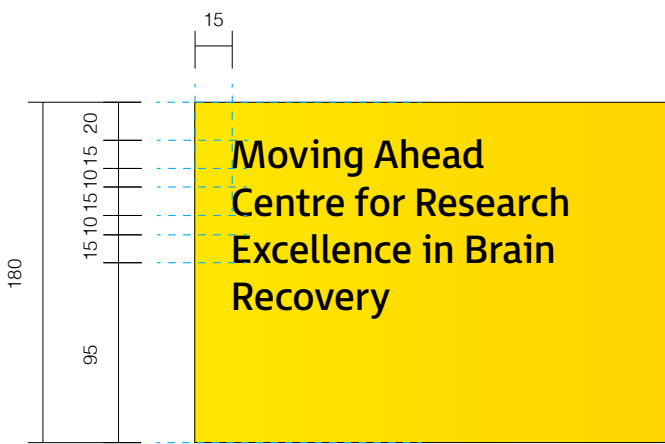


Name Panel 3 -
Utility, Learning & Facility Room Names
Scale 1:4

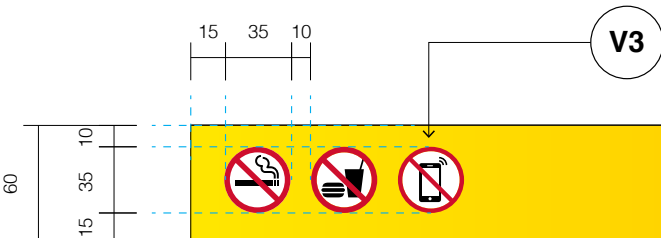

Pictogram Panel 1 -
Regulatory pictograms
Scale 1:4

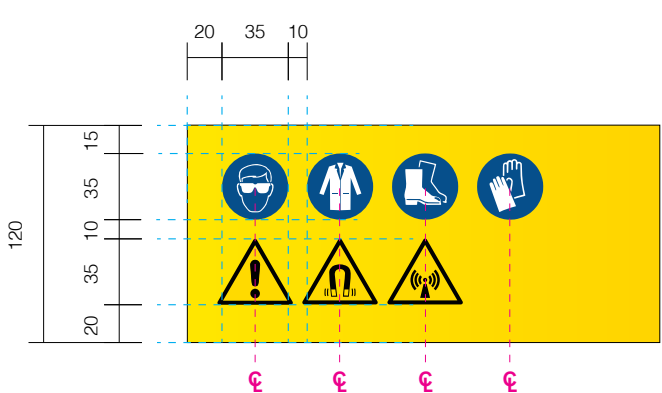

Pictogram Panel 2 -
Regulatory pictograms
Scale 1:4

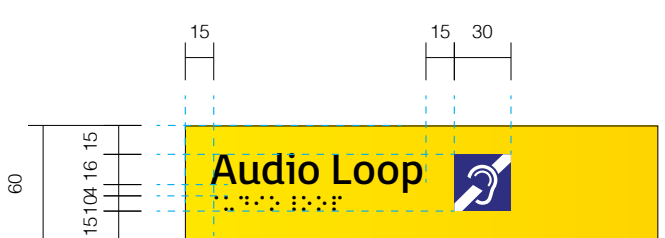

Braille Panel -
Regulatory pictograms and braille
Scale 1:4

Graphic Layout

Room Number
FS Millbank Bold
Alignment: Left
Size: 25mm

Room Name
FS Millbank Regular
Alignment: Left
Size: 15mm, 10mm

Pictograms
Refer to Section 9, Graphic Standards, Pictogram Suite

Braille
Size: 8mm

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms




**ID.20a
General Room ID**
- Number panel




**ID.20b
Utility Room ID**
- Number panel
- Name panel 1 to 3



**ID.20c
Class Room ID**
- Number panel
- Pictogram panel 1




**ID.20d
Learning Space ID**
- Number panel
- Name panel 1 to 3
- Pictogram panel 1




**ID.20e
Staff Office**
- Number panel
- Name panel 1 to 3
- Name plate



**ID.20f
Staff Directory**
- Number panel
- Name panel 1 to 3
- Name plate



**ID.20g
Class Room with
Timetable ID**
- Number panel
- Pictogram panel 1
- A4 frame



**ID.20h
Laboratory with
Hazard Table ID**
- Number panel
- Name panel 1 to 3
- Pictogram panel 2
- A4 frame



**ID.20i
Staff Directory with
Contact list**
- Number panel
- Name panel 1 to 3
- A4 frame

Room ID Family
Scale: 1:10

Family

Panel Configurations

The ID.20 family acts as a modular system intended to identify multiple rooms of varying functionality. In result, Room ID panel configurations may vary from room to room in response to the messaging required. This page showcases the various Room ID sign types and the panels they include.

Note

For name plate and A4 frame details, refer to Section 10, Construction Standards, Off-the-shelf



01 Room ID
Lecture theatre configuration



02 Existing Sign
Lecture theatre configuration

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Refer to Section 15, Operational Signage, OP.02: General ID for door-mounted push/pull signage.



01 Room ID
Laboratory configuration




02 Existing Sign
Laboratory configuration


Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Refer to Section 15, Operational Signage, OP.02: General ID for door-mounted push/pull signage.

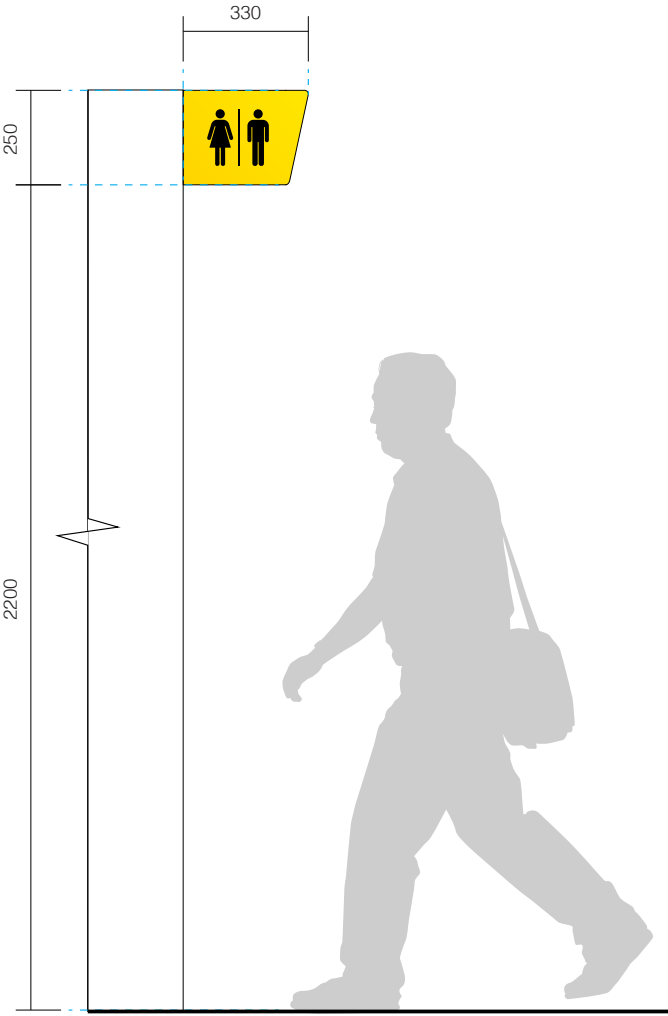

Front Elevation
Scale 1:20

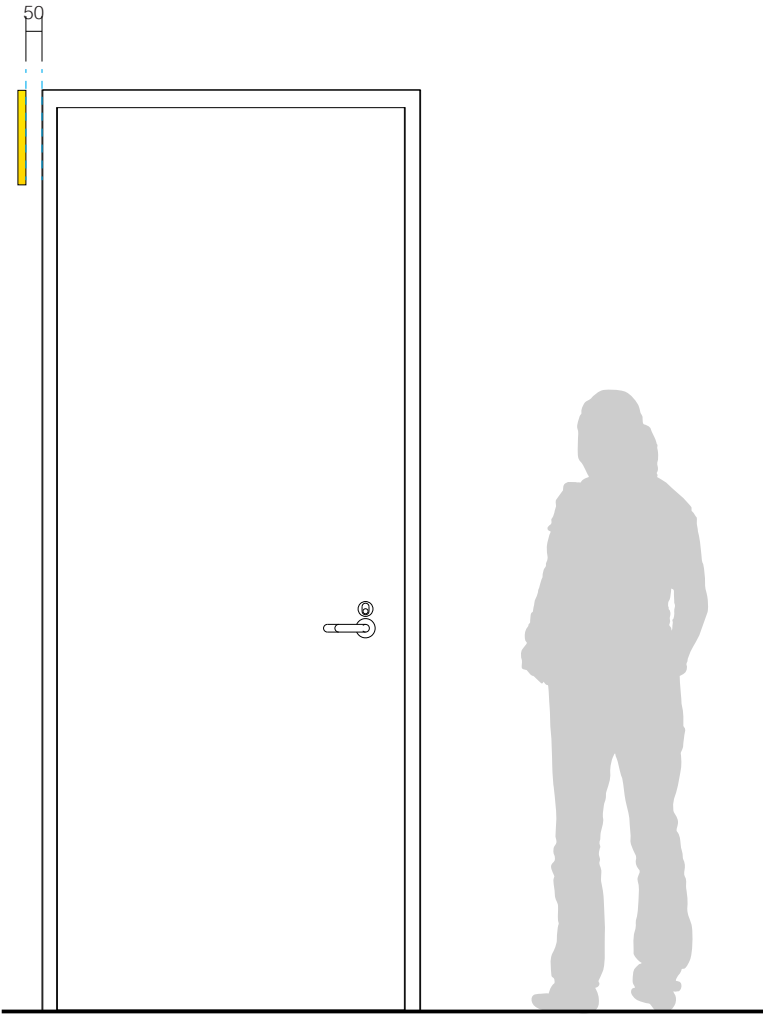


Side Elevation
Scale 1:20

Sign Location


Purpose
Identifies entry point for typical amenities.

Location
Cantilevered from solid walls in path of travel at confirmation or decision points.


- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

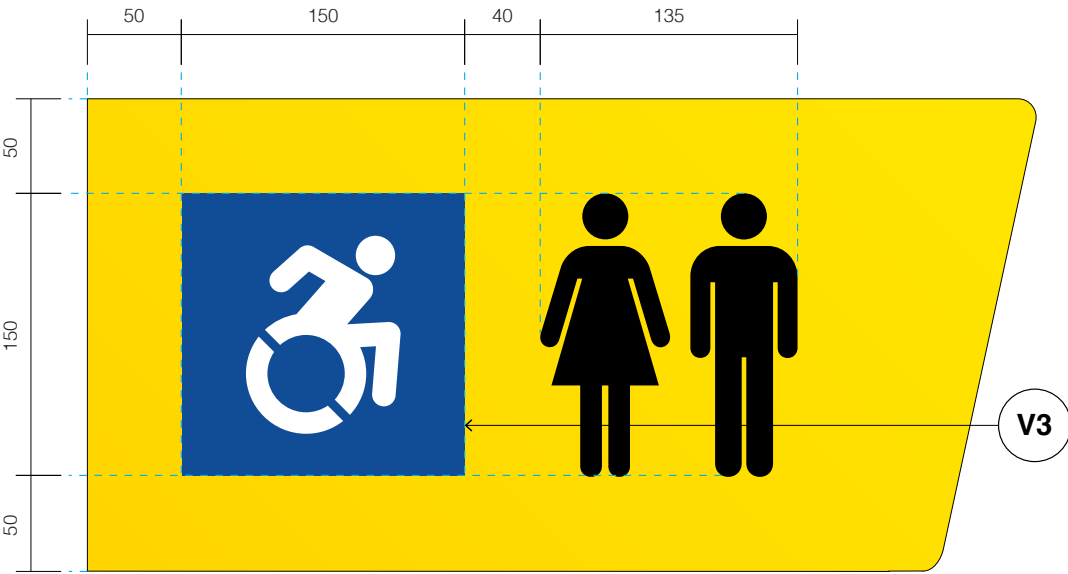


ID.21a - Accessible Unisex Toilet
Scale 1:4

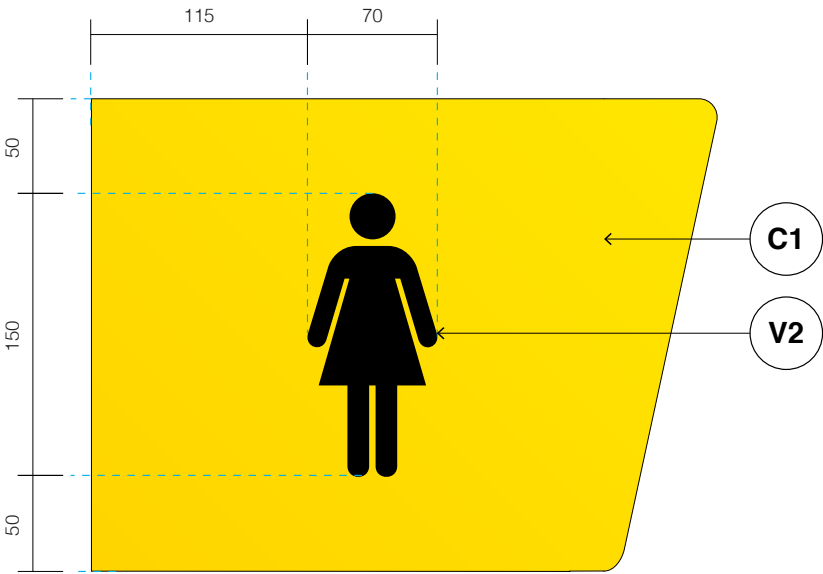

ID.21b - Female Toilet
Scale 1:4

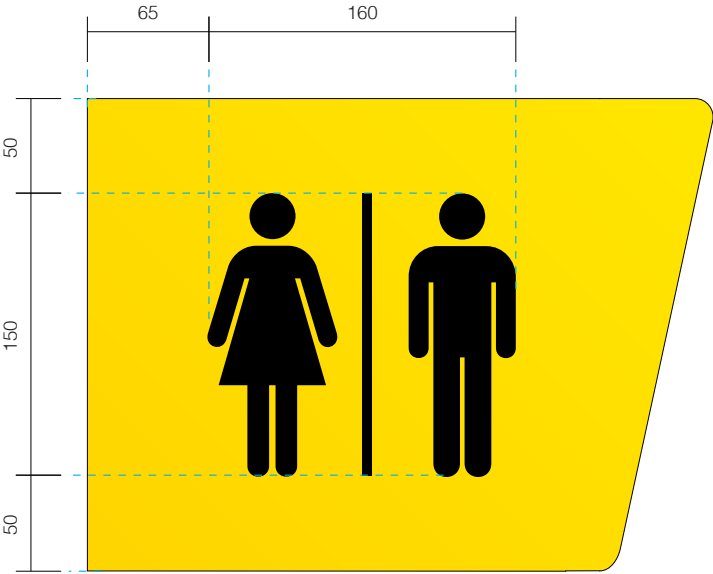

ID.21c - Male & Female Toilet
Scale 1:4

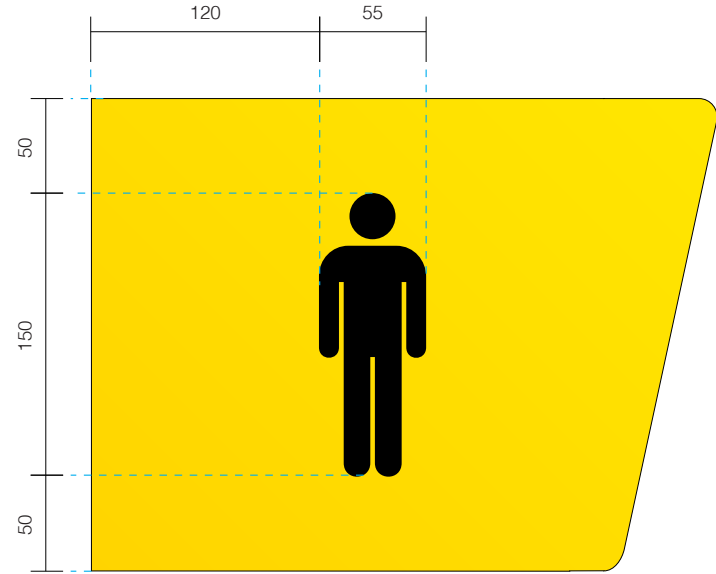

ID.21d - Male Toilet
Scale 1:4

Graphic Layout

Pictograms
Refer to Section 9, Graphic Standards, Pictogram Suite.

Construction & Materials

Materiality Legend

C1

- C1 finish on 3mm aluminium

V2

- V2 applied on top of aluminium

V3

- V3 print applied on top of aluminium

Construction Details
• Refer to: Section 10, Construction Standards, Cantilevered Signforms



01 Amenity ID
Law Building




02 Existing Sign
Law Building


Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Refer to Section 16, Statutory Signage, ST.01: Amenity Braille & Tactile Family for wall-mounted amenity signage.

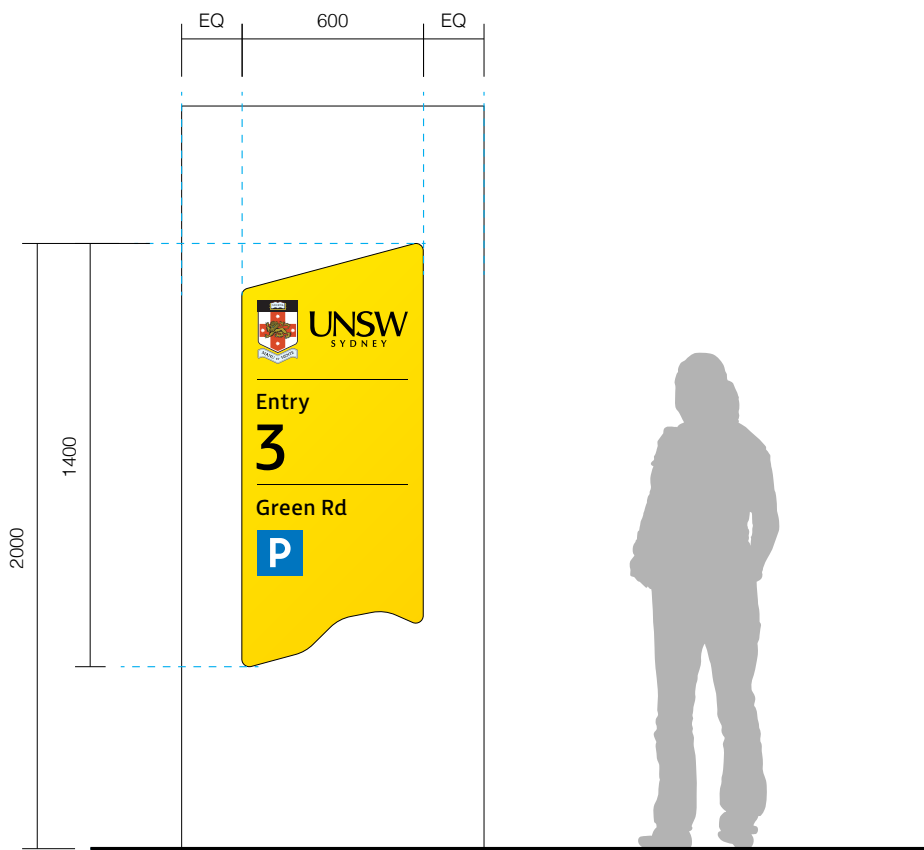

Elevation - Centered to wall
Scale 1:25

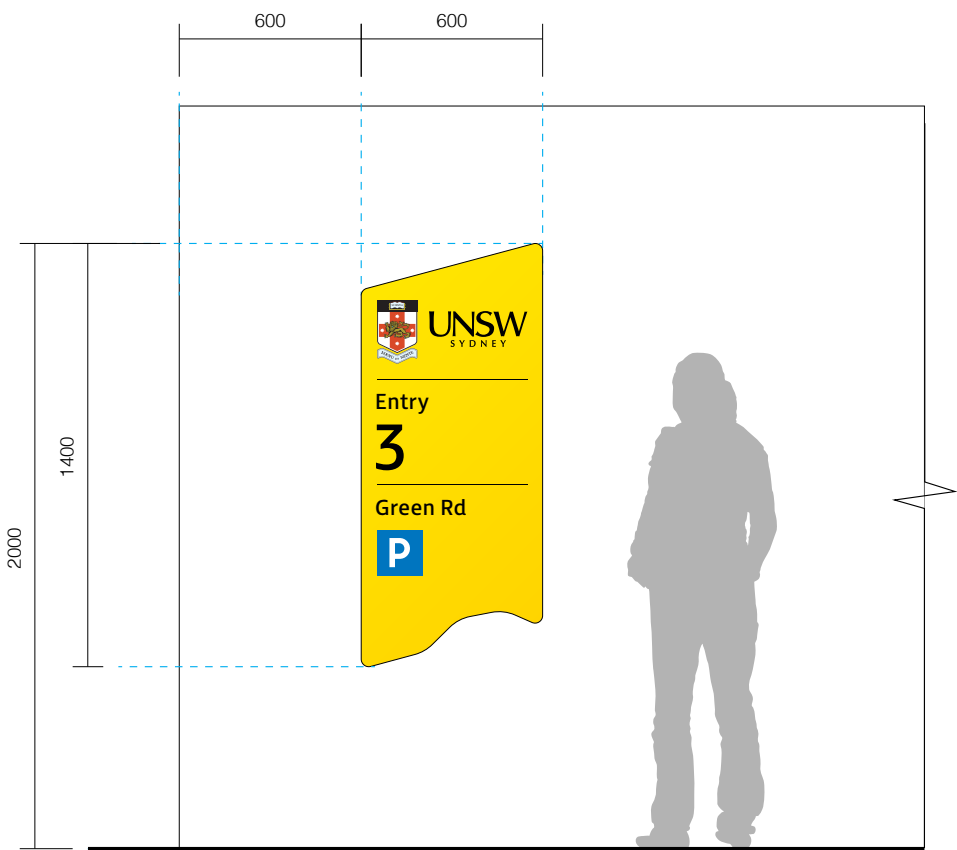


Elevation - Aligned to corner
Scale 1:25

Sign Location


Purpose
Identifies primary or secondary entries into the UNSW site. Refer to Section 3, Addressing & Terminology, Category 2.

Location
Positioned on walls, gates, or glazing at primary and secondary entry points into the UNSW site. This sign type is to be used when lacking sufficient space for a totem signform.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

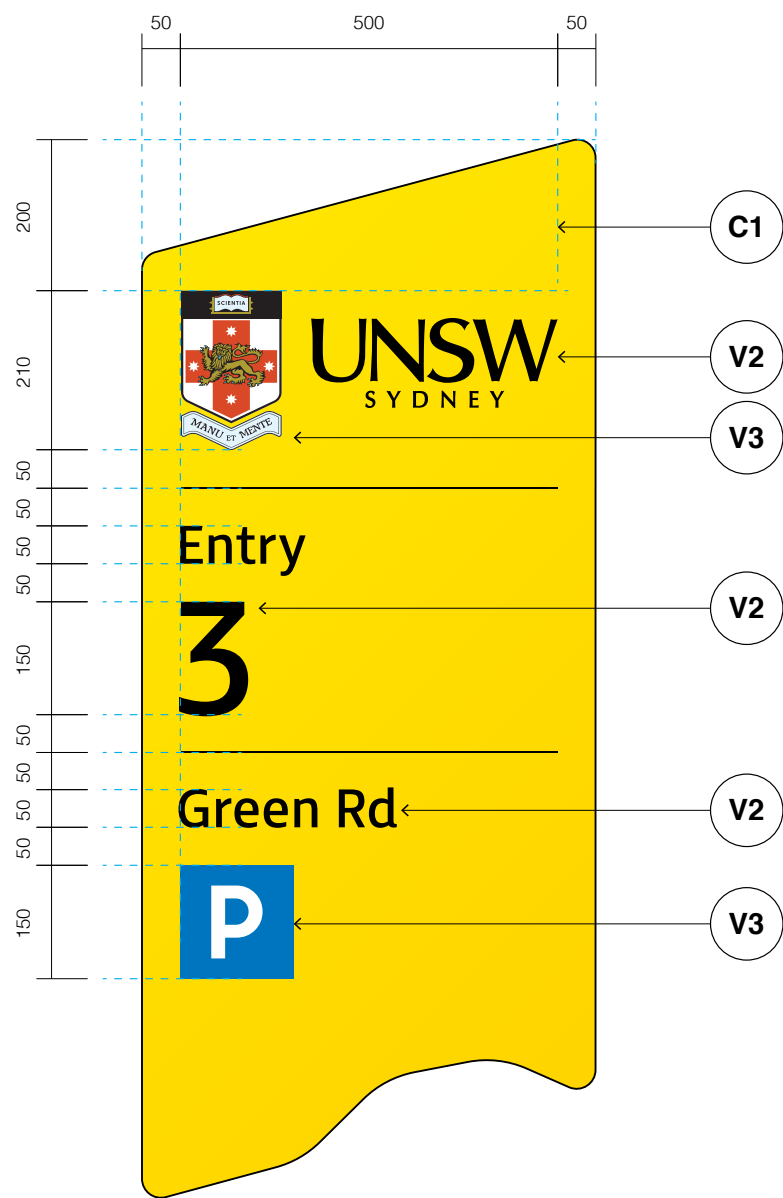

ID.22a
Gate ID - Parking
Scale 1:10

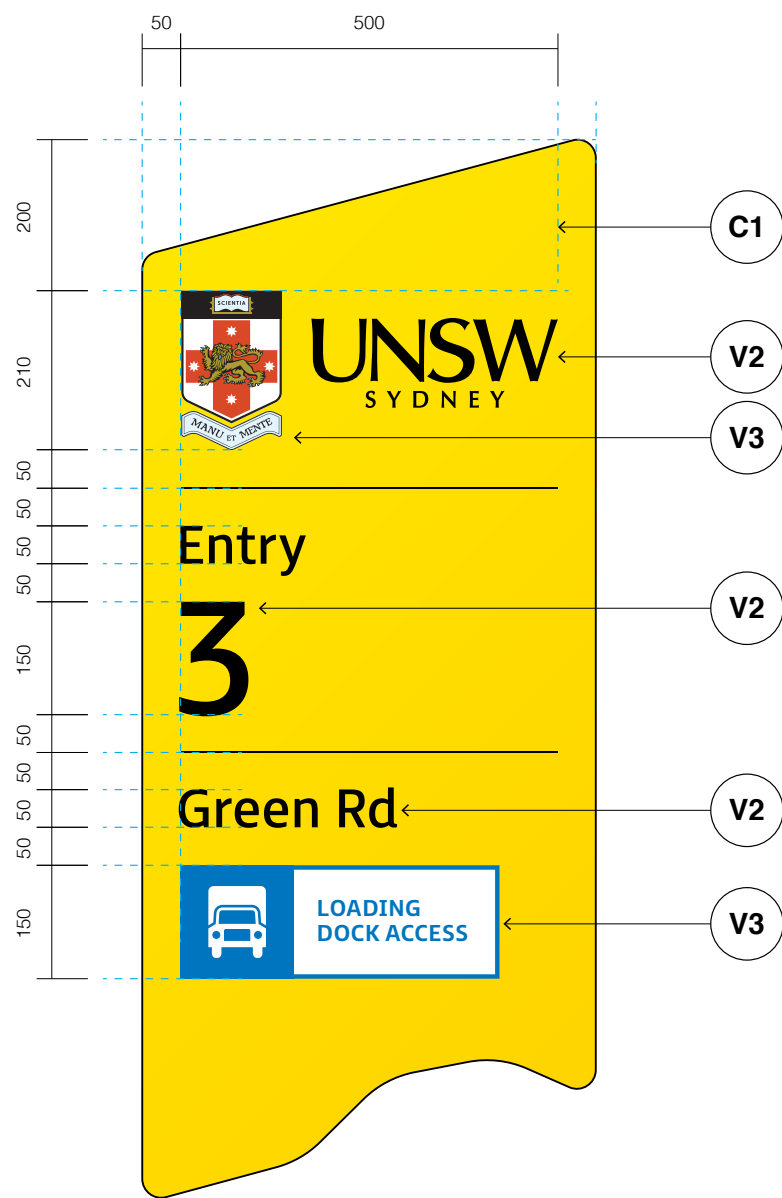

ID.22b
Gate ID - Loading Dock
Scale 1:10

Graphic Layout

Dividing Line

Line weight: 2mm

Entry Name

FS Millbank Regular

Alignment: Left

Size: 50mm

Entry Number

FS Millbank Regular

Alignment: Left

Size: 150mm

Pictogram

Parking or Loading Dock: 150mm height

UNSW Logo

150mm height

Construction & Materials

Materiality Legend



• C1 finish on
3mm aluminium





• V2 applied on top
of aluminium



• V3 print applied on
top of aluminium

Construction Details

- Refer to: Section 10, Construction Standards, Layered Panel Signforms

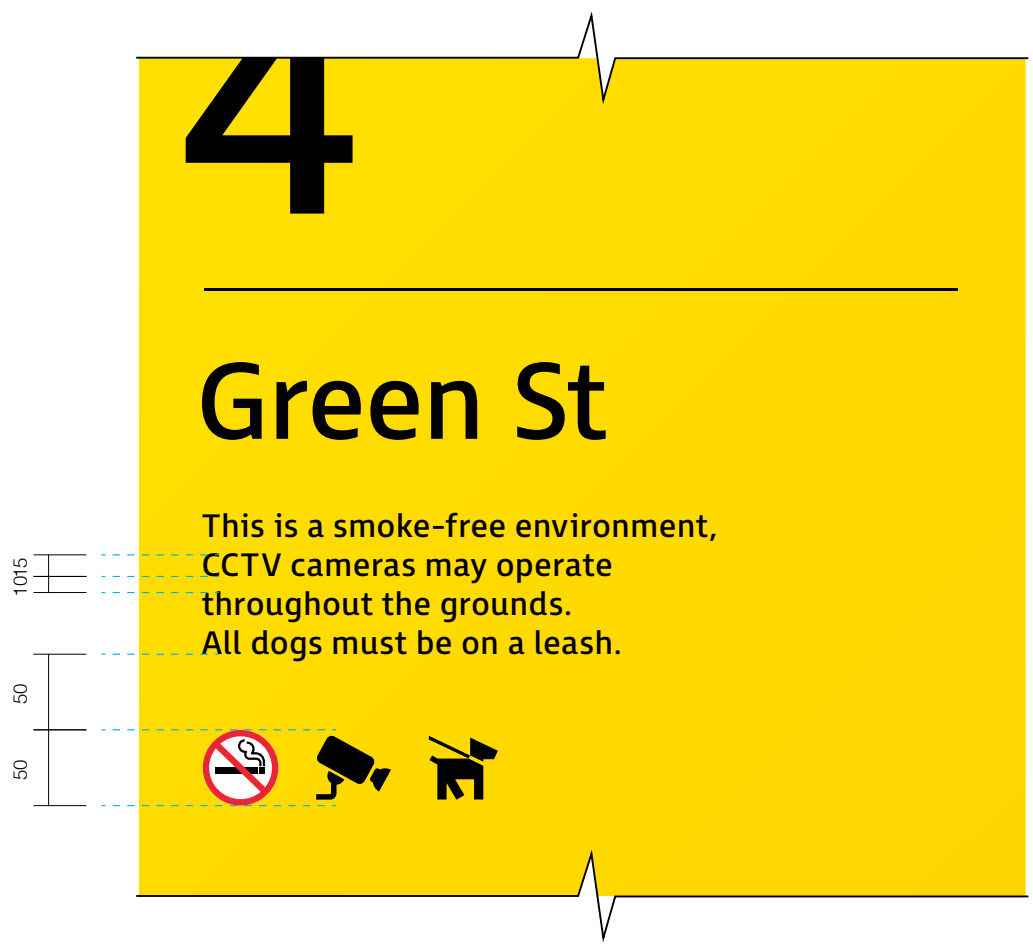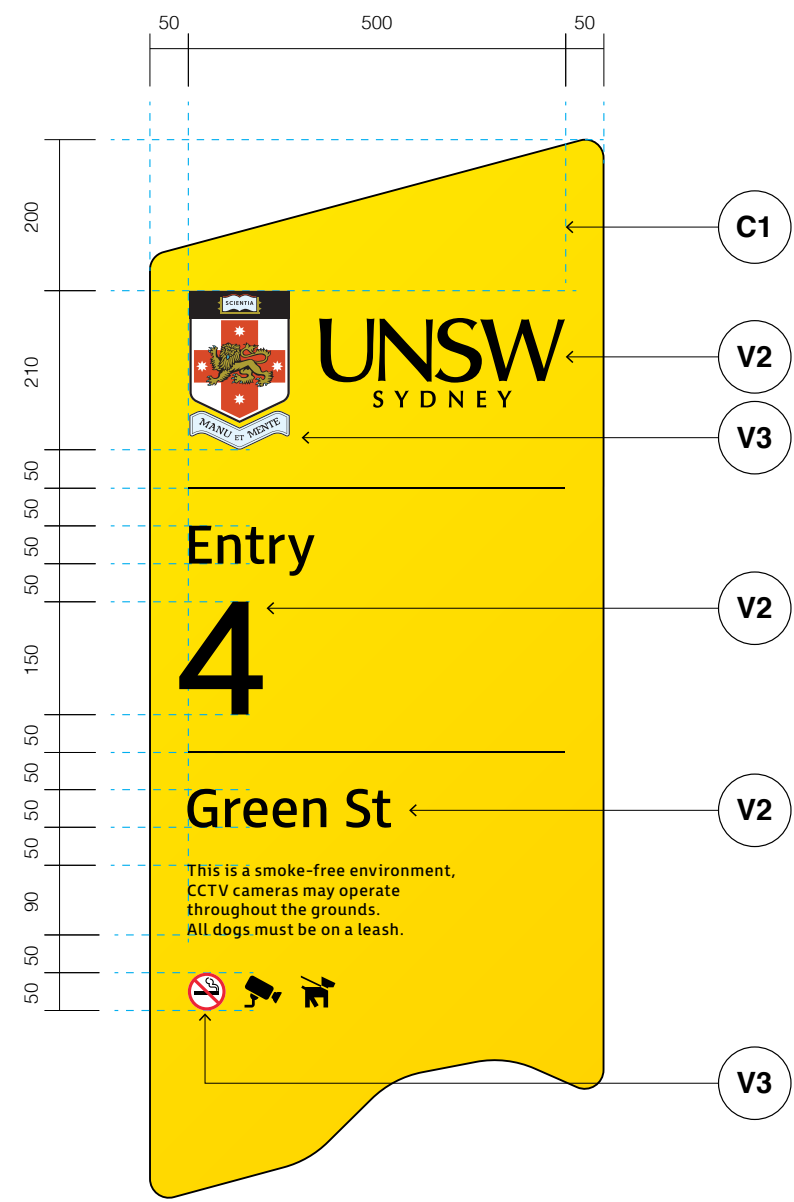

Statutory Messaging
Scale 1:5

Graphic Layout

Dividing Line

Line weight: 2mm

Entry Name

FS Millbank Regular

Alignment: Left

Size: 50mm

Entry Number

FS Millbank Regular

Alignment: Left

Size: 150mm

Statutory Content

Alignment: Left

Size/Leading: 15mm, 10mm

Tracking: 10+, Optical kerning

Pictograms & UNSW Logo

No Smoking, CCTV & Dogs on Leash: 50mm diameter.

UNSW Logo: 210mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 10, Construction Standards, Layered Panel Signforms



01 Gate ID Wall Mounted
Greens Rd Gate 2 & 3



02 Existing Gate Signage
Greens Rd Gate 2 & 3

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.



01 Campus ID Facade Mounted
UNSW Art & Design Campus




02 Existing Sign
UNSW Art & Design Campus

Sign Location

Purpose
Identifies site boundaries of UNSW campuses.

Location
Positioned on walls at site boundary edges or corners of the UNSW campus. This sign is only to be used as a replacement for existing facade mounted campus identification signage, and is to be positioned in the same location as the sign it is replacing.

- Note**
- For sign type selection, refer to:
Section 7, The Process, Step 3
 - For content guidelines, refer to:
Section 3, Addressing & Terminology
 - For material finishes, refer to:
Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to:
Section 23, Maintenance

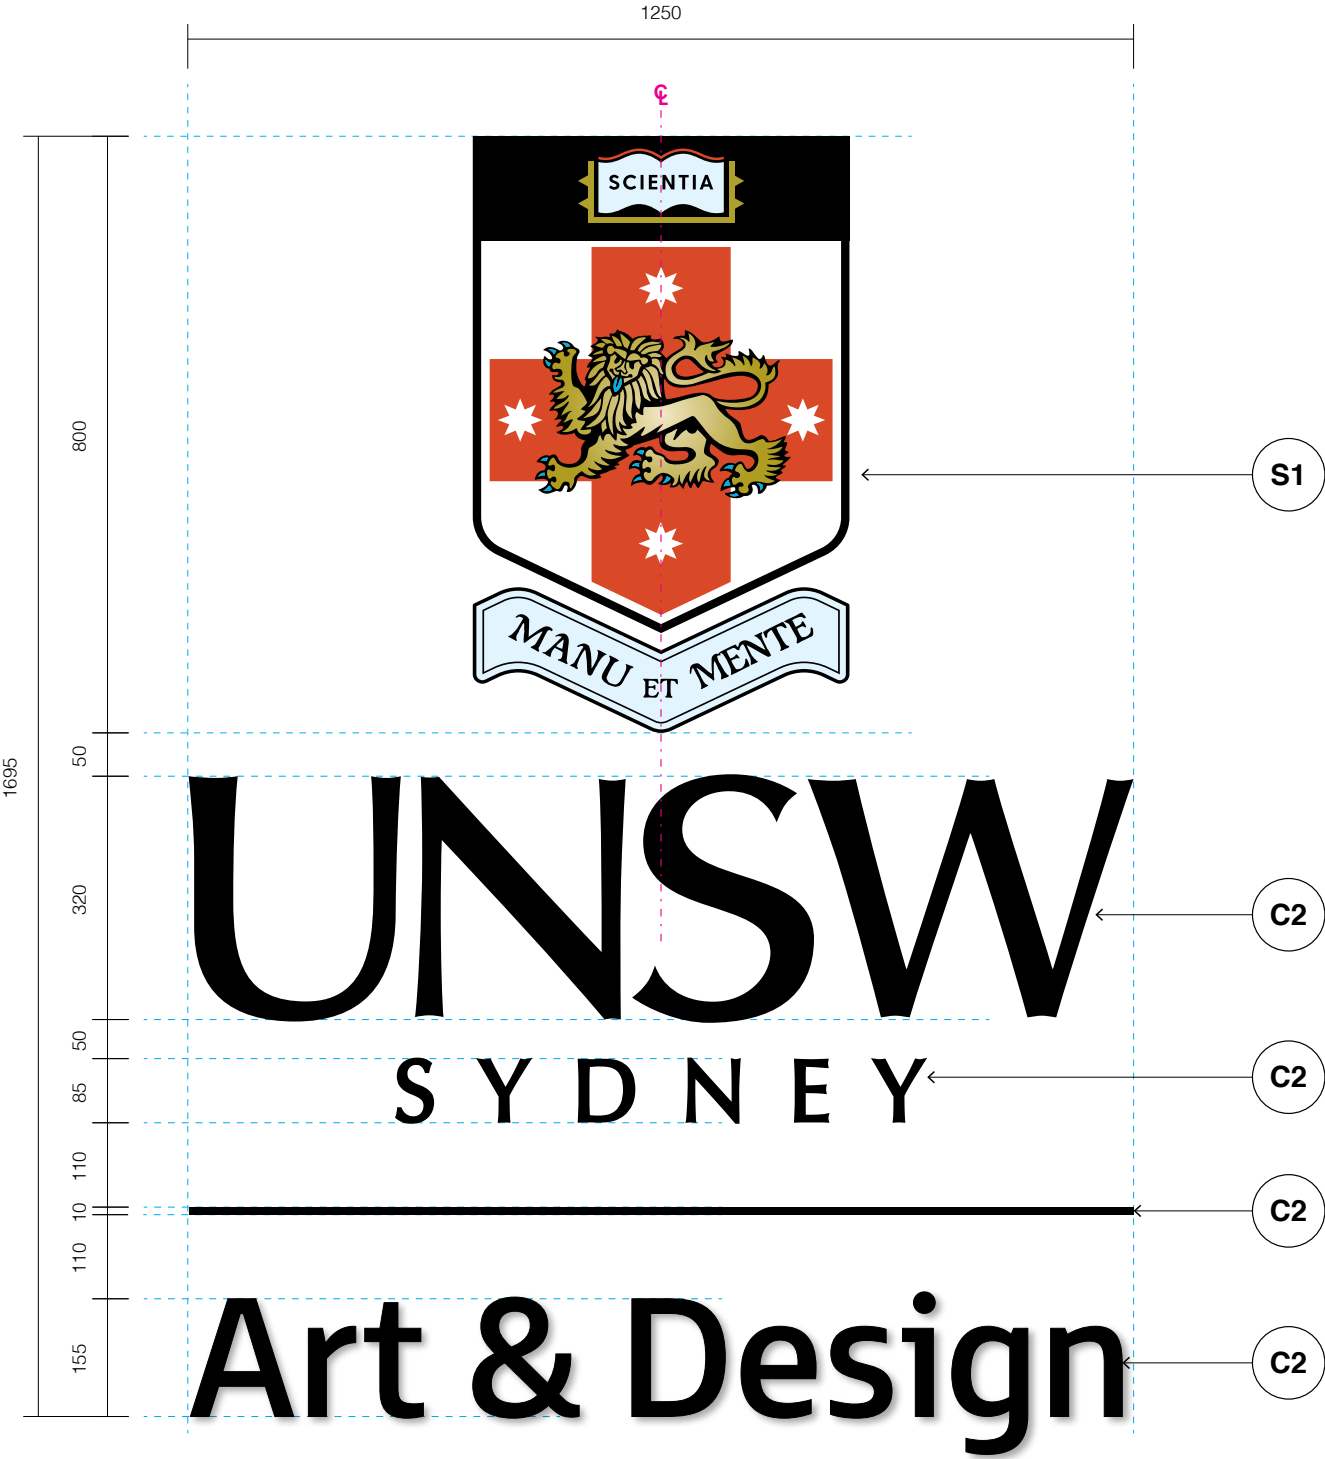

Detail
Scale 1:10

Graphic Layout

UNSW Logo

Vertical stack
1325mm

Dividing Line

10mm

Campus Name

FS Millbank Bold
Alignment: Centre
Size: 155mm

Construction & Materials

Materiality Legend



• C1 finish on
10mm aluminium



• Screenprint to
10mm aluminium


Section 13.0

Directional Series

This section documents all the directional signs of the system including specifications for both external and internal signs.

DR.01 External: Vehicular Totem 2400mm	257
DR.02 External: Pedestrian Totem 2400mm	261
DR.03 External: Pedestrian Totem 2000mm	265
DR.04 External: Access Bollard	267
DR.05 Suspended Directional Family	271
DR.06 External: Primary Wall Mounted (Large)	276
DR.07 External: Primary Wall Mounted (Small)	279
DR.08 Internal: Primary Wall Mounted (Large)	281
DR.09 Internal: Primary Wall Mounted (Small)	283
DR.10 Secondary Wall Mounted (Landscape)	285

DR.11 Secondary Wall Mounted (Portrait)	288
DR.12 Secondary Wall Mounted (Flag)	290

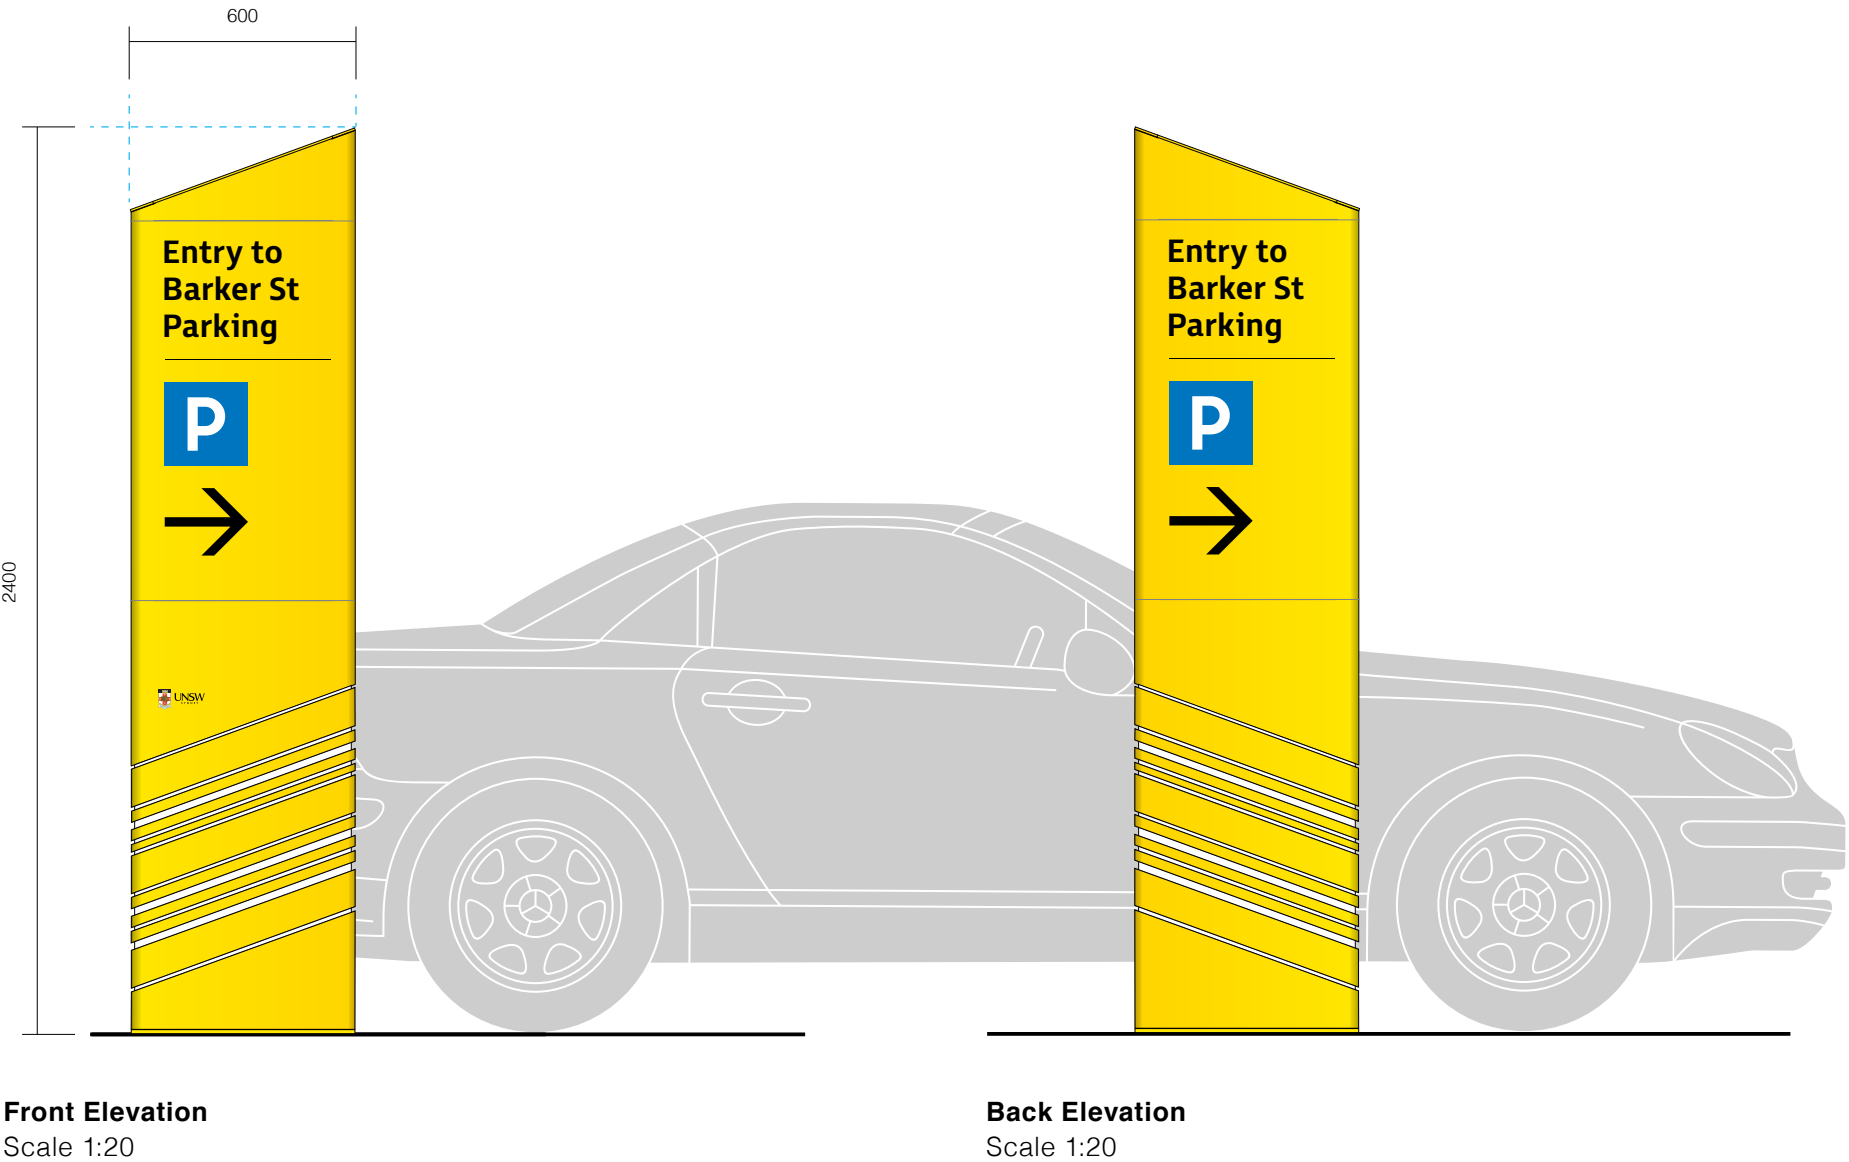


Sign Location

Purpose
Directs vehicular traffic to major car park destinations from external areas. Refer to Section 3, Addressing & Terminology, Category 11

Location
Located at decision points and on major external circulation paths

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate sculptural base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

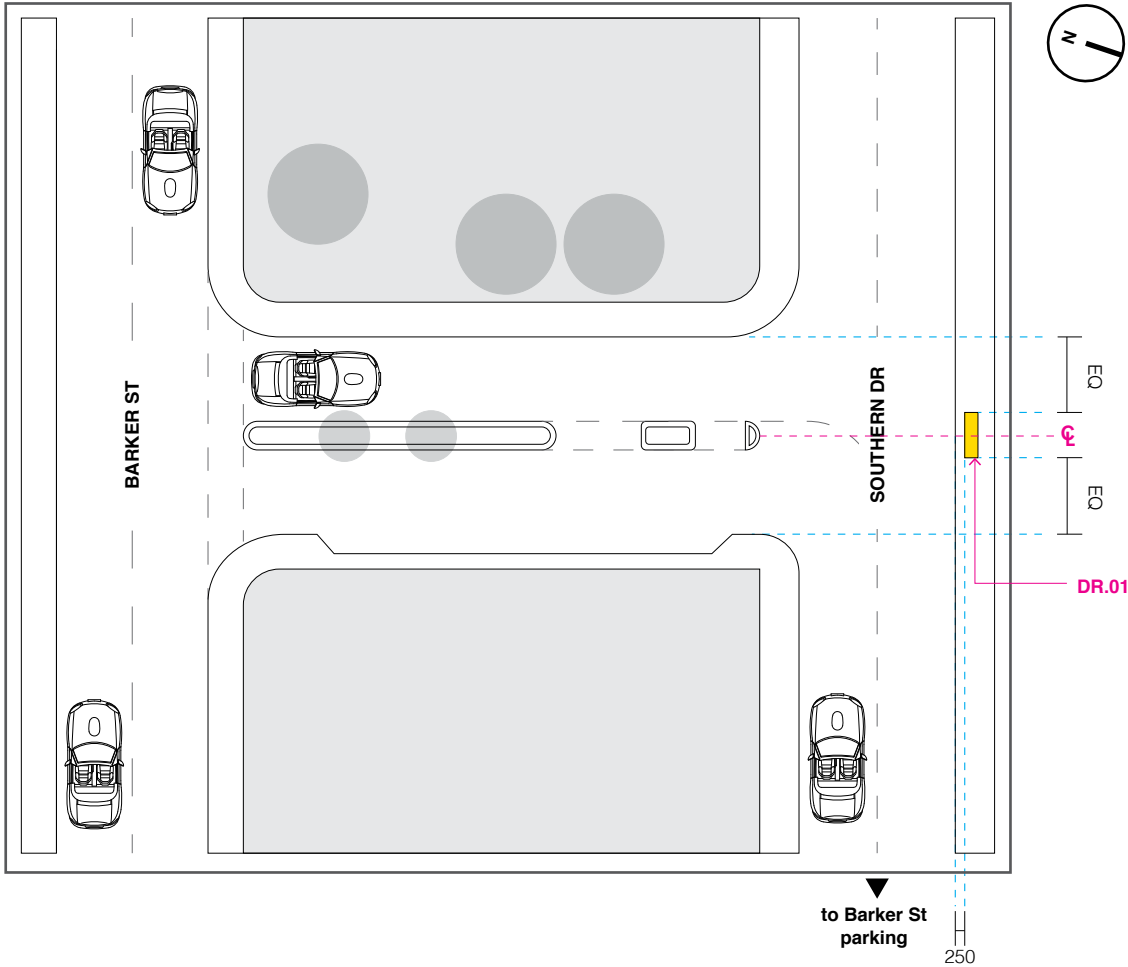

01 Vehicular Directional -
Gate 14 to Barker St parking
Scale 1:200


Positioning

Positioning Guide
Directional vehicular totems are to be placed at the intersection of vehicular circulation routes within the campus. They should be positioned as to provide equal visibility for vehicles both entering and travelling within campus boundaries.

Totems are to be placed 250mm from pathway or landscape edges, aligned to intersecting roads.

Refer to plan 01 for insitu positioning at an intersection of internal and external pathways.

- Note**
- For wayfinding placement principles, refer to: Section 4, User Journeys

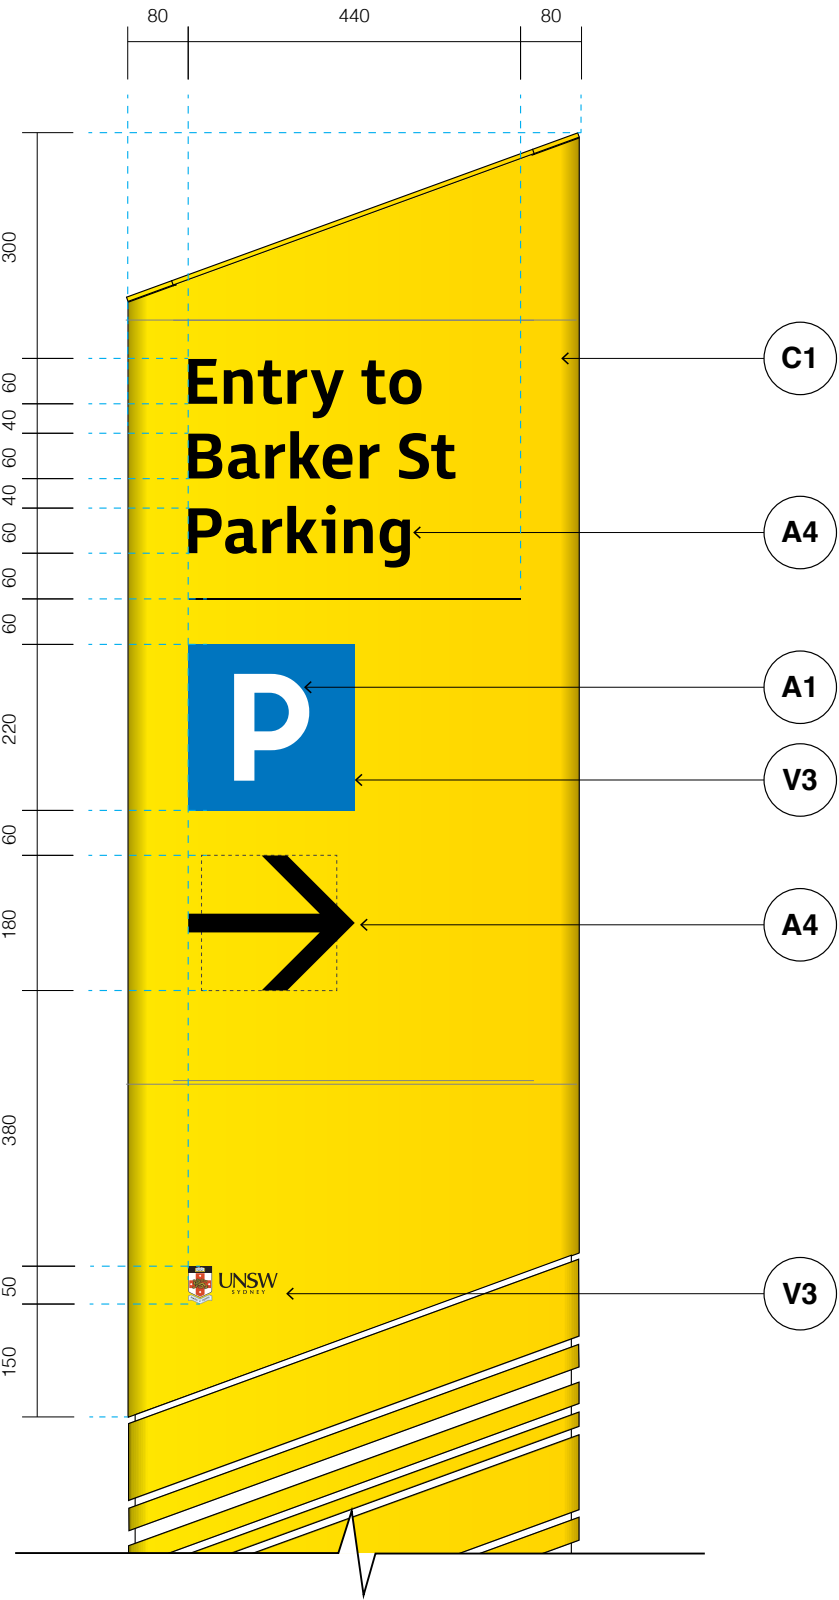

Detail
Scale 1:10

Graphic Layout

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 60mm, 40mm
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 2mm

Pictogram
Parking Pictogram, 220mm height

Arrow
180mm height

UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|--|--|---|
| C1
• C1 finish on 3mm aluminium | A1
• A1 finish to allow illumination | V3
• V3 print applied on top of acrylic |
| A4
• A4 finish to allow illumination | | |

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms



01 Vehicular Totem 2400mm (day time view)
Southern Drive to Baker Street parking

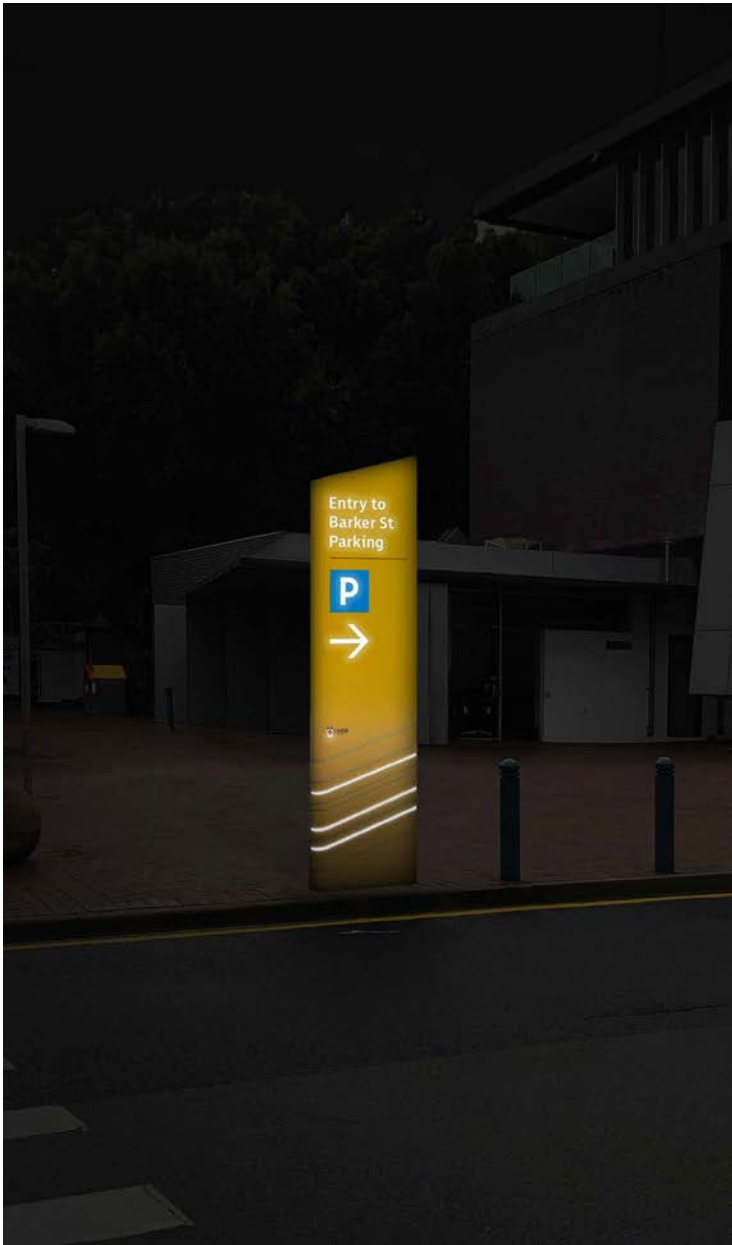

02 Vehicular Totem 2400mm (night time view)
Southern Drive to Baker Street parking




03 Existing Totem
Southern Drive to Baker Street parking

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.



Front Elevation
Scale 1:20

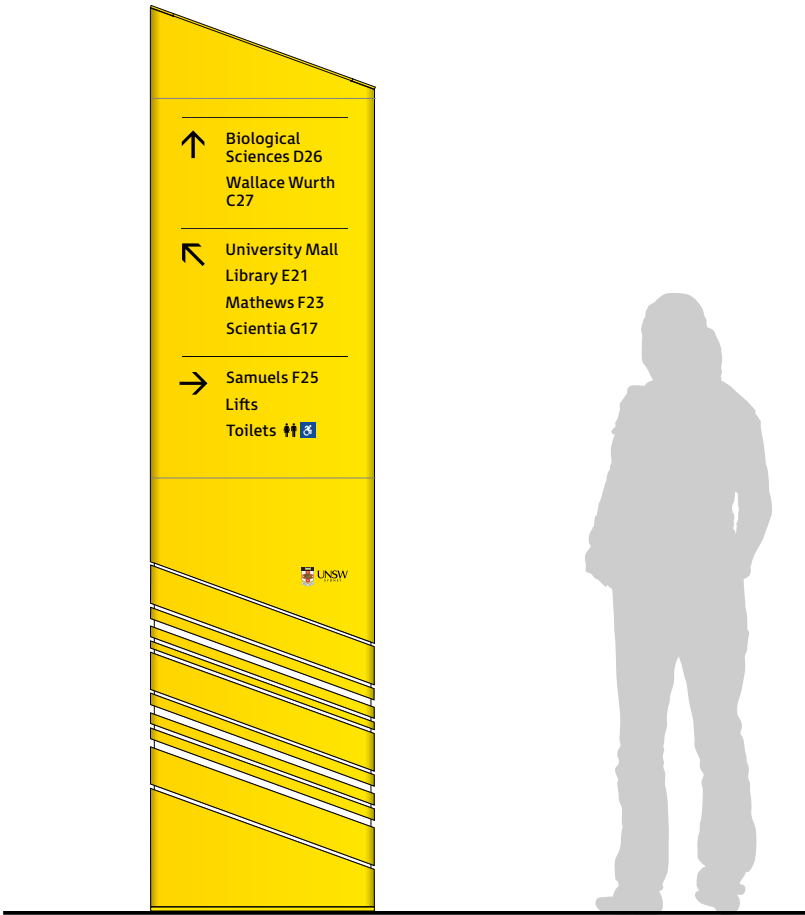

Back Elevation
Scale 1:20

Sign Location

Purpose

Directs to pedestrian traffic major site destinations from external areas. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location


Located at decision points and on major external circulation paths.

Illumination


Project Design Team to evaluate and test in-ground lighting to illuminate sculptural base of totem.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

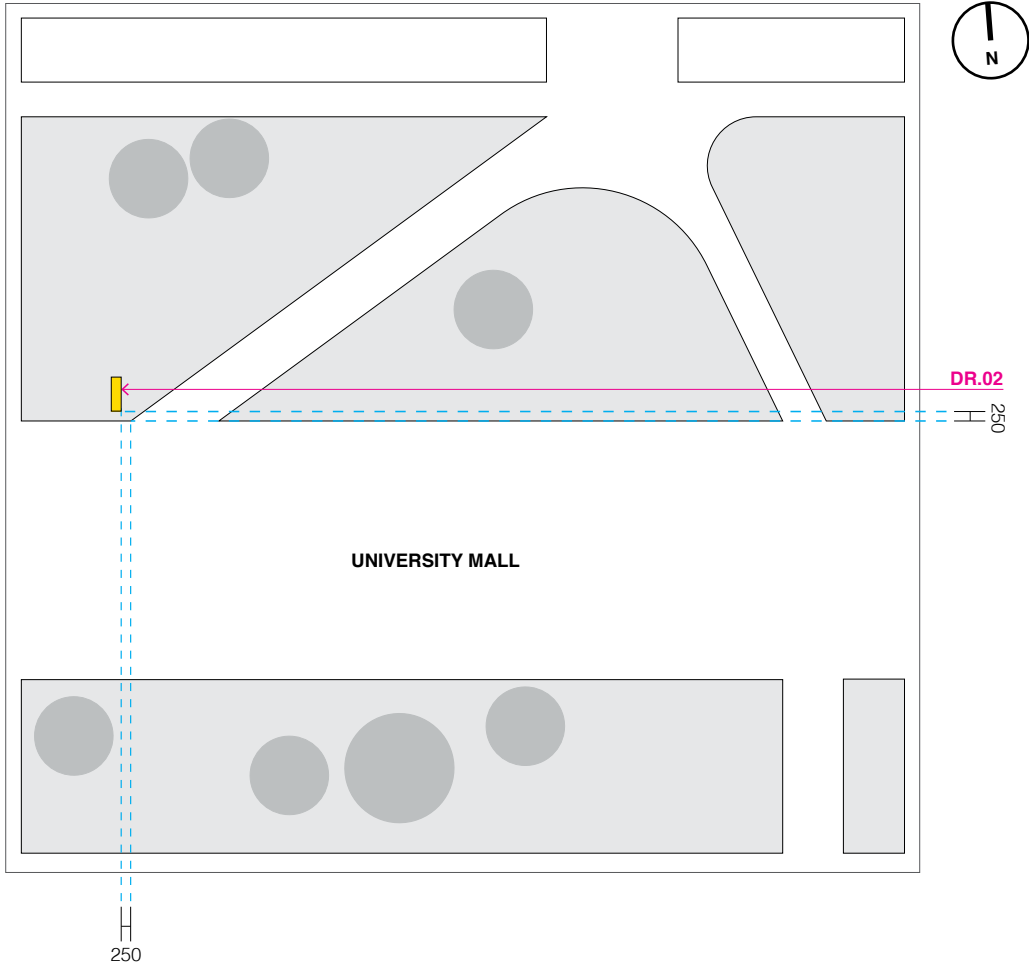

01 Pedestrian Totem 2400mm
University Mall
Scale 1:200

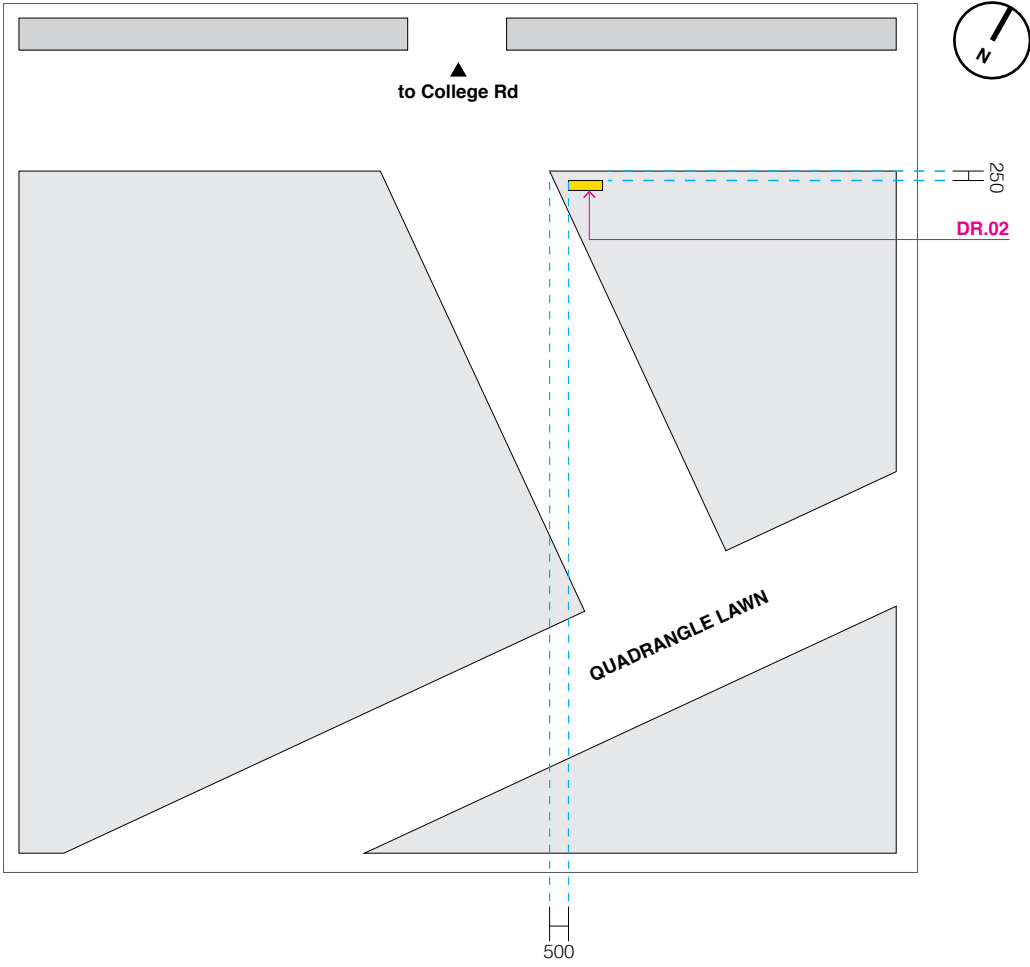

02 Pedestrian Totem 2400mm
Quadrangle
Scale 1:200

Positioning


Positioning Guide
Directional pedestrian totems are to be placed at decision points on major external circulation paths within the campus. They should ideally be placed within landscaping elements, to avoid impeding foot traffic.

Totems are to be placed 250mm from pathway or landscape edges, aligned perpendicular to circulation routes so as to provide equal visibility for pedestrians coming from either direction.

Refer to plan 01 for insitu positioning at an intersection of a major circulation path with secondary pathways.

Refer to plan 02 for insitu positioning at the exit/entrance of a courtyard space.

- Note**
- For wayfinding principles, refer to: Section 6, Wayfinding Principles

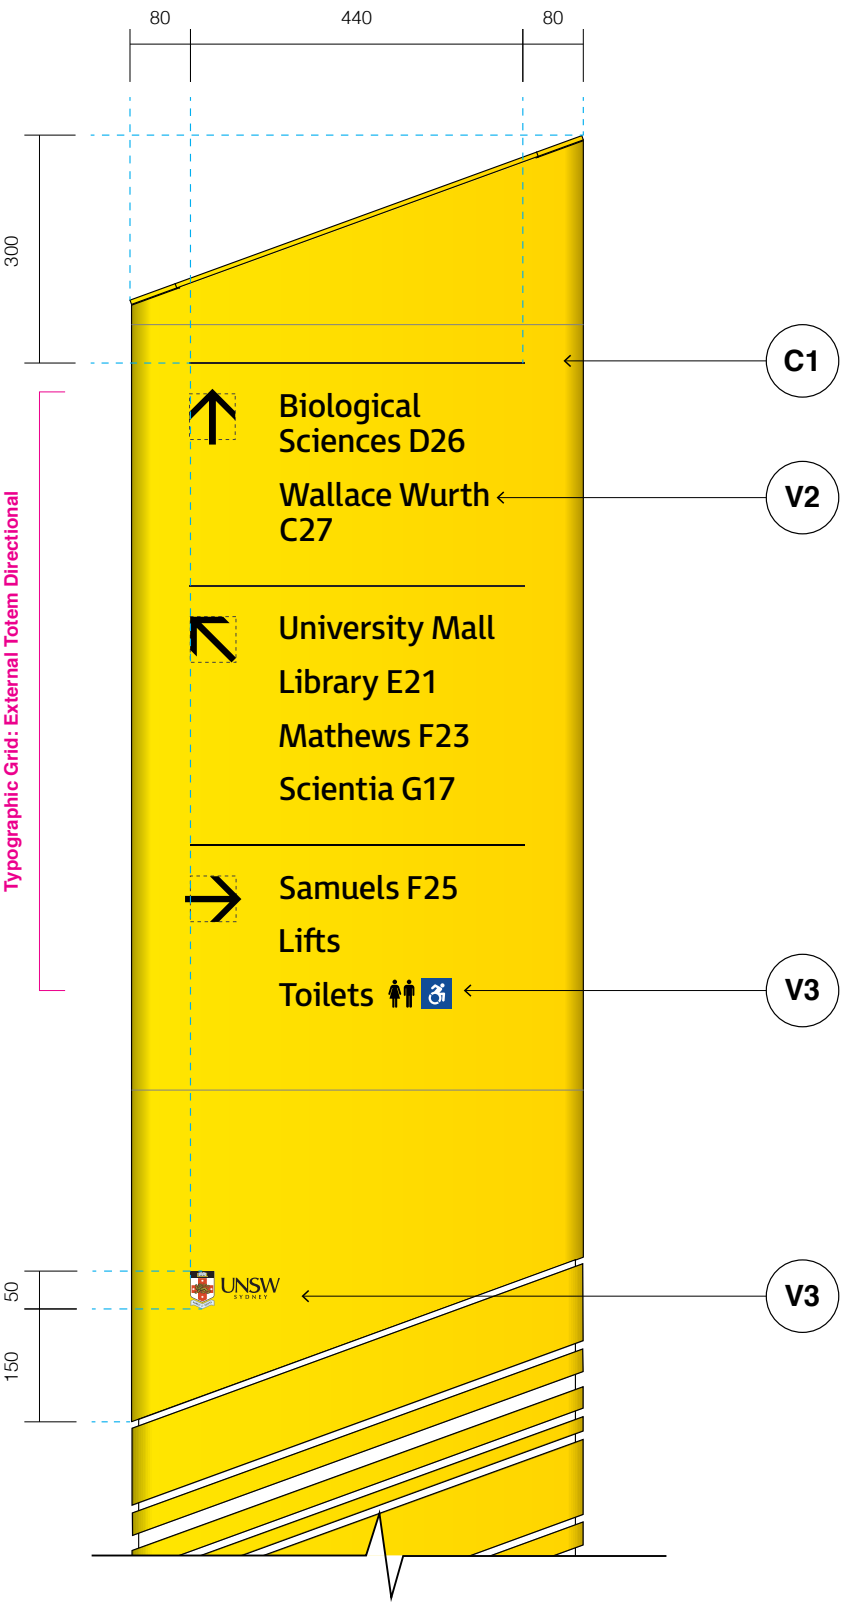

Detail
Scale 1:10

Graphic Layout

Typographic Grid – Directional
External Directional Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 5 arrow directions.
Maximum 12 destinations in total.

UNSW logo
50mm height

Back
Double sided messaging. Messaging to be different in response to masterplanning.

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms



01 Pedestrian Totem 2400mm
Lower campus University Mall




02 Existing Totem
Lower campus University Mall

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Messaging has been altered as per wayfinding and terminology strategy.

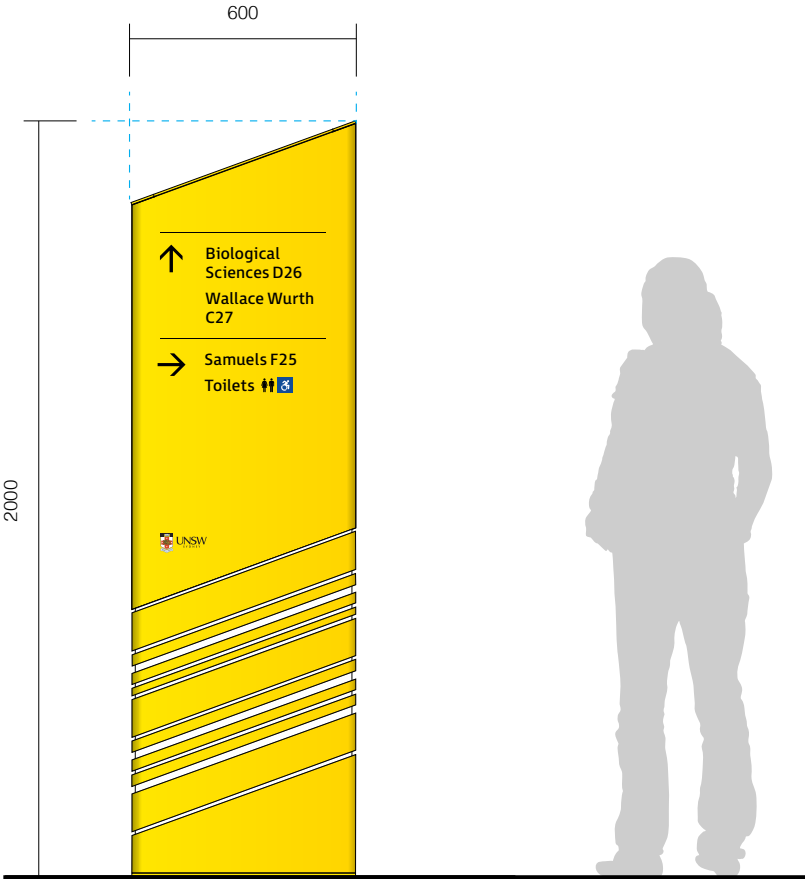

Front Elevation
Scale 1:20



Back Elevation
Scale 1:20

Sign Location

Purpose

Directs pedestrian traffic to major site destinations from external areas. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location


Located at decision points and on major external circulation paths.

Illumination

Project Design Team to evaluate and test in-ground lighting to illuminate sculptural base of totem.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

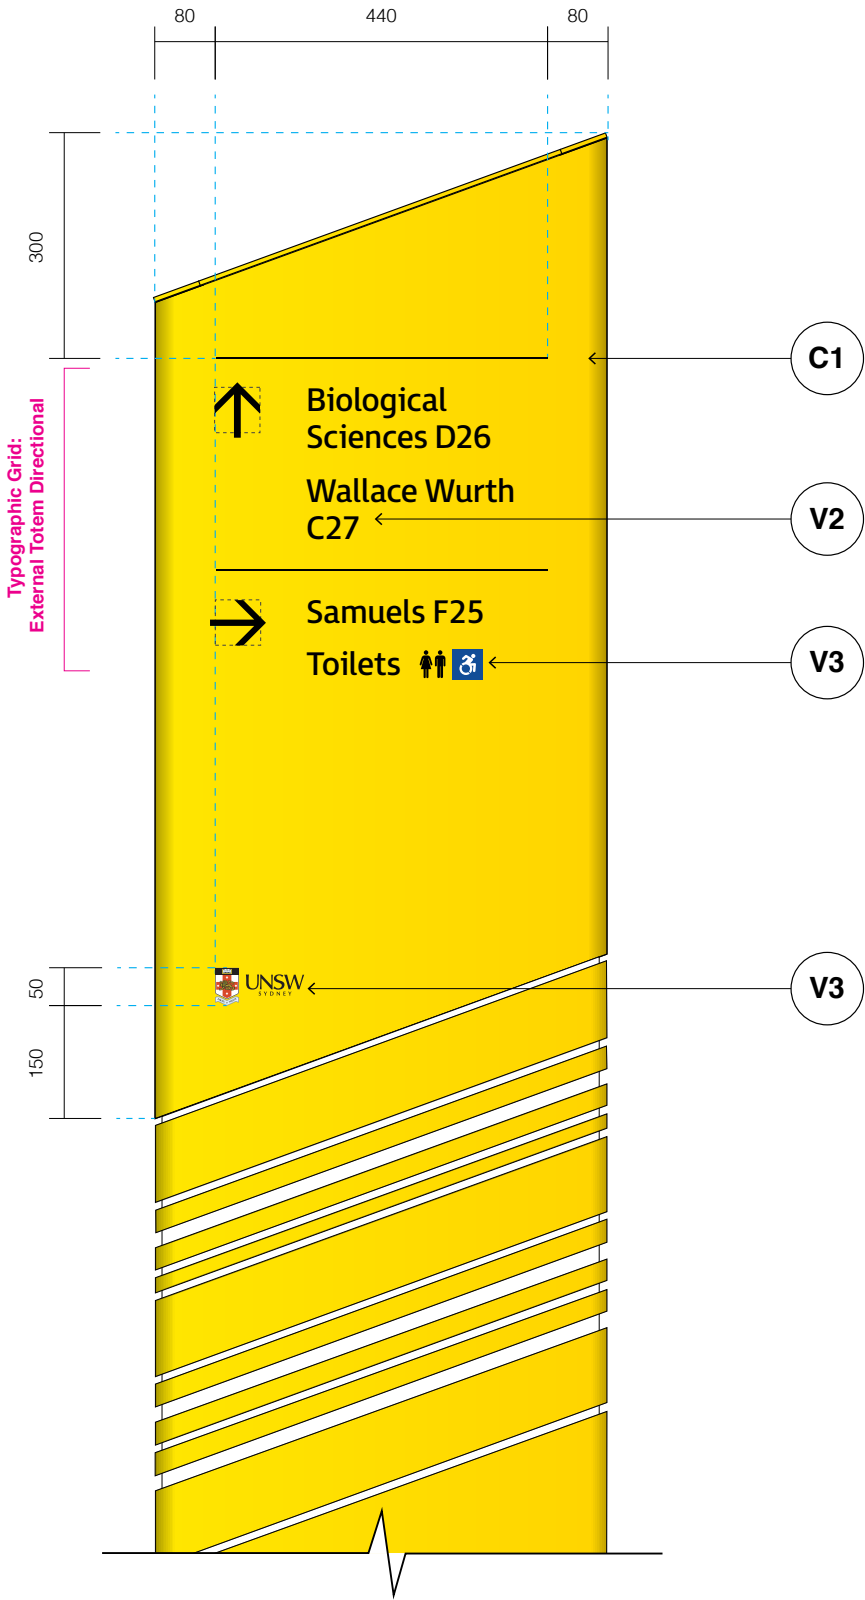

Detail
Scale 1:10

Graphic Layout

Typographic Grid – Identification
External Directional Totem layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 3 arrow directions.
Maximum 6 destinations in total.

UNSW logo
50mm height


Back
Double sided messaging. Messaging to be different in response to masterplanning.

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |


Construction Details
• Refer to: Section 10, Construction Standards, Totem Signforms

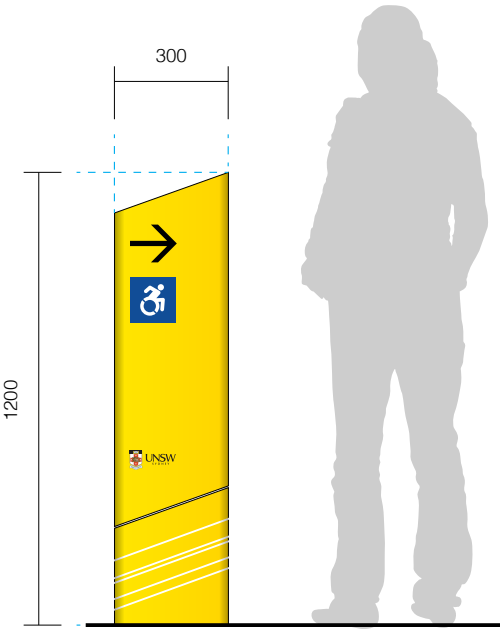

Front Elevation
Scale 1:20

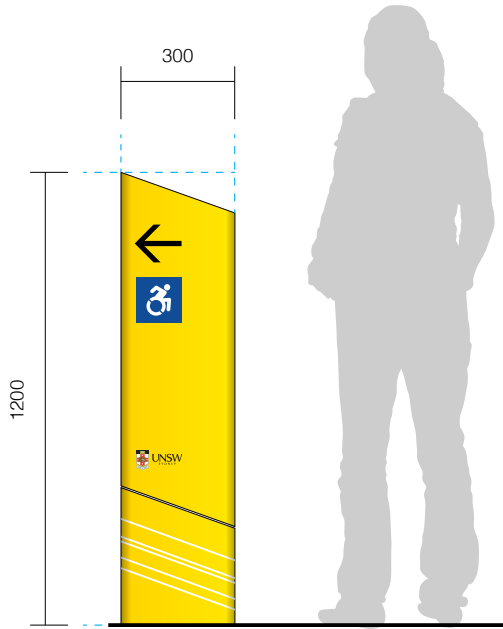

Back Elevation
Scale 1:20

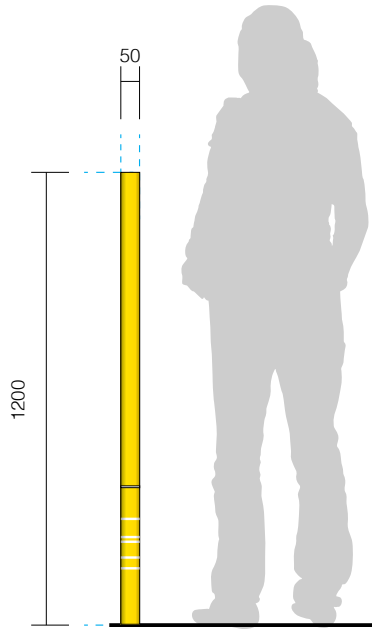

Side Elevation
Scale 1:20


Sign Location

Purpose
Directs pedestrians to accessibility routes. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Located at decision points and on major external circulation paths.

Illumination
Project Design Team to evaluate and test in-ground lighting to illuminate base of totem.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

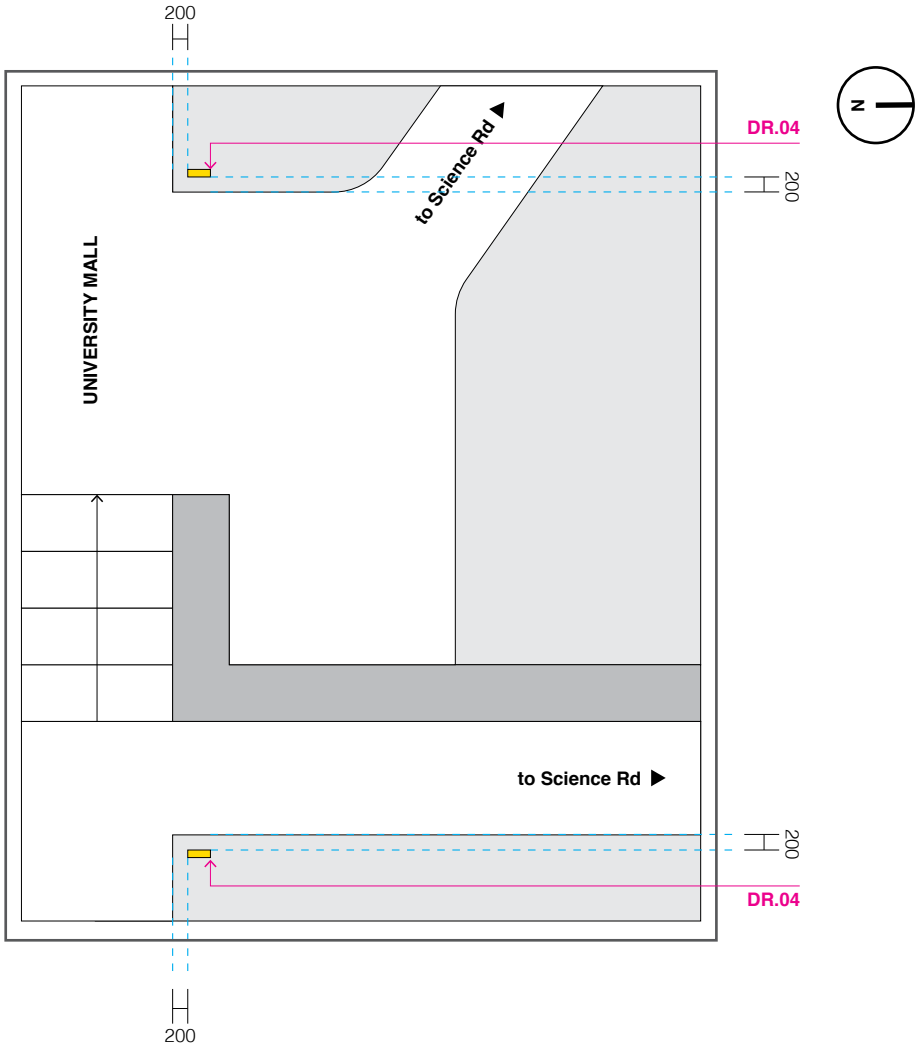

01 Bollard Totem
University Mall
Scale 1:100

Positioning

Positioning Guide


Bollard totems are to be positioned on the intersections of major circulation routes and accessible pathways, located within landscape elements at these intersections.

Totems are to be placed 200mm from edges of pathways, positioned to align with the indicated accessible pathway.


Refer to plan 01 for insitu positioning at an intersection of main circulation and accessible pathways.

Note

- For wayfinding placement principles, refer to: Section 4, User Journeys

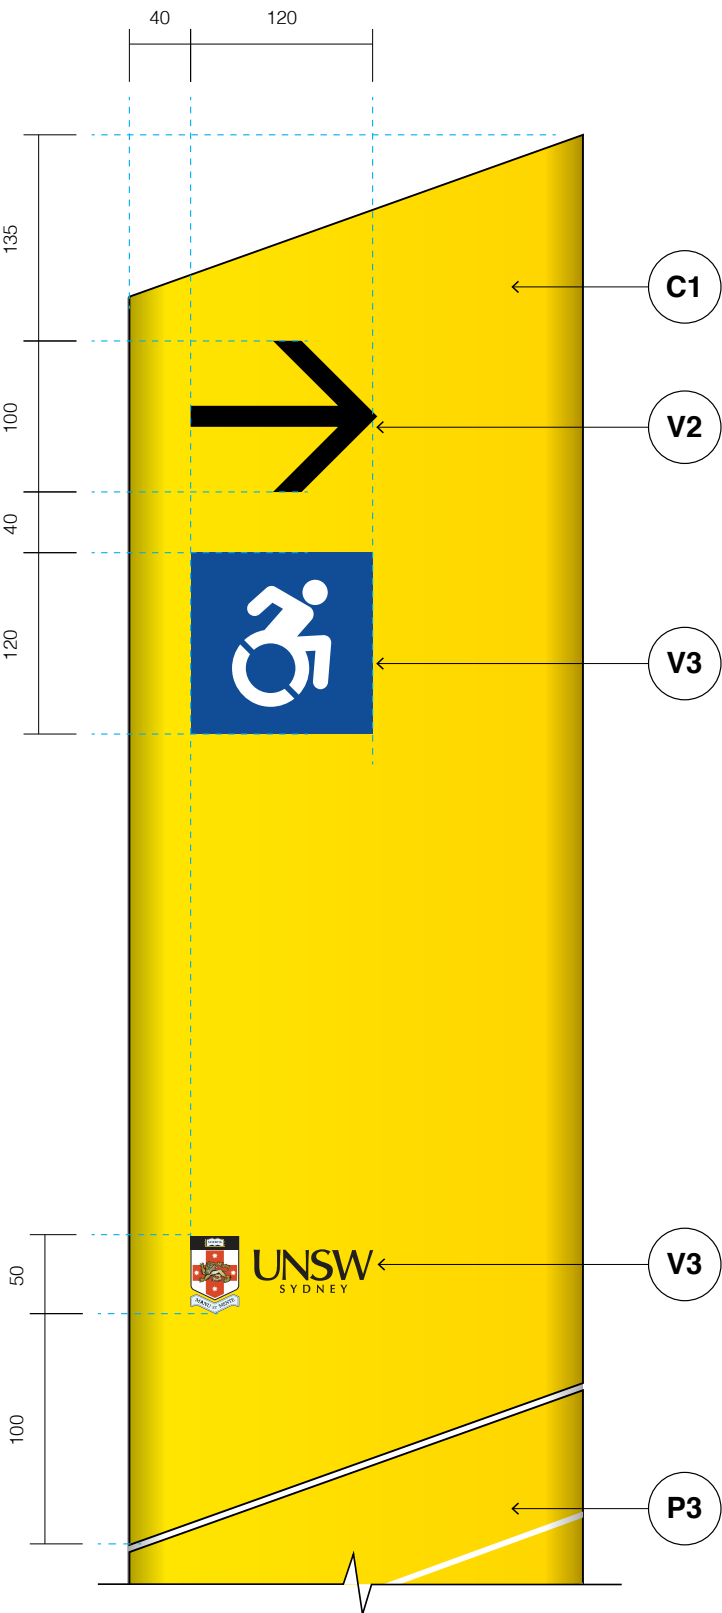

Template 01 - Single pictogram
Scale 1:5

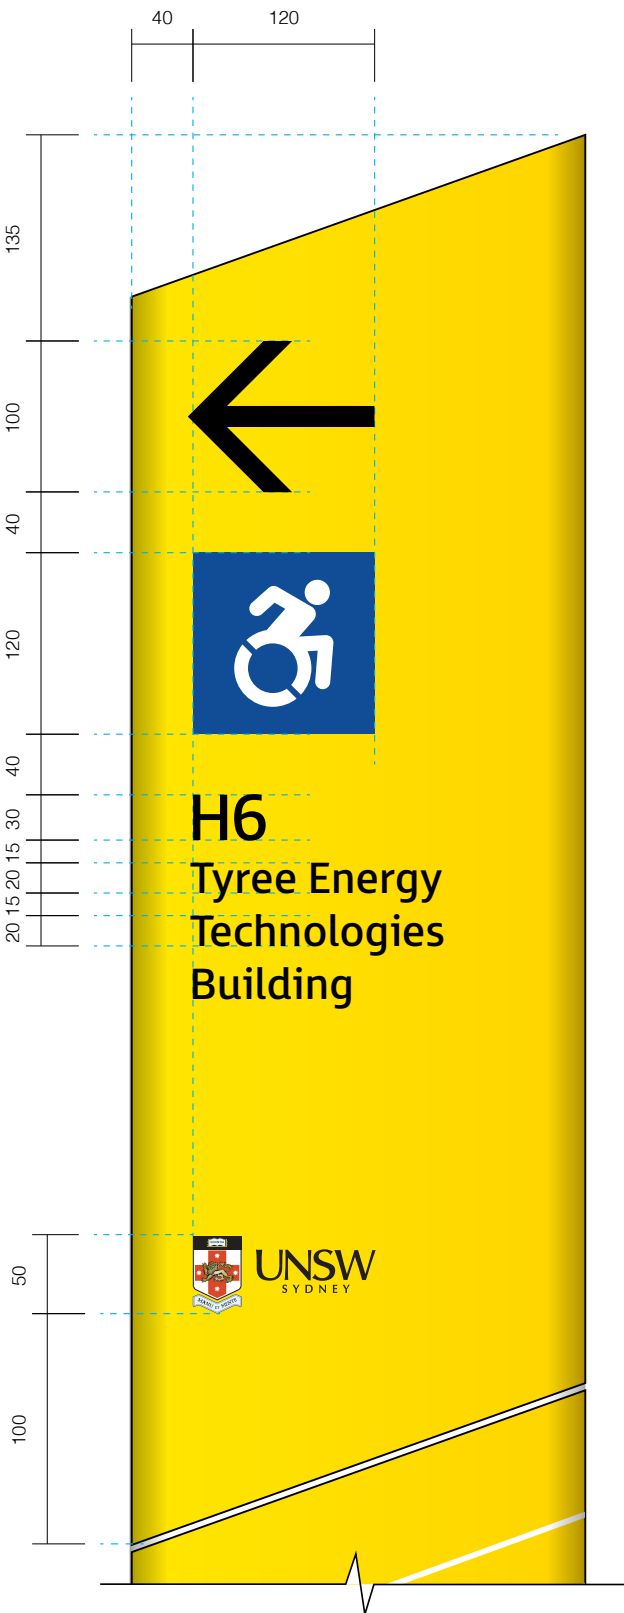

Template 02 - Single pictogram
and single destination with
building number
Scale 1:5


Graphic Layout

- Arrow**
75-100mm height
- Pictogram**
Accessibility Pictogram, 100-120mm height
- UNSW logo**
50mm height


Construction & Materials

- Materiality Legend**
- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium
- P3**
• P3 finish in 4mm routed groove

- Construction Details**
- Refer to: Section 22, Shop Drawing

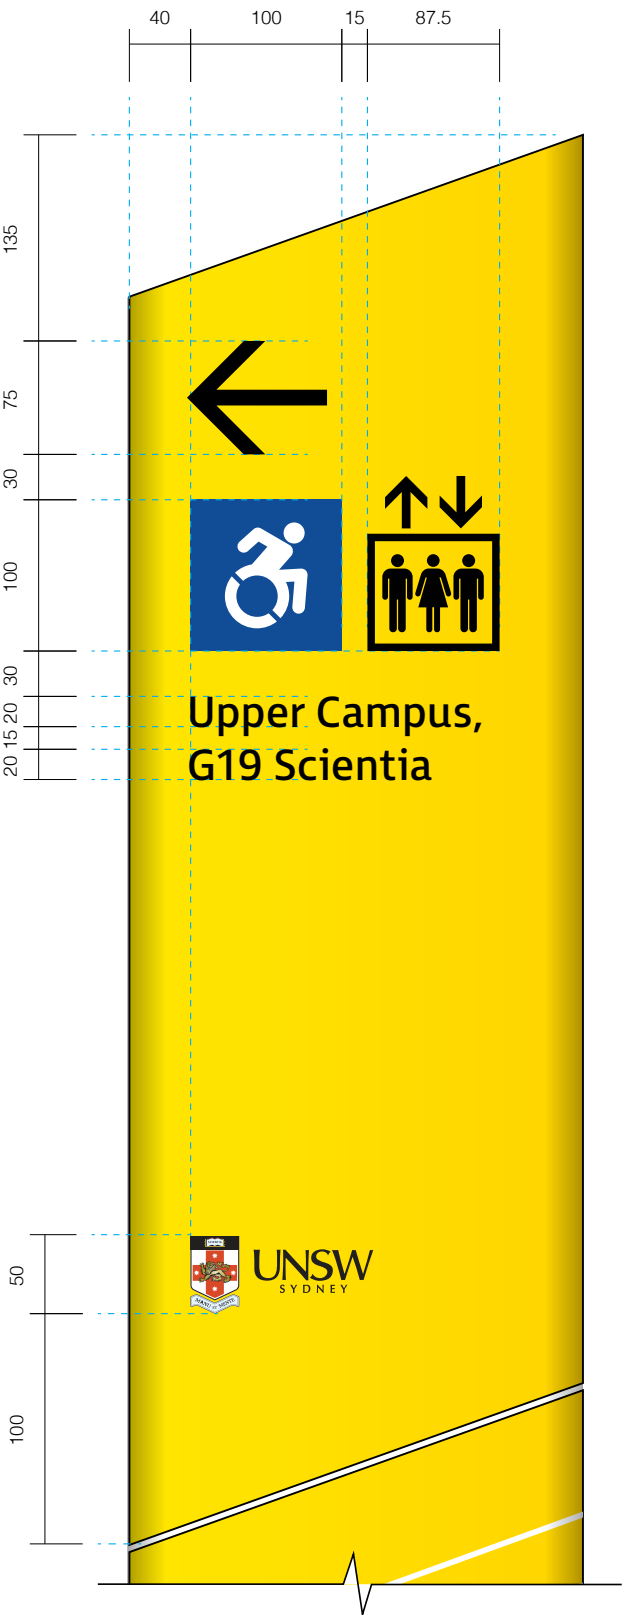

Template 03 - Multiple pictograms and single destination
Scale 1:5

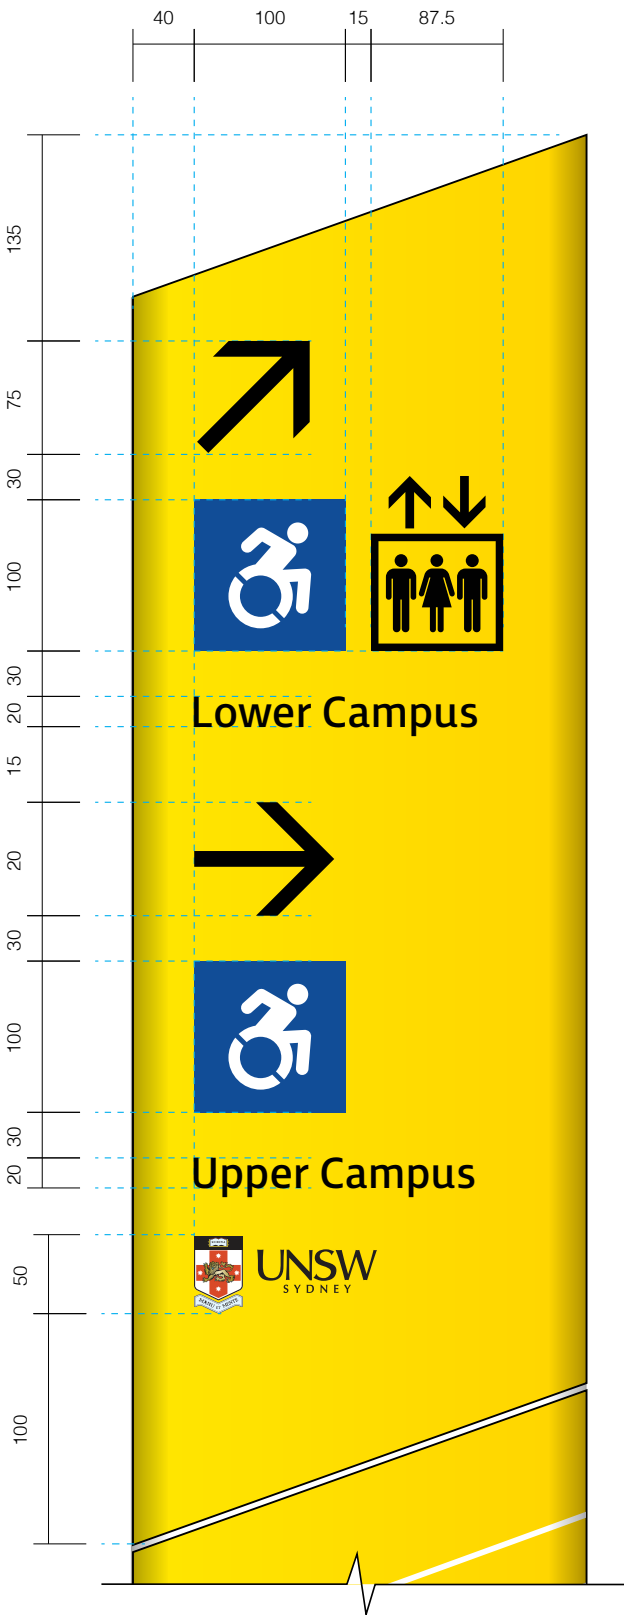

Template 04 - Multiple pictograms and multiple destinations
Scale 1:5

Graphic Layout

- Arrow**
75-100mm height
- Pictogram**
Accessibility Pictogram, 100-120mm height
- UNSW logo**
50mm height

Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium
- P3**
• P3 finish in 4mm routed groove

Construction Details

- Refer to: Section 22, Shop Drawing




01 Bollard Totem
Lower campus University Mall



02 Existing Sign
Lower campus University Mall

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

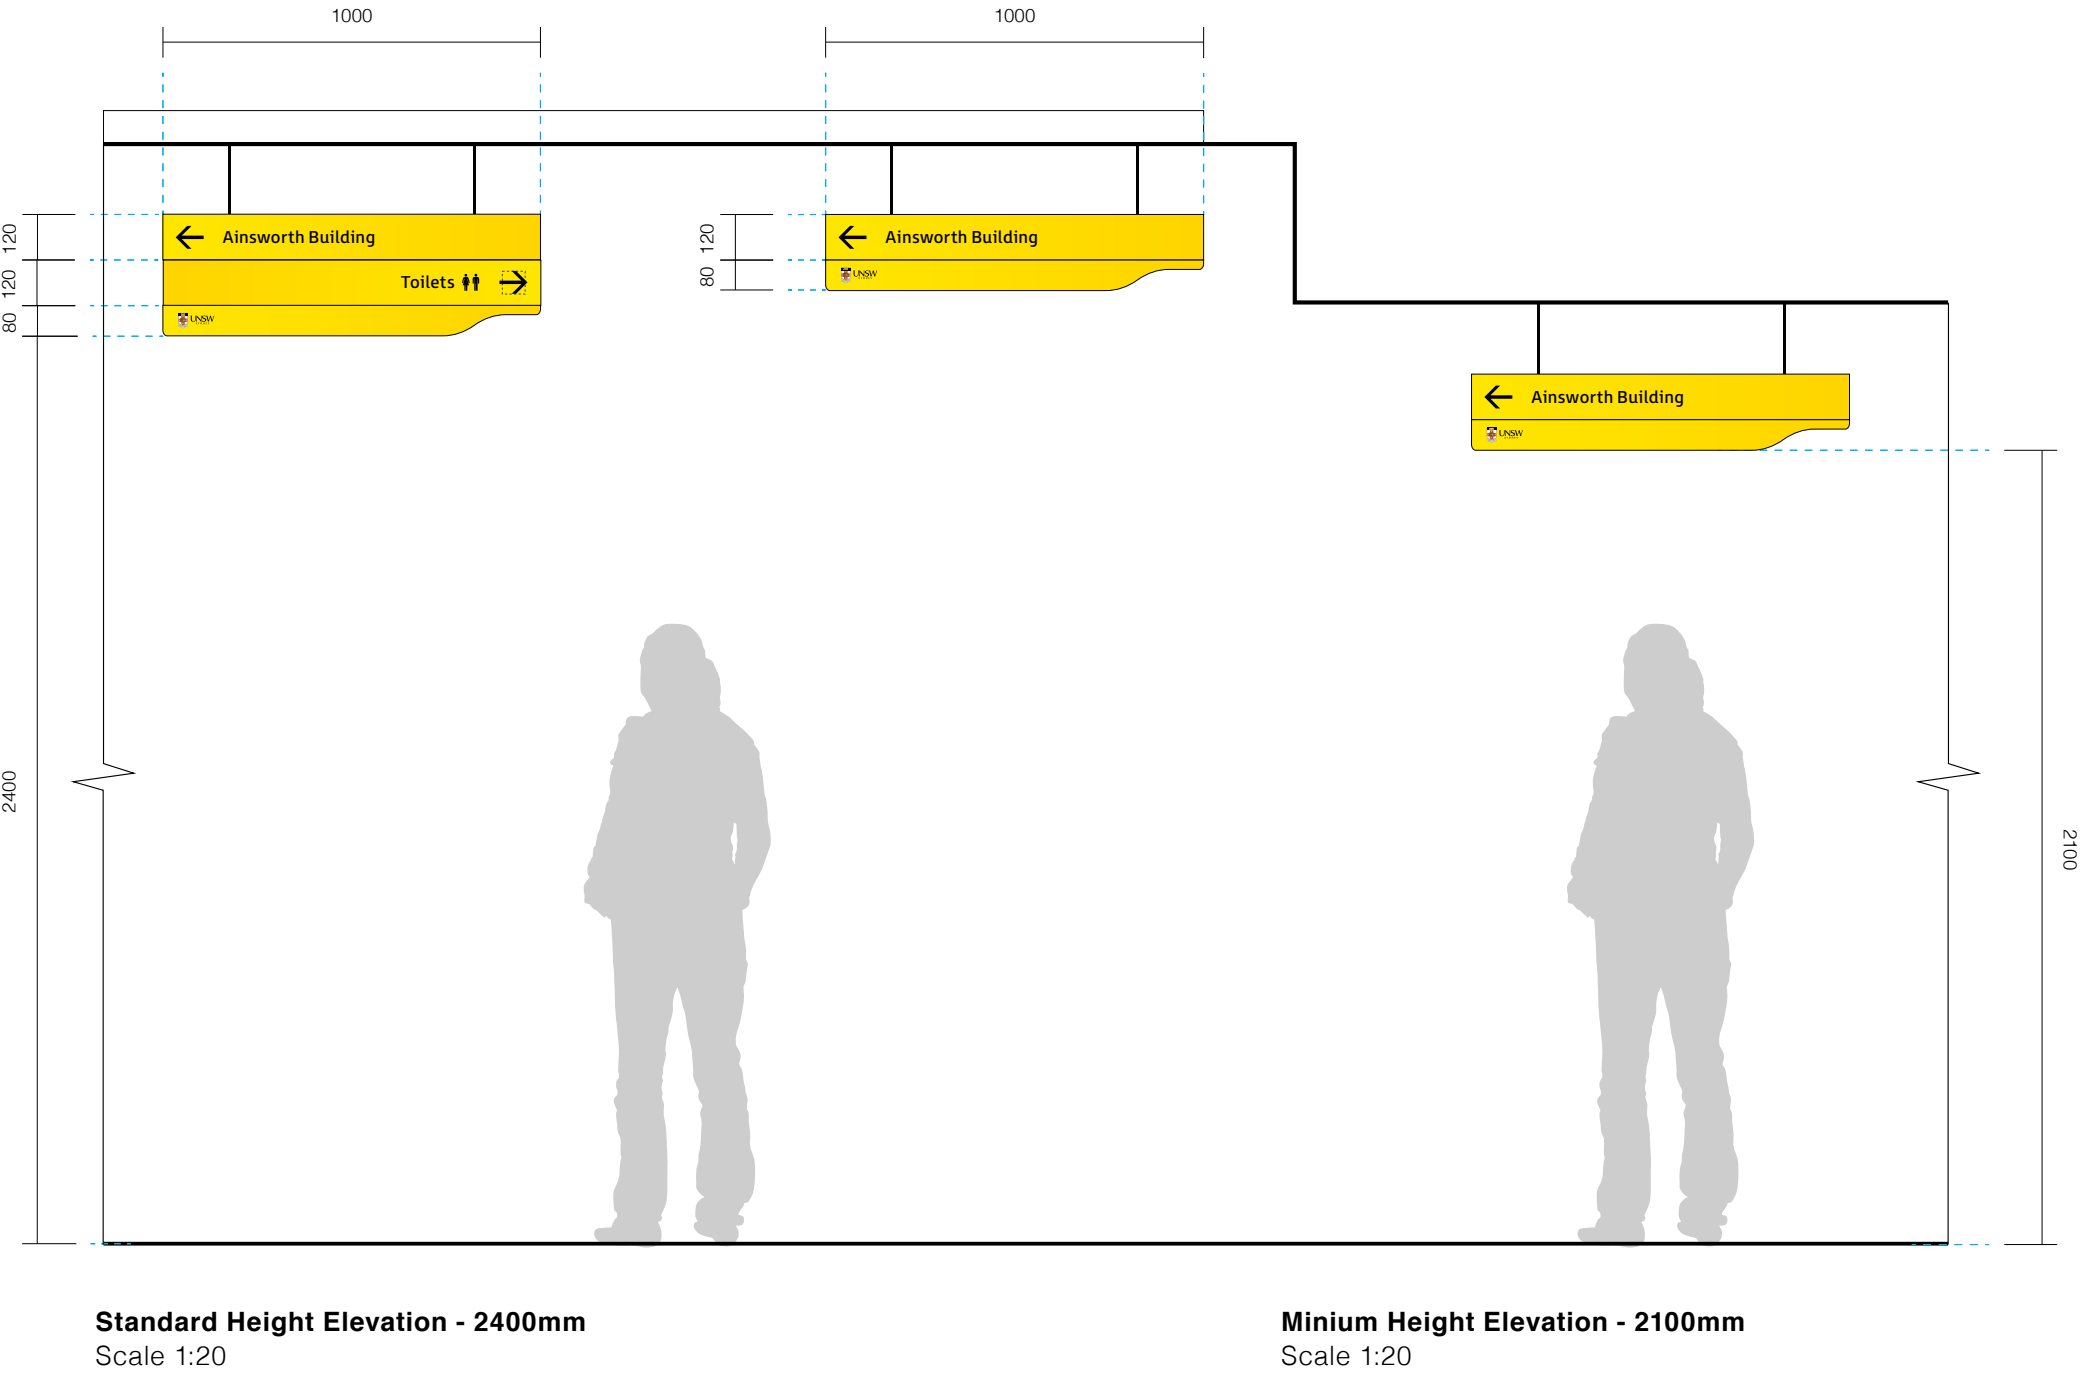


Sign Location

Purpose
Directs to main destinations at an external and internal level. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.


Location
Suspended along circulation corridors, at confirmation and decision points. Message content to be applied to both sides, with directions to various destinations as required by the circulation pattern.

Alternate Location
For buildings with ceiling heights of higher than 2700mm utilise alternate location. Confirm on site or during design phase.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

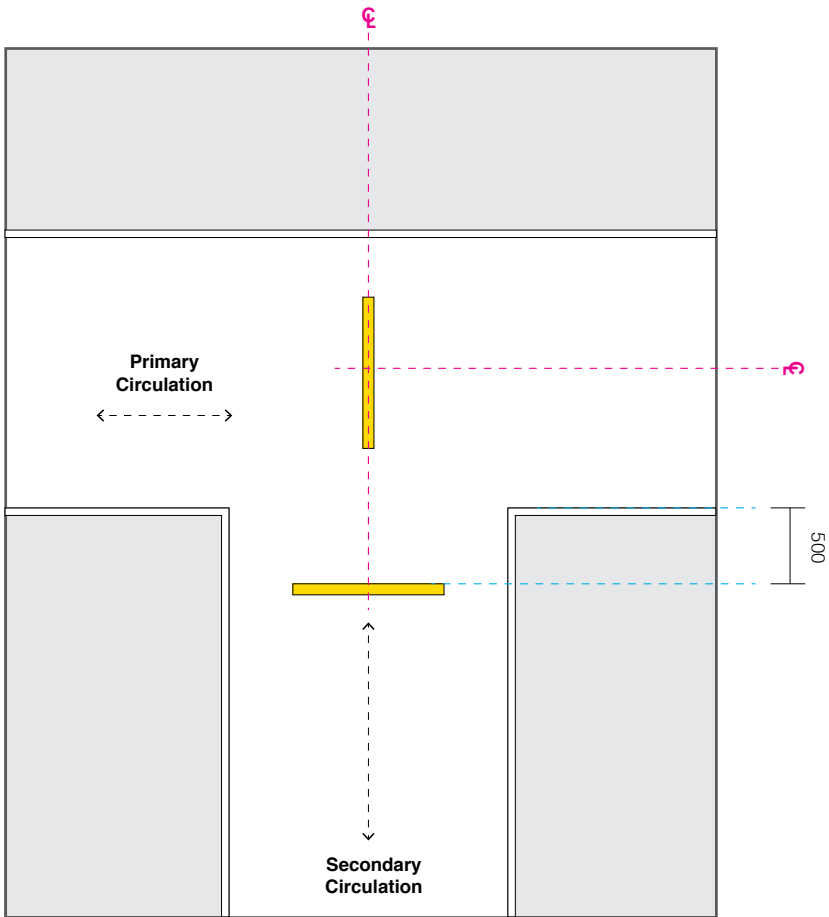

01 Suspended Directional
T-intersection
Scale 1:50

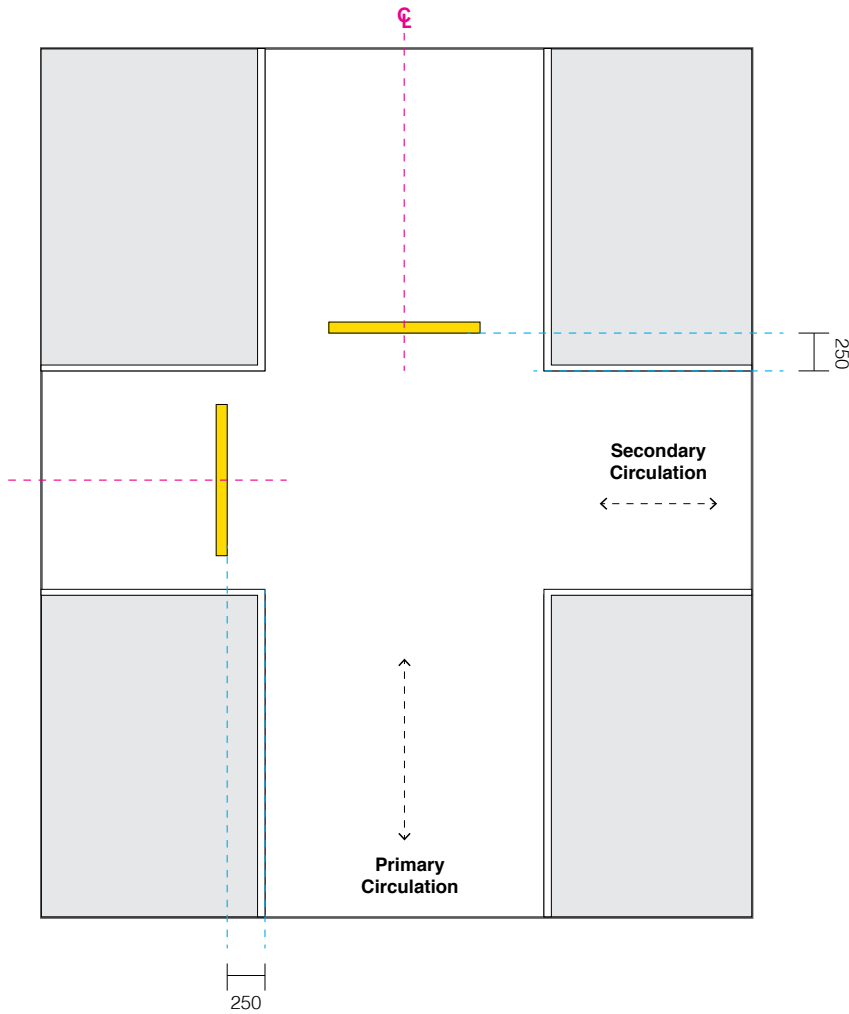

02 Suspended Directional
X-intersection
Scale 1:50


Positioning

Positioning Guide
Suspended directional signs are to be placed within circulation corridors at confirmation and decision points within both internal and external campus areas.


Signs to be centered within the circulation corridor, mounted at 2400 FFL. Positioning should be adjusted to avoid obstruction by ceiling mounted elements e.g. lighting, emergency exit signage.

Refer to plan 01 for insitu positioning at a T-intersection and plan 02 for insitu positioning at a X-intersection.


Note
• For wayfinding placement principles, refer to: Section 4, User Journeys

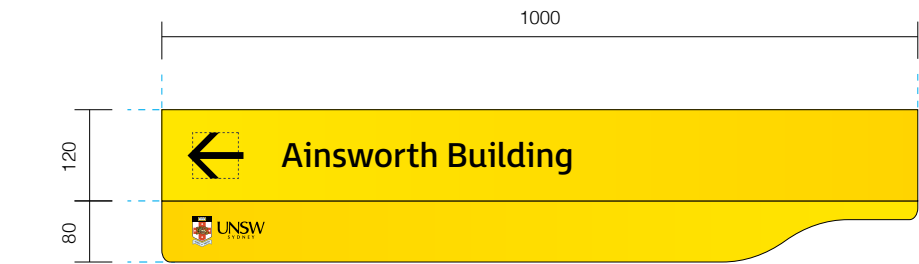


DR.05a - Small Single Panel
Scale 1:5

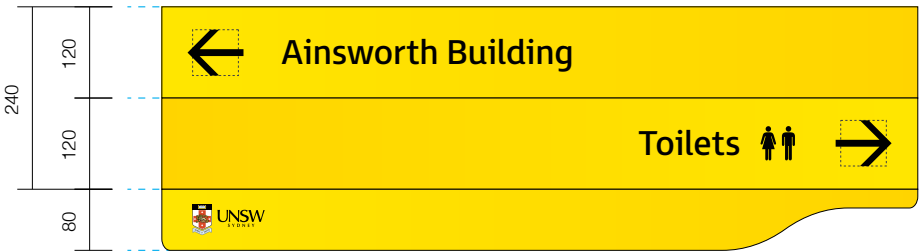


DR.05b - Medium Double Panel
Scale 1:5

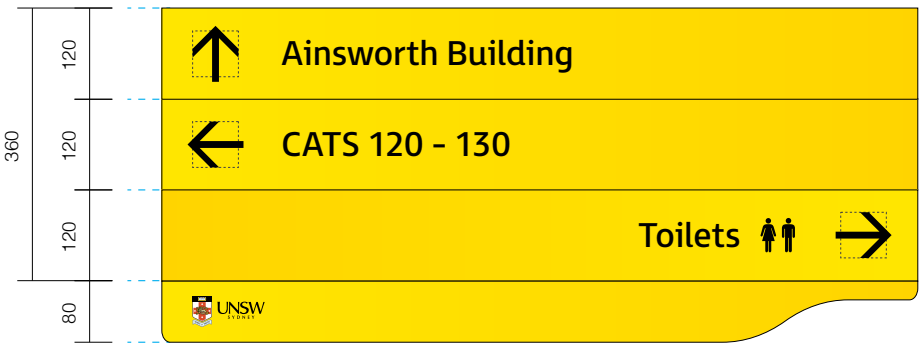


DR.05d - Large Triple Panel
Scale 1:5

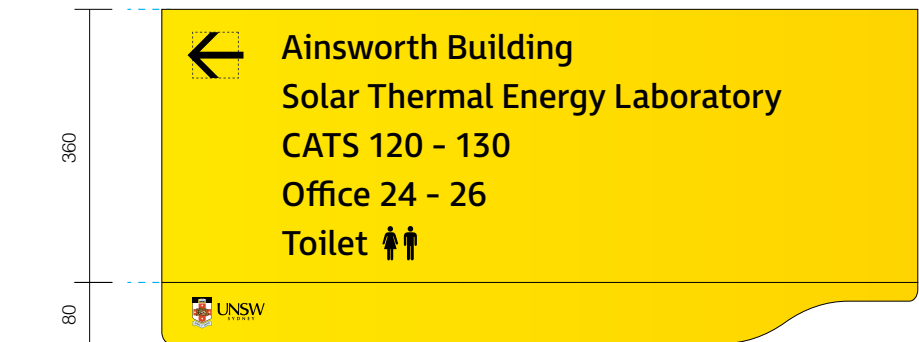

DR.05f - Large Single Panel
Scale 1:5

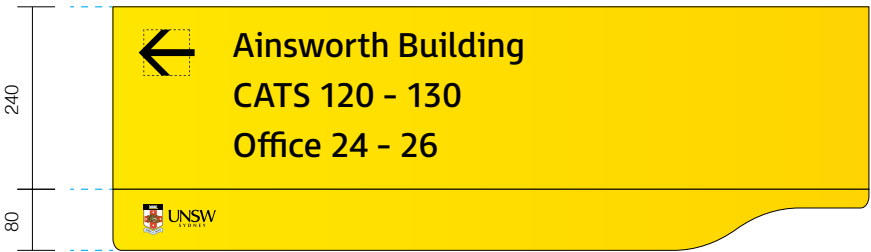

DR.05c - Medium Single Panel
Scale 1:5

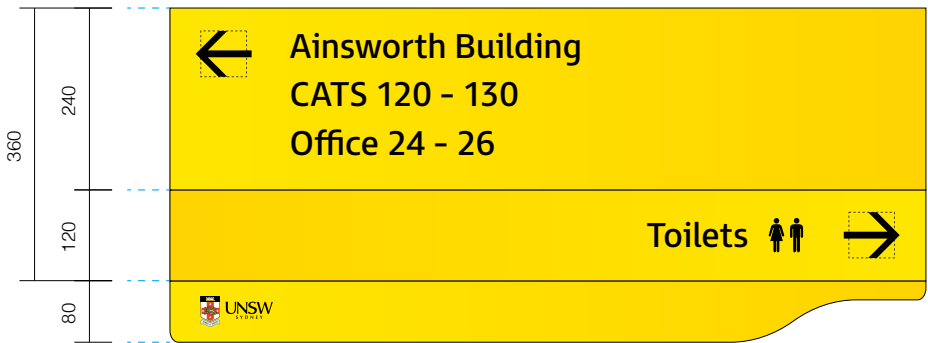

DR.05e - Large Combination Panel
Scale 1:5

Family

Sign Selection


Selection of sign panel configuration is to respond to messaging specific to its location.

Destination Quantities


A maximum of 5 destinations. Only to be applied on DR.05f suspended sign panel. When location requires more than 5 destinations, it is advised to use DR.06 or DR.08 wall mounted signs instead.

Note


- For wayfinding placement principles, refer to: Section 4, User Journeys

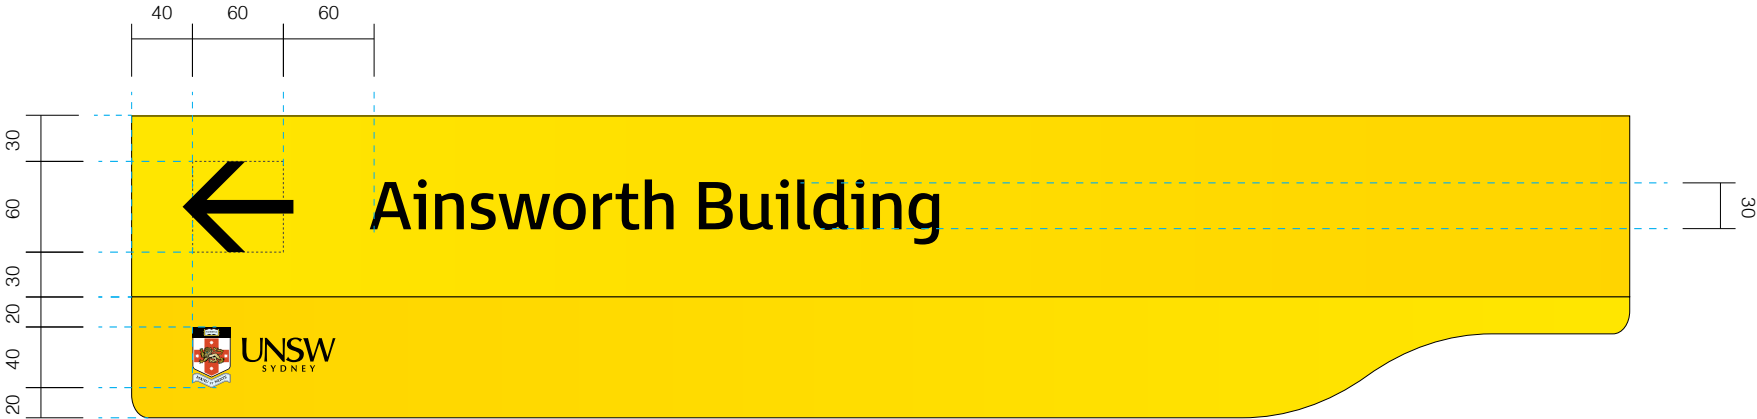


Typical Single Panel
Arrow & Destination
Scale 1:5

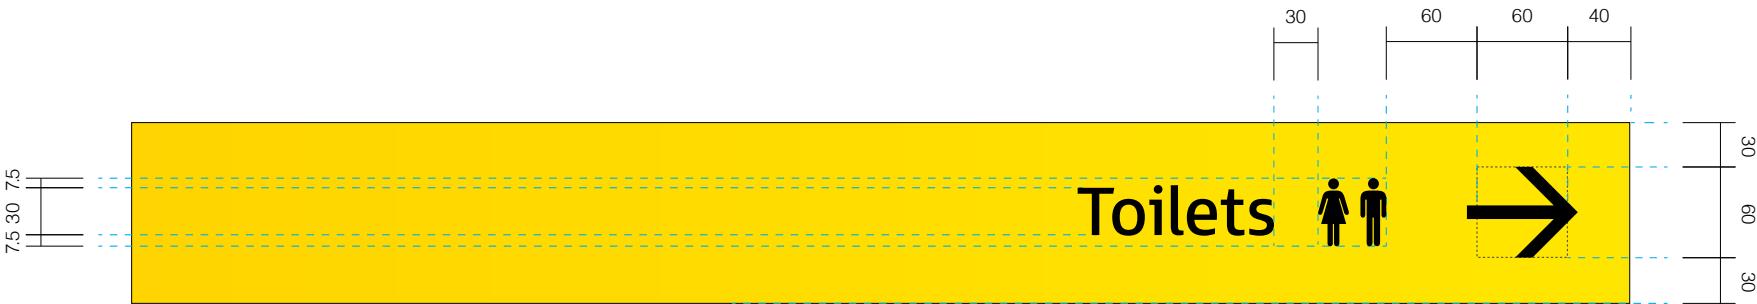

Typical Single Panel
Arrow, Destination &
Pictogram
Scale 1:5

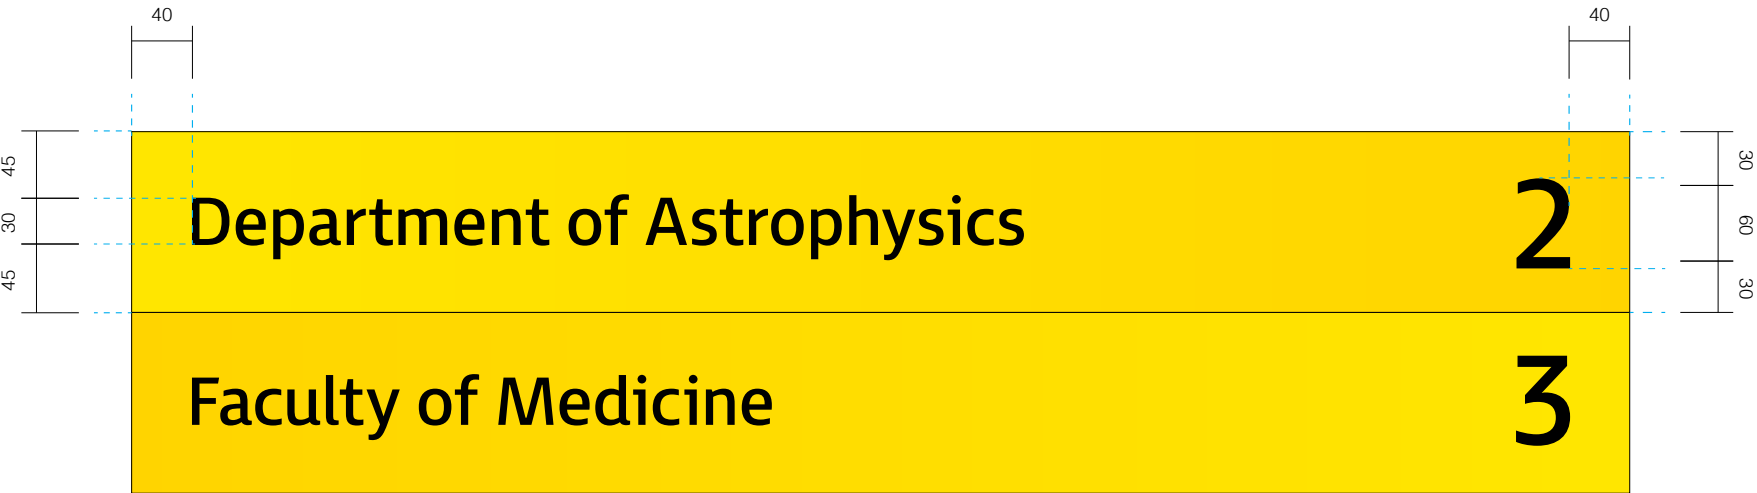

Typical Single Panel
Level Identification
Scale 1:5

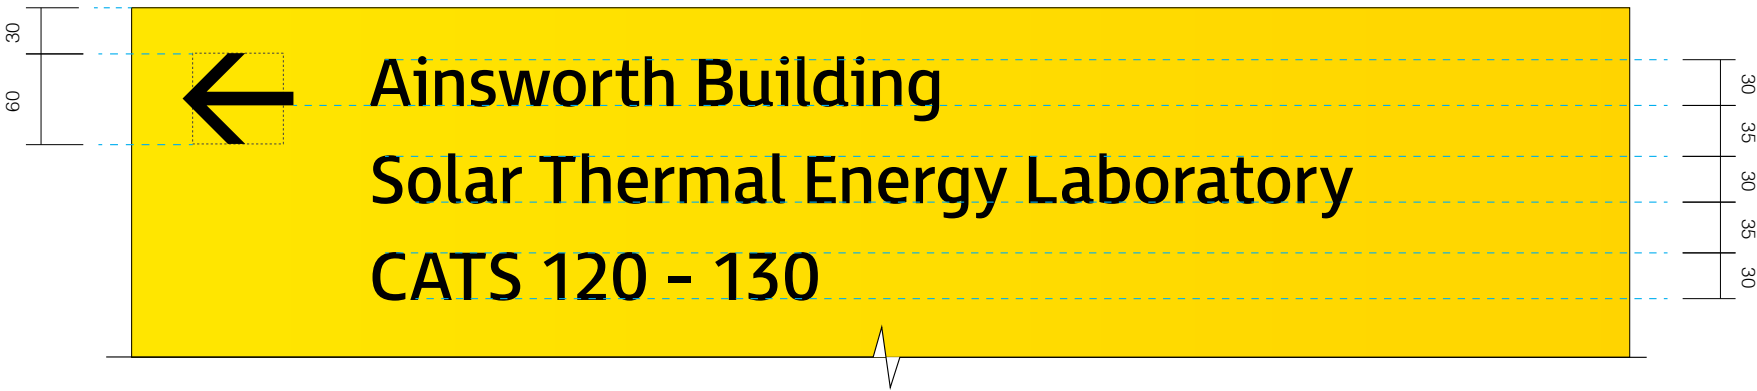

Large Panels
Arrow & Destination
Scale 1:5

Graphic Layout

Destination Name
FS Millbank Regular
Alignment: To respond to arrow direction.
Size: 30mm
Tracking: 10+, Optical Kerning

Pictograms
Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 9, Graphic Standards, Pictogram Suite.

Arrow
60mm height

UNSW Logo
40mm height

Construction & Materials

Materiality Legend

- C1

 - C1 finish on 3mm aluminium
- V2

 - V2 applied on top of aluminium
- V3

 - V3 print applied on top of aluminium

Fixing Details
• Refer to: Section 10, Construction Standards, Suspended Signforms



01 Directional Suspended Sign
Chemical Sciences Building




02 Existing Sign
Chemical Sciences Building


Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy.

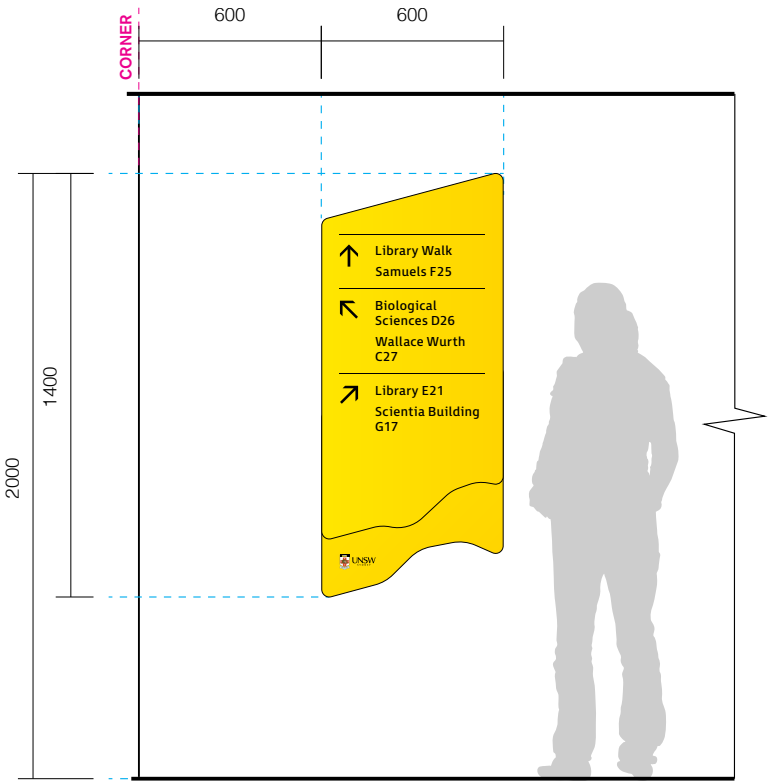

Elevation - Aligned to corner
Scale 1:25

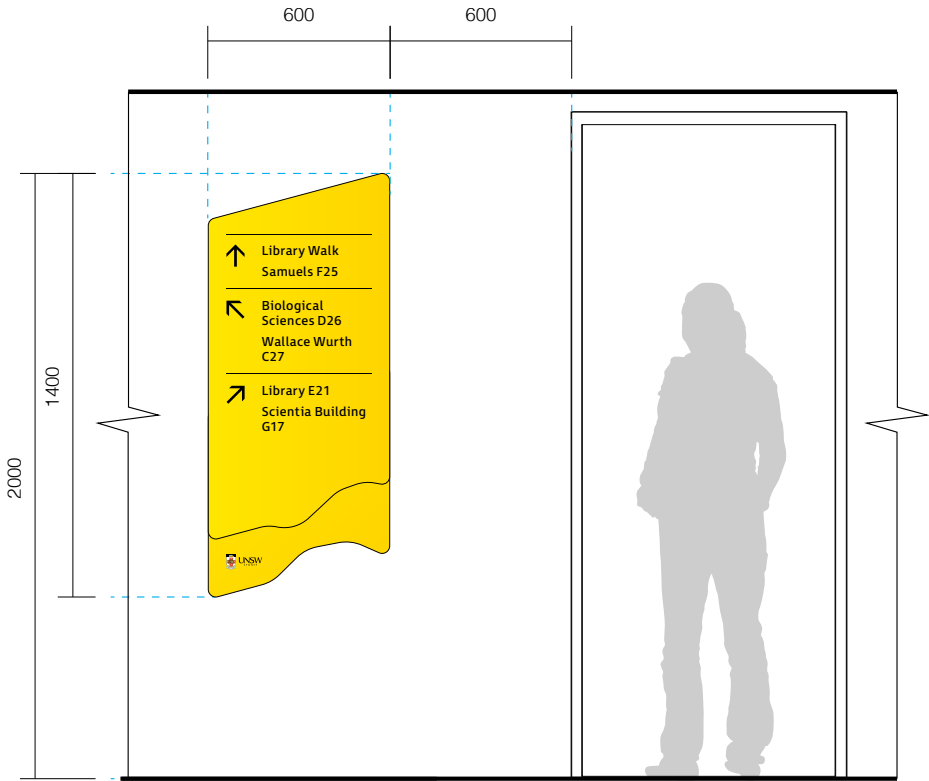

Elevation - Beside door or opening
Scale 1:25

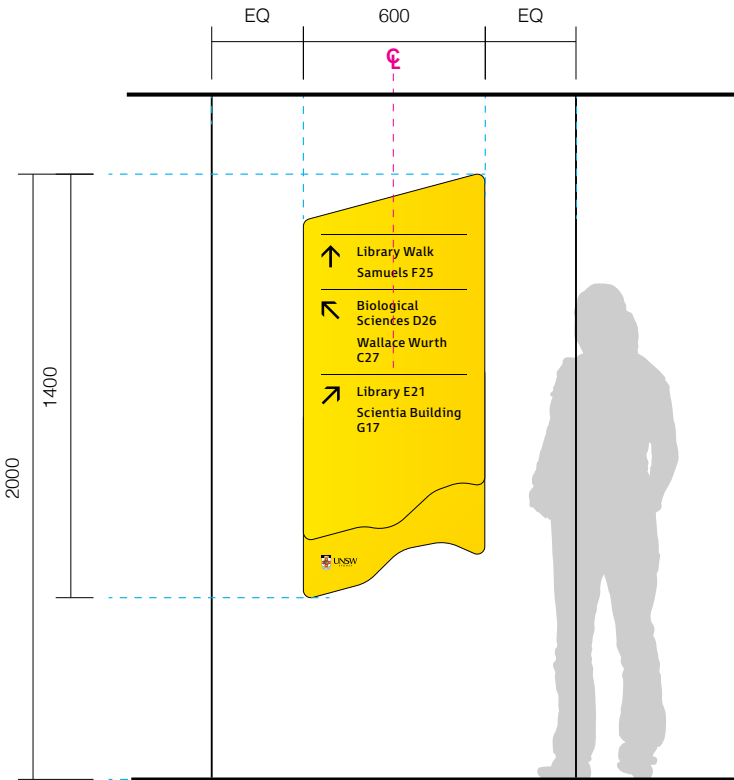


Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose
Directs pedestrians to main destinations from an external area. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

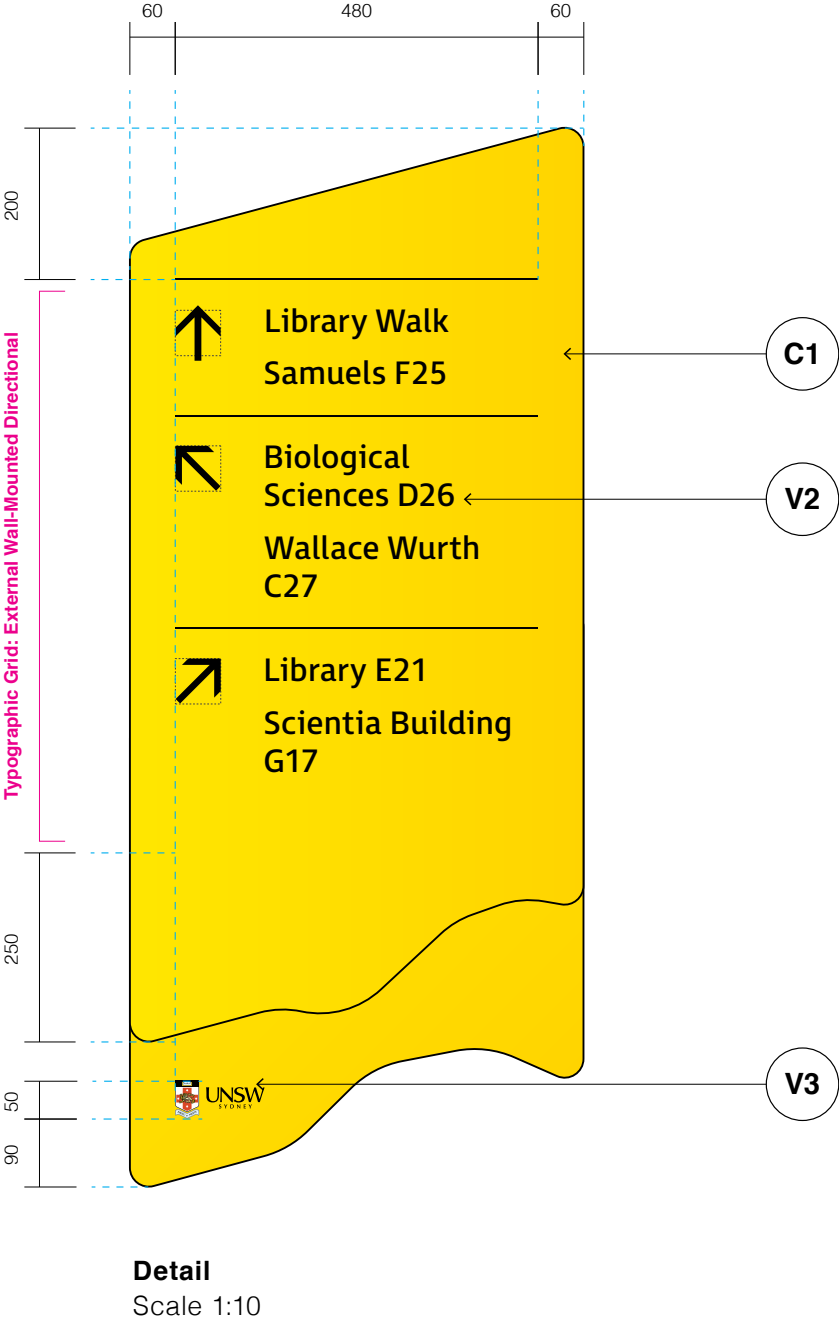

Graphic Layout

Typographic Grid – Identification
Internal Wall Mounted Directional Layout. Refer to Section 9, Graphic Standards, Typographic Grids

Dividing Line
Line weight: 2mm


Destination Quantity
Maximum 3 arrow directions.
Maximum 8 destinations in total.
Destinations must not exceed below 250mm footer of front message panel.

UNSW logo
50mm height

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

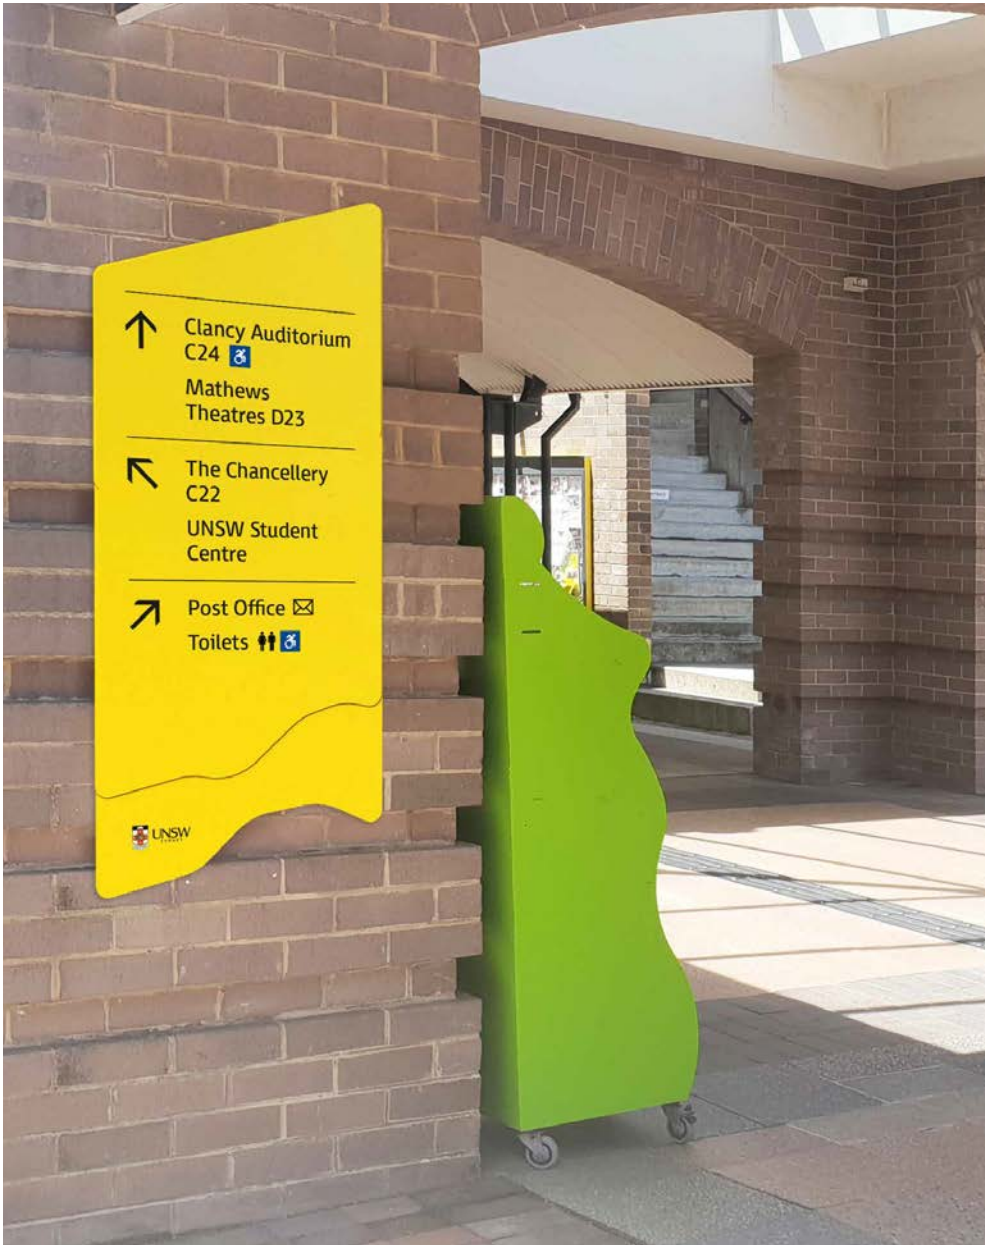

01 External Wall-Mounted Directional
Library Lawn




02 Existing Sign
Library Lawn


Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.


Messaging has been altered as per wayfinding and terminology strategy.

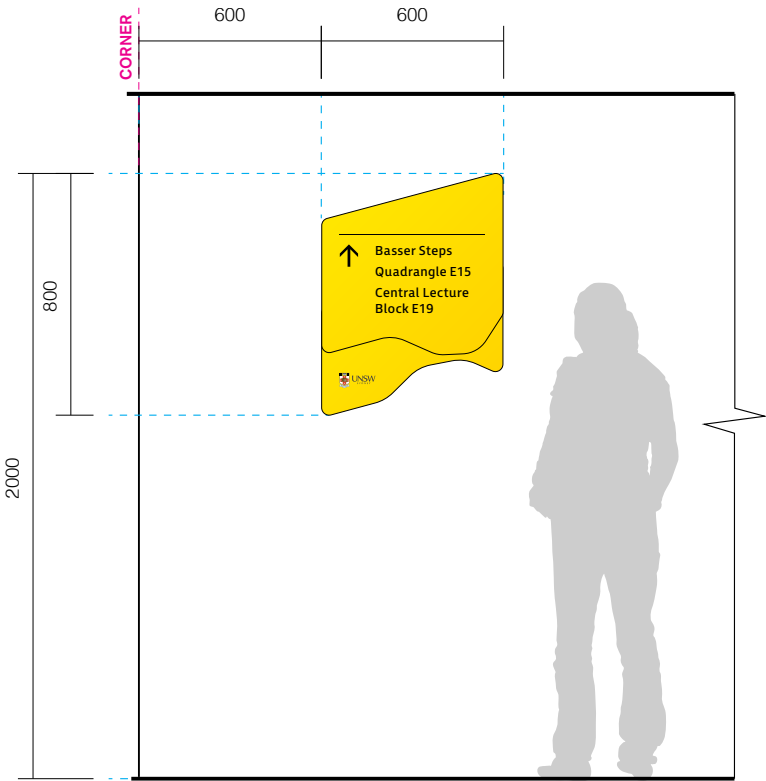

Elevation - Aligned to corner
Scale 1:25

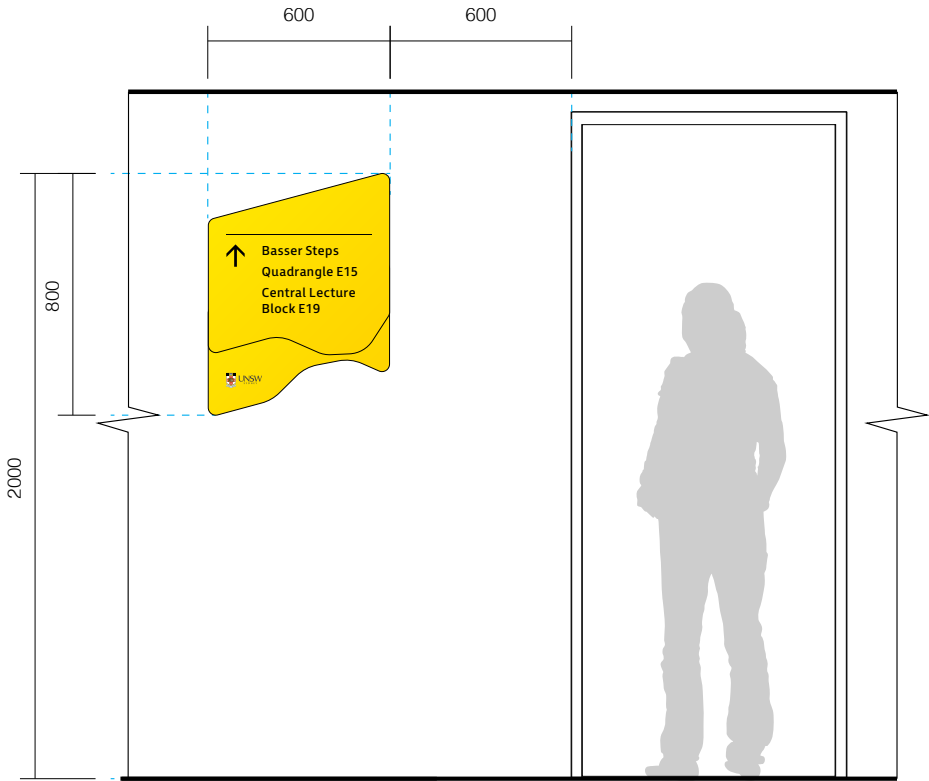

Elevation - Beside door or opening
Scale 1:25

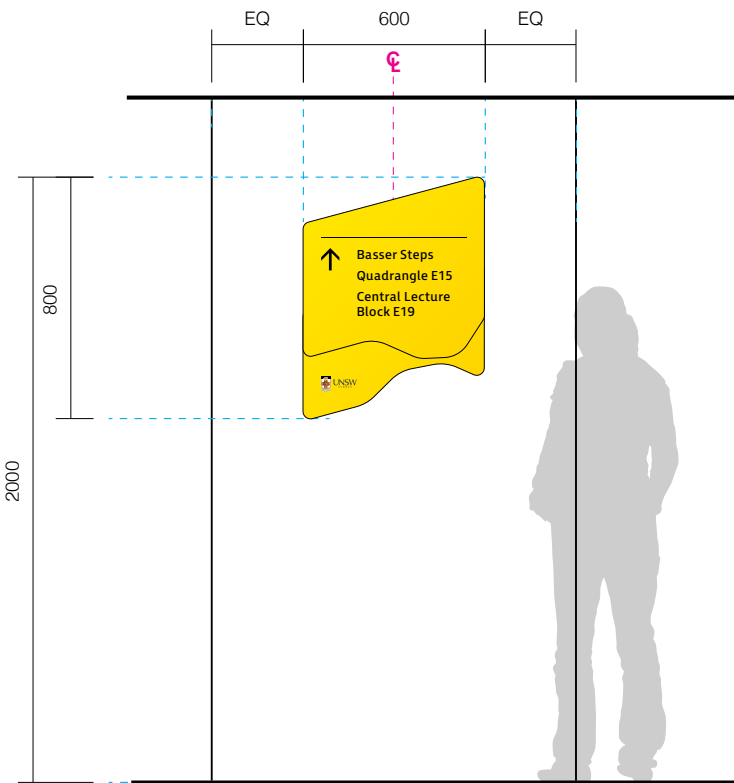

Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose


Directs pedestrians to main destinations from an external area. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location

Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

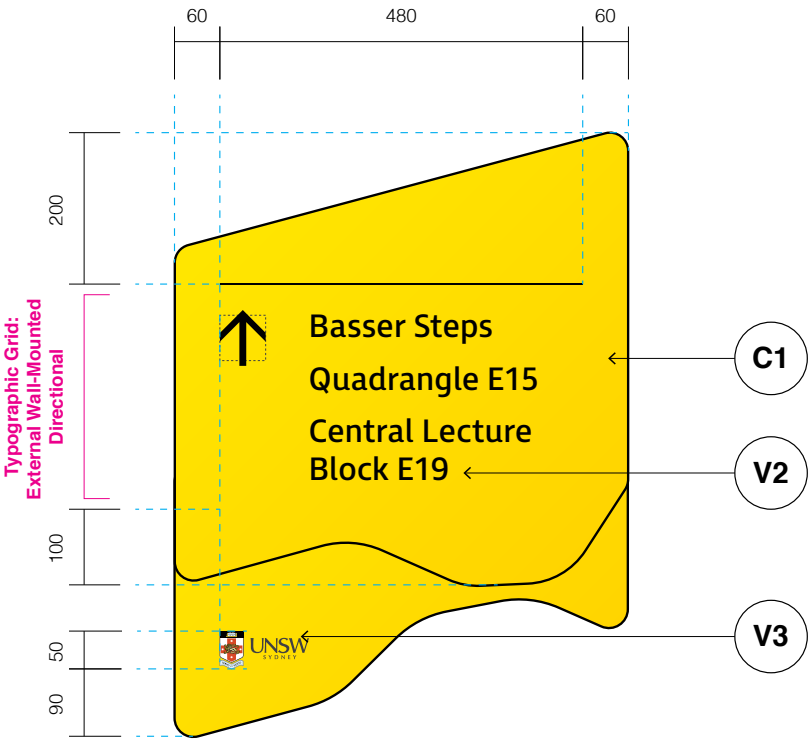

Detail
Scale 1:10

Graphic Layout

Typographic Grid – Identification
External Wall Mounted Directional Layout.
Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 1 arrow directions.
Maximum 4 destinations in total.
Destinations must not exceed below 100mm footer of front message panel.

UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |


Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

Section 13 – Internal: Primary Wall Mounted (Large)


DR.08

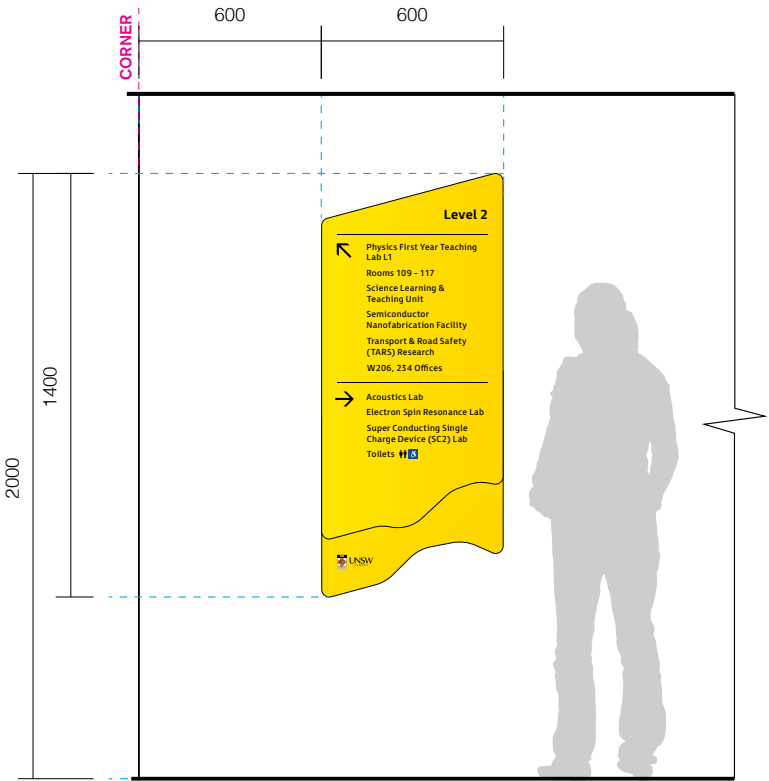

Elevation - Aligned to corner
Scale 1:25

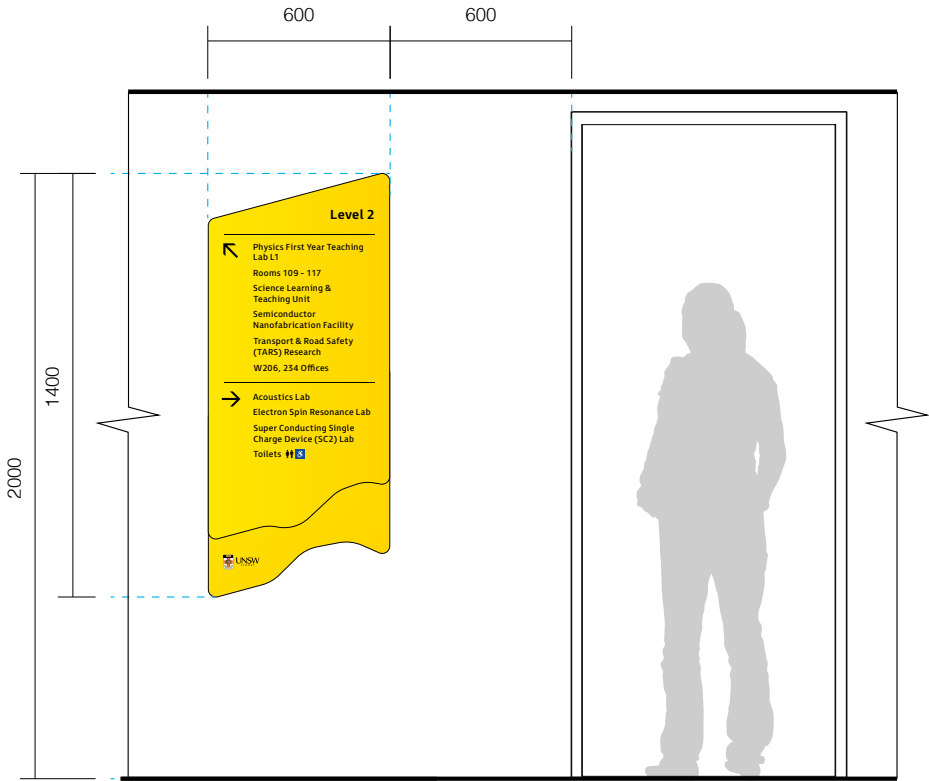

Elevation - Beside door or opening
Scale 1:25

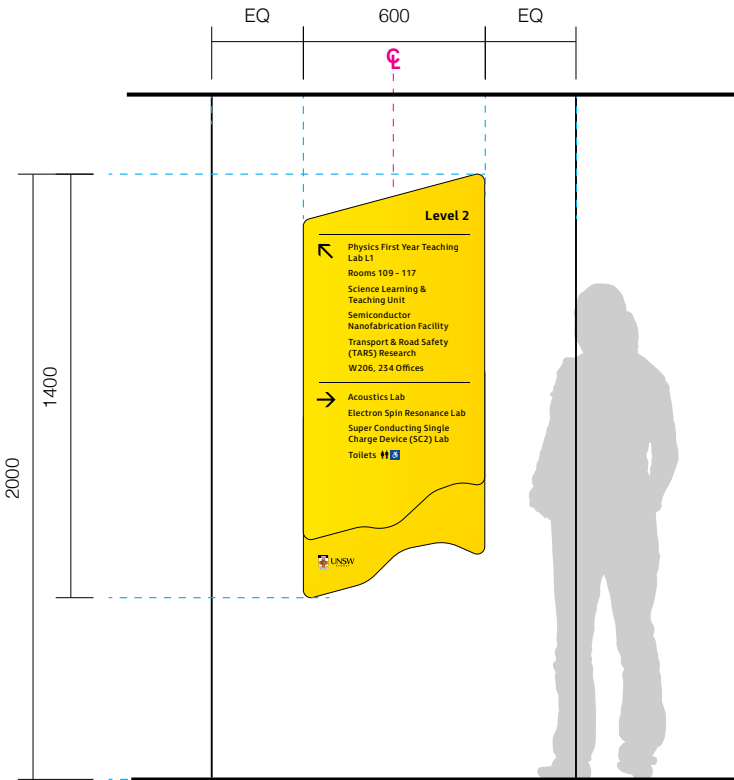

Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose


Directs pedestrians to main destinations from in an internal area. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location

Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

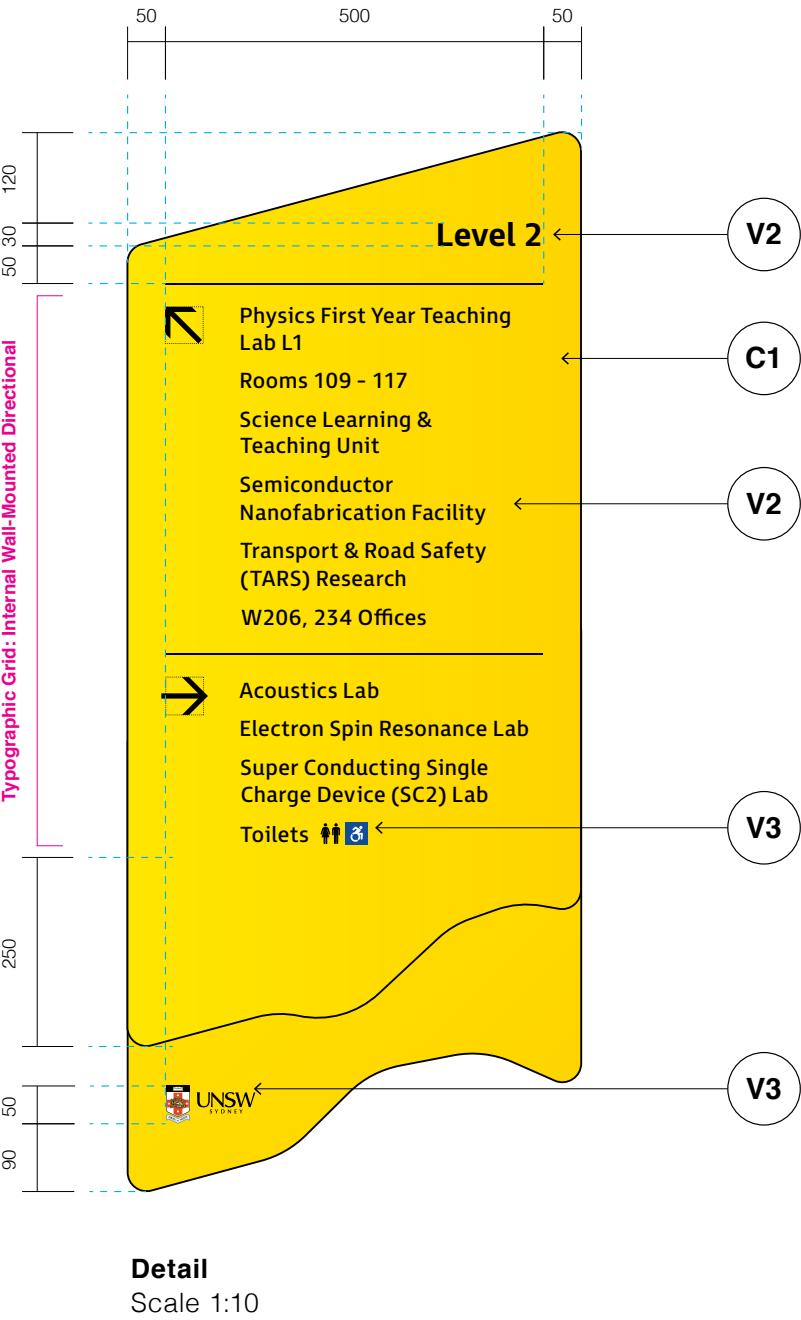

Graphic Layout

Typographic Grid – Identification
Internal Wall Mounted Directional Layout.
Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 4 arrow directions.
Maximum 12 destinations in total.
Destinations must not exceed below 250mm footer of front message panel.

UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |


Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

Section 13 – Internal: Primary Wall Mounted (Small)


DR.09

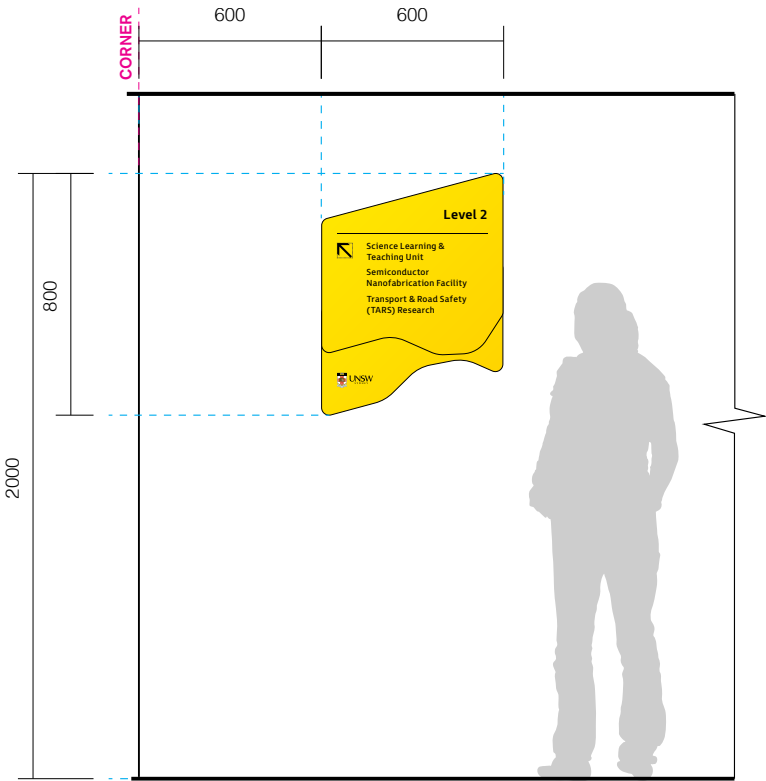

Elevation - Aligned to corner
Scale 1:25

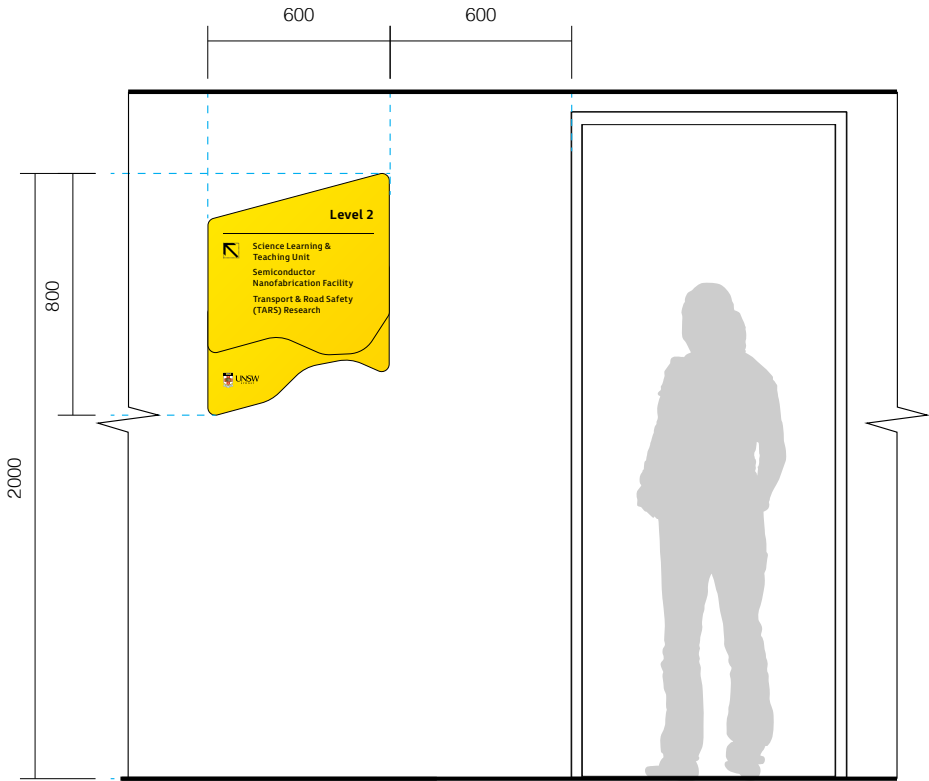

Elevation - Beside door or opening
Scale 1:25

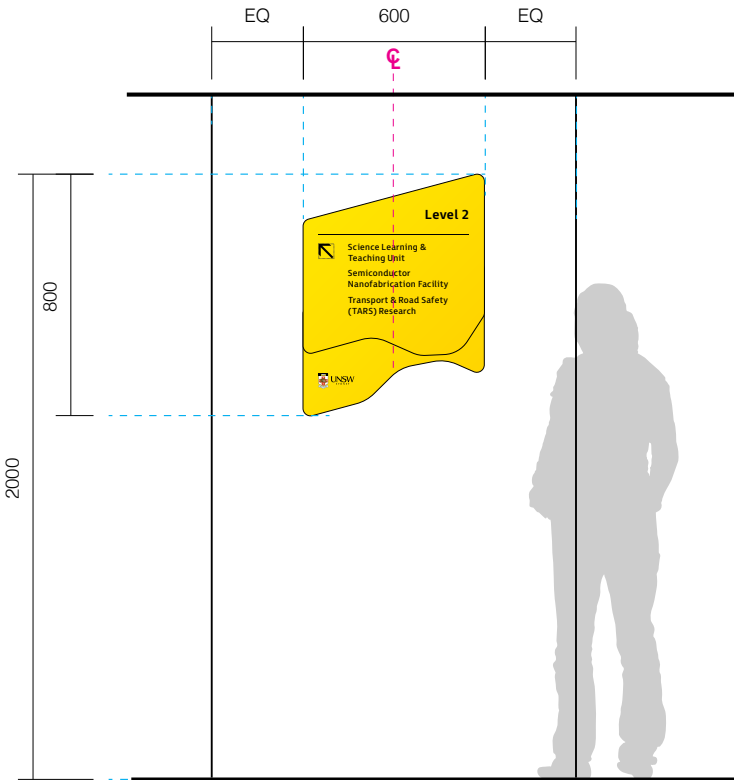


Elevation - Centered to wall
Scale 1:25

Sign Location

Purpose
Directs pedestrians to main destinations from in an internal area. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls at major decision points. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

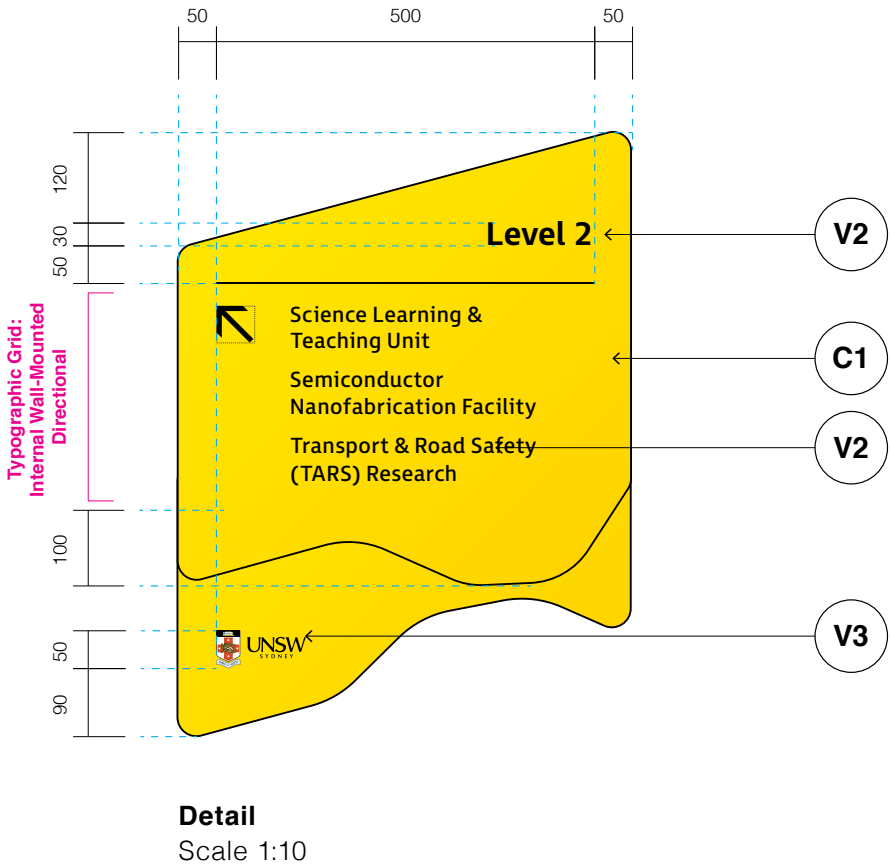

Graphic Layout

Typographic Grid – Identification
Internal Wall Mounted Directional Layout.
Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Destination Quantity
Maximum 2 arrow directions.
Maximum 6 destinations in total.
Destinations must not exceed below 100mm footer of front message panel.

UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Layered Panel Signforms

Section 13 – Secondary Wall Mounted (Landscape)

DR.10

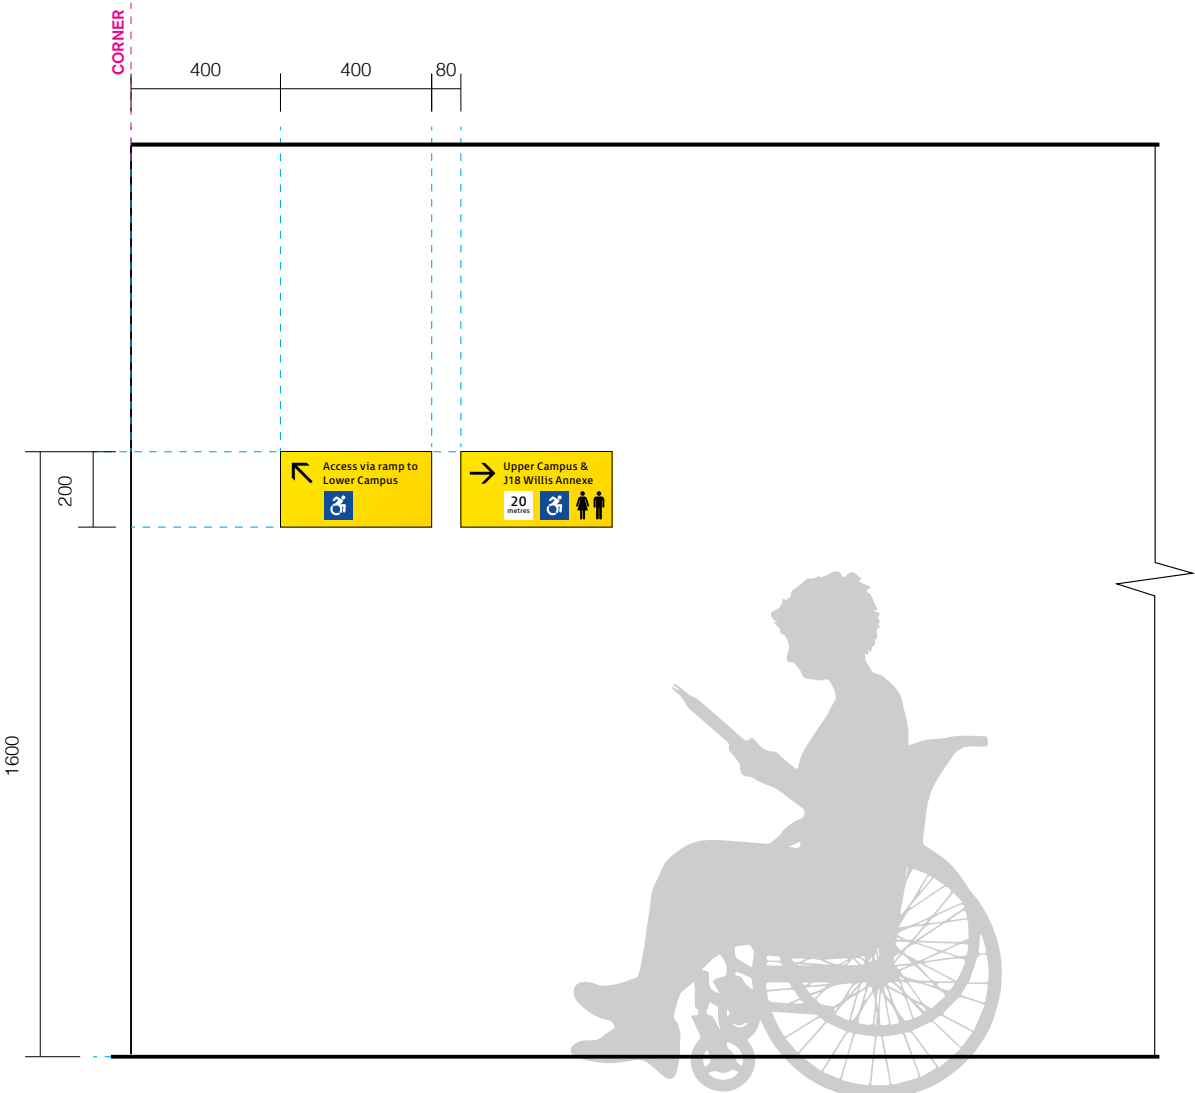

Elevation
Scale 1:20

Sign Location

Purpose


Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location


Applied to solid walls at major decision points within accessibility circulation routes. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

Note


- For sign type selection, refer to:
Section 7, The Process, Step 3
- For content guidelines, refer to:
Section 3, Addressing & Terminology
- For material finishes, refer to:
Section 10, Construction Standards,
Finishes Schedule
- For sign maintenance, refer to:
Section 23, Maintenance

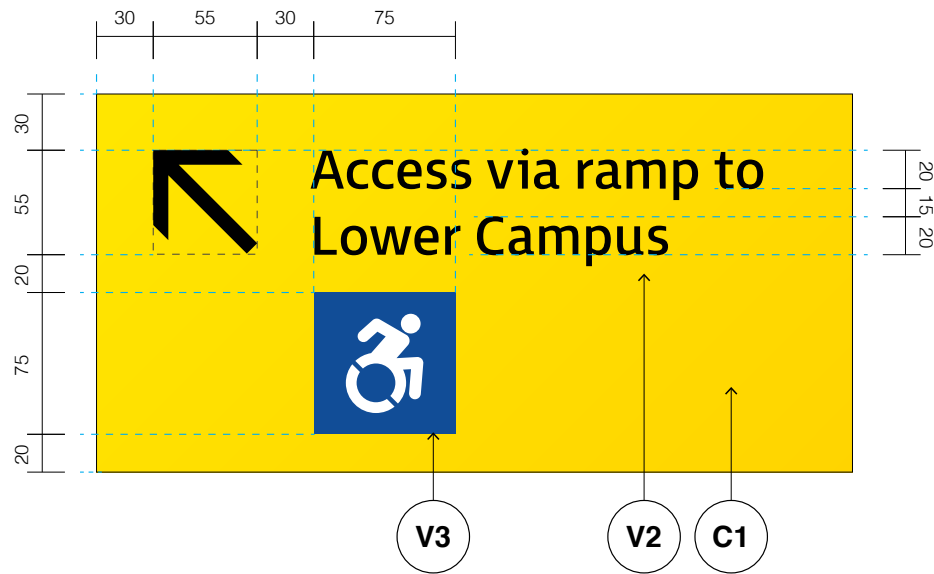

Template 01 - Single pictogram
Scale 1:4

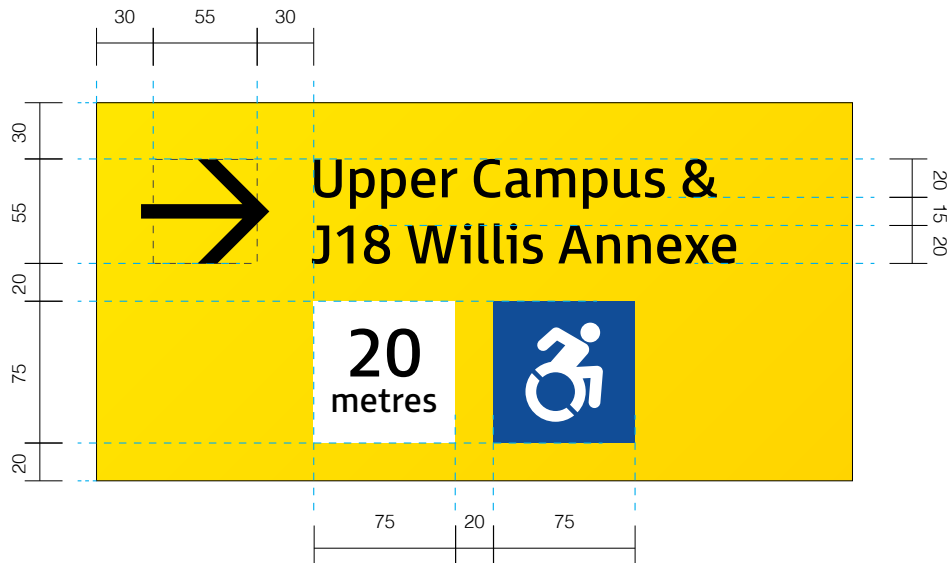

Template 02 - Two pictograms
Scale 1:4

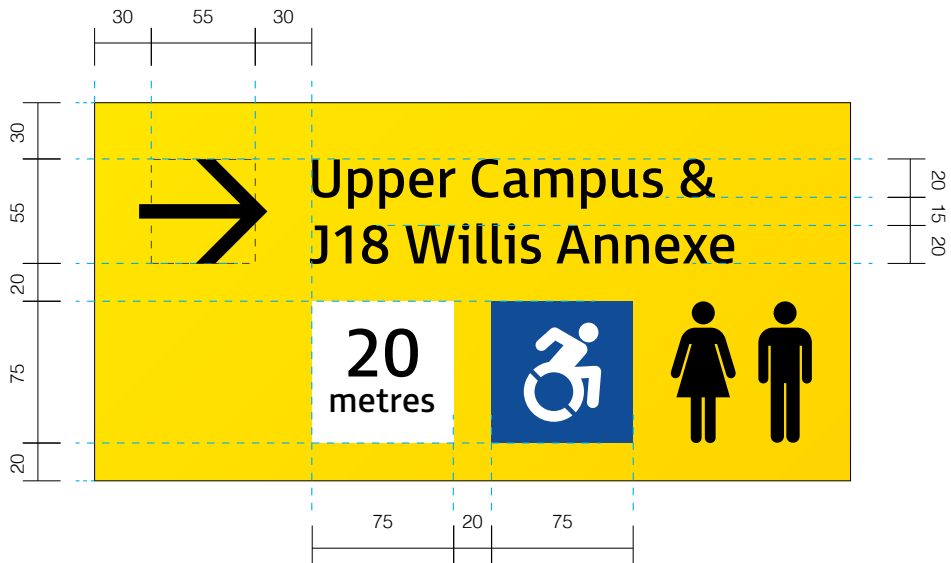

Template 03 - Multiple pictograms
Scale 1:4

Graphic Layout

Messaging
FS Millbank Regular
Alignment: Left
Size/ Leading: 20mm, 15mm
Tracking: 10+, Optical Kerning

Pictograms
Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 9, Graphic Standards, Pictogram Suite.

Arrow
55mm height

Construction & Materials

Materiality Legend


- C1**

 - C1 finish on 3mm aluminium
- V2**


 - V2 applied on top of aluminium
- V3**

 - V3 print applied on top of aluminium

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

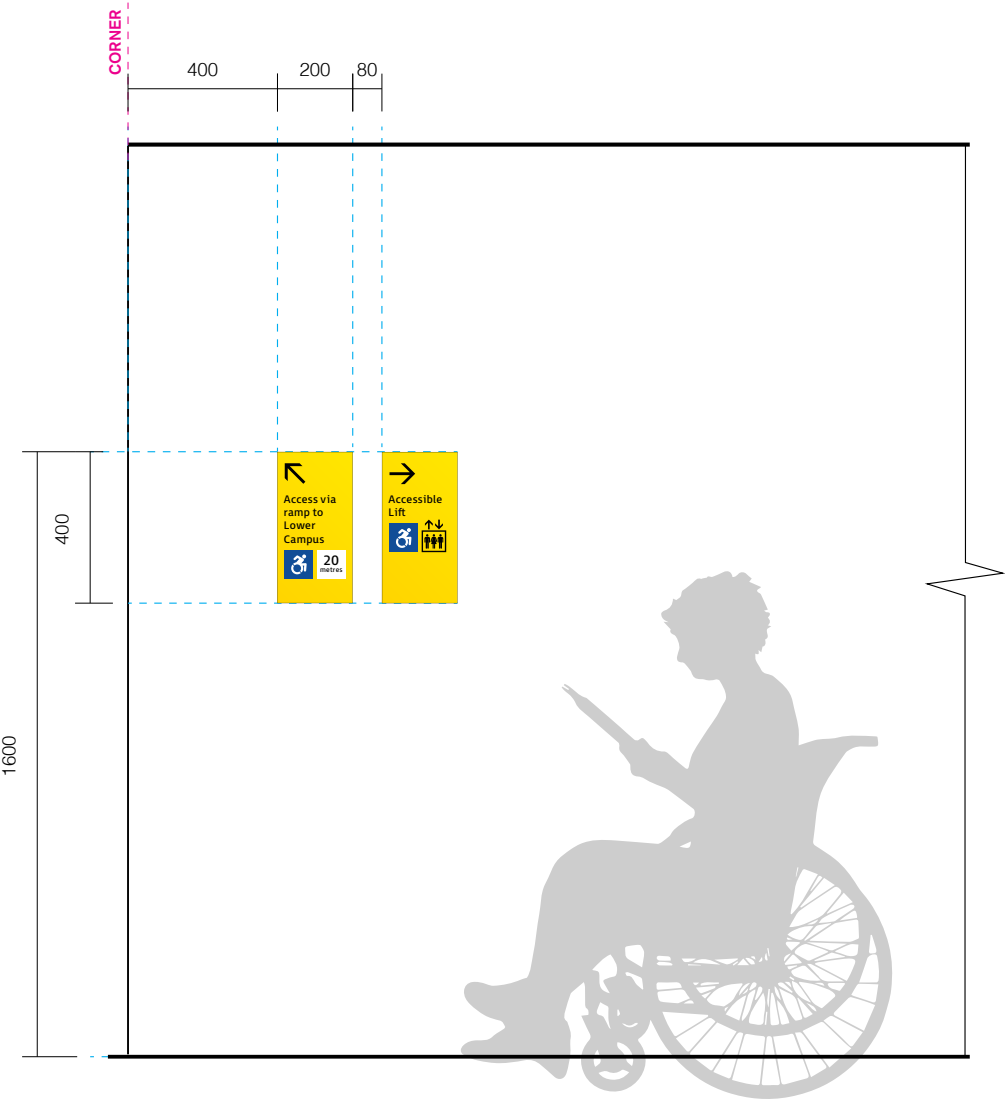

Elevation – Wall
Scale 1:20

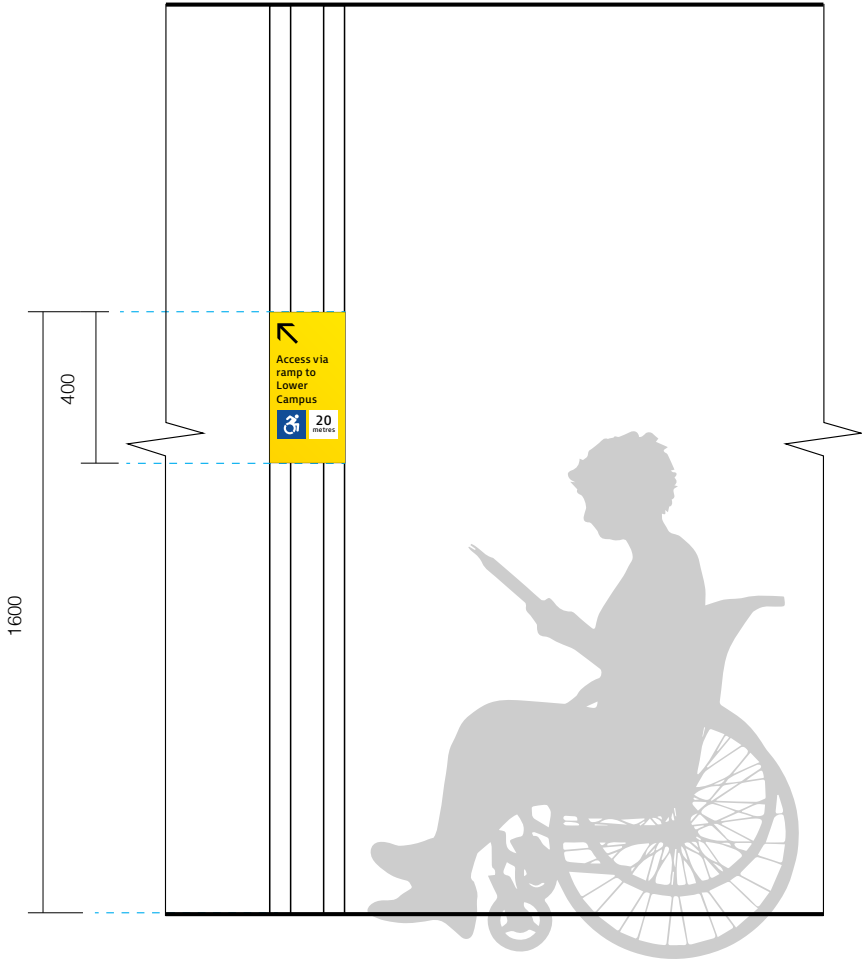

Elevation – Pillar
Scale 1:20

Sign Location

Purpose
Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location
Applied to solid walls or columns at major decision points within accessibility circulation routes. Preferred location is 600mm away from corner, entry or adjacent wall feature, e.g. window, noticeboard, planter or artwork.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

Graphic Layout

- Messaging**
FS Millbank Regular
Alignment: Left
Size/ Leading: 20mm, 15mm
Tracking: 10+, Optical Kerning
- Pictograms**
Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 9, Graphic Standards, Pictogram Suite.
- Arrow**
55mm height

Construction & Materials


- Materiality Legend**
- C1

• C1 finish on 3mm aluminium
- V2


• V2 applied on top of aluminium
- V3

• V3 print applied on top of aluminium


- Fixing Details**
- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

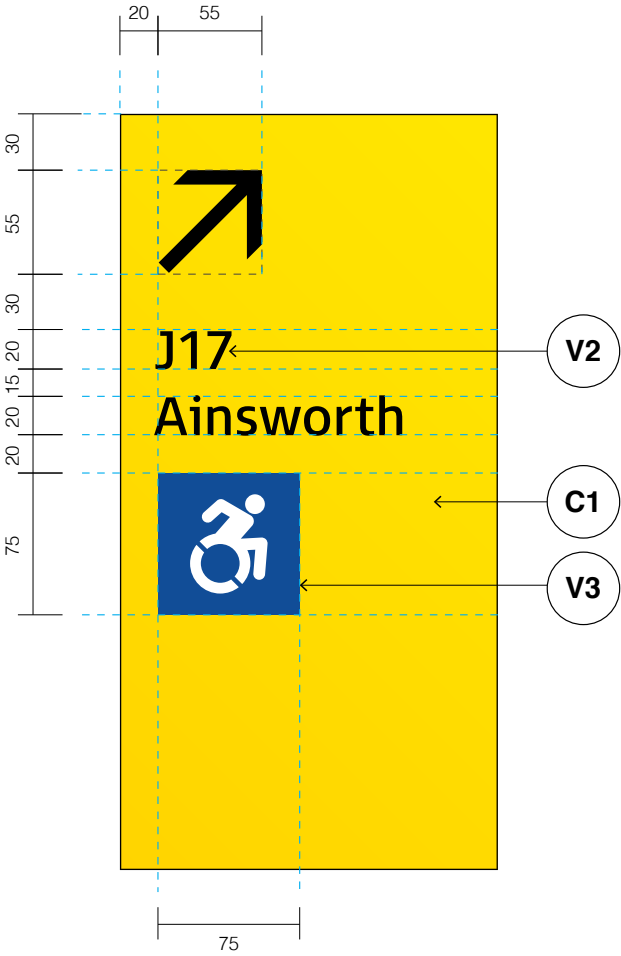


Template 01 - Single pictogram
Scale 1:4

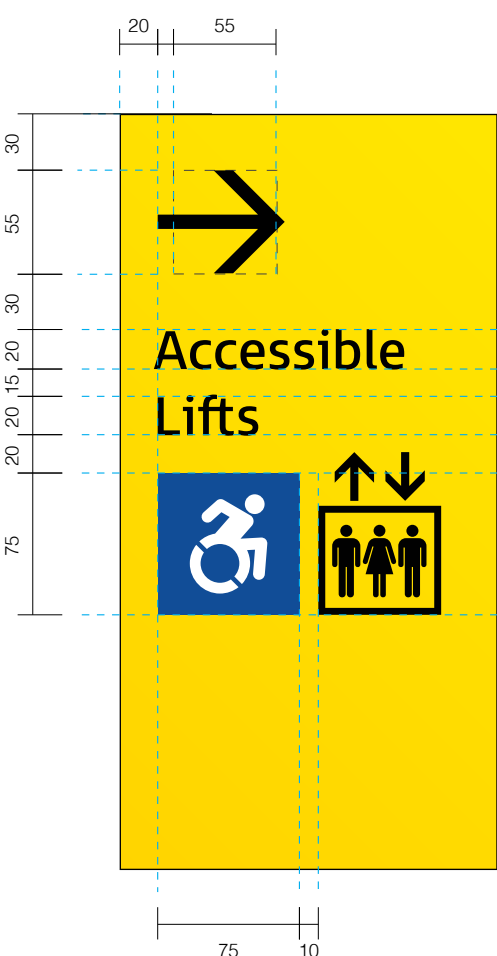

Template 02 - 2 pictograms
Scale 1:4

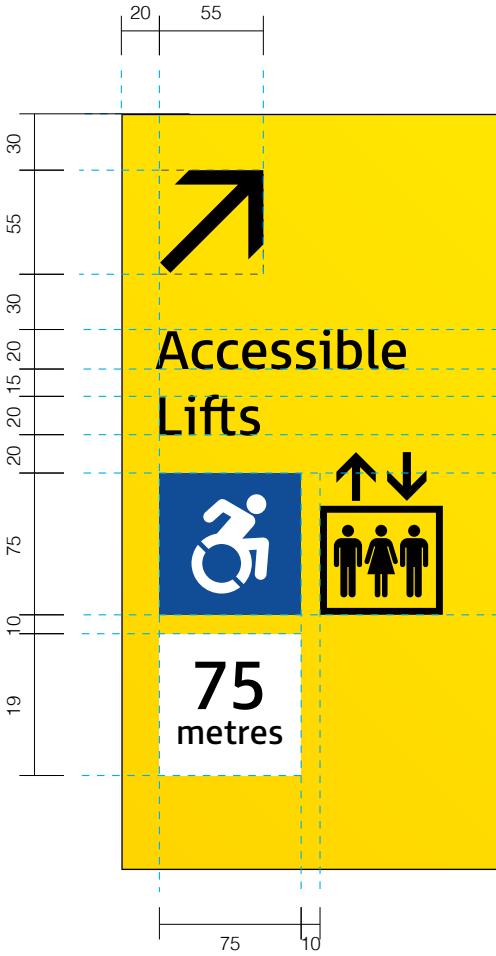

Template 03 - Multiple pictograms
Scale 1:4

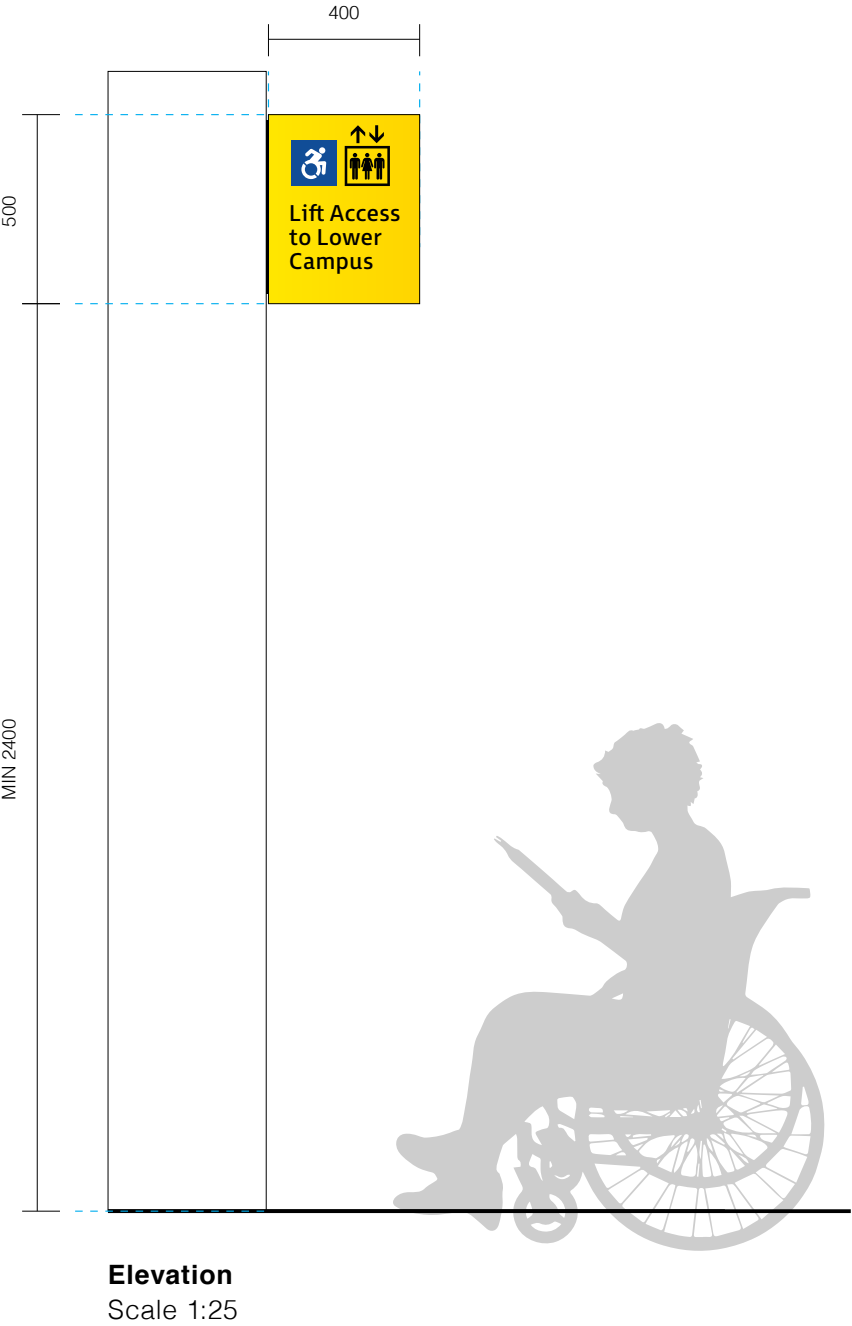

Sign Location

Purpose


Directs to destinations at an external and internal level, prioritising accessibility messaging for destinations within a 20m scope. Refer to Section 3, Addressing & Terminology, Category 3, 5, 6, 8, 9, 11.

Location


Mounted on solid walls or columns at major decision points within accessibility circulation routes.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

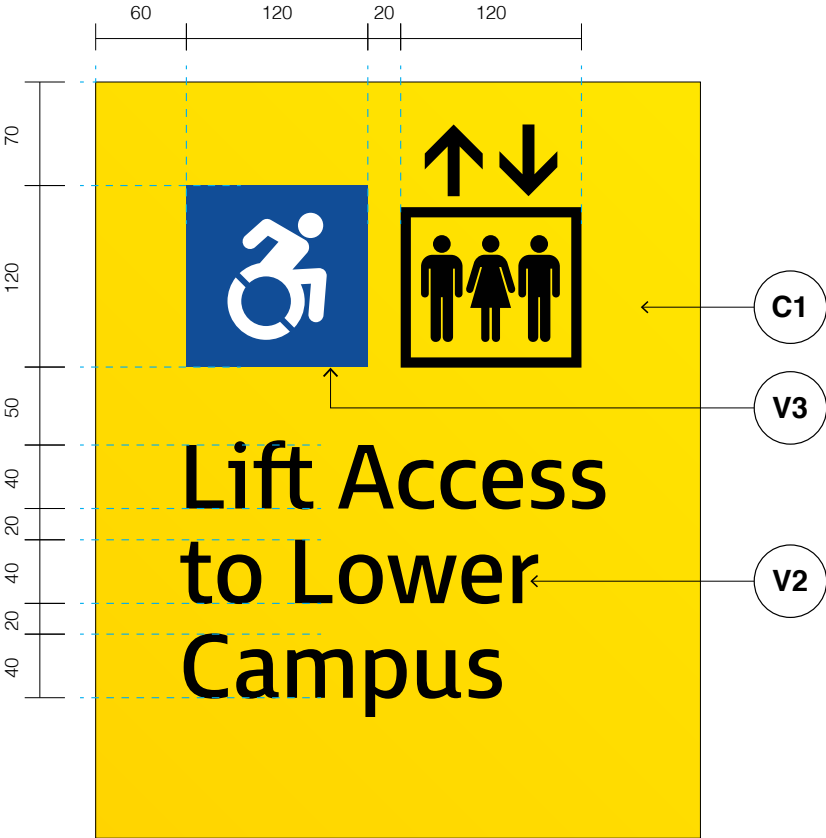

Template 01 - Three Lines Messaging
Scale 1:5

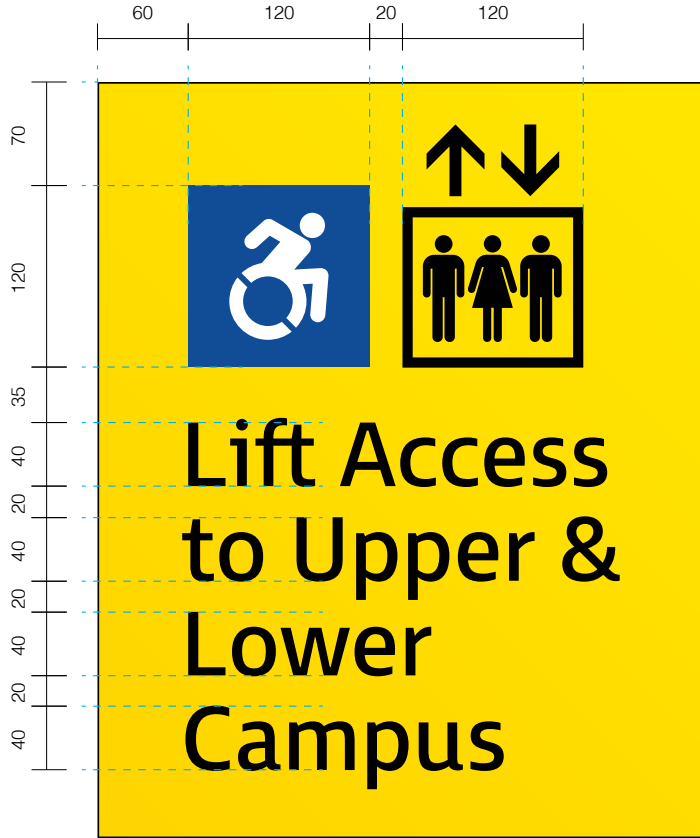

Template 02 - Four Lines Messaging
Scale 1:5

Graphic Layout

Messaging

FS Millbank Regular
Alignment: Left
Size/ Leading: 30mm, 20mm
Tracking: 10+, Optical Kerning

Pictograms

Accessibility focused pictograms, e.g. Accessibility, Unisex Toilet, Metres. Refer to Section 9, Graphic Standards, Pictogram Suite.

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Fixing Details

- Refer to: Section 10, Construction Standards, Cantilevered Signforms

Section


14.0

Car Park Series

This section documents all the car park signs of the system including specifications for both external and internal signs.

CP.01 Entry ID: Vehicular Wall Mounted	293
CP.02 Entry ID: Pedestrian Wall Mounted	295
CP.03 Entry ID: Bulk Head	297
CP.04 Lift ID	300
CP.05 Car Park Rules & Pay Meter	302
CP.06 Suspended Directional Family	304
CP.07 Loading Dock ID	307
CP.08 Column: Level ID	309
CP.09 Column: Zone ID	311
CP.10 Column: Reserved ID	313

CP.11 Column: Directional	315
CP.12 Pole: Lot ID	317
CP.13 Pole: Directional	319
CP.14 Floor Graphics	321
CP.15 Reserved Parking ID	323

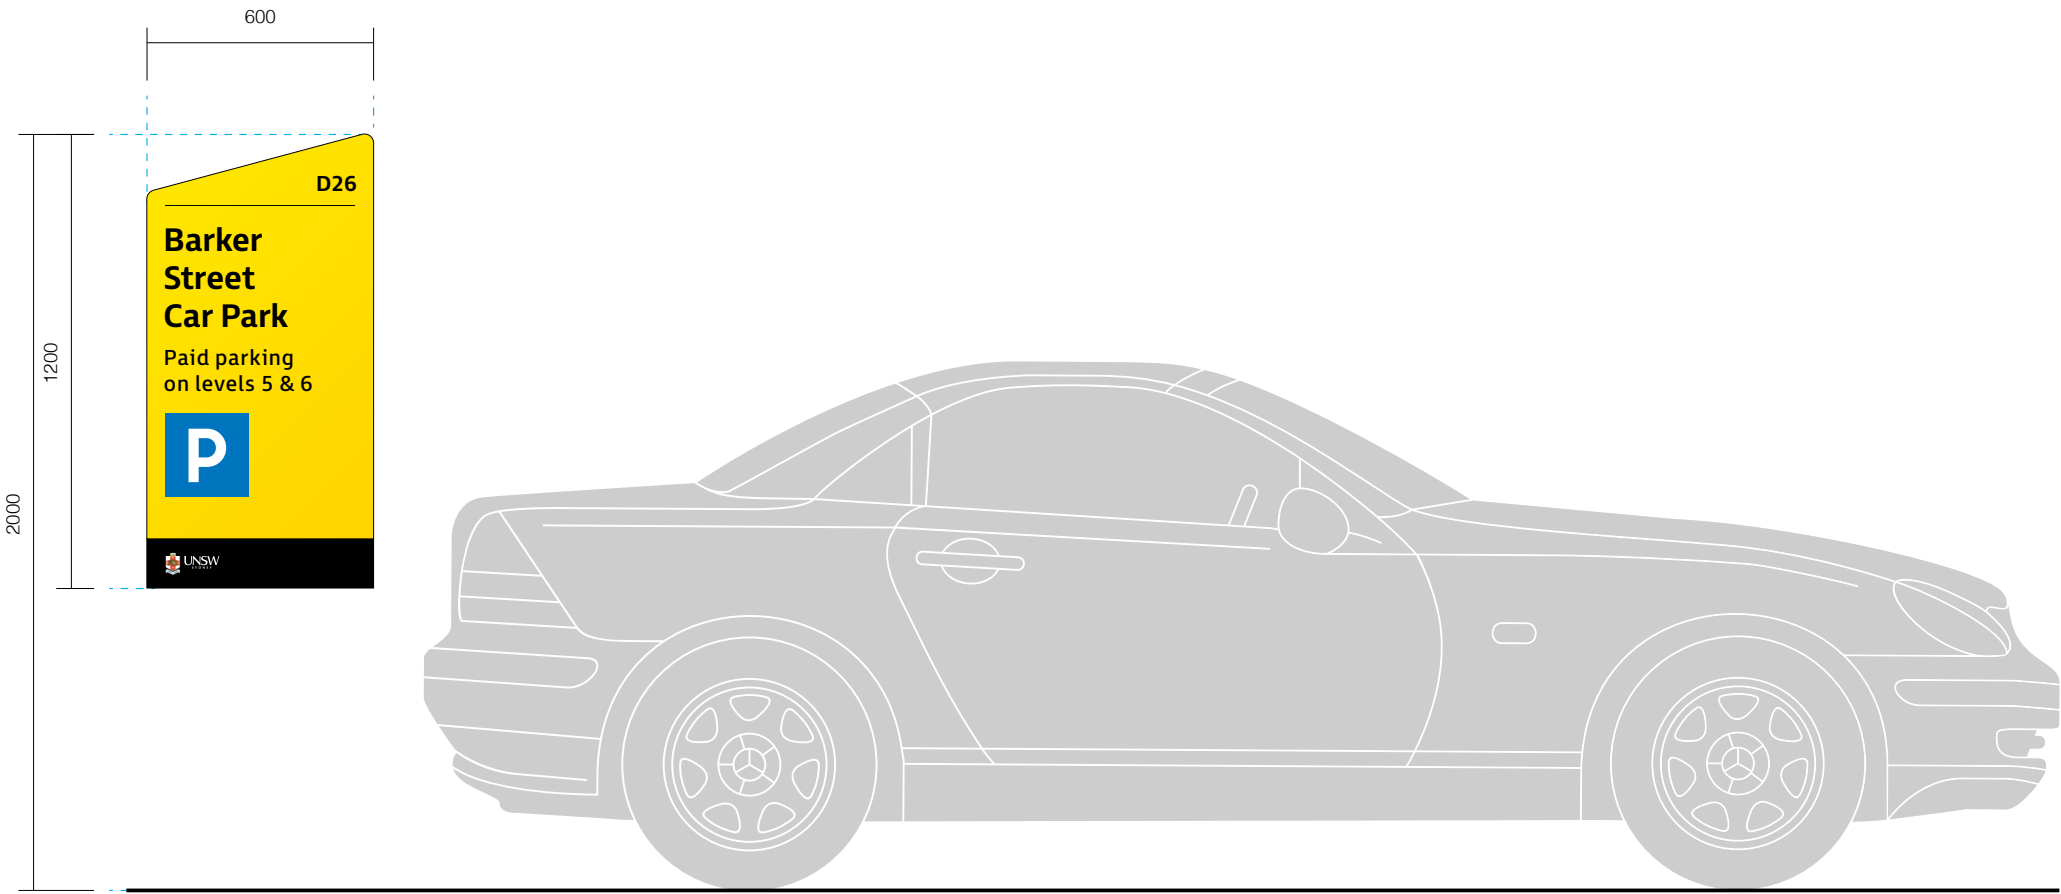


Front Elevation
Scale 1:20

Sign Location

Purpose
Confirms car park entry point for vehicular traffic from a viewing distance of at least 20m. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Located at vehicular entry points at car parks.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

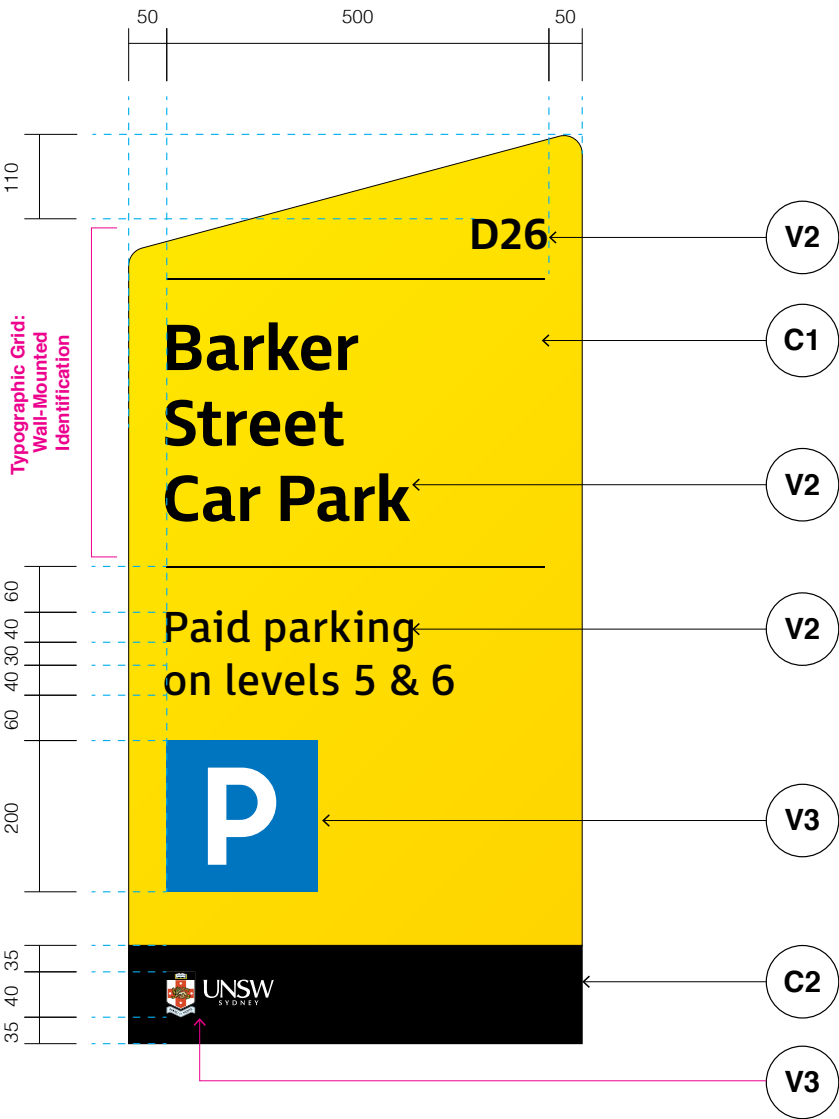

Detail
Scale 1:10

Graphic Layout

Typographic Grid - Identification
Building Identification Layout. Refer to Section 9, Graphic Standards, Typographic Grids.

Dividing Line
Line weight: 2mm

Messaging
FS Millbank Regular
Alignment: Left
Size Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning

Pictogram
Parking Pictogram: 200mm height


UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|--|------------------------------|----------------------------------|
| C1 | C2 | V2 |
| • C1 finish on 3mm aluminium | • C2 finish on 3mm aluminium | • V2 applied on top of aluminium |
| V3 | | |
| • V3 print applied on top of aluminium | | |

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

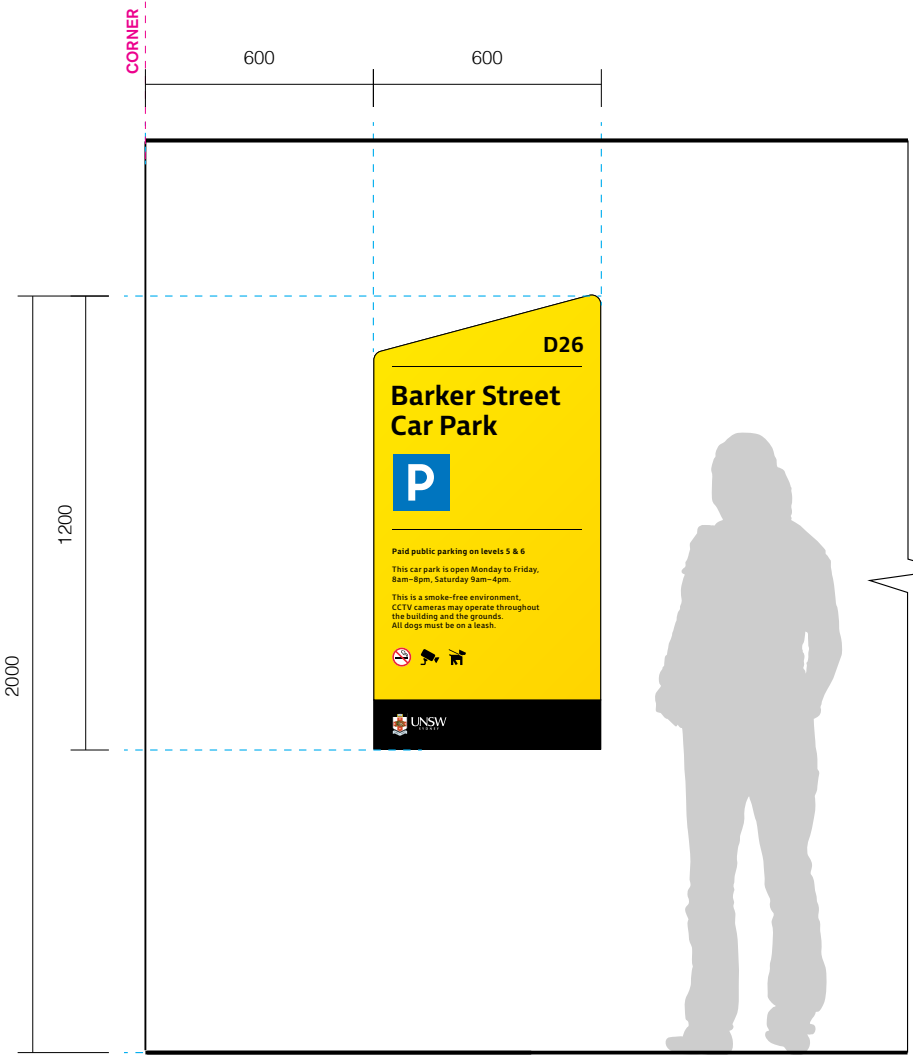

Elevation - Aligned to corner
Scale 1:20

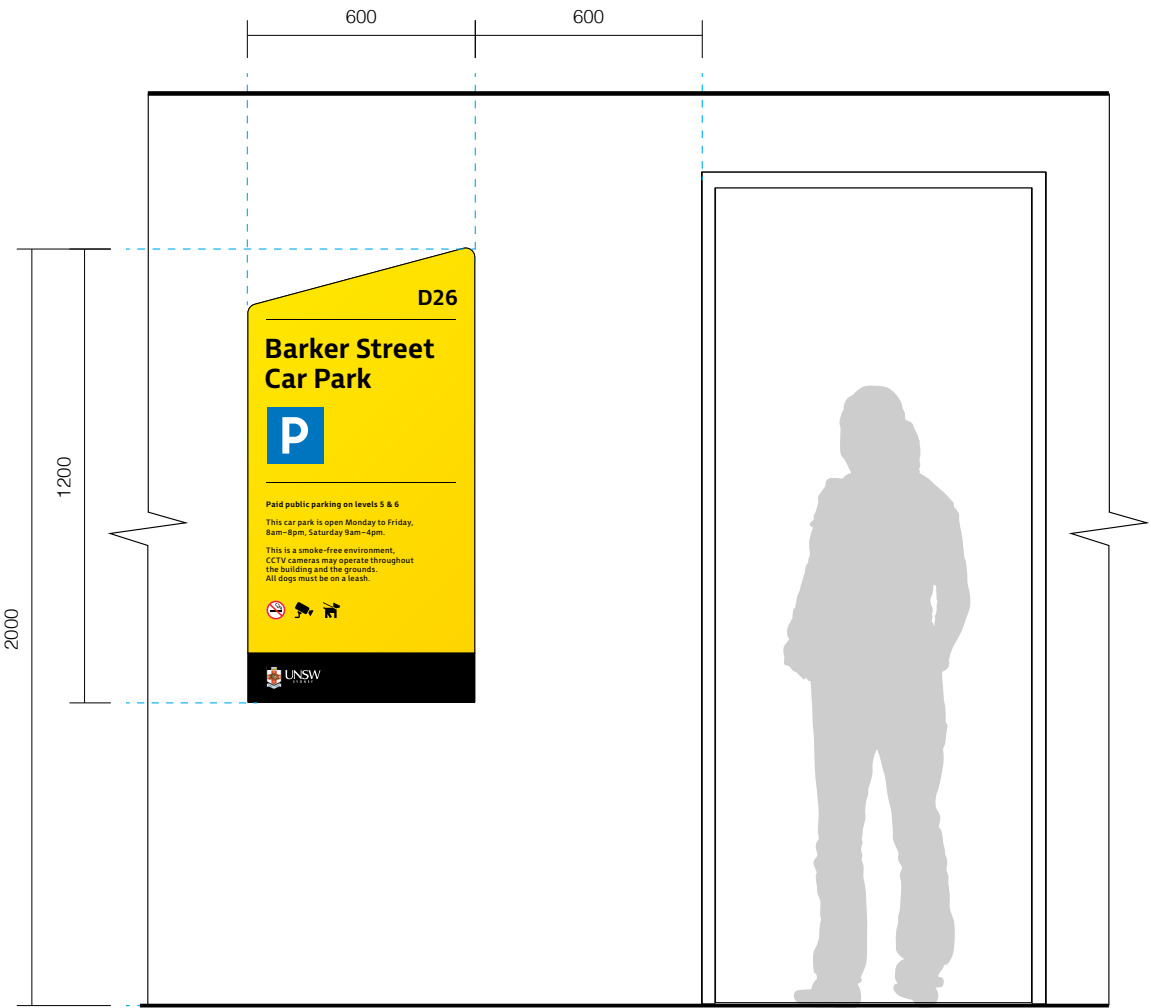


Elevation - Beside door or opening
Scale 1:20

Sign Location

Purpose
Confirms car park entry point for pedestrian traffic from a viewing distance of at least 20m. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Located at pedestrian entry points at car parks.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

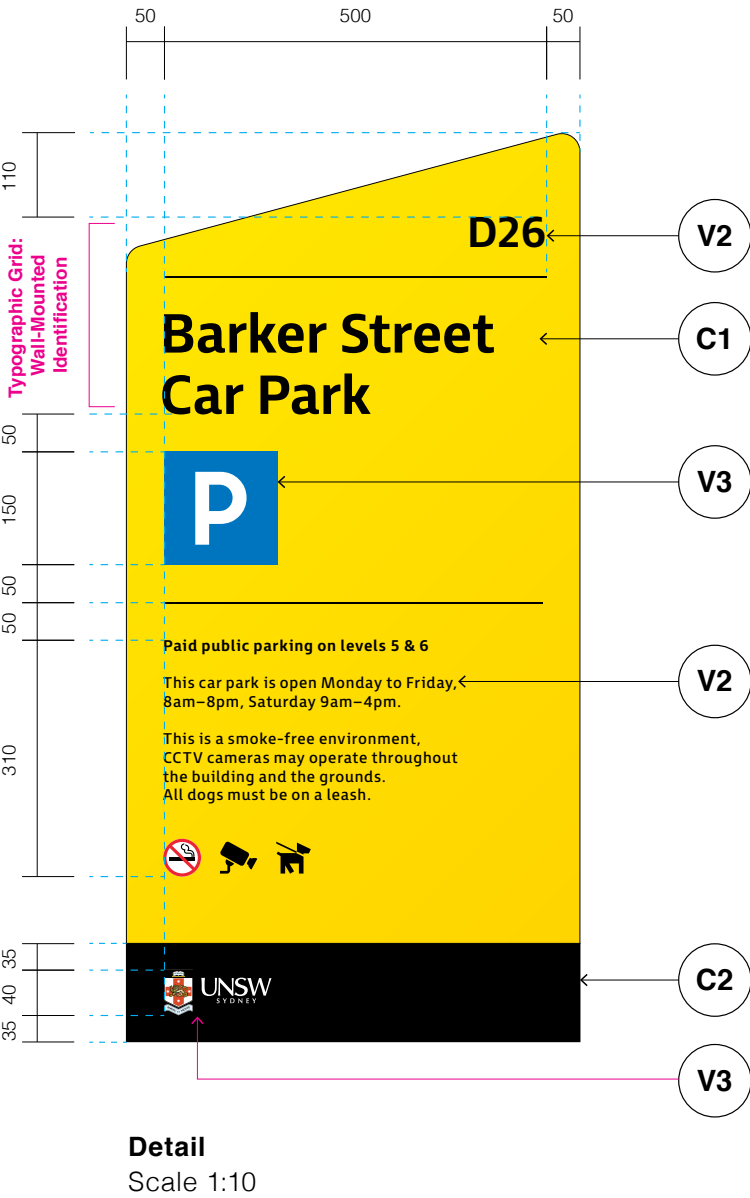


Graphic Layout

- Typographic Grid - Identification**
Building Identification Layout. Refer to Section 9, Graphic Standards, Typographic Grids.
- Dividing Line**
Line weight: 2mm
- Messaging**
FS Millbank Regular
Alignment: Left
Size Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning
- Pictograms**
Parking Pictogram: 200mm height
No Smoking, CCTV & Dogs on Leash: 50mm diameter
- UNSW logo**
50mm height

Construction & Materials

- Materiality Legend**
 - C1**
• C1 finish on 3mm aluminium
 - C2**
• C2 finish on 3mm aluminium
 - V2**
• V2 applied on top of aluminium
 - V3**
• V3 print applied on top of aluminium
- Fixing Details**
 - Refer to: Section 10, Construction Standards, Wall Mounted Signforms

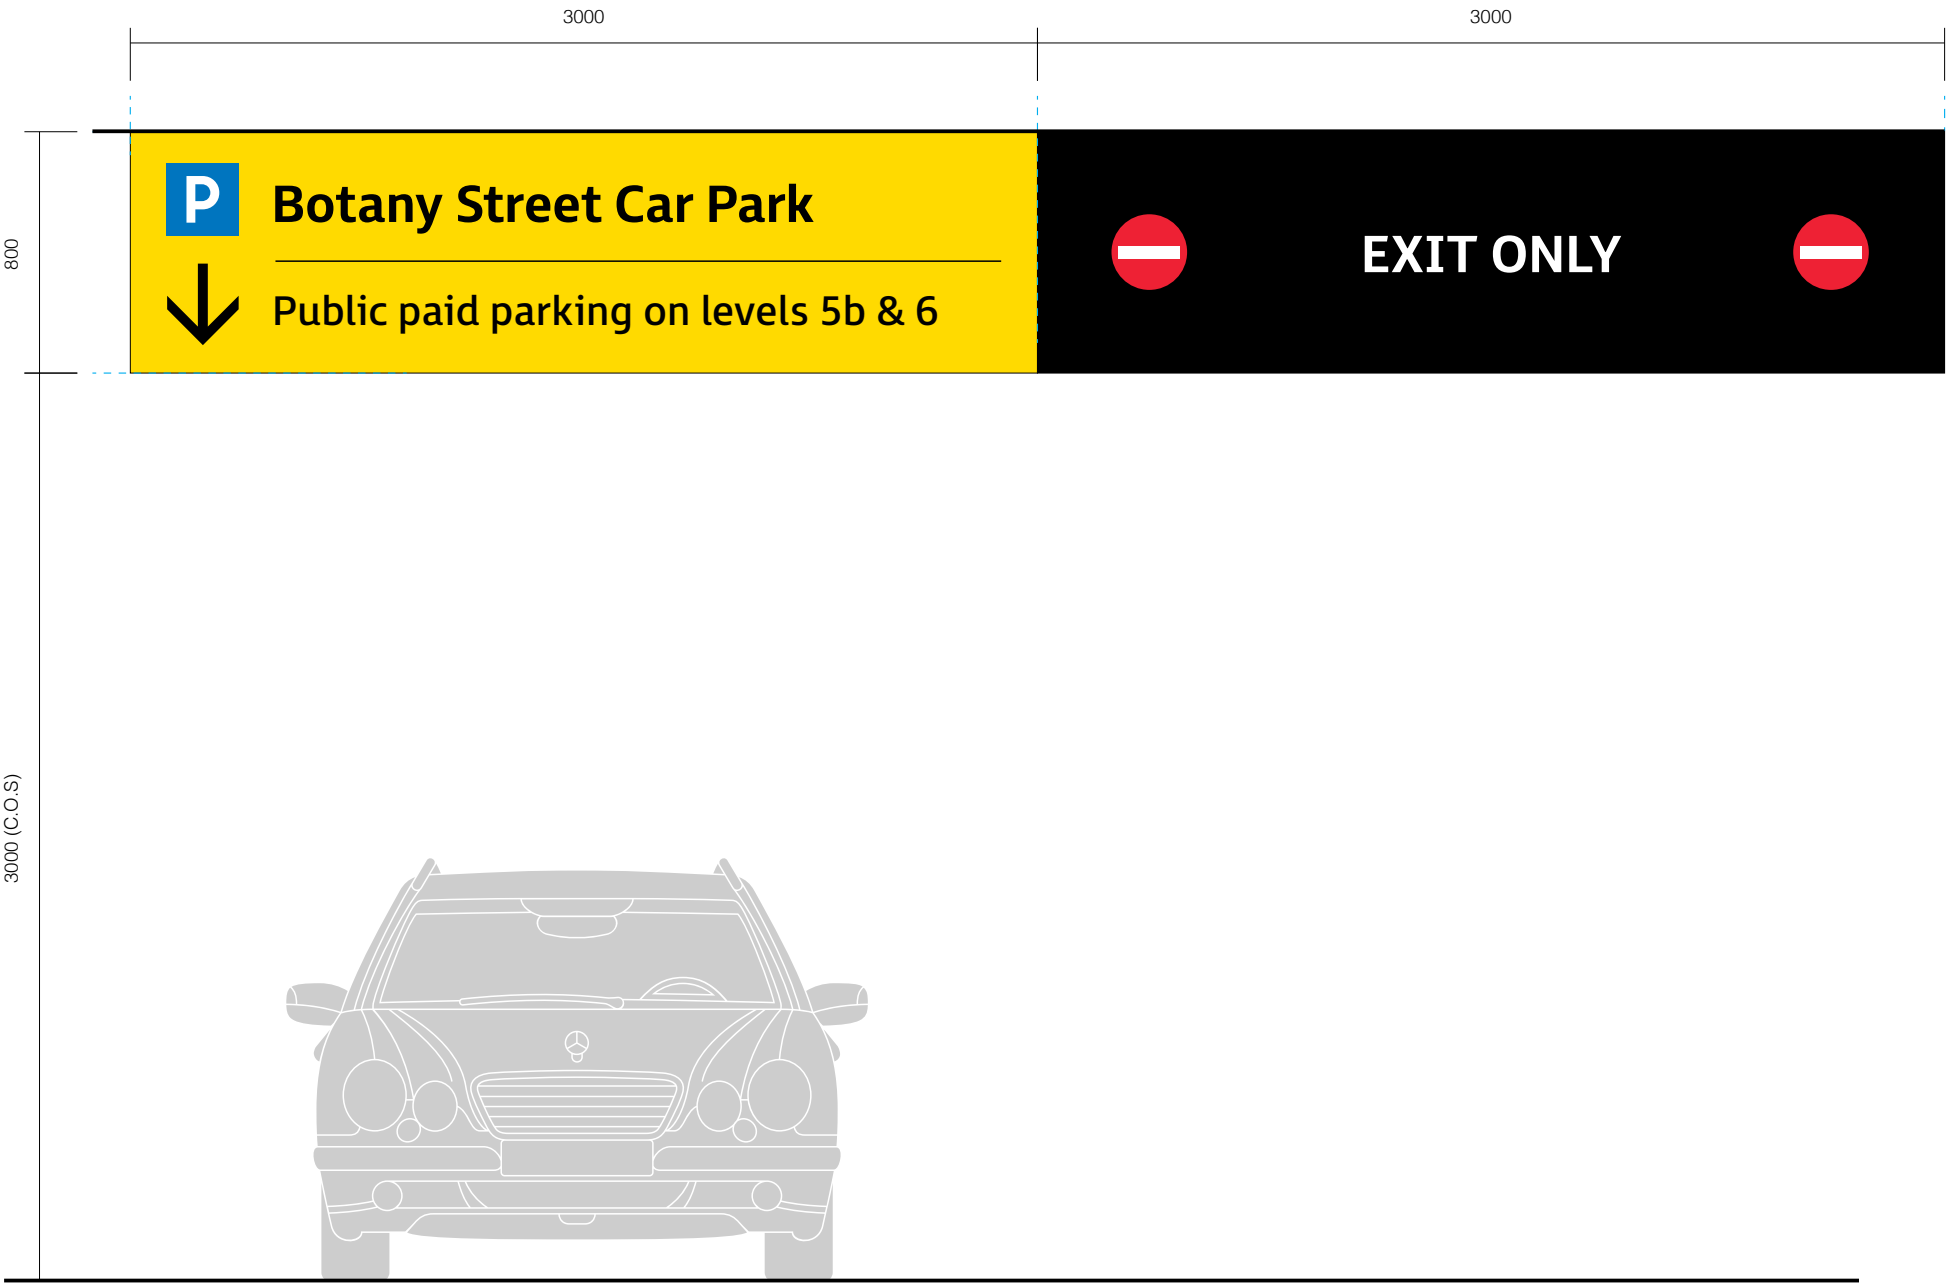


Elevation
Scale 1:25

Sign Location


Purpose
Confirms car park entry point for vehicular traffic from a viewing distance of at least 160m. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Located at vehicular entry points at car parks.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

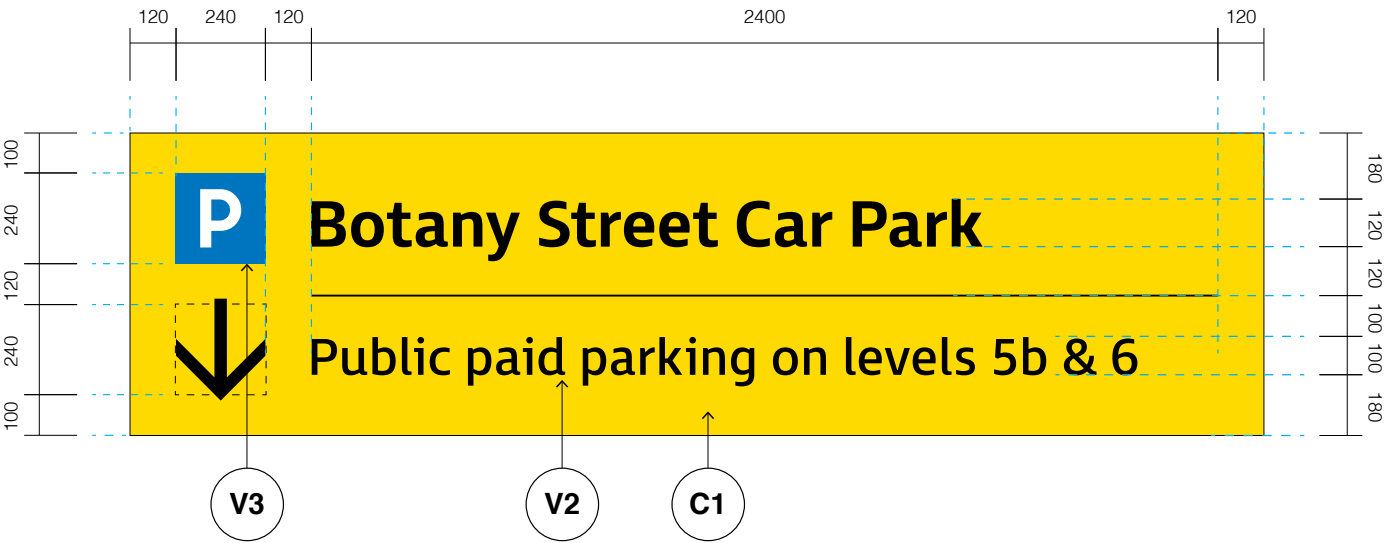

Layout 01 - Entry Side
Scale 1:20

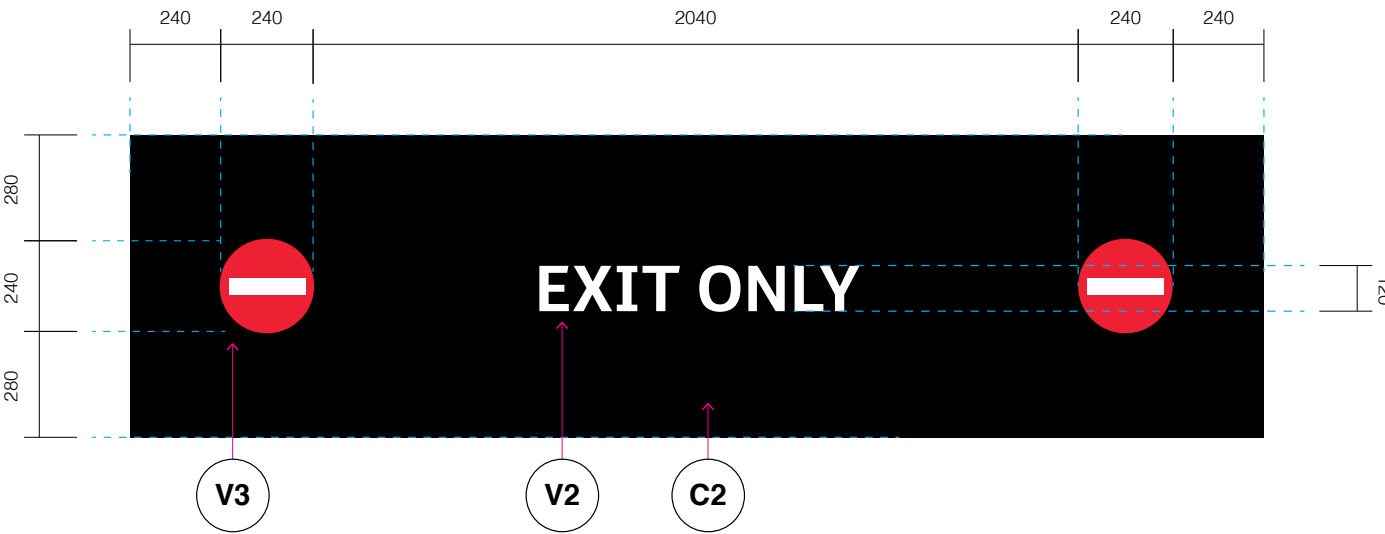

Layout 02 - Exit Side
Scale 1:20

Graphic Layout

Car Park Name and Exit
FS Millbank Bold
Alignment: Left (Name), Right (Exit)
Size: 120mm
Tracking: 10+, Optical Kerning

Messaging
FS Millbank Regular
Alignment: Left
Size: 120mm
Tracking: 10+, Optical Kerning
Dividing line weight: 5mm

Pictogram
Parking: 240mm height
No Entry: 240mm diameter

Arrows
200mm height


Construction & Materials

Materiality Legend

- C1**
 - C1 finish on 3mm aluminium
- C2**
 - C2 finish on 3mm aluminium
- V2**
 - V2 applied on top of aluminium
- V3**
 - V3 print applied on top of aluminium

Fixing Details

- Refer to: Section 22, Shop Drawings

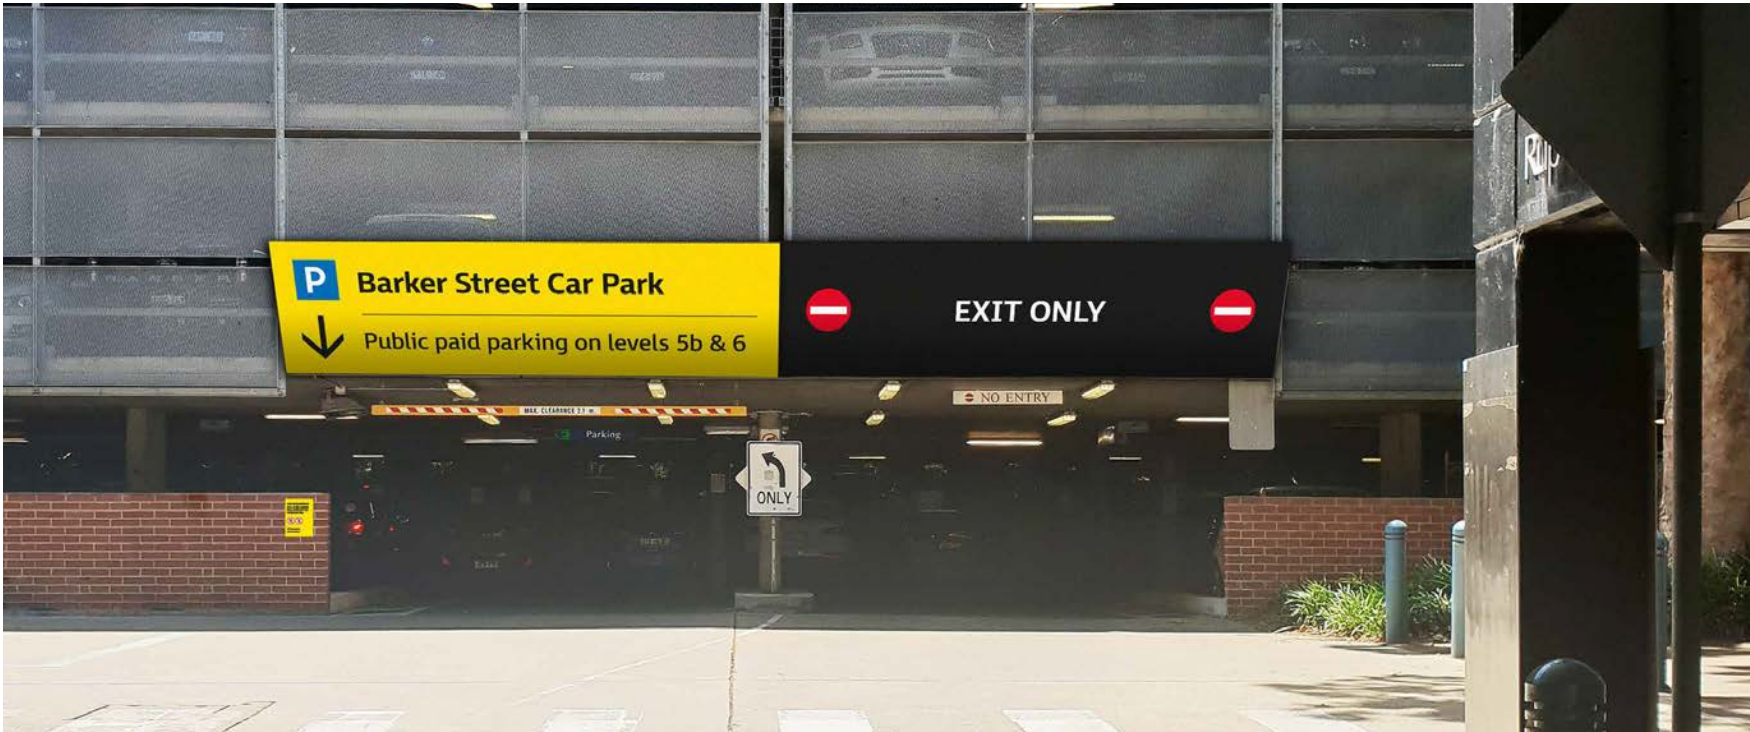


01 Car Park Entry ID
Baker Street Parking



02 Existing Bulkhead Sign
Baker Street Parking

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

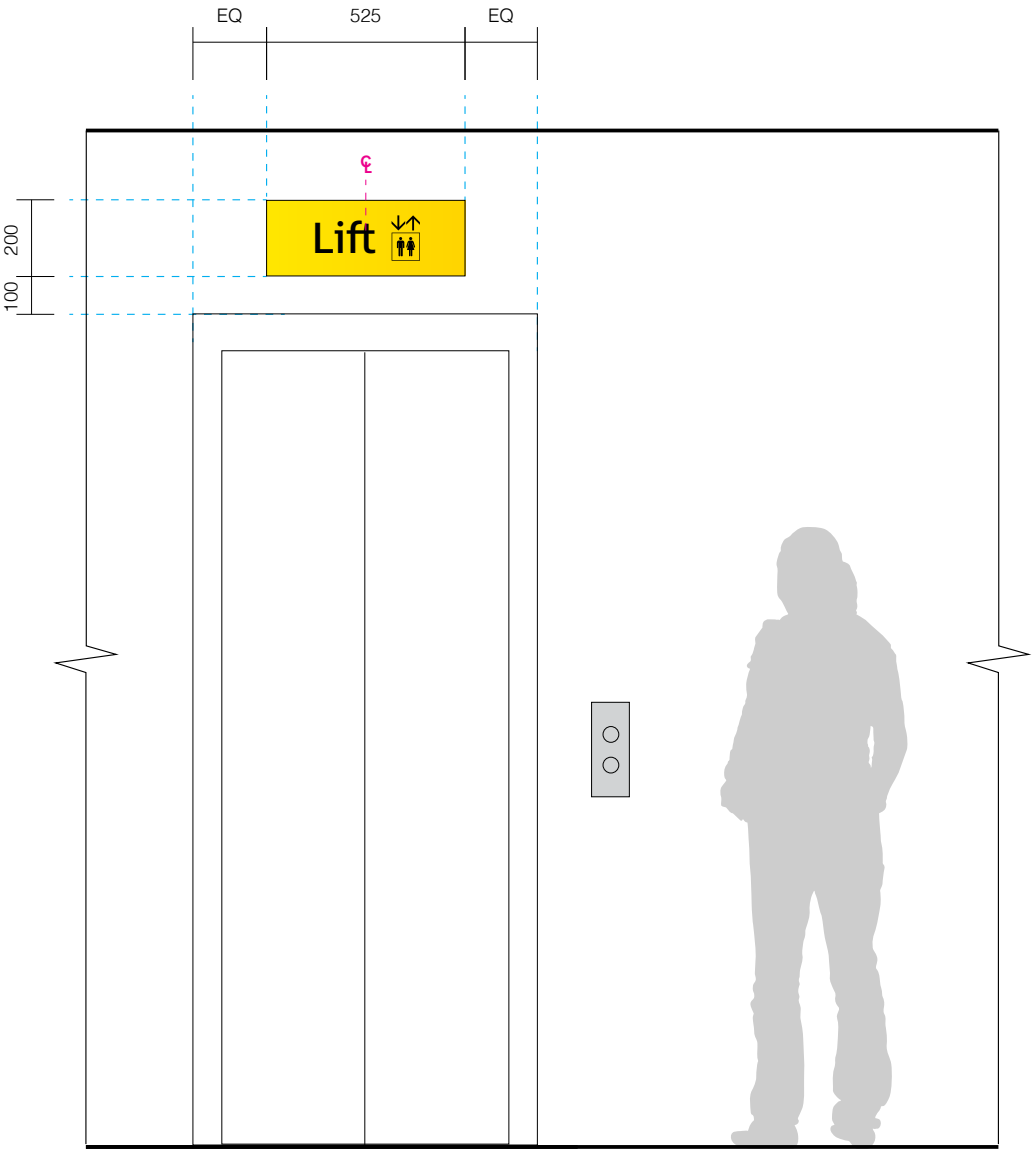


Elevation
Scale 1:20

Sign Location

Purpose
Identifies Lift for pedestrian traffic within car parks
Refer to Section 3, Addressing & Terminology, Category 11.

Location
Mounted above lift entries.

- Note**
- For sign type selection, refer to:
Section 7, The Process, Step 3
 - For content guidelines, refer to:
Section 3, Addressing & Terminology
 - For material finishes, refer to:
Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to:
Section 23, Maintenance

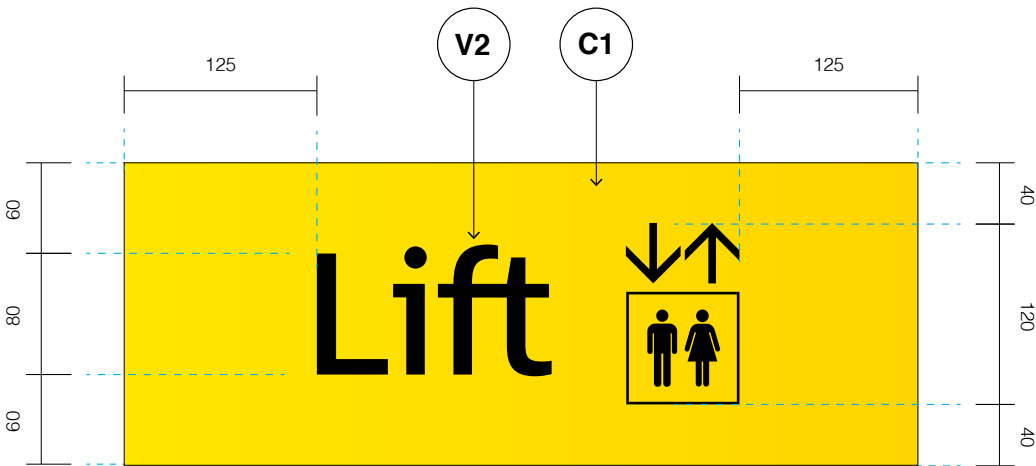

Detail
Scale 1:5

Graphic Layout

Lift ID
FS Millbank Regular
Alignment: To respond to arrow direction
Size: 110mm height
Tracking: 10+, Optical Kerning


Arrow
150mm height

Construction & Materials

Materiality Legend

- | | |
|------------------------------|----------------------------------|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium |

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

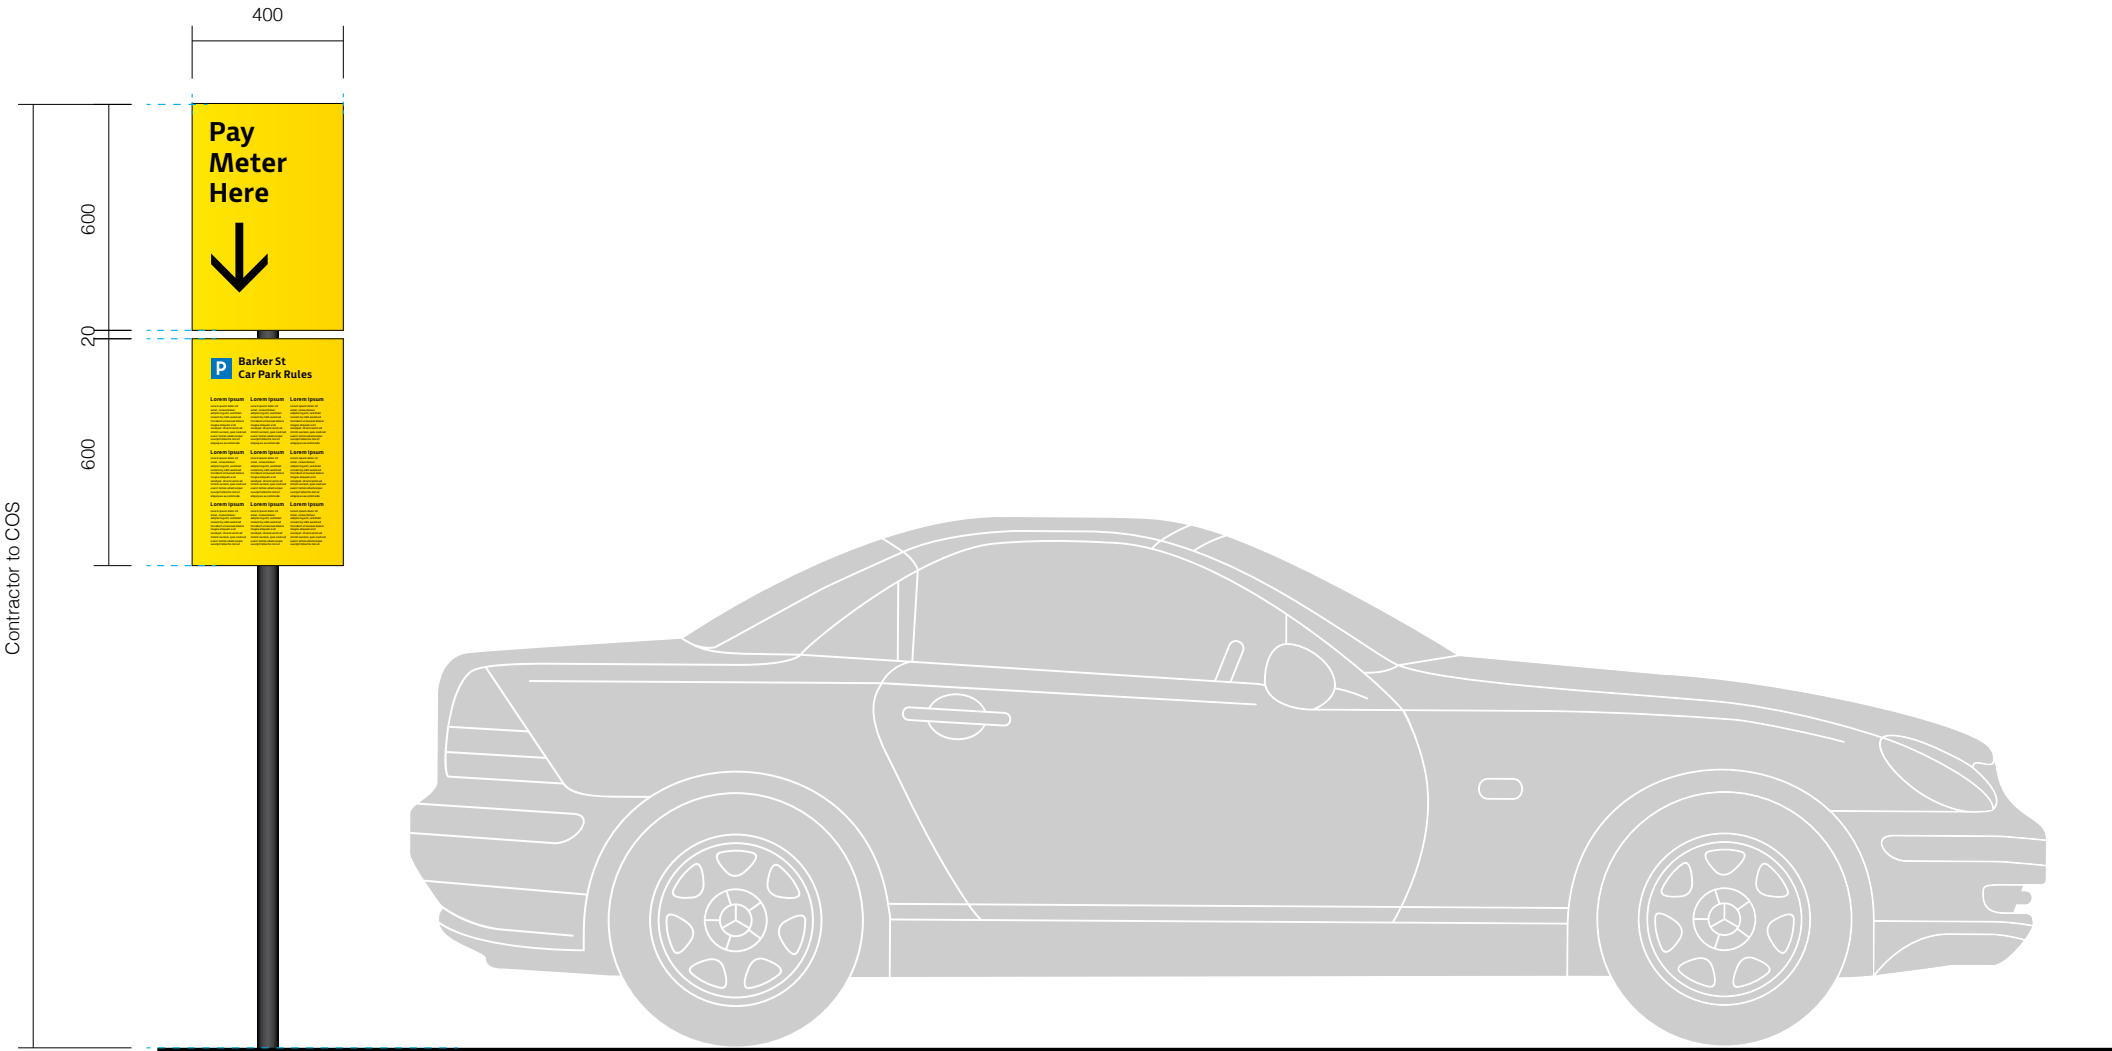


Elevation
Scale 1:20

Sign Location


Purpose
Identifies pay meter and rules of parking space.

Location
Mounted above pay meter.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

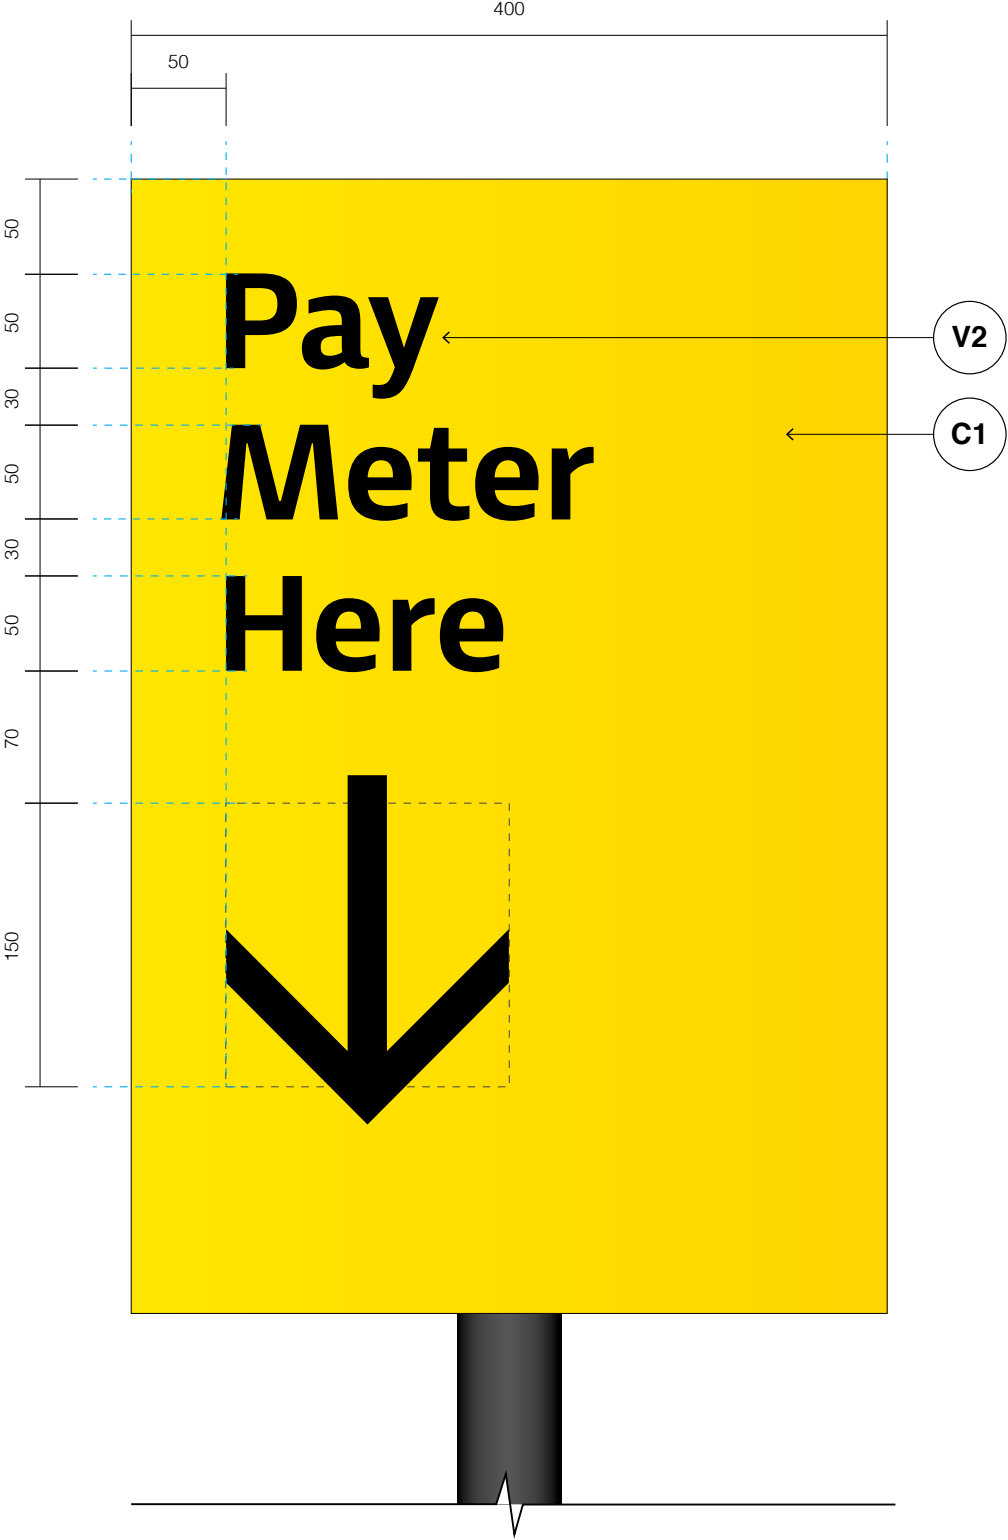

Layout 01 - Pay Meter Here
Scale 1:4

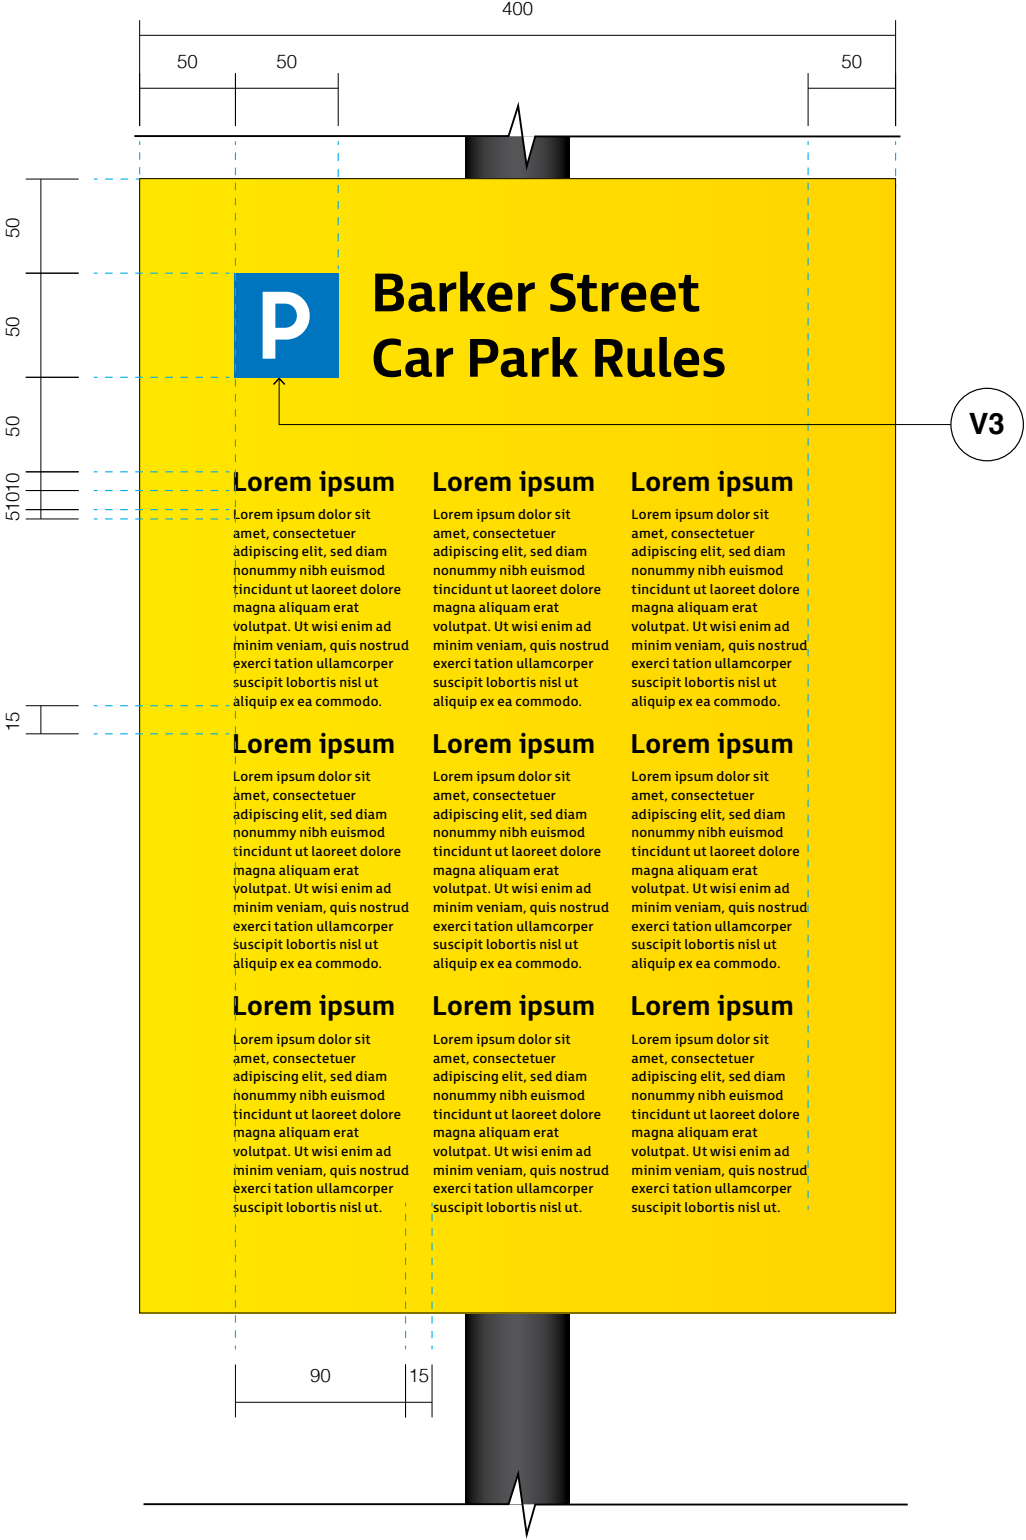

Layout 02 - Parking Rules
Scale 1:4

Graphic Layout

Pay Meter ID
FS Millbank Bold
Alignment: Left
Size Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning

Car Park ID
FS Millbank Bold
Alignment: Left
Size Leading: 20mm, 10mm
Tracking: 10+, Optical Kerning

Content
FS Millbank Regular
Alignment: Left
Size Leading: 5mm, 5mm
Tracking: 10+, Optical Kerning

Pictogram
Parking Pictogram: 50mm height

UNSW logo
50mm height


Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium

Fixing Details

- Refer to: Section 22, Shop Drawings

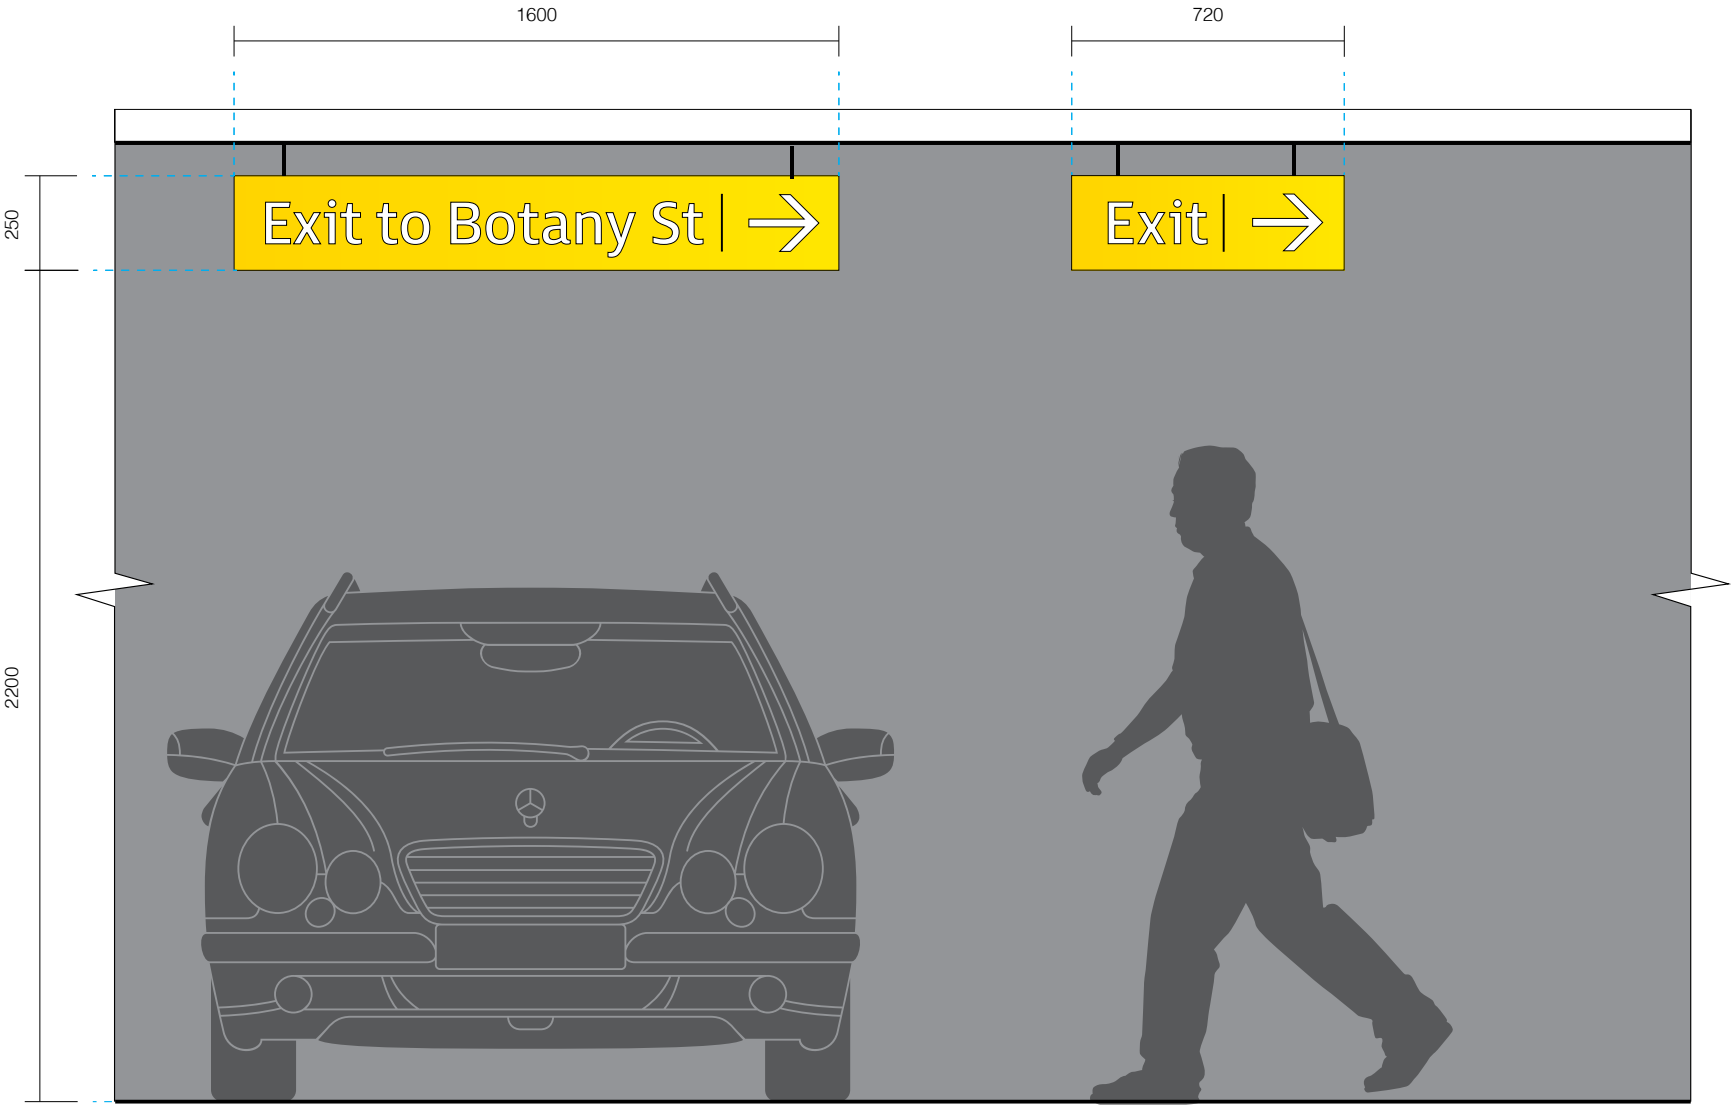


Elevation
Scale 1:20


Sign Location

- Purpose**
Directs vehicular and pedestrian traffic to main level and exit destinations in internal levels
- Location**
Suspended at major vehicular decisions point

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

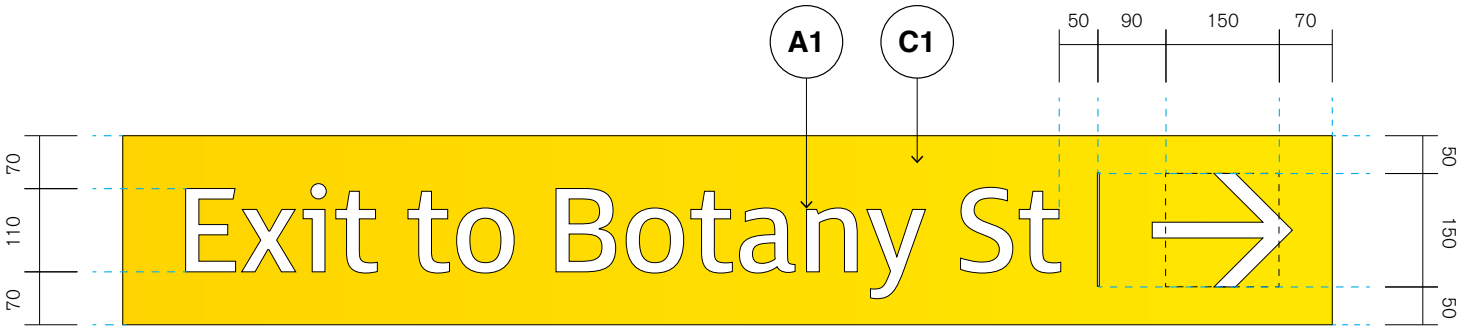

CP.06a - 1600mm Sign
Scale 1:10

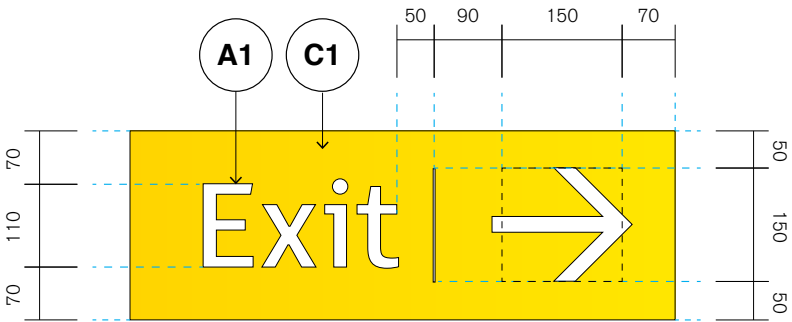

CP.06b - 700mm Sign
Scale 1:10

Graphic Layout

Messaging
FS Millbank Bold
Alignment: To respond to arrow direction
Size: 110mm height
Tracking: 10+, Optical Kerning
Dividing line weight: 2mm

Arrow
150mm height

Construction & Materials

Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium
- S1**

 - S1 finish for illumination
- A1**

 - A4 finish for illumination

Construction Details
• Refer to: Section 22, Shop Drawings



01 Car Park Suspended Directional
Baker Street Parking




02 Existing Sign
Baker Street Parking

Insitu Comparison

Note
The images shown are indicative of sign location and are to be used as a guide only.

Messaging has been altered as per wayfinding and terminology strategy.

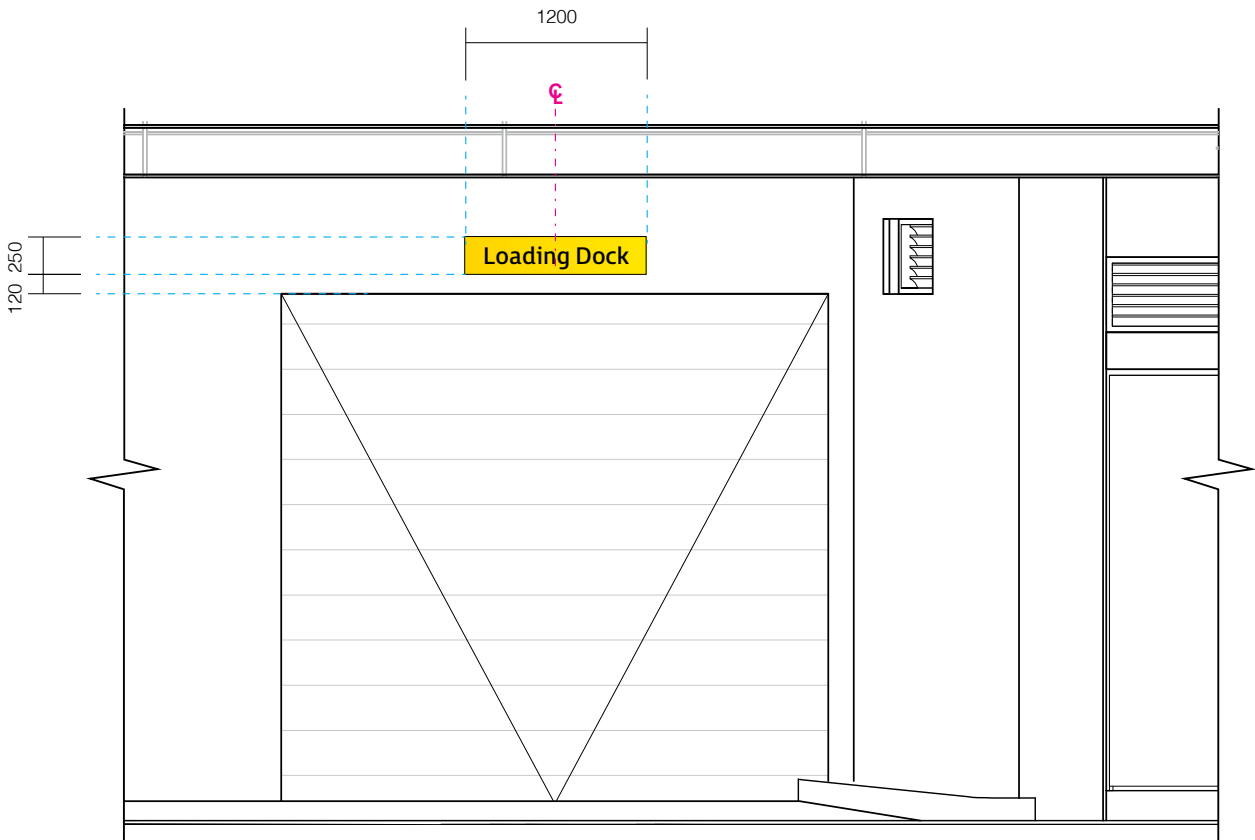


Elevation
Scale 1:50

Sign Location

Purpose
Identifies Loading Dock area for vehicular traffic. Refer to Section 3, Addressing & Terminology, Category 12.

Location
Applied above loading dock entry at bulk head.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

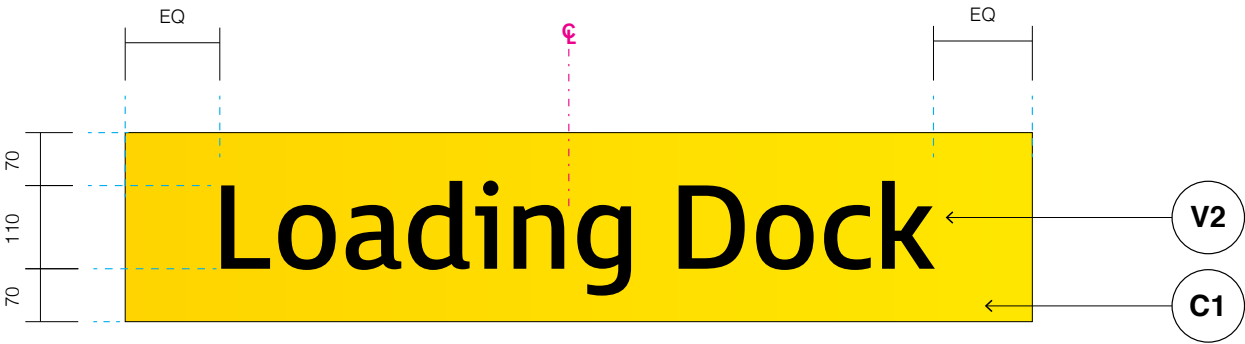

Detail
Scale 1:10

Graphic Layout

Loading Dock ID
FS Millbank Regular
Alignment: Centre aligned
Size: 110mm height
Tracking: 10+, Optical Kerning

Construction & Materials

Materiality Legend


- C1**

 - C1 finish on 3mm aluminium
- V2**


 - V2 applied on top of aluminium

Fixing Details

- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

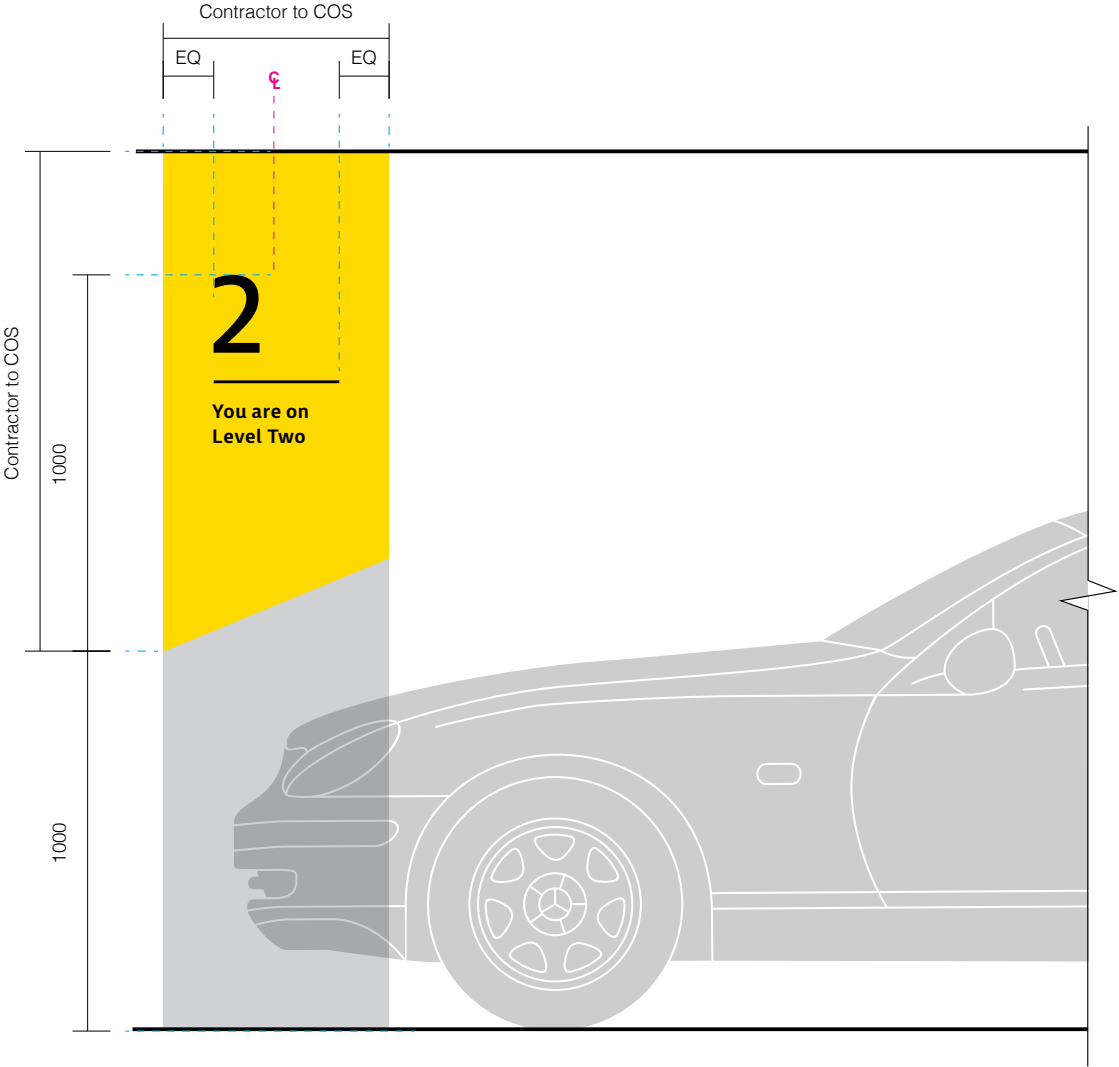

Front Elevation
Scale 1:20

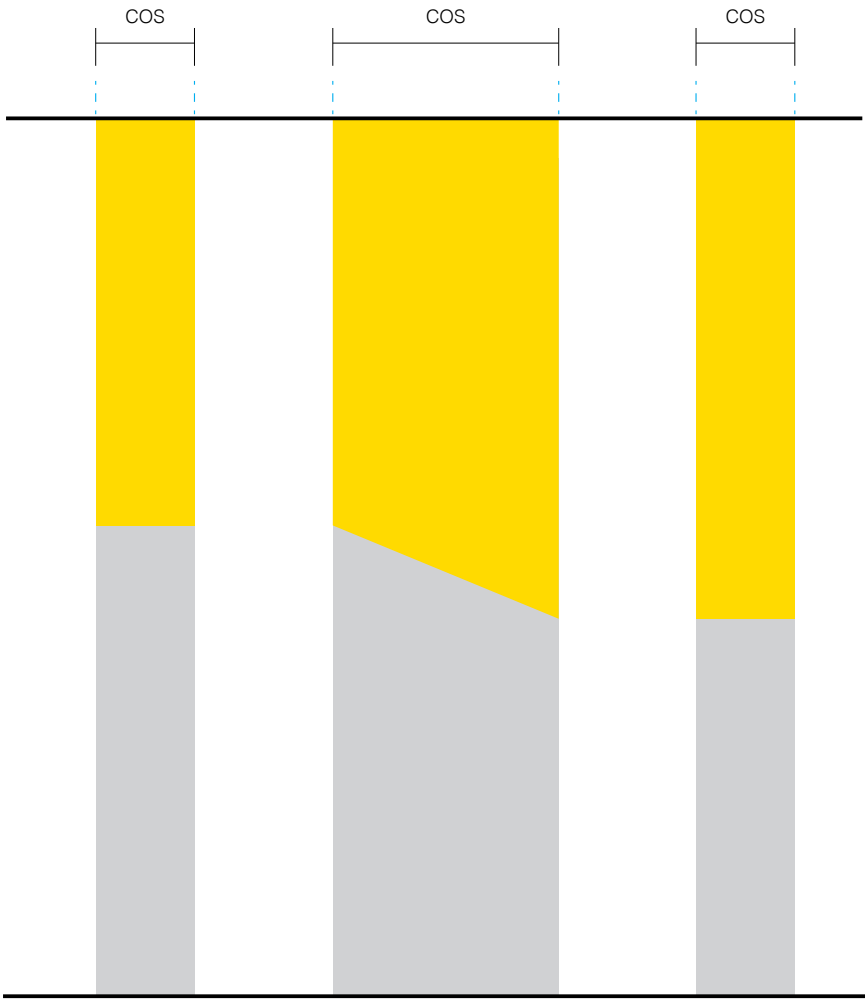

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20


Side Elevation
Scale 1:20

Sign Location

Purpose
Identifies car park level for vehicular and pedestrian traffic. Refer to Section 3, Addressing & Terminology, Category 4.

Location
Applied on surface of designated columns facing circulation paths.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

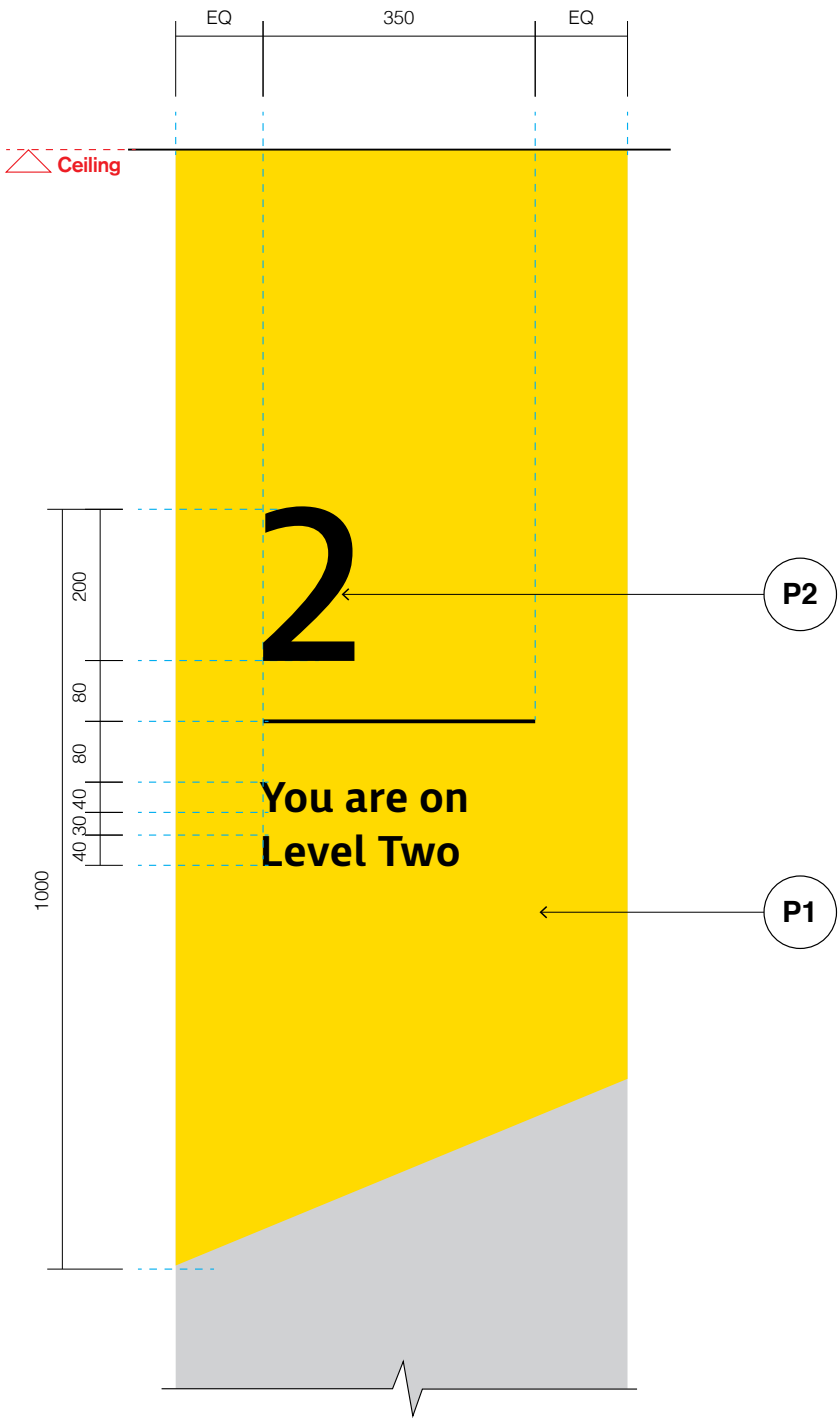

Detail
Scale 1:10

Graphic Layout

Level Number
FS Millbank Regular
Alignment: Left
Size: 200mm height
Tracking: 10+, Optical Kerning

Dividing Line
Line weight: 5mm

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning


Construction & Materials

- Materiality Legend**
- P1**


 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column

- Application Details**
- Refer to: Section 10, Construction Standards, Direct Applied Graphics

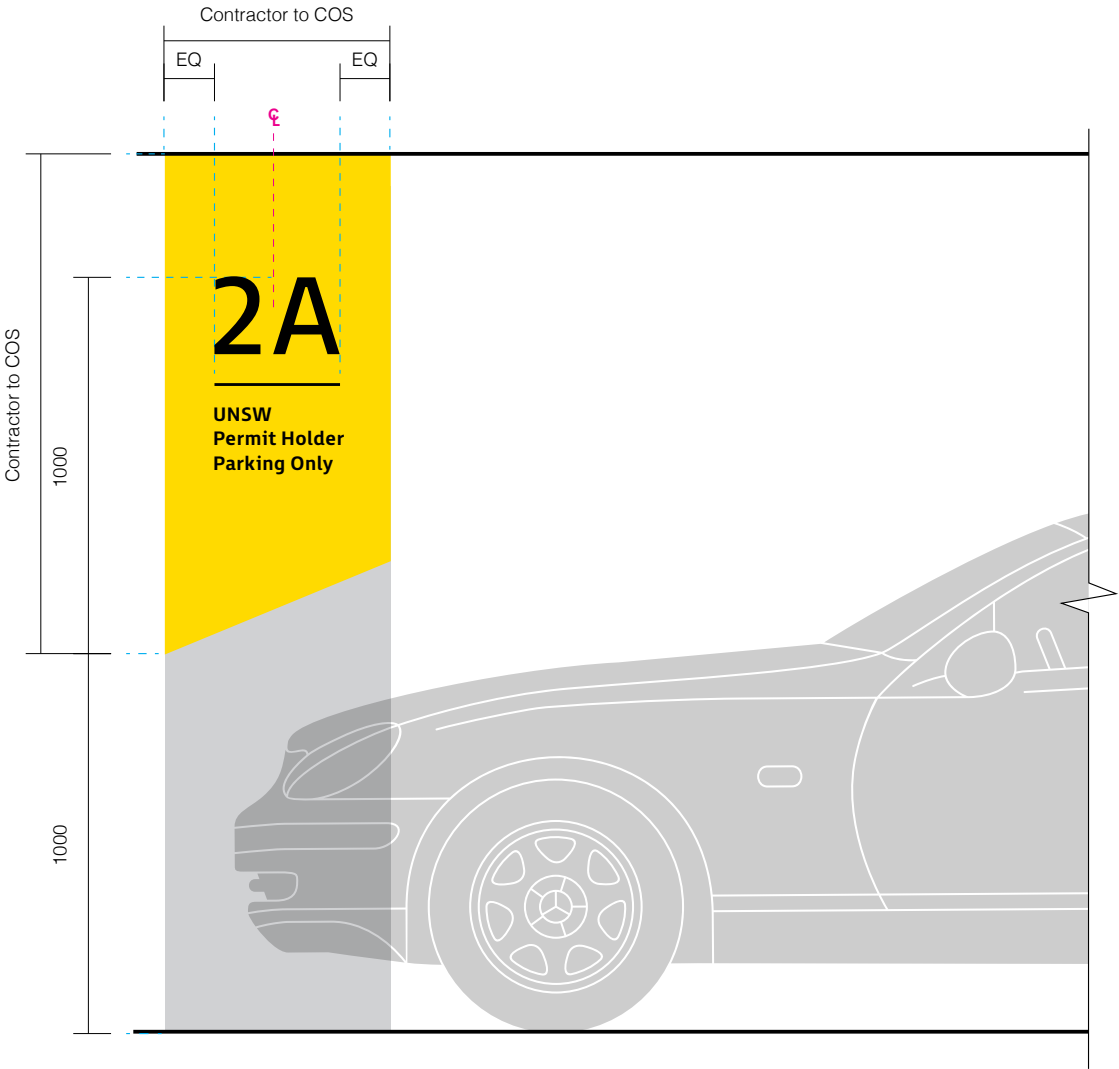

Front Elevation
Scale 1:20

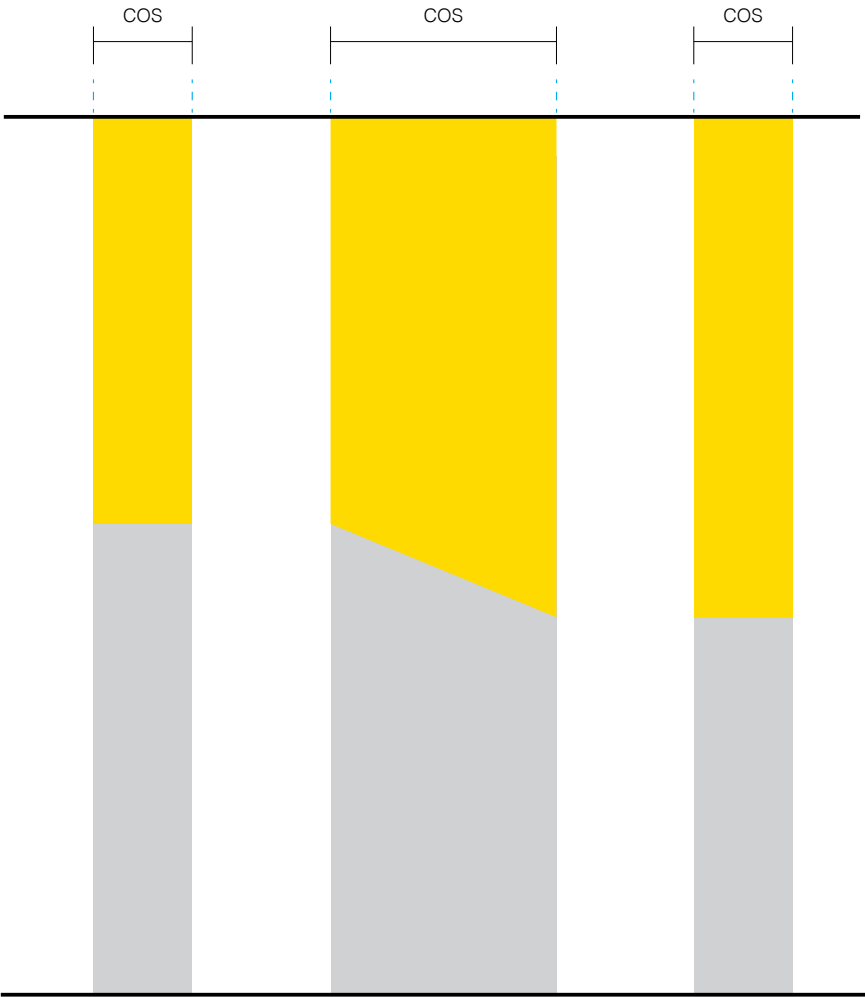

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20

Side Elevation
Scale 1:20

Sign Location

Purpose


Identifies parking zone ID for vehicular and pedestrian traffic.

Location

Applied on surface of designated columns facing circulation paths.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

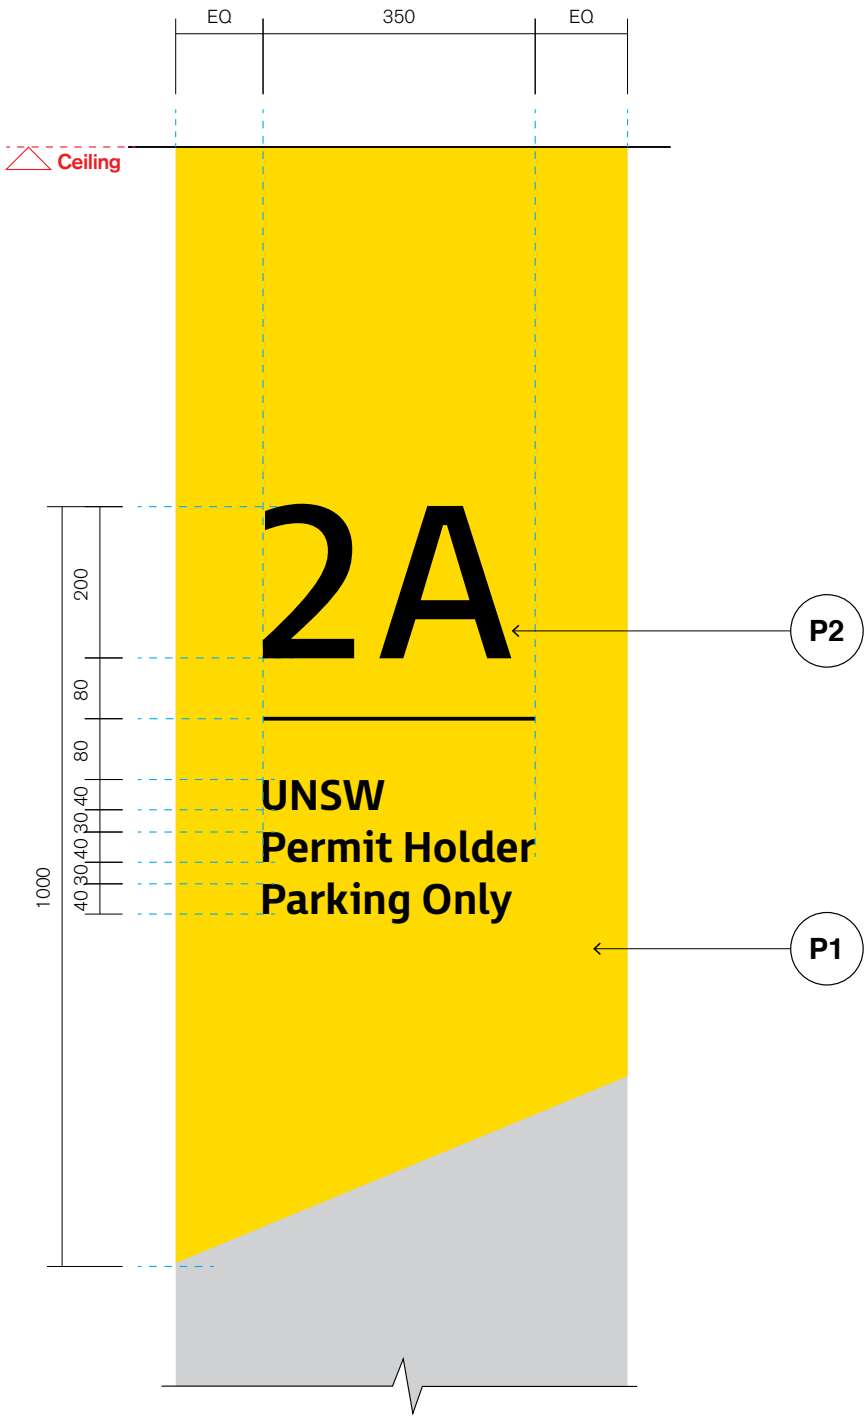

Detail
Scale 1:10

Graphic Layout

Zone Designation
FS Millbank Regular
Alignment: Left
Size: 200mm height
Tracking: 10+, Optical Kerning

Dividing Line
Line weight: 5mm

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning

Construction & Materials



- Materiality Legend**
- P1**

 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column

Application Details

- Refer to: Section 10, Construction Standards, Direct Applied Graphics

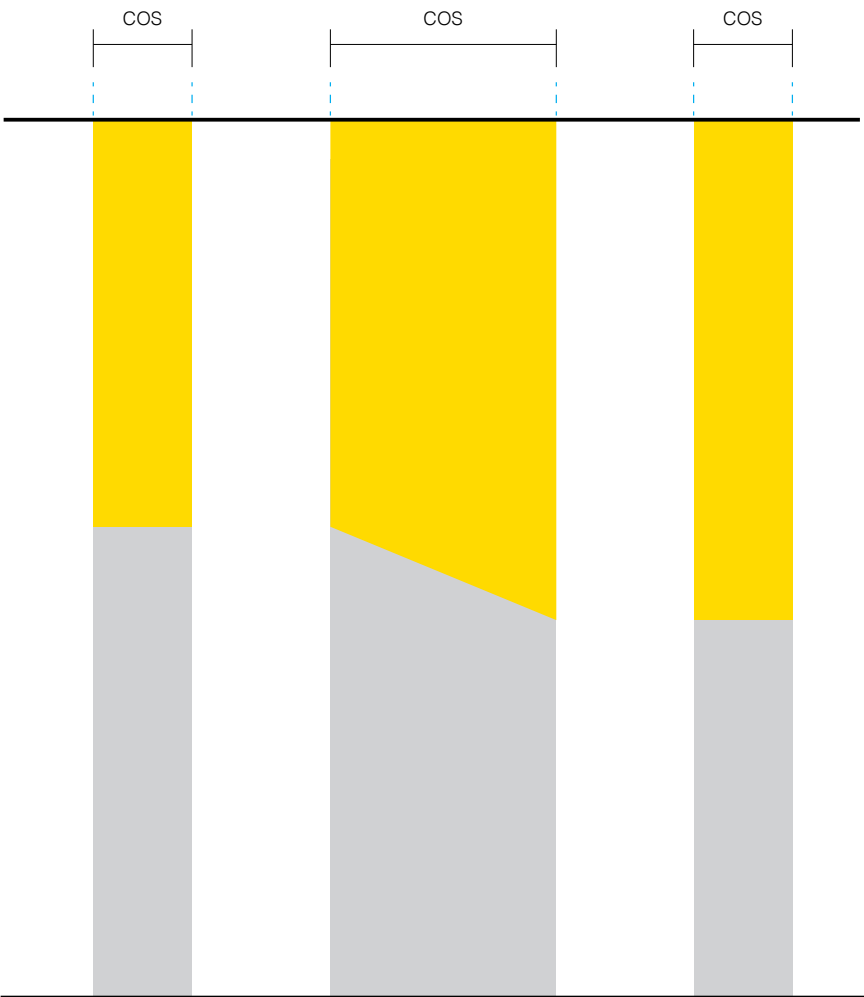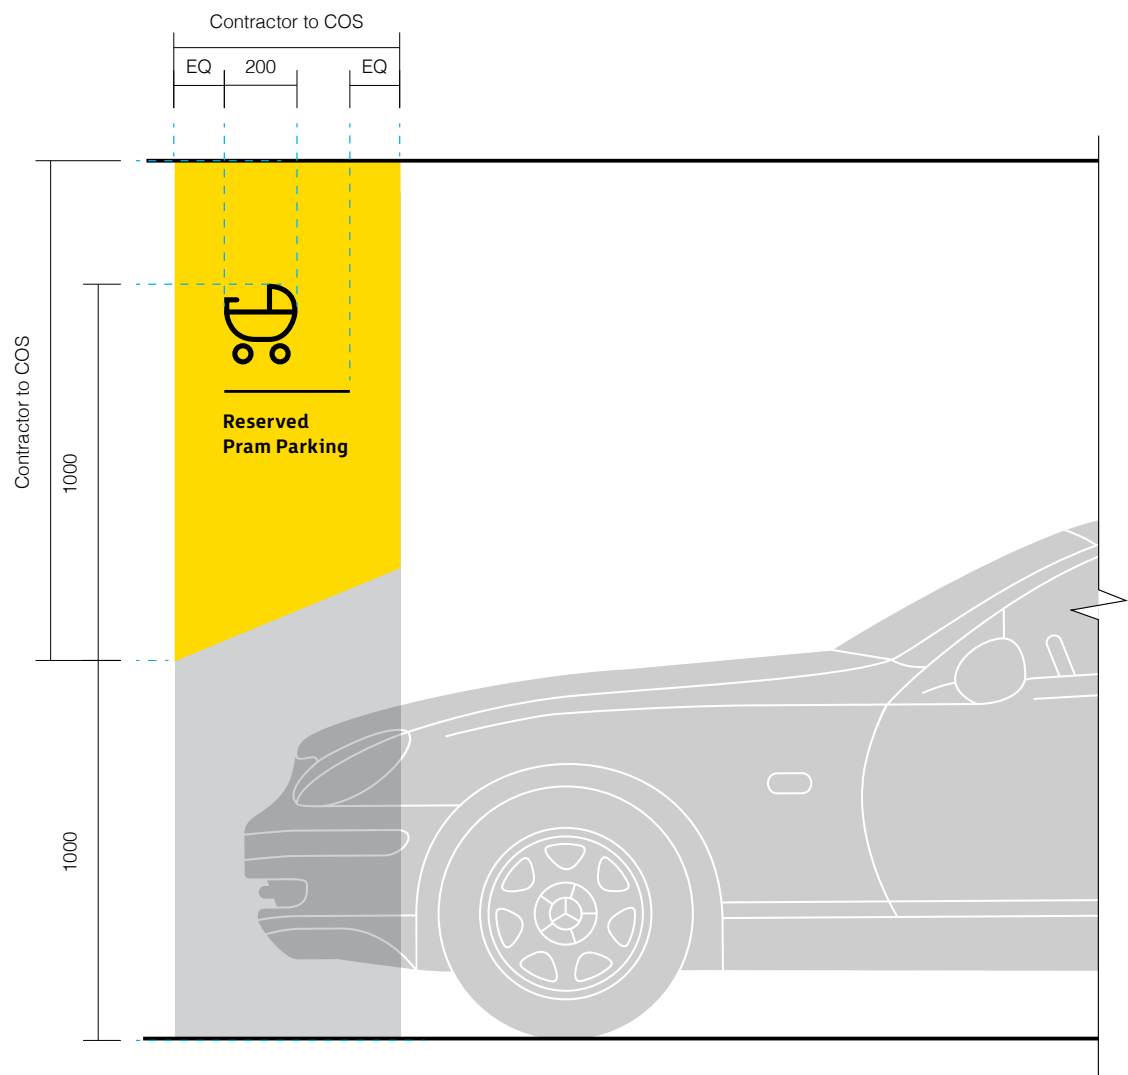

Front Elevation
Scale 1:20

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20

Side Elevation
Scale 1:20

Sign Location

Purpose


Identifies reserved parking zone for vehicular and pedestrian traffic, specific to accessibility and parent parking.

Location


Applied on surface of designated columns facing circulation paths.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For content guidelines, refer to: Section 3, Addressing & Terminology
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

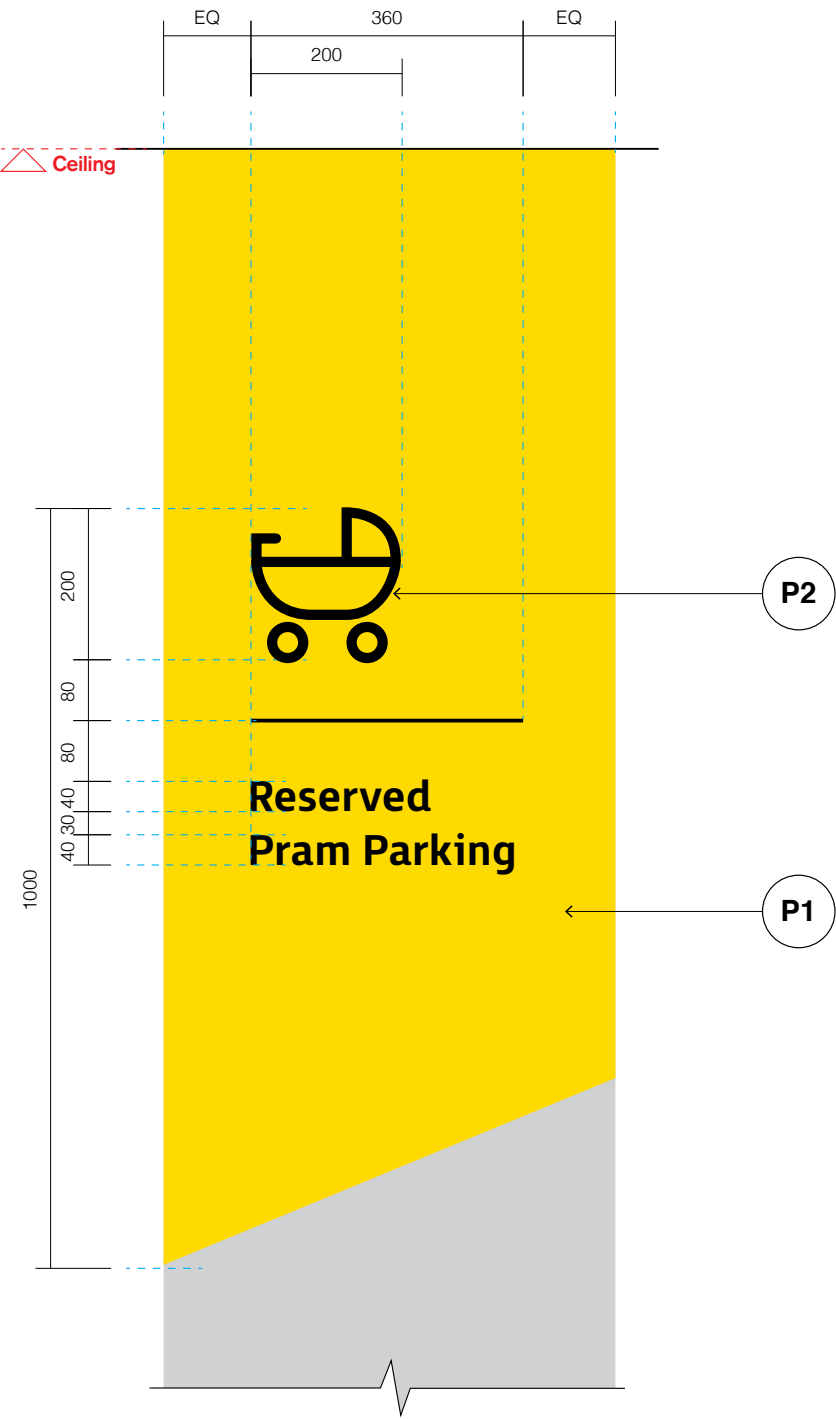

Template 01 - Pictogram & Text
Scale 1:10

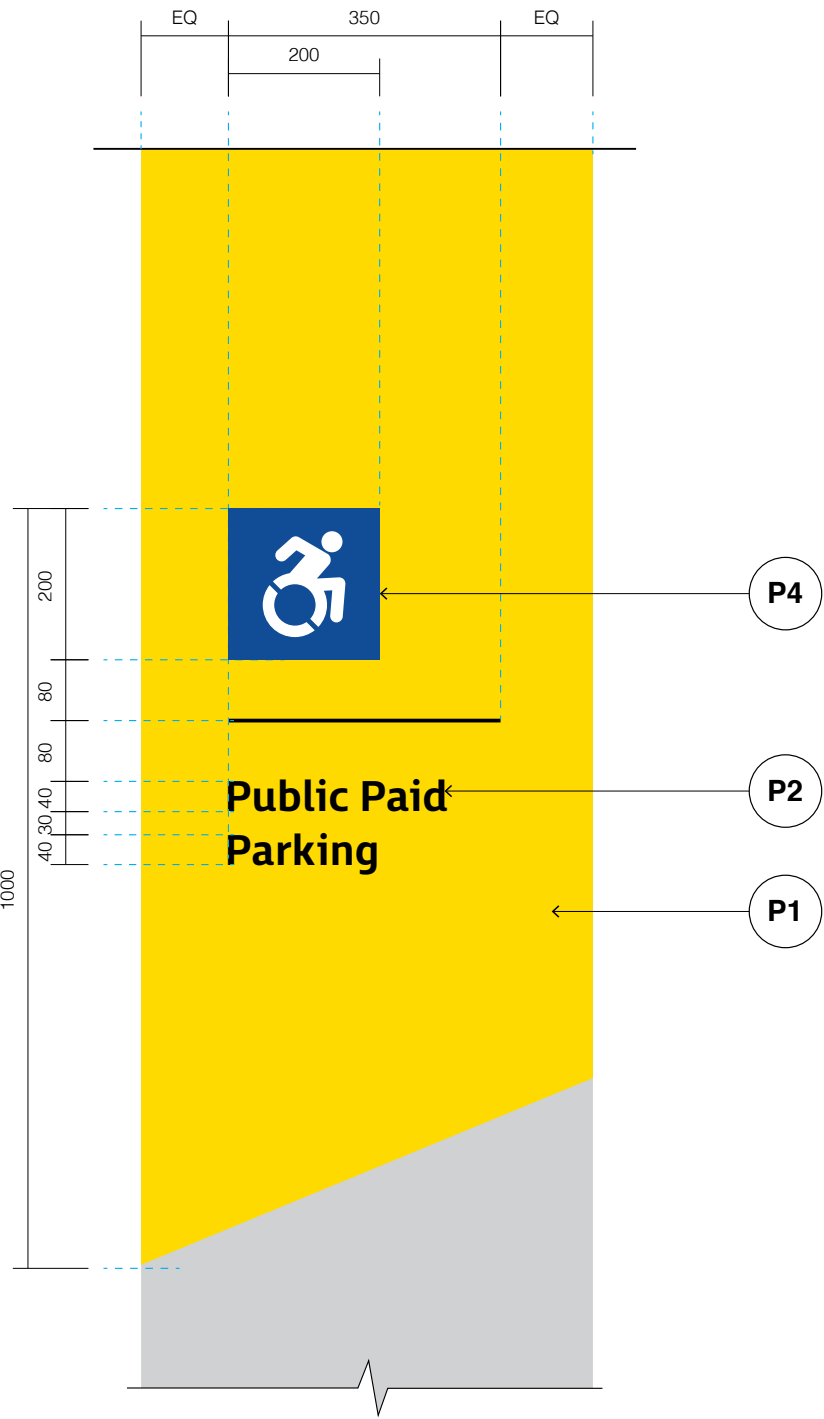

Template 02 - Accessibility
Scale 1:10

Graphic Layout

- Pictograms**
Size: 200mm height
- Dividing Line**
Line weight: 5mm
- Messaging**
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 20mm
Kerning: 10+, Optical Kerning

Construction & Materials

- Materiality Legend**
- P1**

 - P1 mask & spray on column
- P2**

 - P2 mask & spray on column
- P3**


 - P3 mask & spray on column
- P4**

 - P4 mask & spray on column

- Application Details**
- Refer to: Section 10, Construction Standards, Direct Applied Graphics



Front Elevation
Scale 1:20

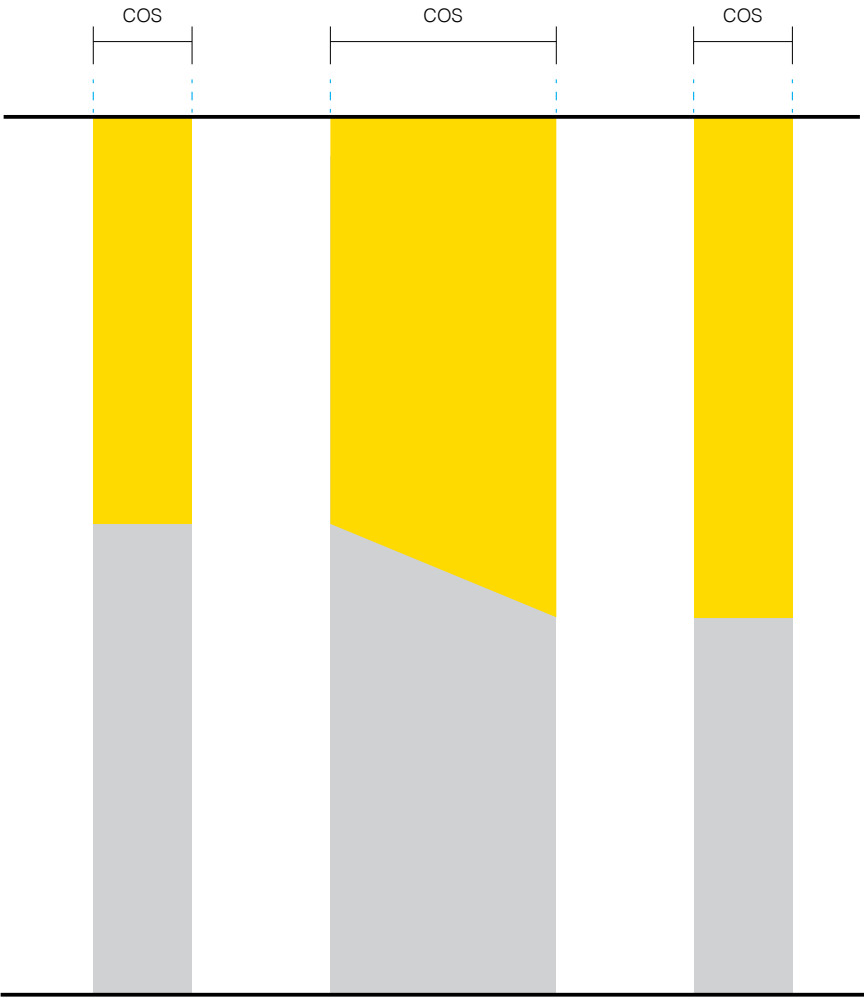

Side Elevation
Scale 1:20

Back Elevation
Scale 1:20


Side Elevation
Scale 1:20

Sign Location


Purpose
Directs vehicular and pedestrian traffic to main level and exit destinations at an internal level.

Location
Applied on surface of designated columns facing circulation paths.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

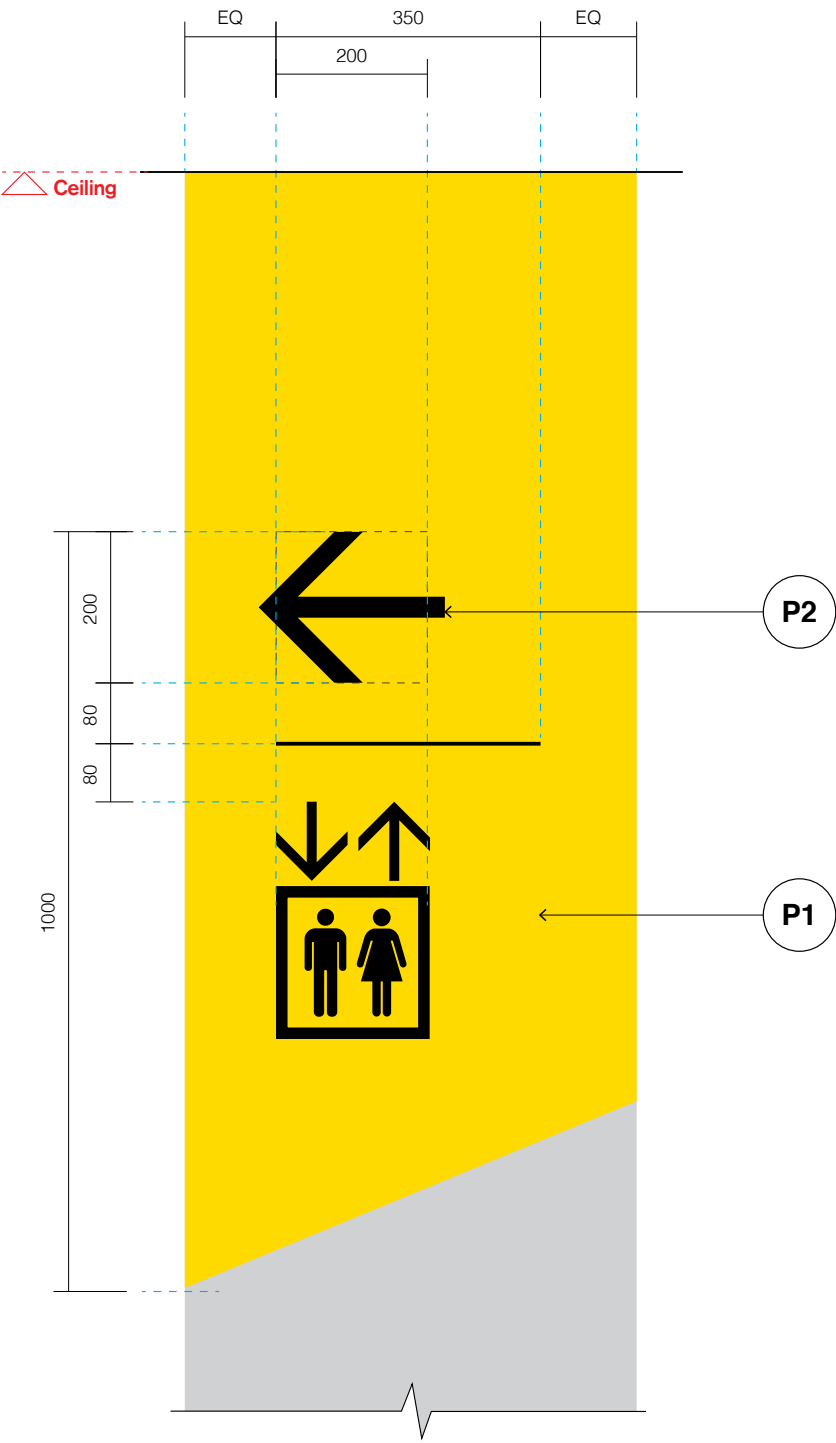

Template 01 - Directional & Pictogram
Scale 1:10

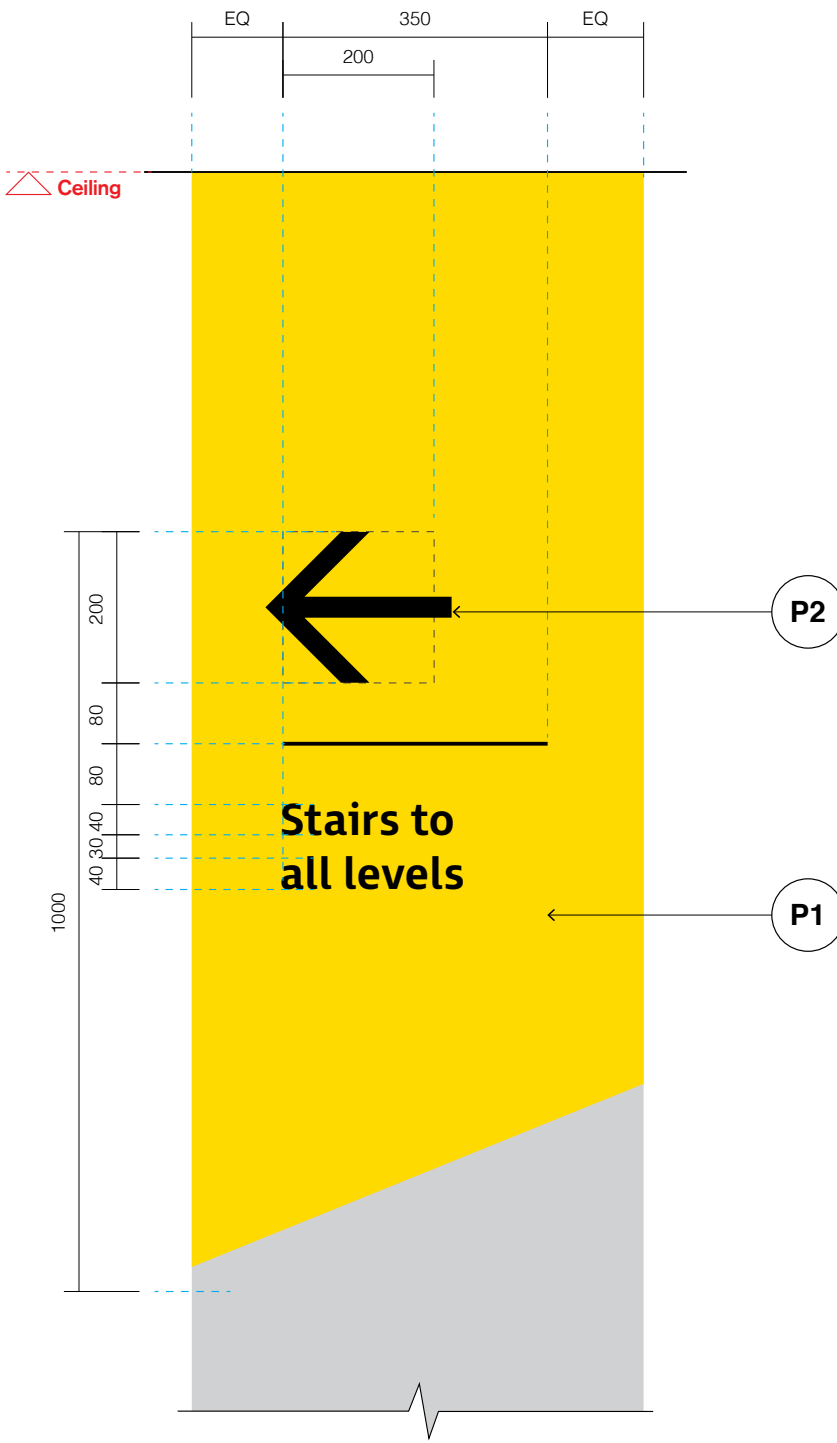

Template 02 - Directional & Text
Scale 1:10

Graphic Layout

Arrows
200mm height

Dividing Line
Line weight: 5mm

Pictograms
200mm width

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 30mm
Tracking: 10+ Optical kerning


Construction & Materials

Materiality Legend

- P1** **P2**
- P1 mask & spray on column
 - P2 mask & spray on column

Application Details

- Refer to: Section 10, Construction Standards, Direct Applied Graphics

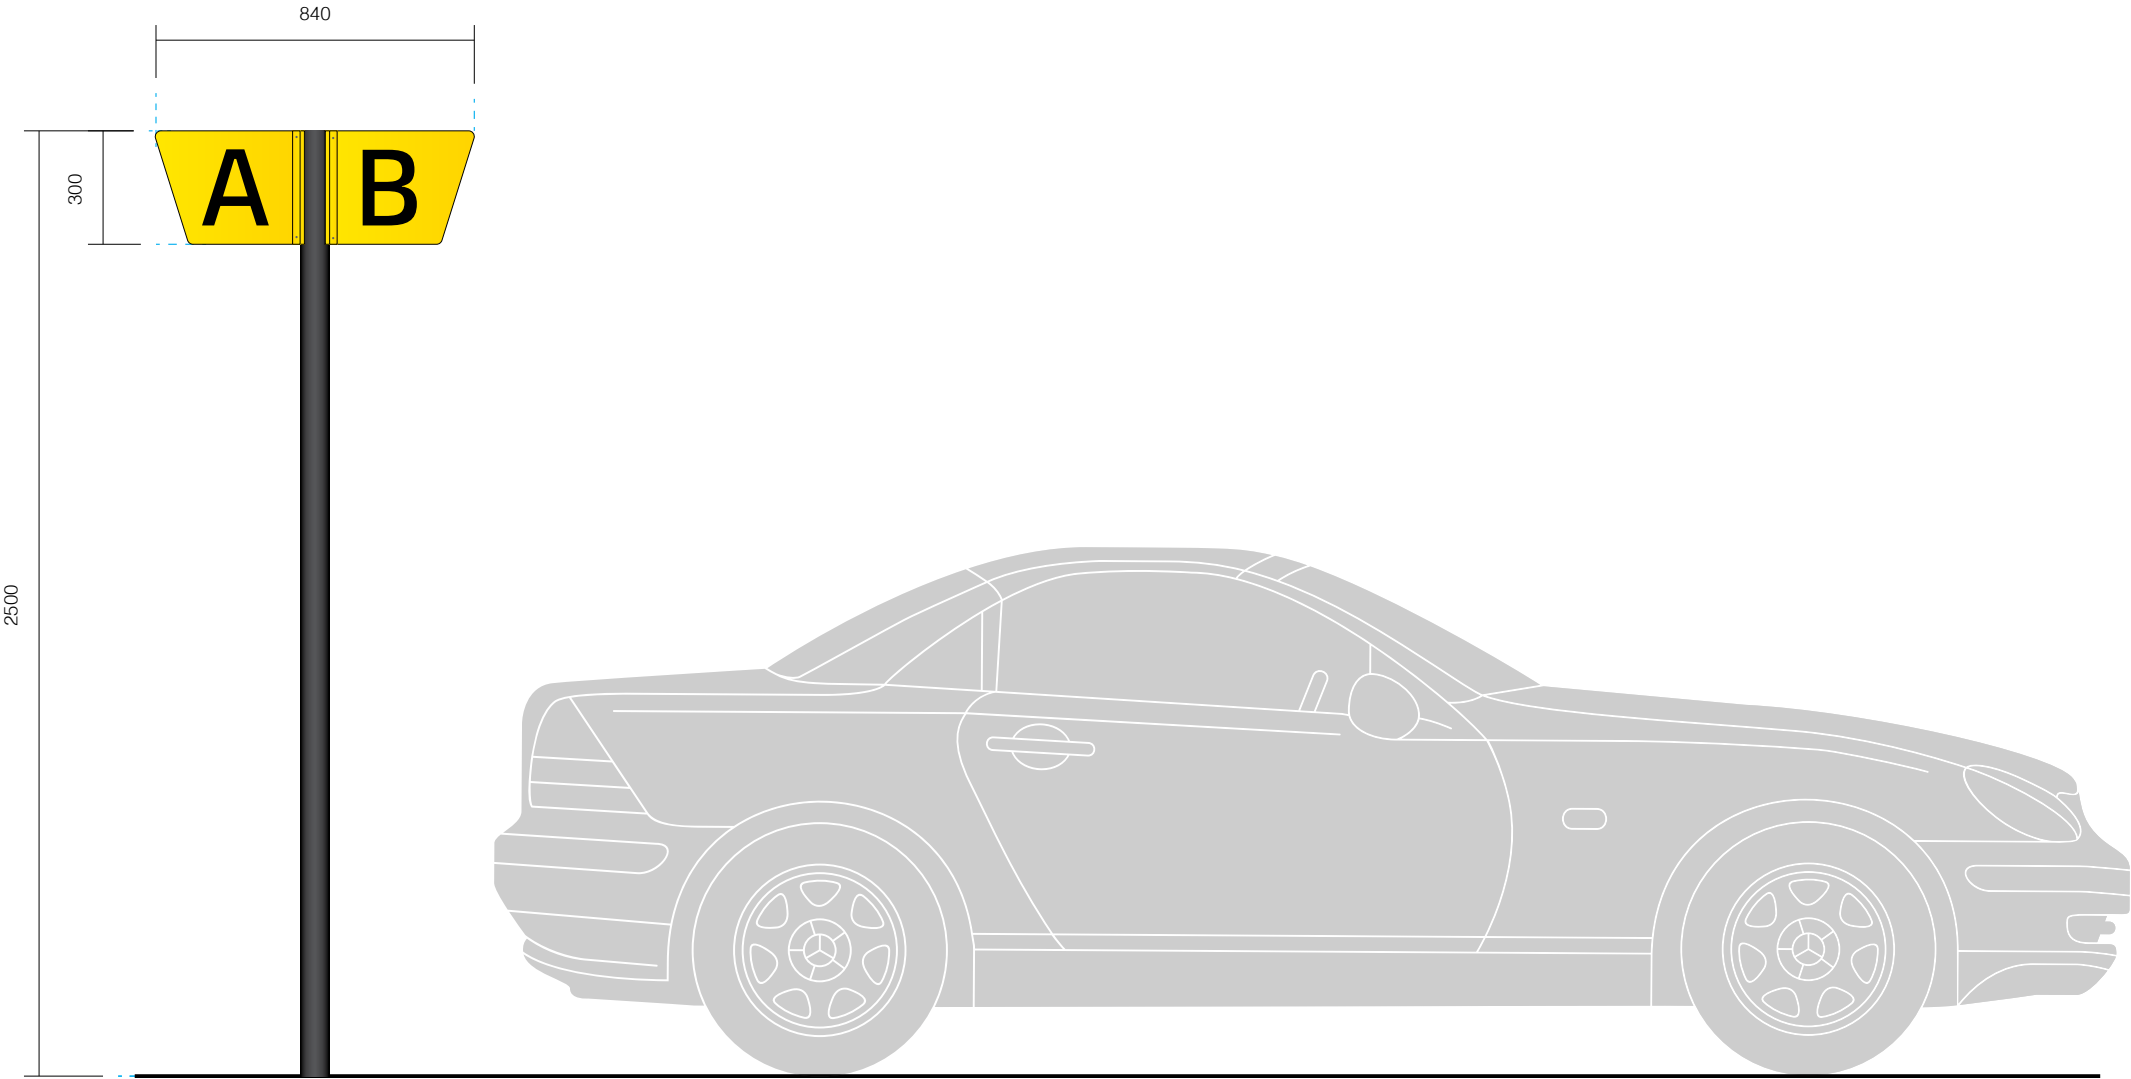


Elevation
Scale 1:20

Sign Location

Purpose
Identifies parking zone ID's on rooftop levels that not do have car park columns.

Location
Located at allocated confirmation points.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

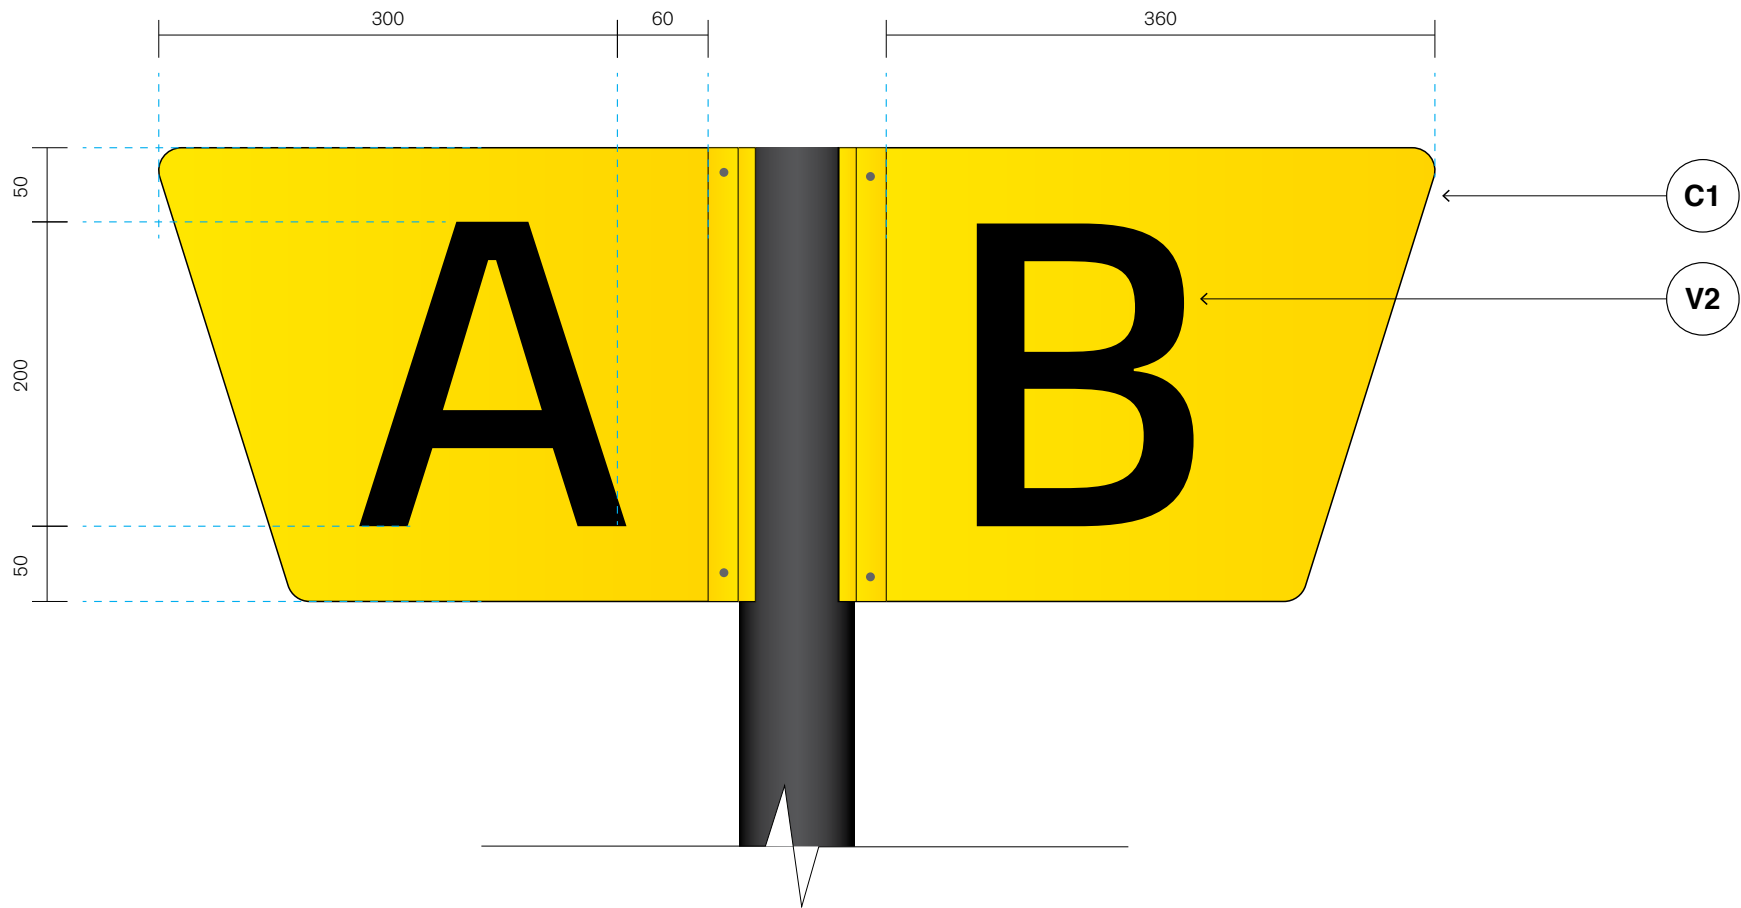

Graphic Layout

Lot Designation
FS Millbank Regular
Alignment: To respond to blade direction
Size: 200mm height


Construction & Materials

Materiality Legend

- | | |
|------------------------------|----------------------------------|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium |

Construction Details

- Refer to: Section 10, Construction Standards, Cantilevered Signforms

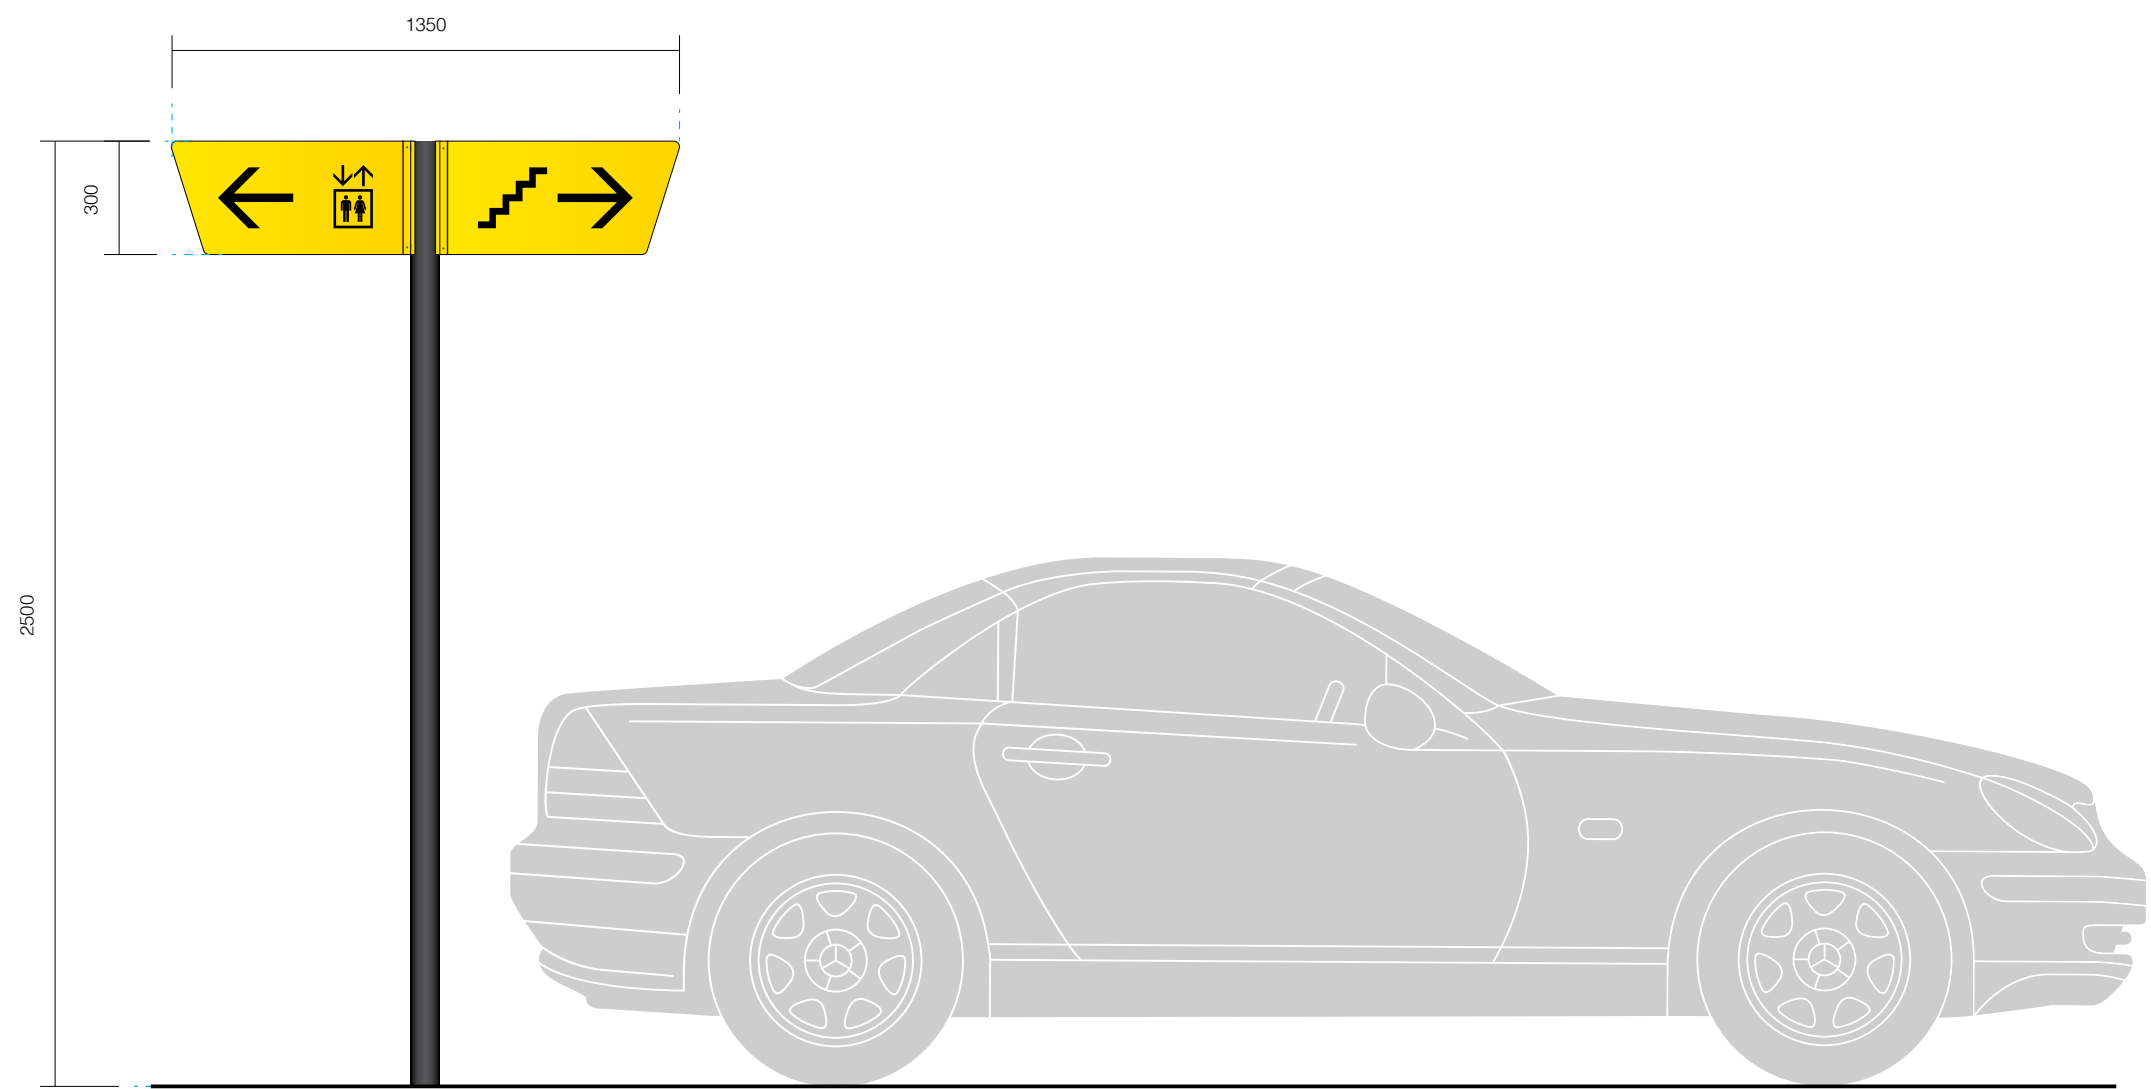


Elevation
Scale 1:20

Sign Location

Purpose
Directs pedestrian traffic at rooftop levels. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Located at major pedestrian decision points at rooftop level.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

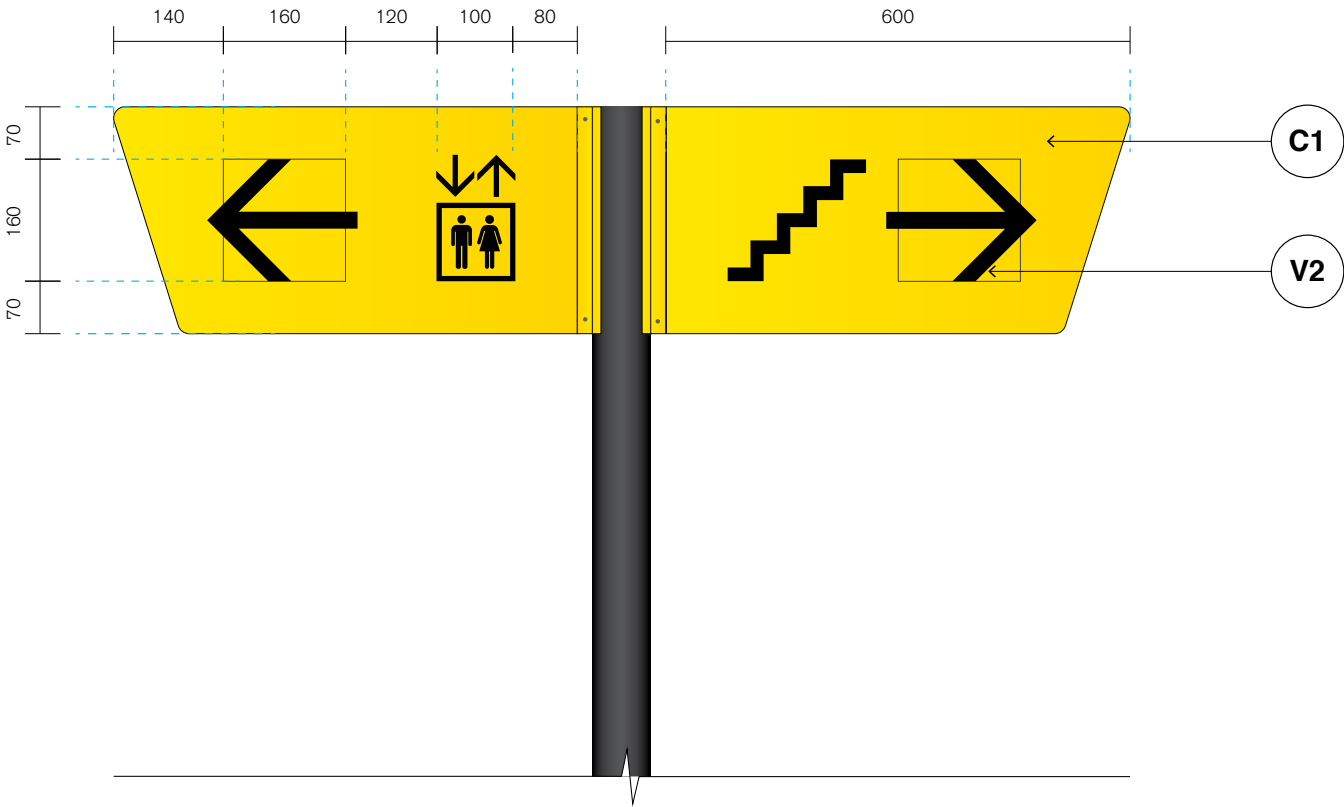

Detail
Scale 1:10

Graphic Layout

Pictogram
Lift & Stair: 160mm height

Arrow
160mm height

Construction & Materials


Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium

Construction Details
• Refer to: Section 10, Construction Standards, Cantilevered Signforms

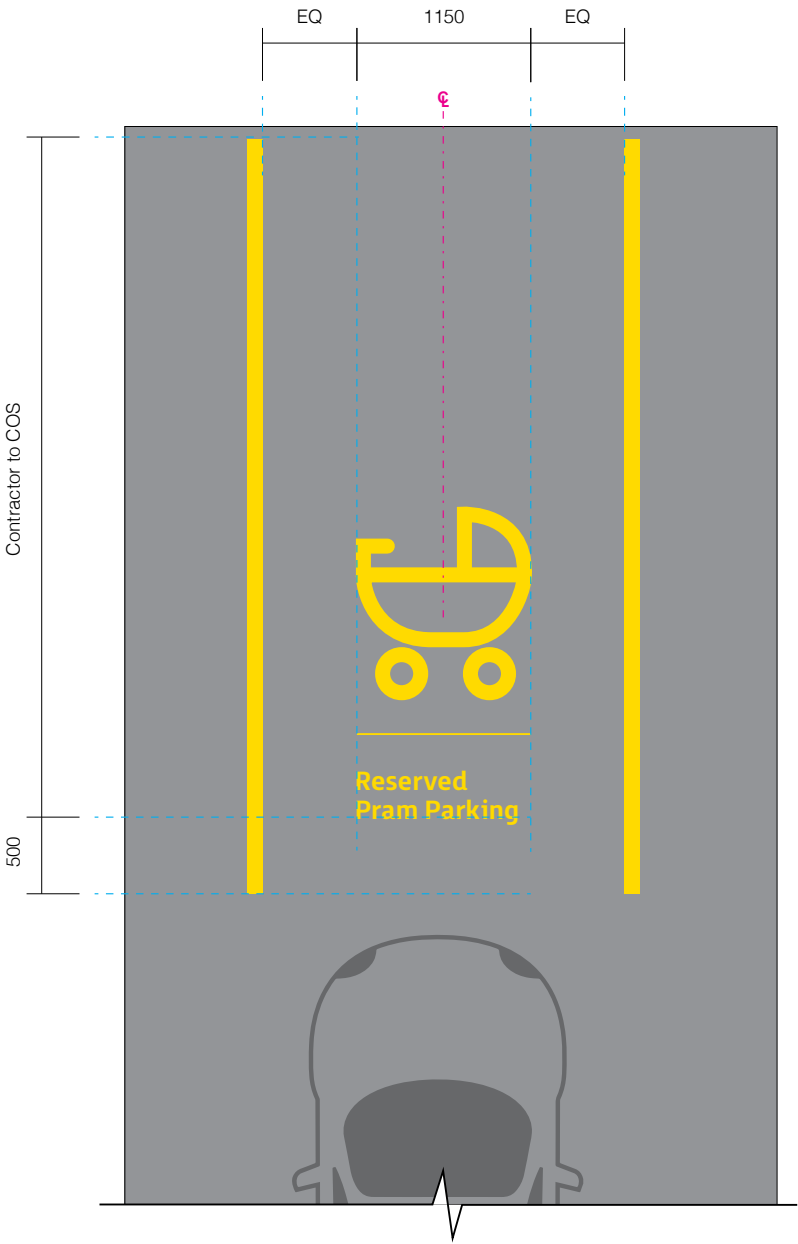

Plan
Scale: 1:50


Sign Location

Purpose
Identifies parking zones for vehicular traffic. Refer to Section 3, Addressing & Terminology, Category 12.


Location
Located at designated parking zones.

Australian Standards
In compliance with AS/NZS 2890.1: 2004, car park floor graphics must have 80-100mm solid lines to distinguish between spaces. Accessibility pictogram must be 1200mm square with white icon in blue square, and be inset 500-600mm from start of space.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

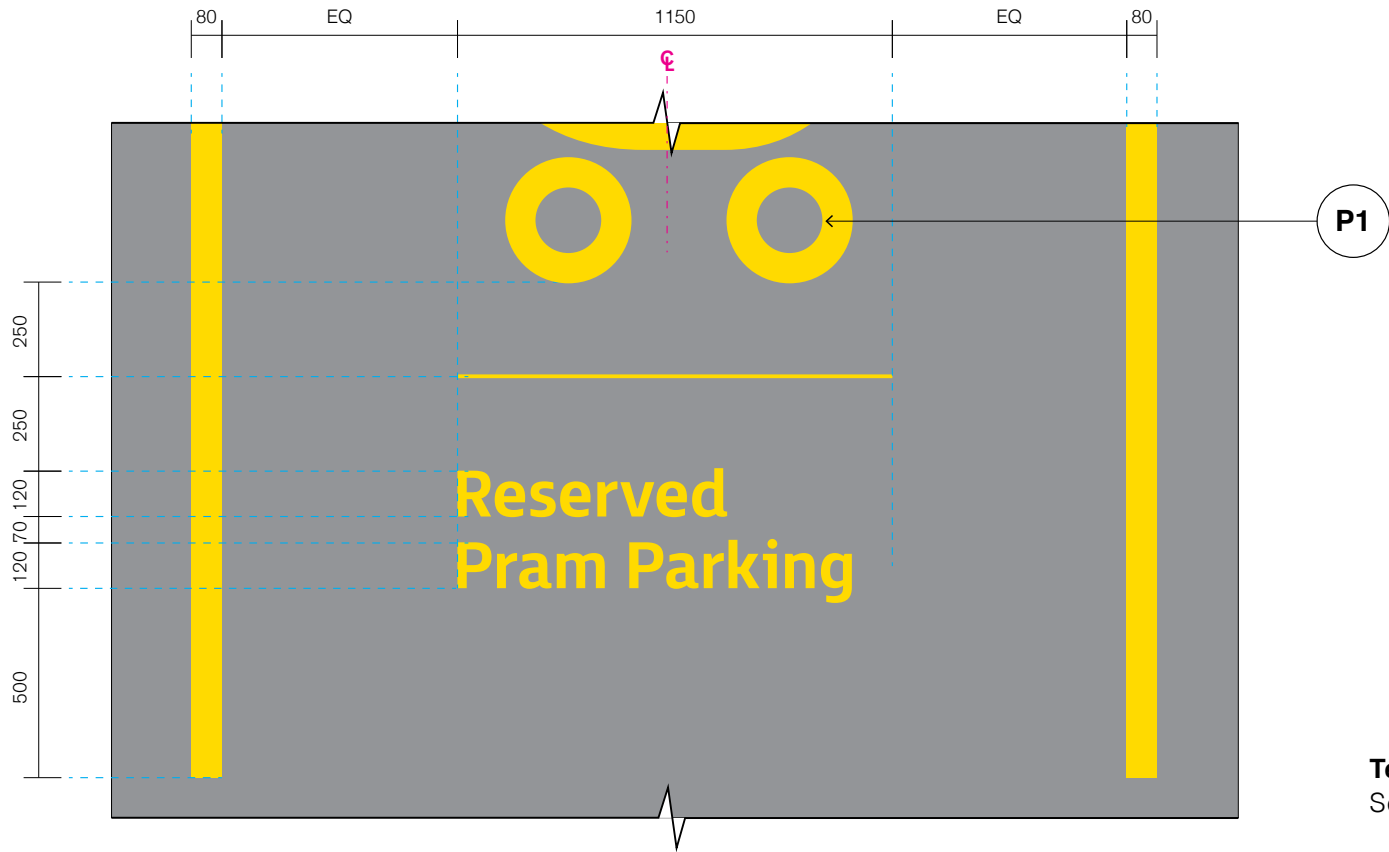

Template 01 - Pictogram & Text
Scale 1:20

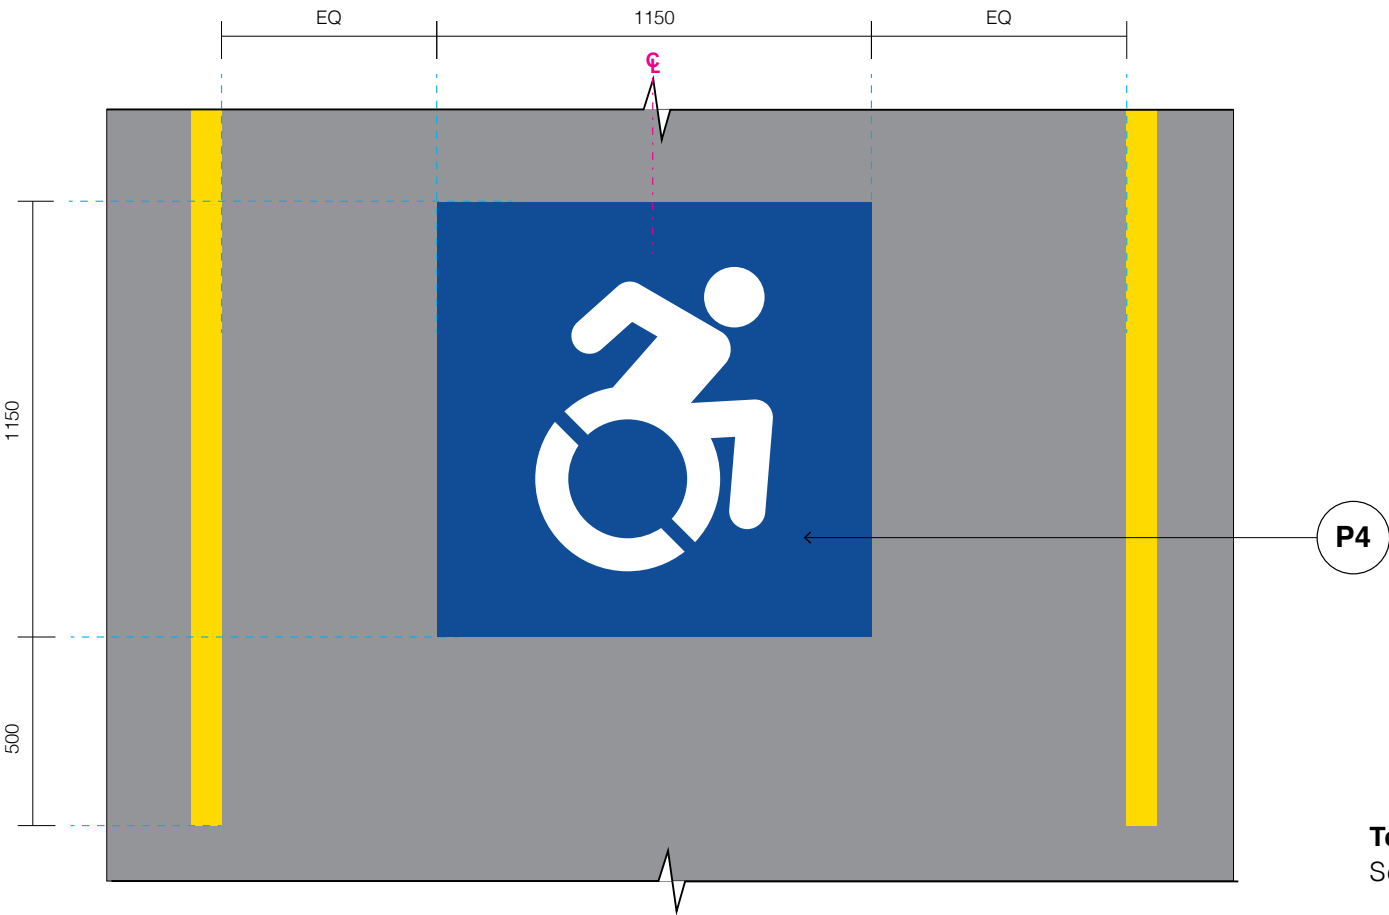

Template 02 - Accessibility
Scale 1:20

Graphic Layout

Pictogram

1120mm width

Dividing Line

Line weight: 5mm

Messaging

FS Millbank Bold

Alignment: Left

Size/ Leading: 120mm, 70mm

Tracking: 10+, Optical Kerning

Construction & Materials

Materiality Legend

P1

- P1 mask & spray on floor

P3


- P3 mask & spray on column

P4

- P4 mask & spray on floor

Application Details

- Refer to: Section 10, Construction Standards, Direct Applied Graphics

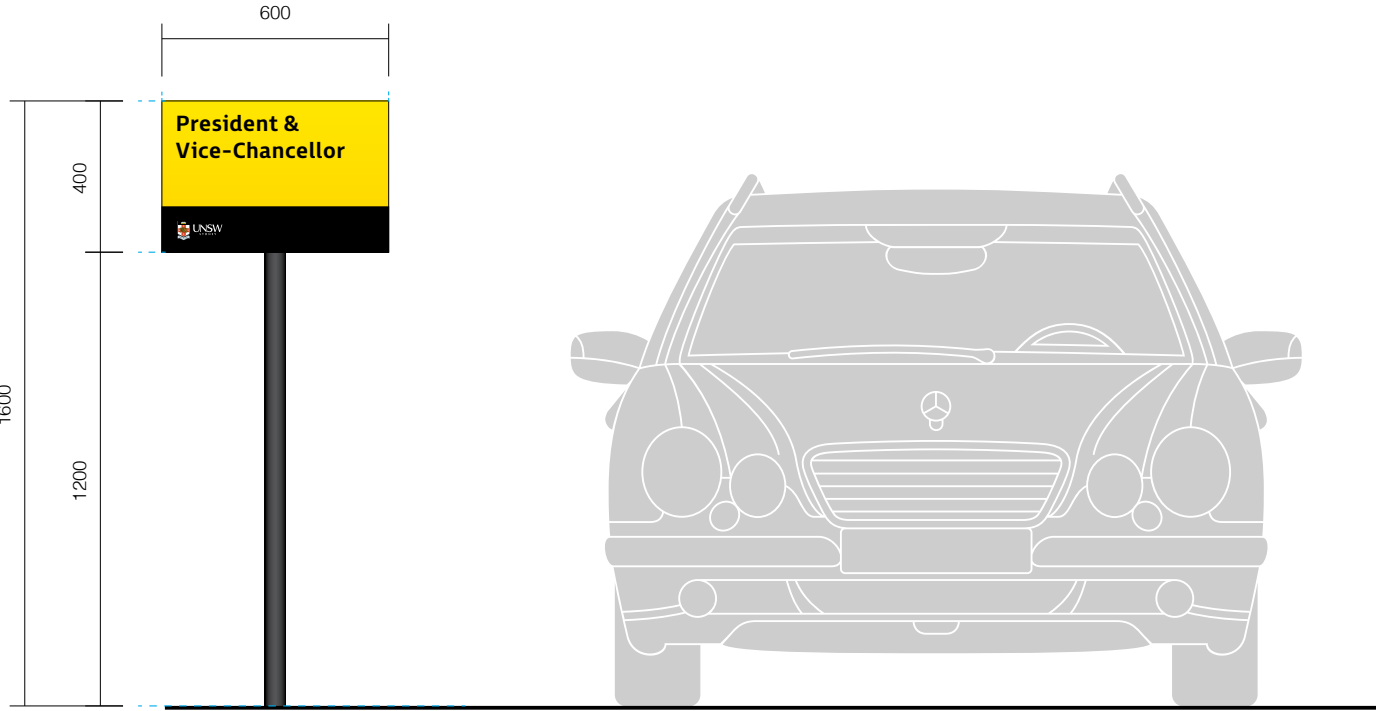

Sign Location

Purpose
Identifies parking zones for authorised users. Refer to Section 3, Addressing & Terminology, Category 12.

Location
Located at designated parking zones.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



Detail
Scale 1:4

Graphic Layout

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 40mm, 30mm
Tracking: 10+, Optical Kerning

UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Fixing Details

- Refer to: Section 22, Shop Drawings


Section

15.0


Operational Series

This section documents all the operational signs of the system including specifications for both external and internal signs.


OP.01 Help Point ID Family	326
OP.02 General ID Family	328
OP.03 Utility ID Family	330
OP.04 Drop Box ID Family	332
OP.05 Water Refill	334
OP.06 Waste ID	336

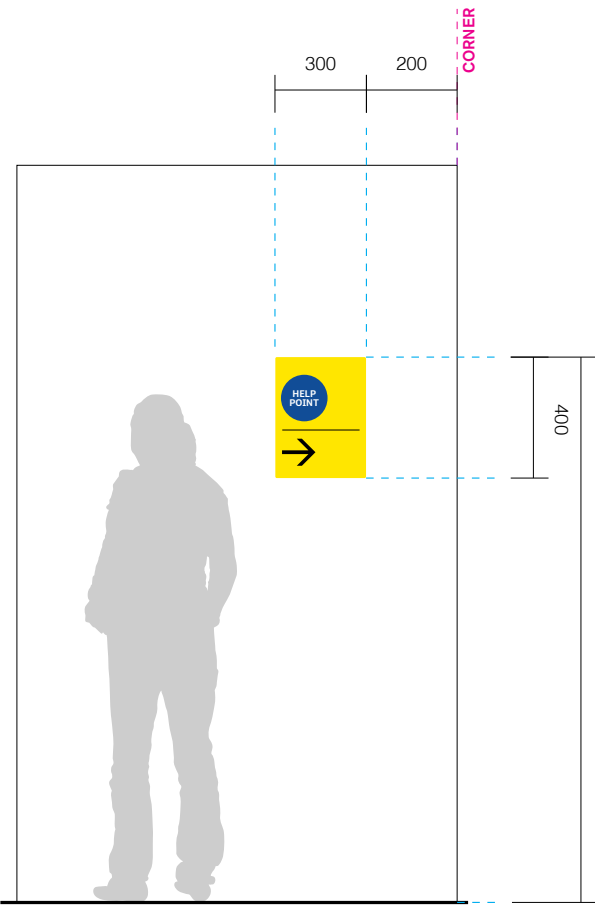

OP.01a
Elevation - Directional
Scale 1:25

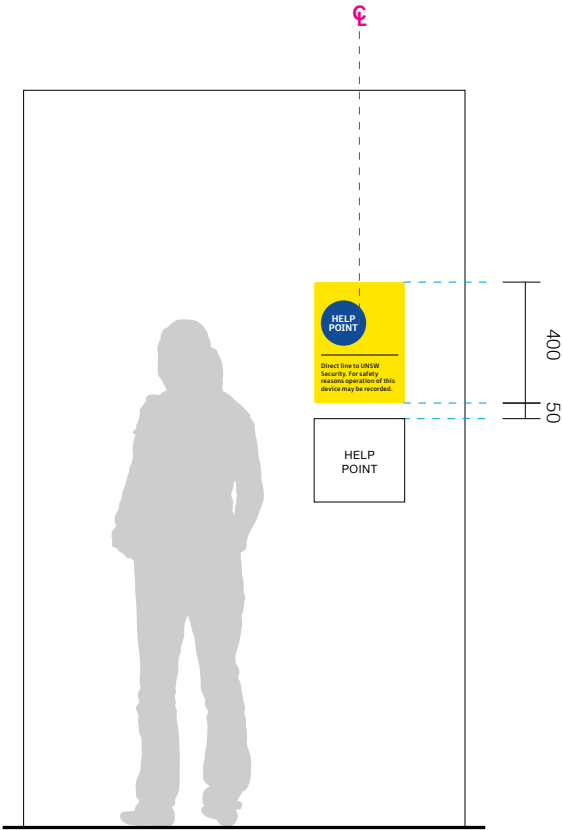

OP.01b
Elevation - Wall-Mount
Scale 1:25
50mm above intercom

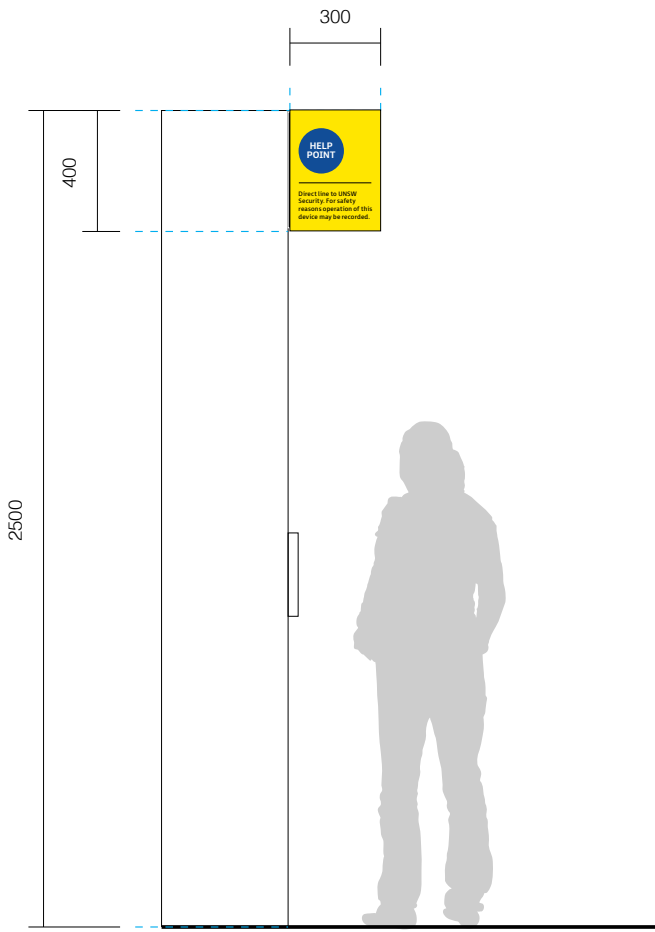


OP.01c
Elevation - Cantilevered
Scale 1:25
2100mm FFL to underside

Sign Location


Purpose
Identifies help point locations. Refer to Section 3, Addressing & Terminology, Category 10

Location
Located above designated Help Point intercoms.


- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

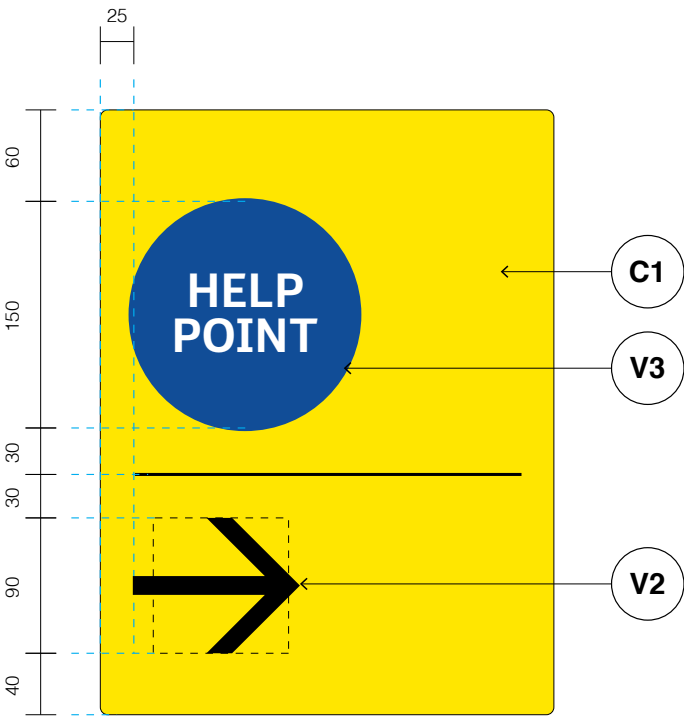

OP.01a
Detail - Directional
Scale 1:5

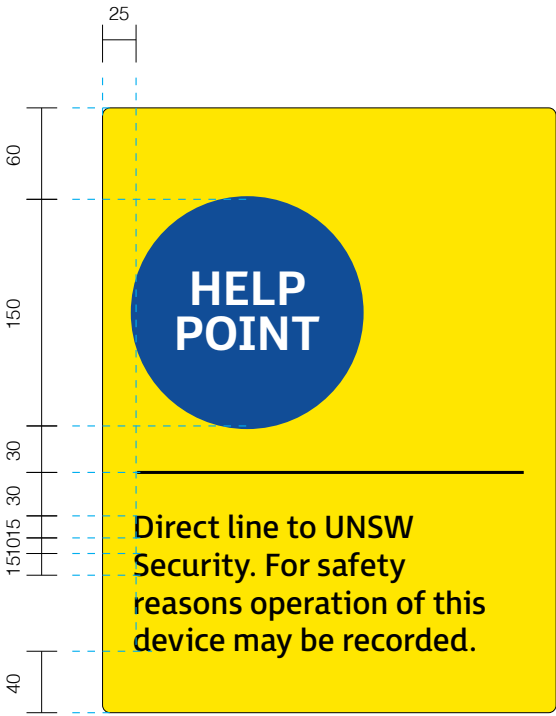

OP.01b
Detail - Wall-Mount
Scale 1:5

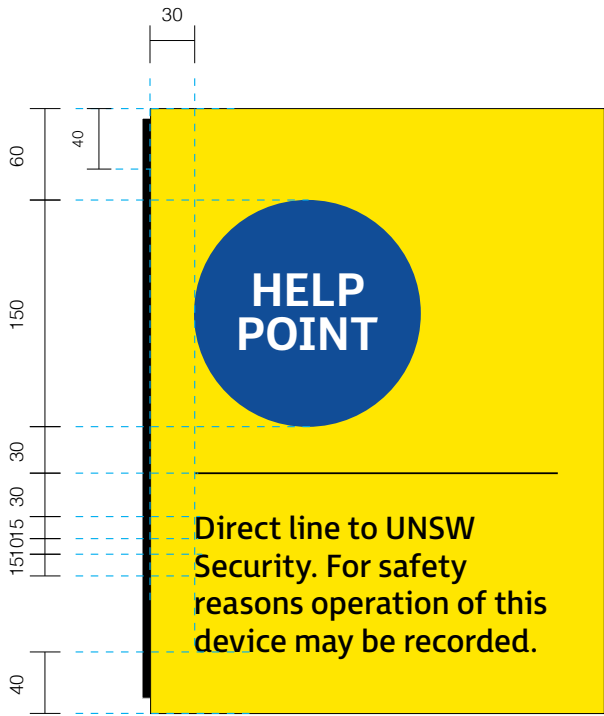

OP.01c
Detail - Cantilevered
Scale 1:5

Graphic Layout

Pictogram
150mm diameter

Dividing Line
Line weight: 2mm

Arrow
90mm height

Messaging
FS Millbank Regular
Alignment: Left
Size/ Leading: 15mm, 10mm
Tracking: 10+, Optical kerning


Back
Double sided messaging for cantilevered variation.
Messaging to be exact copy.

Construction & Materials


Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |


Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms, and Cantilevered Signforms

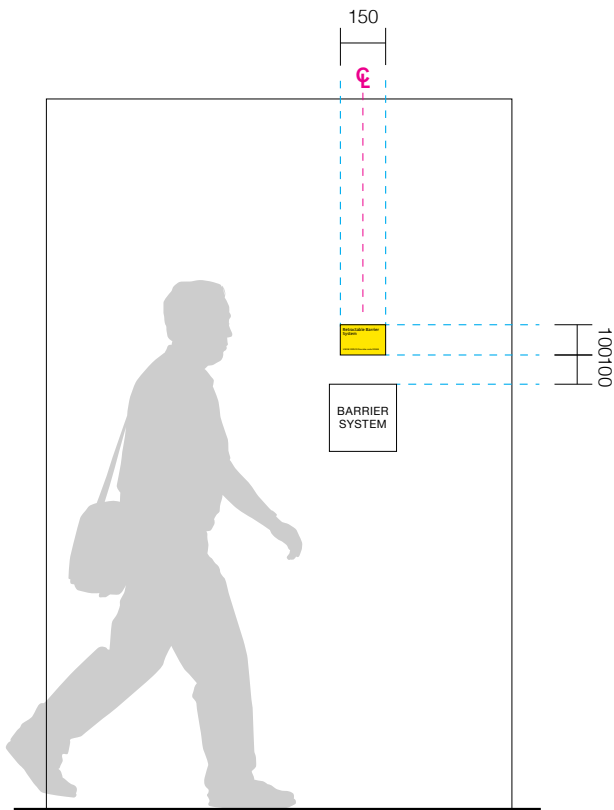


Facility Utilities
100mm above utility location
Scale 1:25

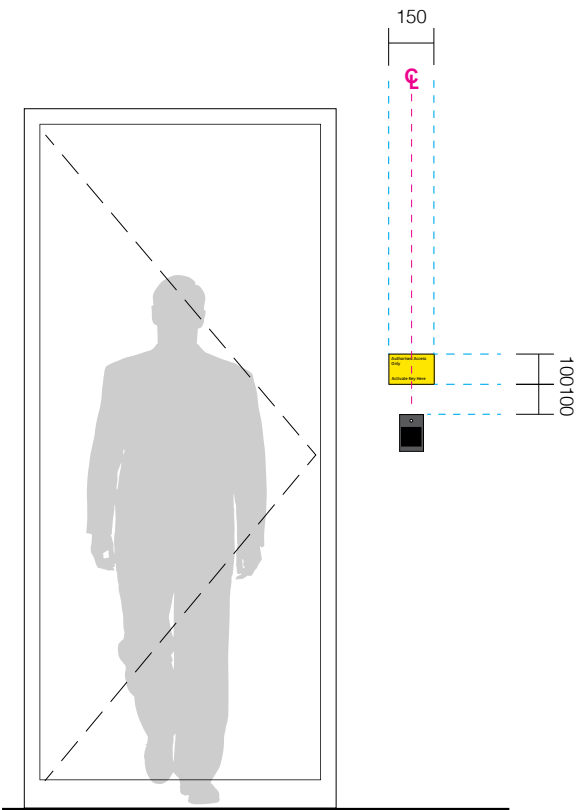

Authorised Access
100mm above fob reader
Scale 1:25

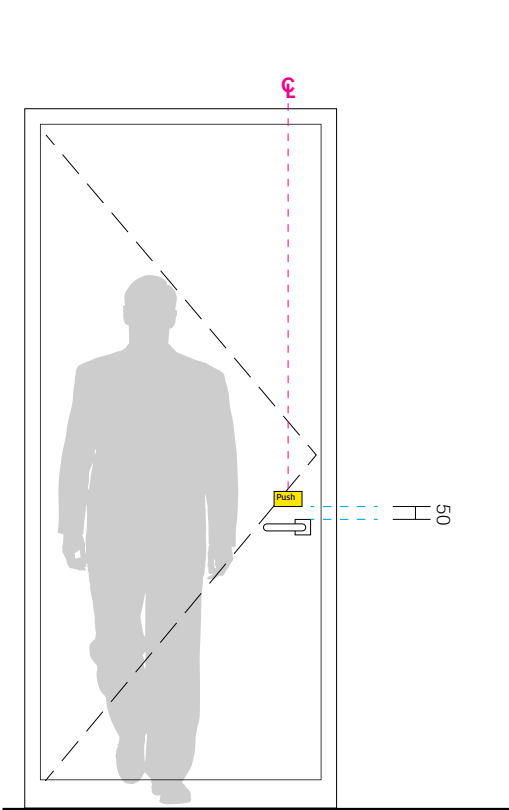

Push/ Pull Door
50mm above door handle/knob
Scale 1:25

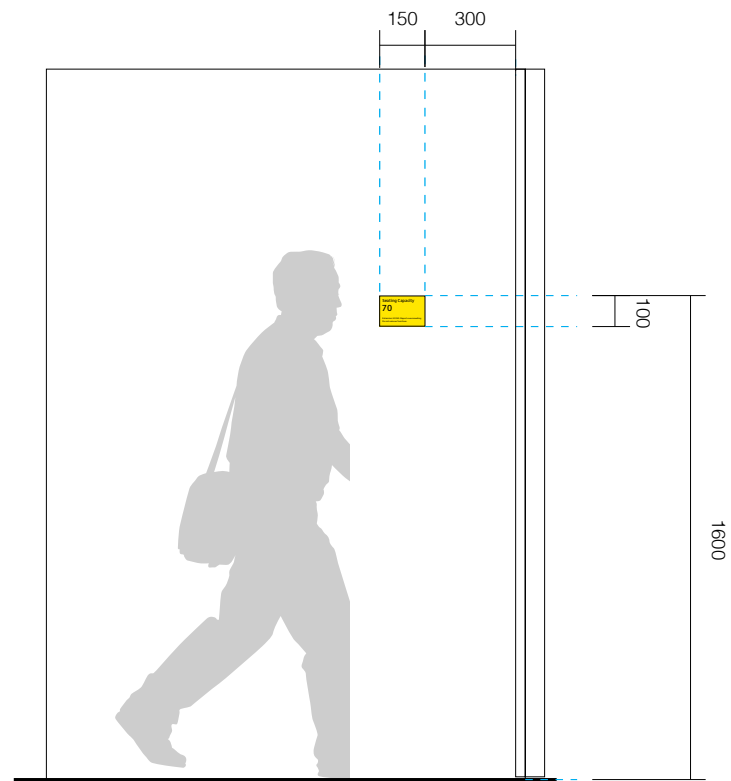


Seating Capacity
300mm from door entry
Scale 1:25

Sign Location


Purpose
Provide operational/ regulatory information at designated area.

Location
Applied on solid wall or glazing were appropriate


- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

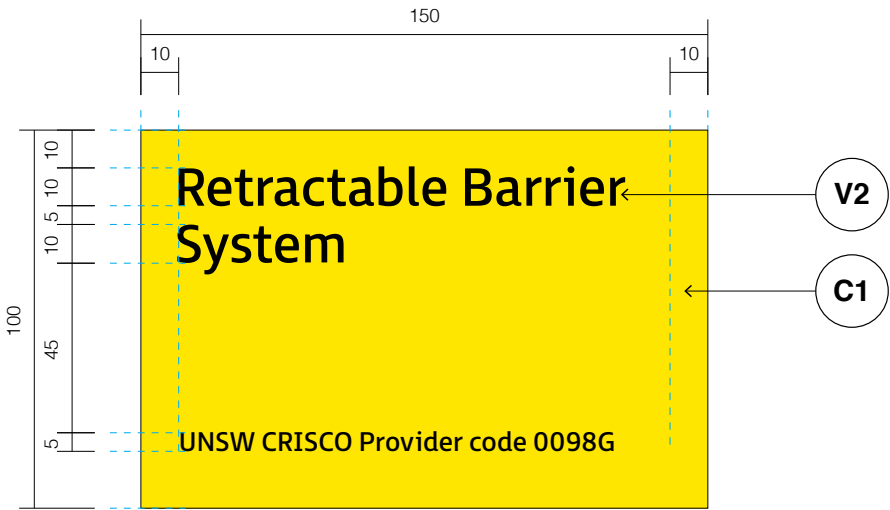


OP.02a
Facility Utilities
Scale 1:2

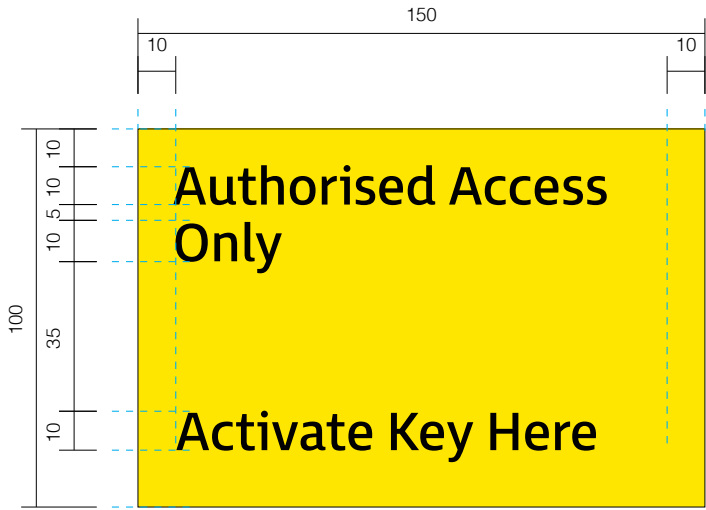


OP.02b
Authorised Access
Scale 1:2

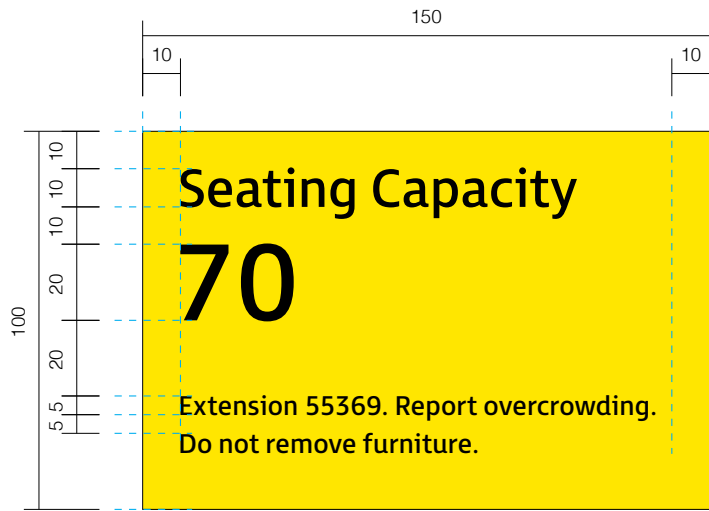

OP.02c
Seating Capacity
Scale 1:2

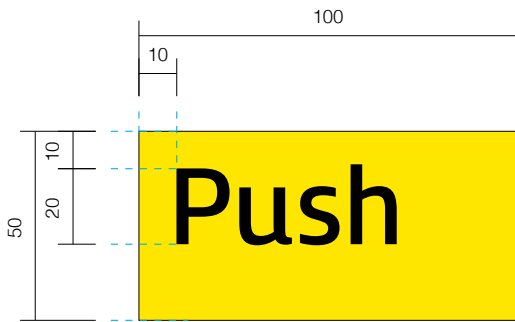

OP.02d
Push Door
Scale 1:2

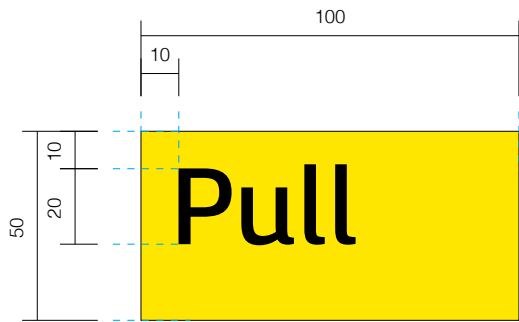

OP.02e
Pull Door
Scale 1:2

Graphic Layout

Type Style 1 (Typical Messaging)

FS Millbank Regular
Size/ Leading: 10mm, 5mm

Type Style 3 (Major numbers or codes)

FS Millbank Regular
Size: 20mm

Type Style 4 (Footer Messaging)

FS Millbank Regular
Size/ Leading: 5mm, 5mm

Alignment

Left

Tracking

10+, Optical kerning


Construction & Materials

Materiality Legend


- | | |
|------------------------------|--------------------------|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 on top of aluminium |

Construction Details


- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

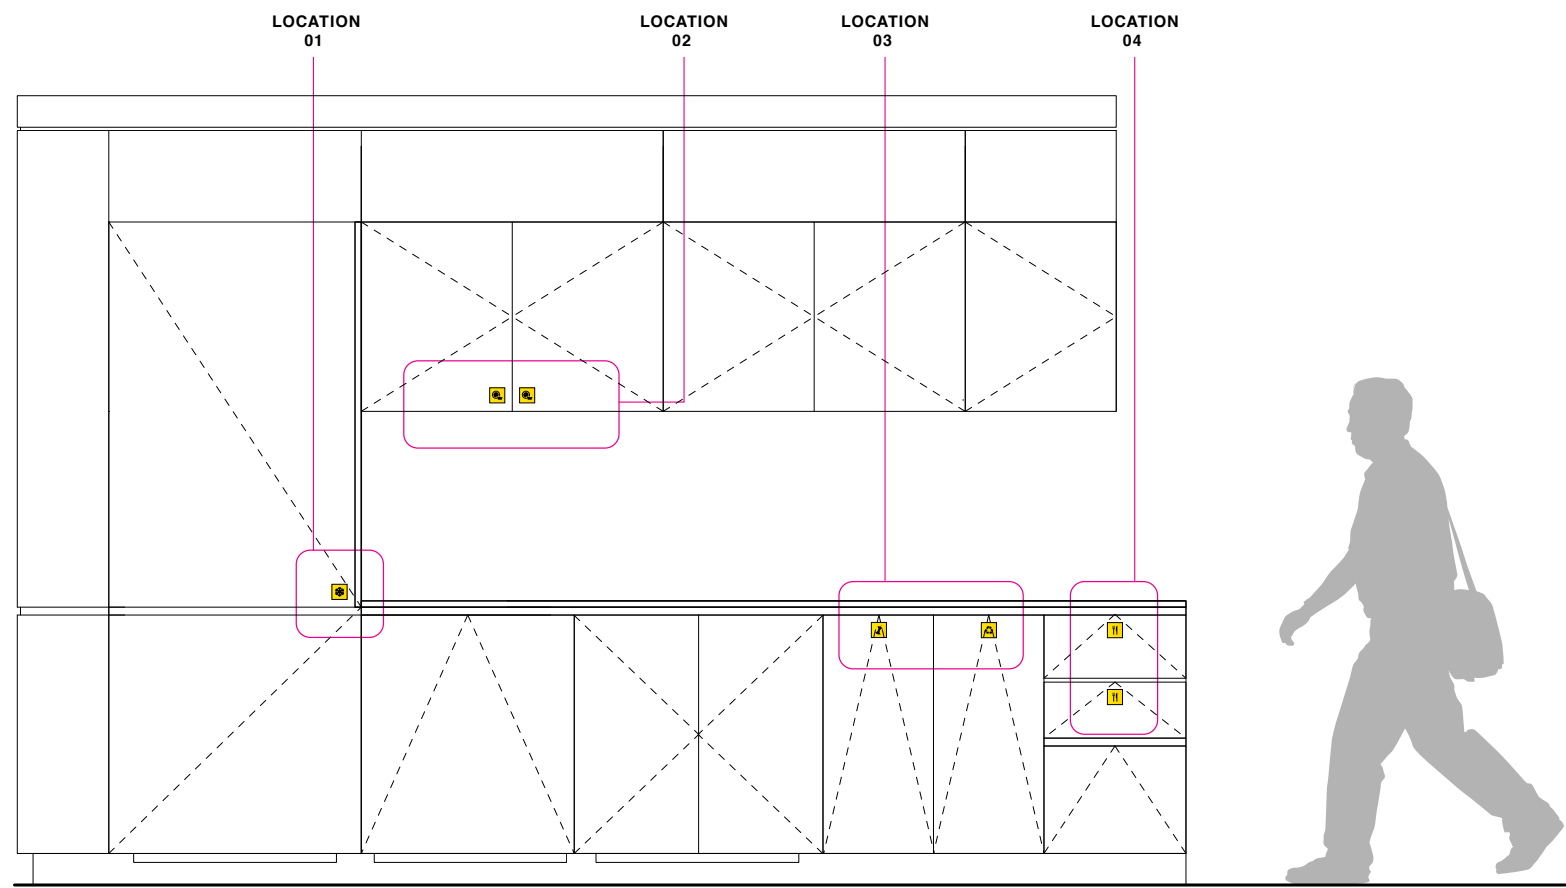


Elevation
Scale: 1:25

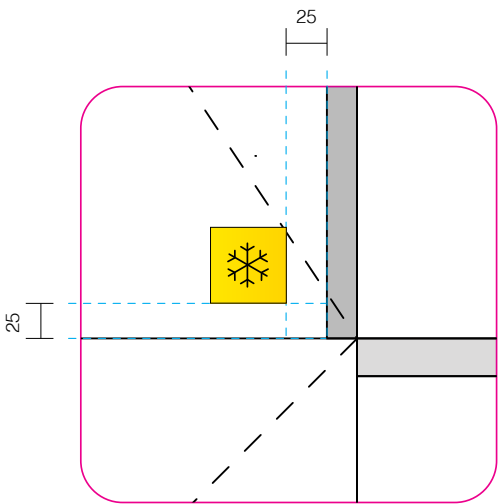


Location 01 -
Full height cupboard
Scale 1:5

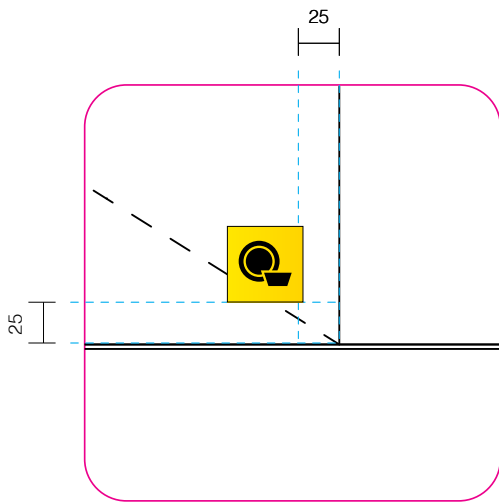

Location 02 -
Overhead cupboard
Scale 1:5

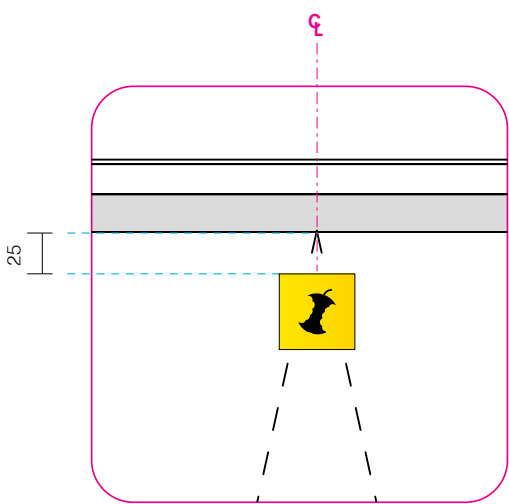

Location 03 -
Bins inside joinery
Scale 1:5

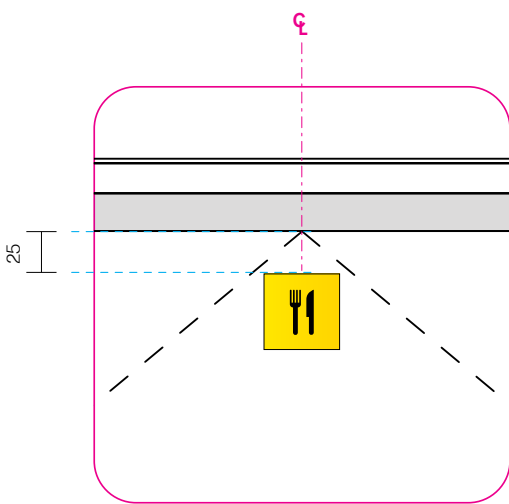


Location 04 -
Drawer
Scale 1:5

Sign Location

Purpose
Identifies staff/ students utilities at kitchenettes, stationery rooms and print areas.

Location
Applied on solid wall, glazing, cupboard leaf or drawer front were appropriate

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

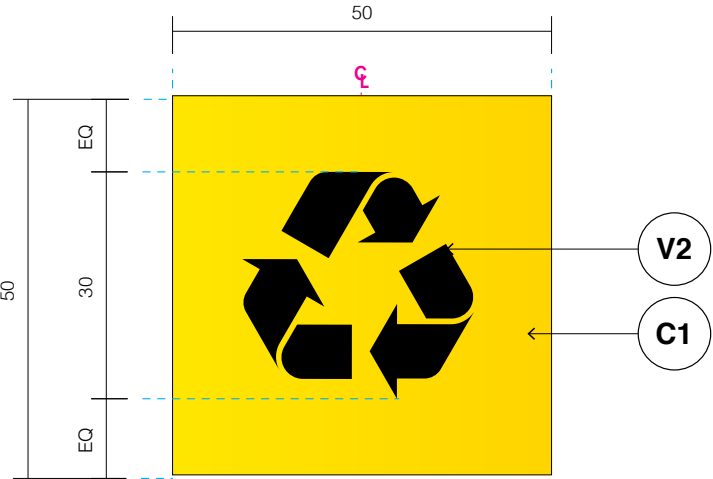

OP.03a
General Recycling Detail
Scale 1:1



OP.03b
Paper Recycling




OP.03c
Organics



OP.03d
General Waste



OP.03e
Fridge

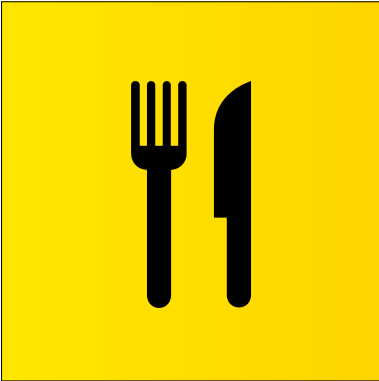


OP.03f
Cutlery



OP.03g
Crockery



OP.03h
Cups & Mugs

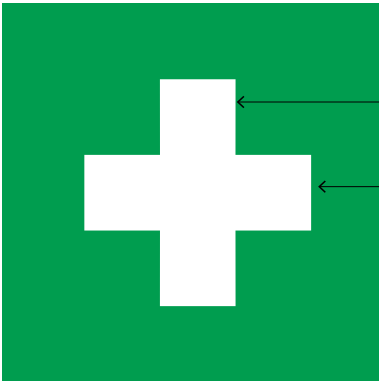

OP.03i
First Aid

Graphic Layout

Utility ID
Pictogram: 30mm height
Refer to Section 9, Graphic Standards, Pictogram Suite


Construction & Materials

Materiality Legend

- C1
• C1 finish on 3mm aluminium
- V2
• V2 on top of aluminium
- V3
• Print to V3 on top of aluminium to match PMS 348U


Construction Details

- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

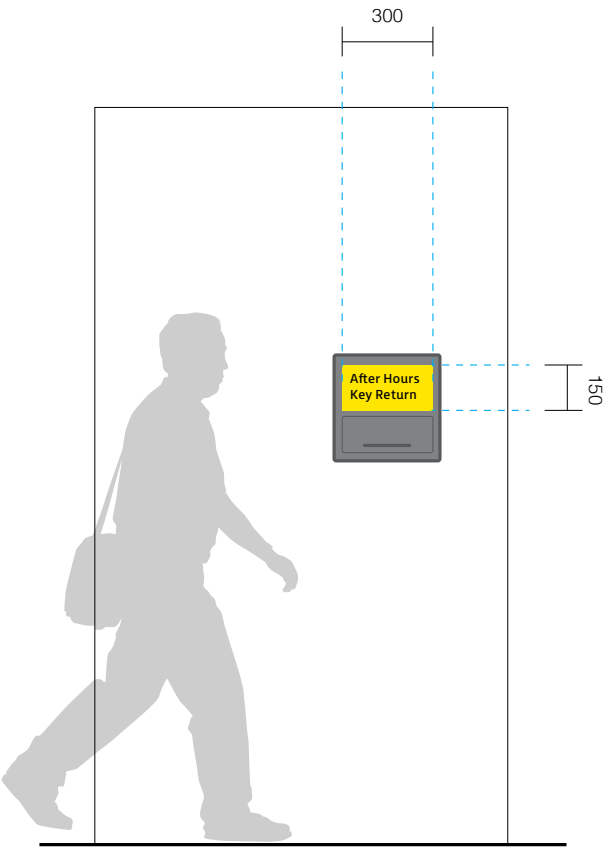

After Hours Return
Integrated into utility
Scale 1:25

Note
Drop box shown is indicative only.

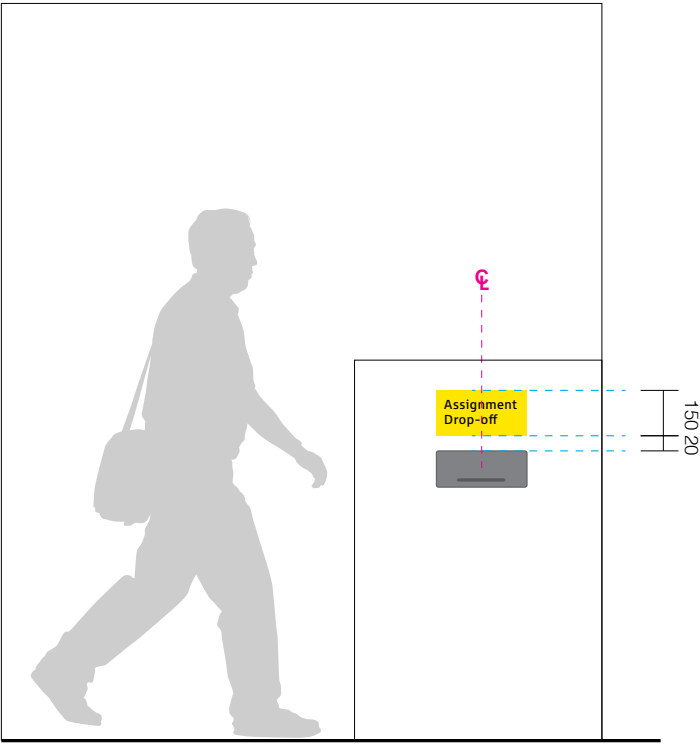

Assignment Drop-off
50mm above slot
Scale 1:25


Note
Drop box shown is indicative only.

Sign Location


Purpose
Identifies student drop boxes

Location
Applied on solid wall, glazing, cupboard leaf or drawer front were appropriate.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

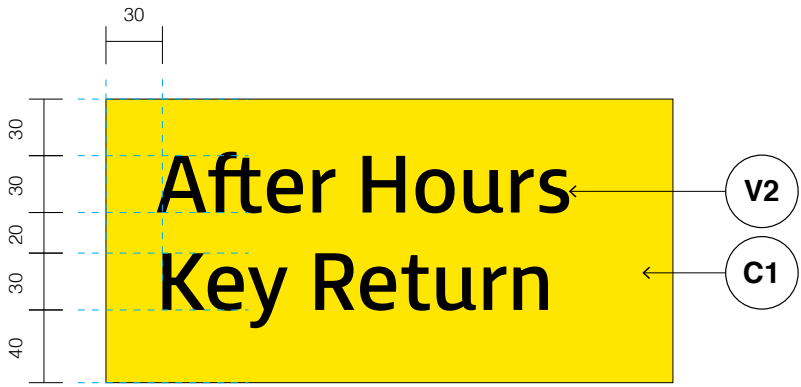

OP.04a
After Hours Return
Scale 1:4

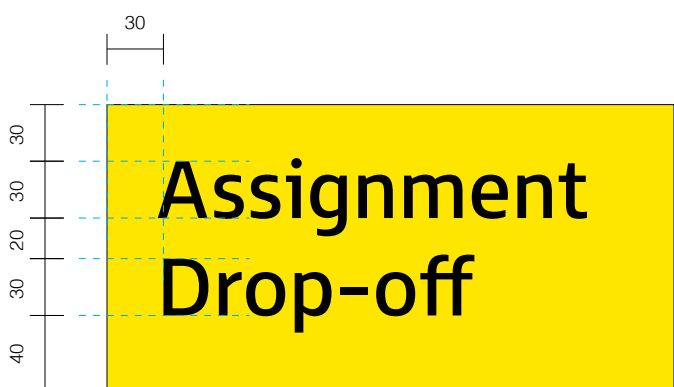

OP.04b
Assignment Drop-off
Scale 1:4

Graphic Layout

Messaging
FS Millbank Regular
Size/ Leading: 30mm, 20mm
Alignment: Left
Tracking: 10+, Optical kerning

Construction & Materials

Materiality Legend

- C1

 - C1 finish on 3mm aluminium
- V2

 - V2 on top of aluminium

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms




Elevation: Integrated with water refill station
Scale 1:20

Sign Location

Purpose
Identifies water refill station

Location
Integrated with water refill station

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

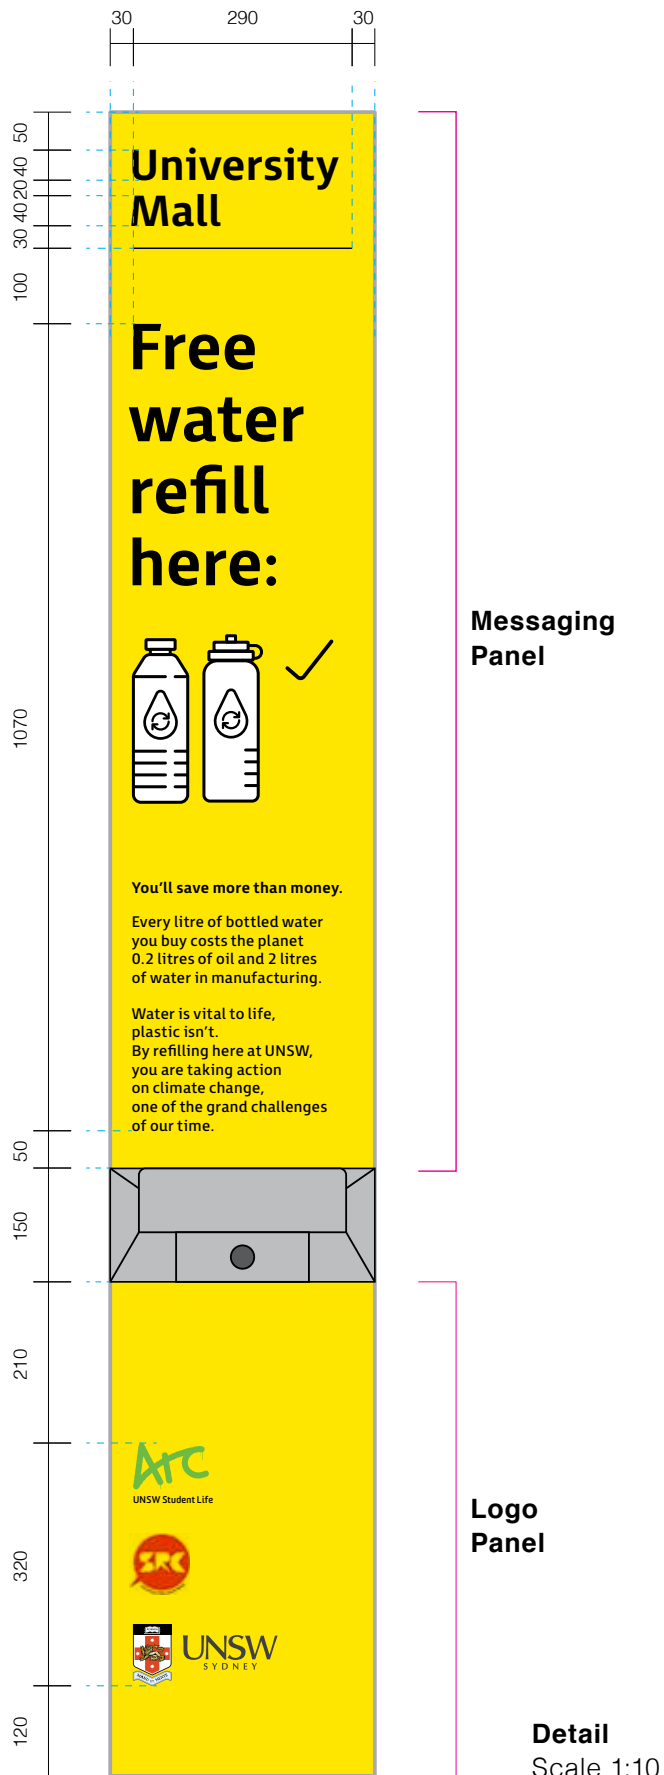

Graphic Layout

Location ID
FS Millbank Bold
Size/ Leading: 40mm, 20mm

Free Water ID
FS Millbank Bold
Size/ Leading: 60mm, 35mm

Messaging
FS Millbank Regular
Size/ Leading: 15mm, 10mm

Alignment
Left


Tracking
10+, Optical kerning

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|--------------------------|--------------------------|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 on top of aluminium | • V3 on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

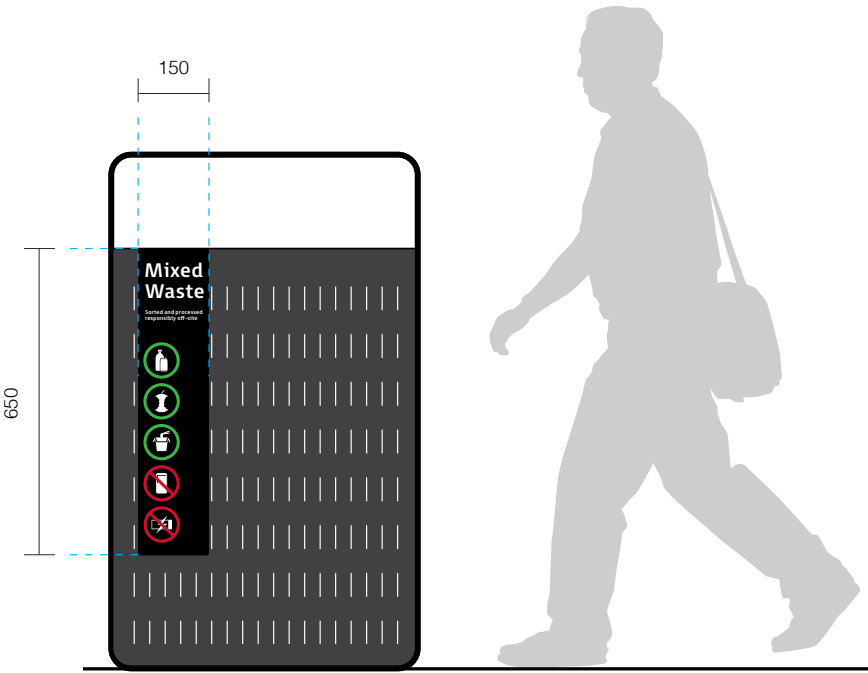


Typical Elevation
1:20

Sign Location

Purpose
Identifies waste bin unit and what types of waste are and are not to be disposed of

Location
Applied on front face of campus bins.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

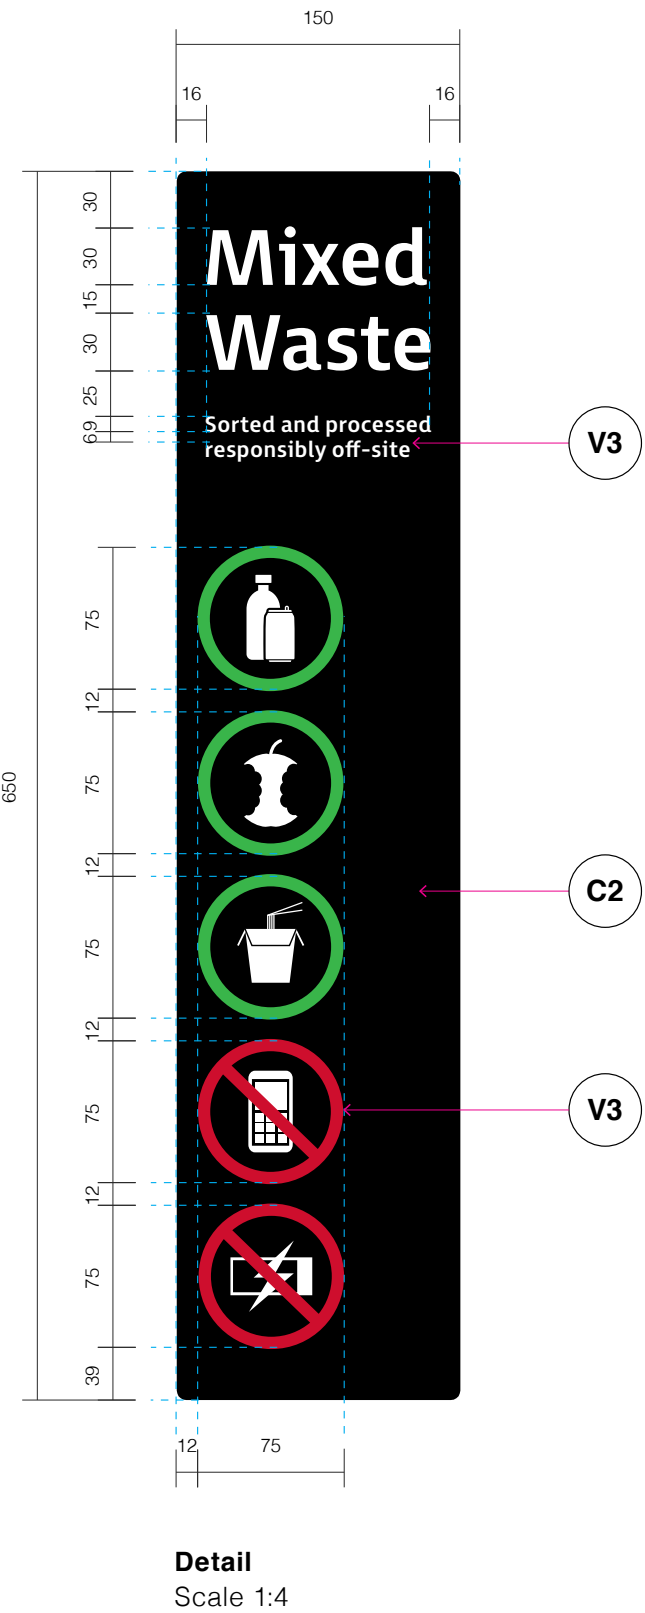

Graphic Layout

Mixed Waste ID
FS Millbank Bold
Alignment: Left
Size/ Leading: 30mm, 15mm
Kerning: 10+, Optical kerning

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 9mm, 6mm
Tracking: 10+, Optical kerning

Pictogram
75mm diameter

Construction & Materials

- Materiality Legend**
- | | |
|------------------------------|--|
| C2 | V3 |
| • C1 finish on 3mm aluminium | • V3 print applied on top of aluminium |

Construction Details

- Refer to: Section 10, Construction Standards, Wall Mounted Signforms


Section

16.0

Statutory Series

This section documents all the statutory signs of the system including specifications for both external and internal signs.

ST.01 Amenity Braille & Tactile Family	339
ST.02 Fire Door Family	341
ST.03 Fire Extinguisher & FHR Family	343
ST.04 Regulations Family	346
ST.05 Security Warning Family	349
ST.06 Hazard & Danger Notices Family	352
ST.07 Safety Decal	355
ST.08 Exit Signage Family	357

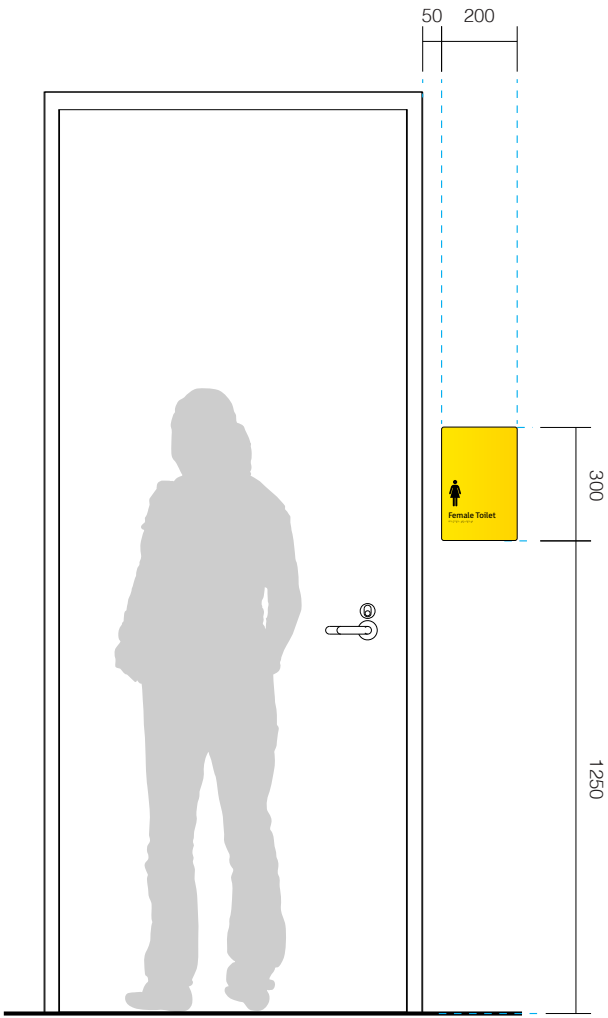

Elevation
Scale 1:20

Sign Location

Purpose
Provide operational/regulatory information at designated area. Refer to Section 3, Addressing & Terminology, Category 11.

Location
At main entry to toilet facility. To be applied to solid wall on latch side of door.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

ST.01a - Male Toilet
Scale 1:5

ST.01b - Female Toilet
Scale 1:5

ST.01c - Male Ambulant Toilet
Scale 1:5

ST.01d - Female Ambulant Toilet
Scale 1:5

ST.01e - Parent Room
Scale 1:5

ST.01f - Accessible RH Toilet
Scale 1:5

ST.01g - Accessible LH Toilet
Scale 1:5

ST.01h - Male Showers
Scale 1:5

ST.01i - Female Showers
Scale 1:5

ST.01j - All Genders Toilet
Scale 1:5

Graphic Layout

Pictogram

70mm height

Messaging

FS Millbank Regular

Alignment: Left

Size/ Leading: 15mm, 10mm

Tracking: 10+, Optical kerning

Braille

Message content as illustrated by tactile text and as required by code, braille must be located 8mm below the bottom line of text (not including descenders). Braille locator must be used if there are multiple lines of text and characters, horizontally aligned with the first line of braille text.

Construction & Materials

Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium
- V3**


 - V3 print applied on top of aluminium
- 01**

 - Tactile to match C2 finish
- 02**


 - Braille to match C1 finish

Fixing Details

- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

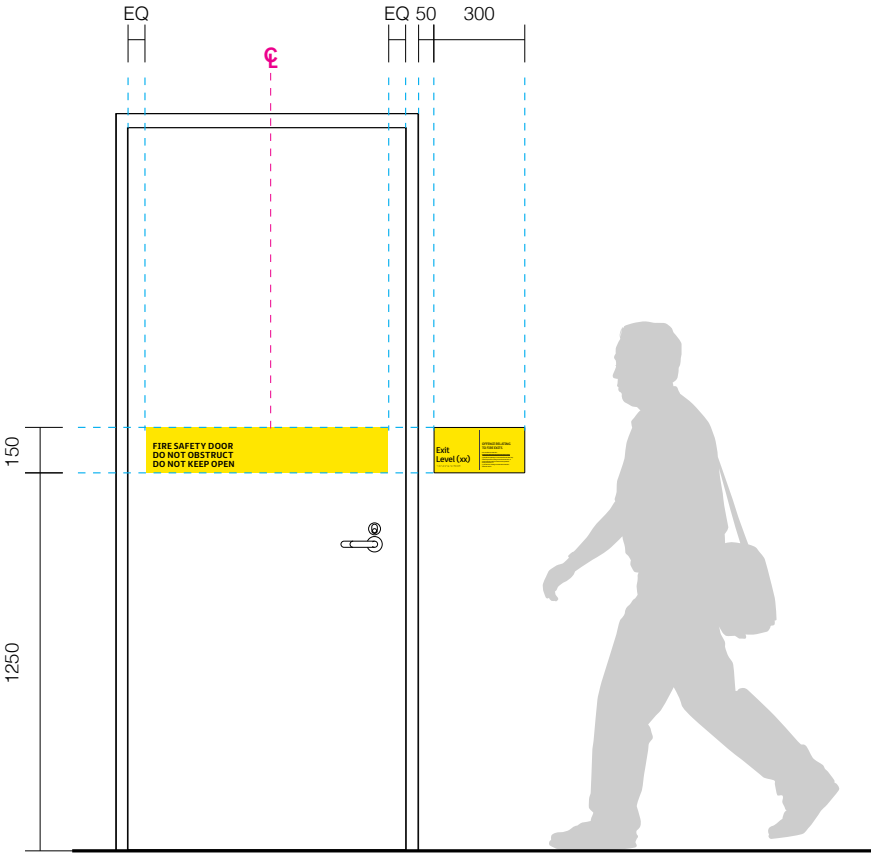

Elevation - Standard door panel
Scale: 1:25

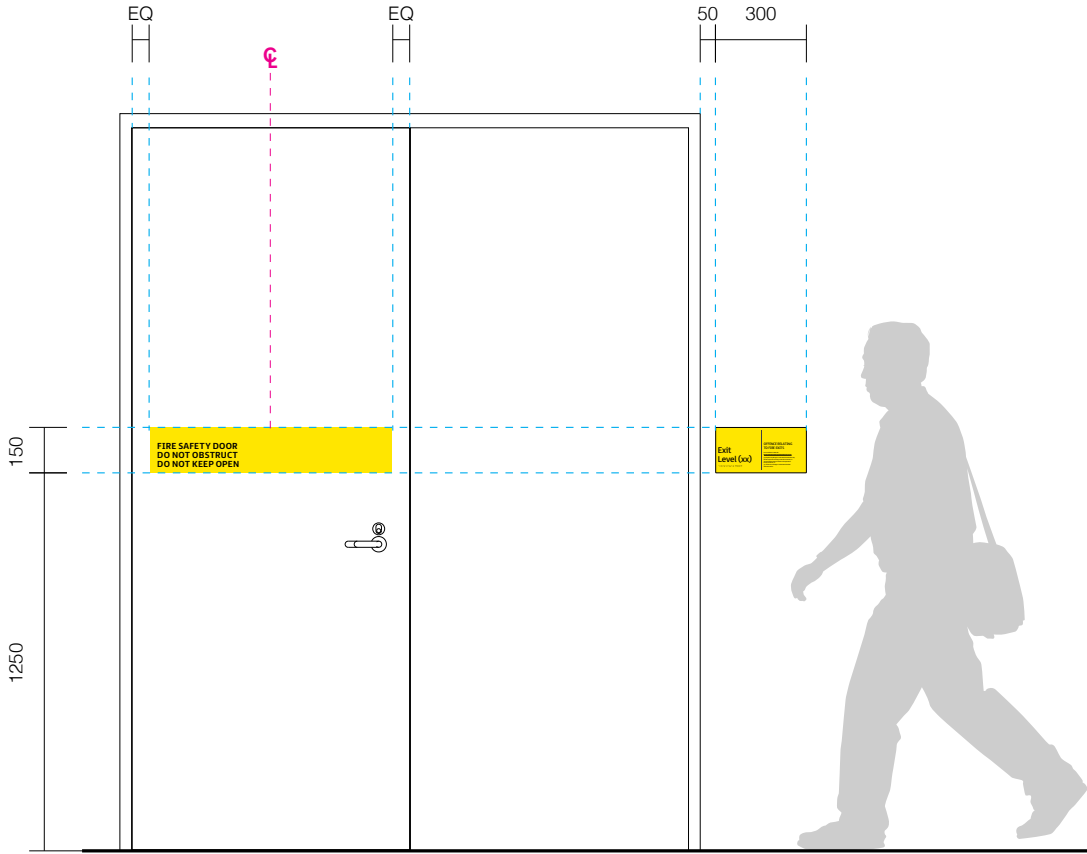

Elevation - Double door panel
Sign to be placed on active leaf
Scale: 1:25


Sign Location

Purpose
Identify room function and or room occupants for BOH destinations and to meet statutory regulations. Refer to Section 3, Addressing & Terminology, Category 11.

Location
For room identification/ operational signs to be applied to front of solid doors, on latch-side and/or both doors as required.

For Exit operational instructions (Offences Relating to Fire Exits) to be located as required by Clause 183 of NSW Environmental Planning & Assessment Regulation 2000. To be installed in a conspicuous position adjacent to a door way providing access to (but not within) a fire isolated stairway, passageway or ramp. Underside of panel to align with underside of adjacent room identification panel, set out as indicated adjacent.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

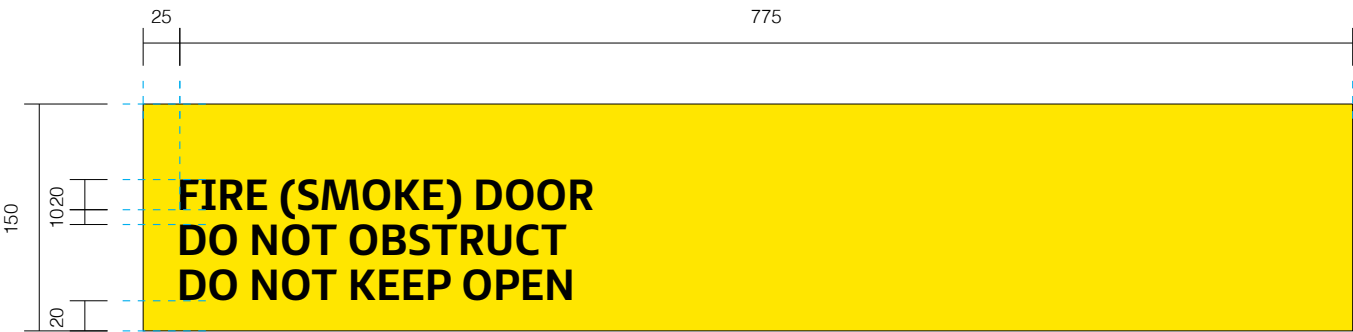


ST.02a
Fire Smoke Door
Scale 1:5



ST.02b
Fire Door
Scale 1:5




ST.02c
Fire Safety Door
Scale 1:5

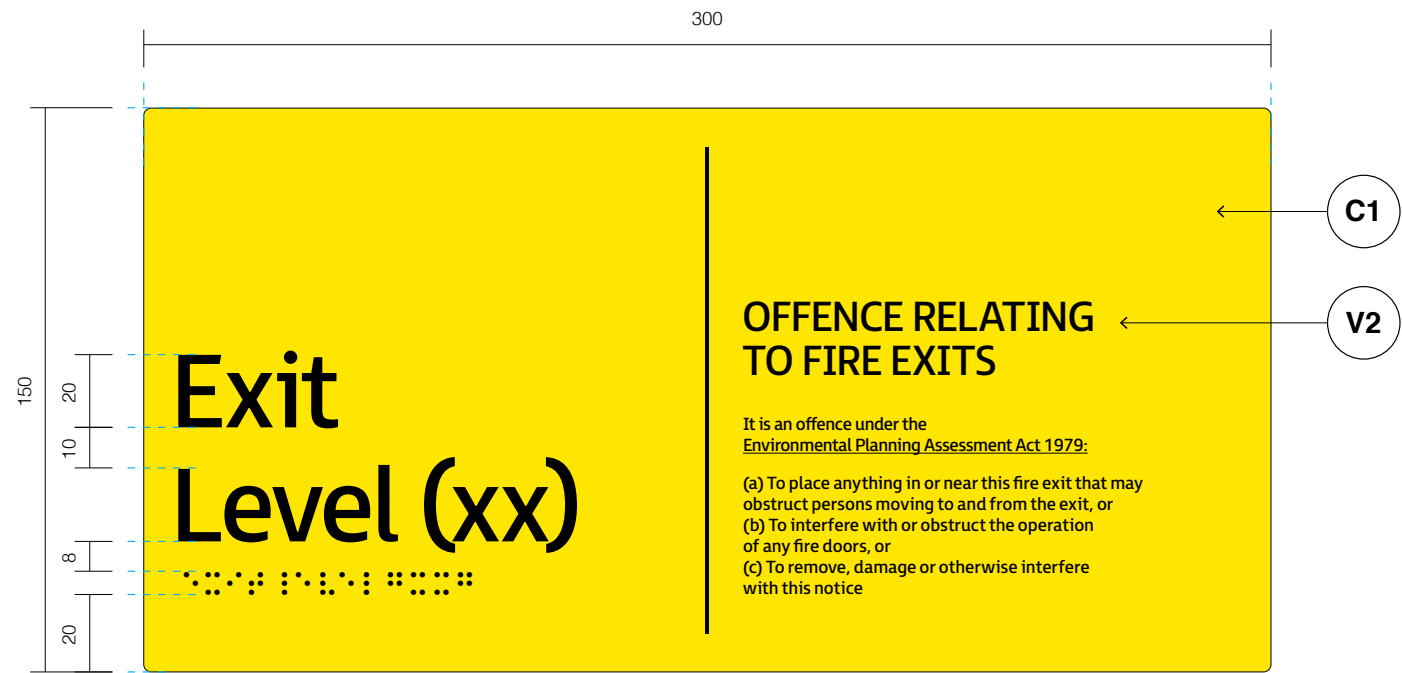

ST.02d

Exit Level
Scale 1:2

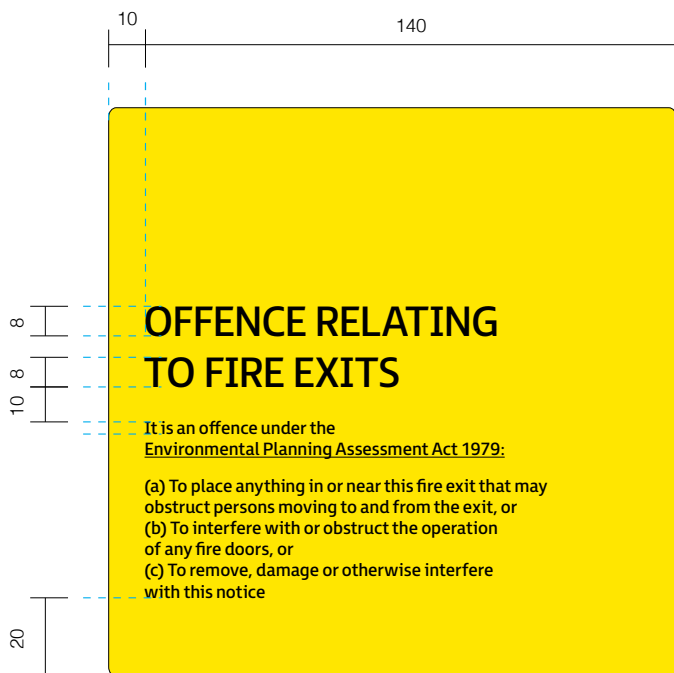

ST.02e

Offences relating to fire exits
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Alignment: Left
Size/ Leading: 20mm, 10mm
Tracking: 10+, Optical kerning

Dividing Line
Line weight: 1mm

Braille
Message content as illustrated by tactile text and as required by code, braille must be located 8mm below the bottom line of text (not including descenders). Braille locator must be used if there are multiple lines of text and characters- horizontally aligned with the first line of braille text.


Construction & Materials

Materiality Legend


- C1**
 - C1 finish on 3mm aluminium
- V2**
 - V2 applied on top of aluminium
- 01**
 - Tactile to match C2 finish
- 02**
 - Braille to match C1 finish

Fixing Details


- Refer to: Section 10, Construction Standards, Typical Wall Mounted Signs

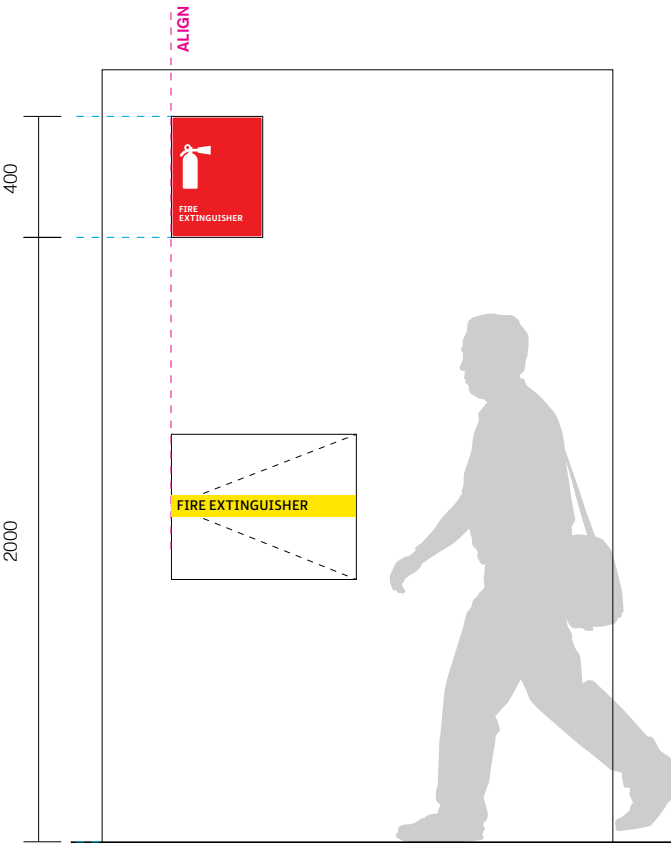


Elevation - FHR Cabinet
Scale: 1:25

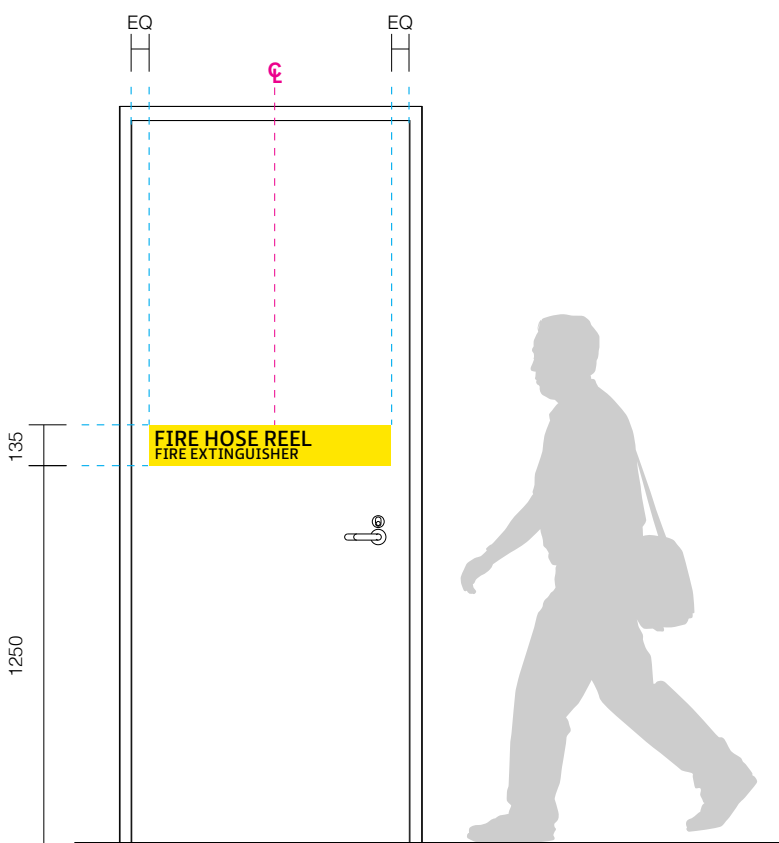

Elevation - FHR Door
Scale: 1:25

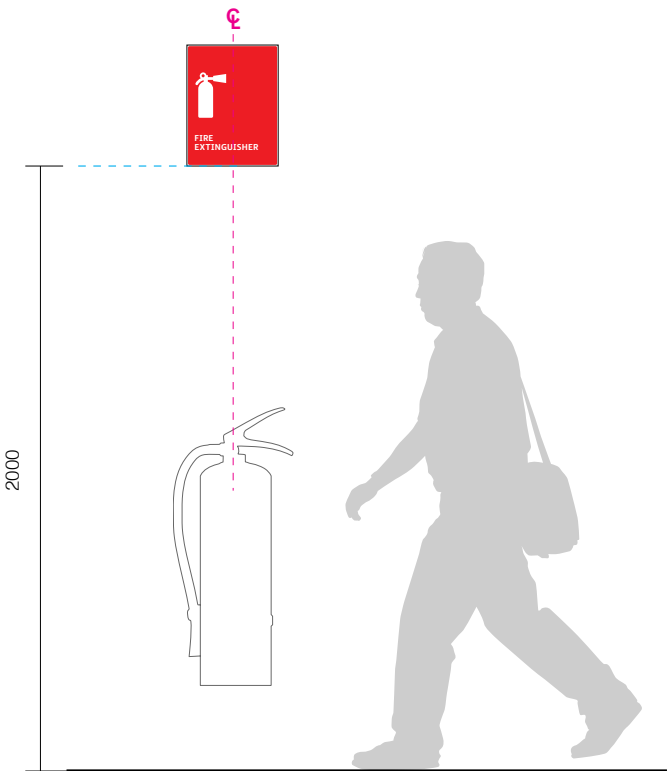

Elevation - Wall-mounted Extinguisher
Scale: 1:25

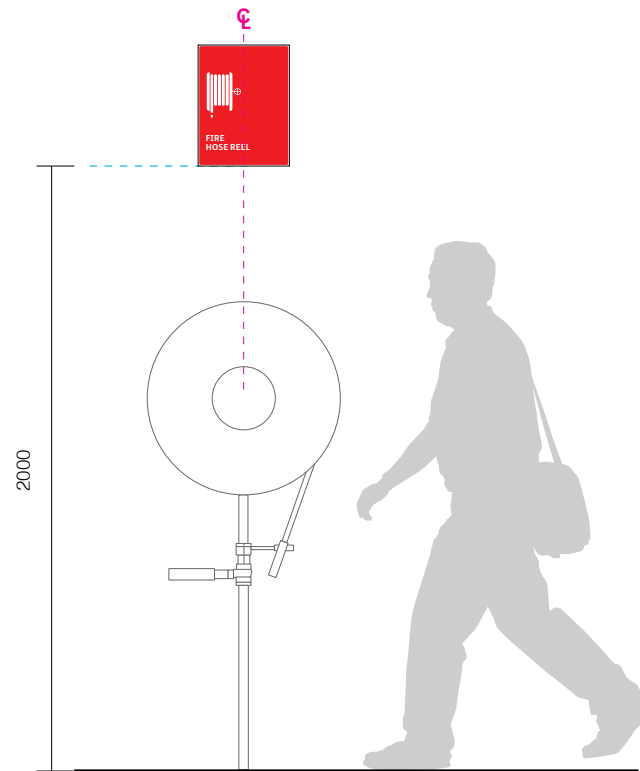

Elevation - Wall-mounted FHR
Scale: 1:25

Sign Location

Purpose
To identify room function and or room occupants for BOH utilities relating to fire safety and to meet statutory regulations. Refer to Section 3, Addressing & Terminology, Category 11.

Location
Above or adjacent to a fire hose reel located, extinguisher in a recess, cavity or an obscure location. Signs shall be positioned so as to be clearly visible to persons approaching the fire hose reel location.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



ST.03a
Fire Extinguisher
Scale 1:4



ST.03b
Fire Hose Reel
Scale 1:4



ST.03c
Fire Hose Reel
Scale 1:4



ST.03d
Fire Hose Reel
Scale 1:4

Graphic Layout

Messaging
FS Millbank Bold
Alignment: Left
Tracking: 10+, Optical kerning

Size
Dependant on sign panel size as shown in diagrams.

Construction & Materials

Materiality Legend

- C1**

 - C1 finish on 3mm aluminium
- V2**

 - V2 applied on top of aluminium

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms



Graphic Layout


- Pictograms**
150mm height
Refer to Section 9, Graphic Standards, Pictogram Suite
- Dividing Line**
Line weight: 1mm
- Messaging**
FS Millbank Bold
Alignment: Left
Tracking: 10+, Optical kerning

Construction & Materials

- Materiality Legend**
- | | |
|------------------------------|----------------------------------|
| C3 | V3 |
| • C3 finish on 3mm aluminium | • V3 applied on top of aluminium |

- Fixing Details**
- Refer to: Section 10, Construction Standards Wall Mounted Signforms

- Note**
- Pictograms are subject to approval from BCA Consultant to ensure compliance.

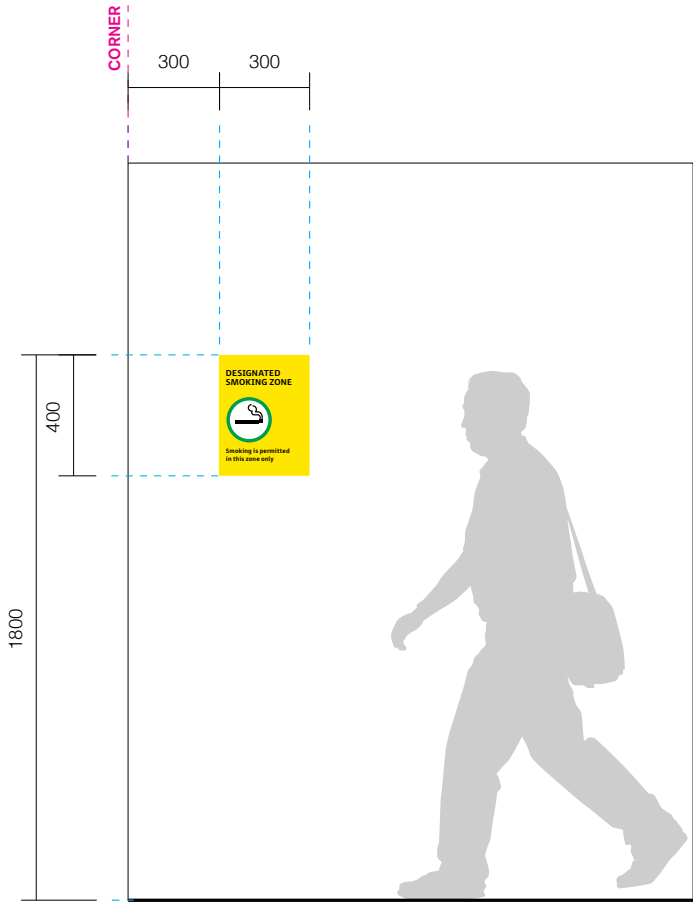


Typical Elevation
Scale: 1:25

Sign Location

Purpose
Identifies or provides statutory/ regulatory information.
Refer to Section 3, Addressing & Terminology, Category 11.

Location
Above or adjacent to a fire hose reel located, extinguisher in a recess, cavity or an obscure location. Signs shall be positioned so as to be clearly visible to persons approaching the fire hose reel location.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

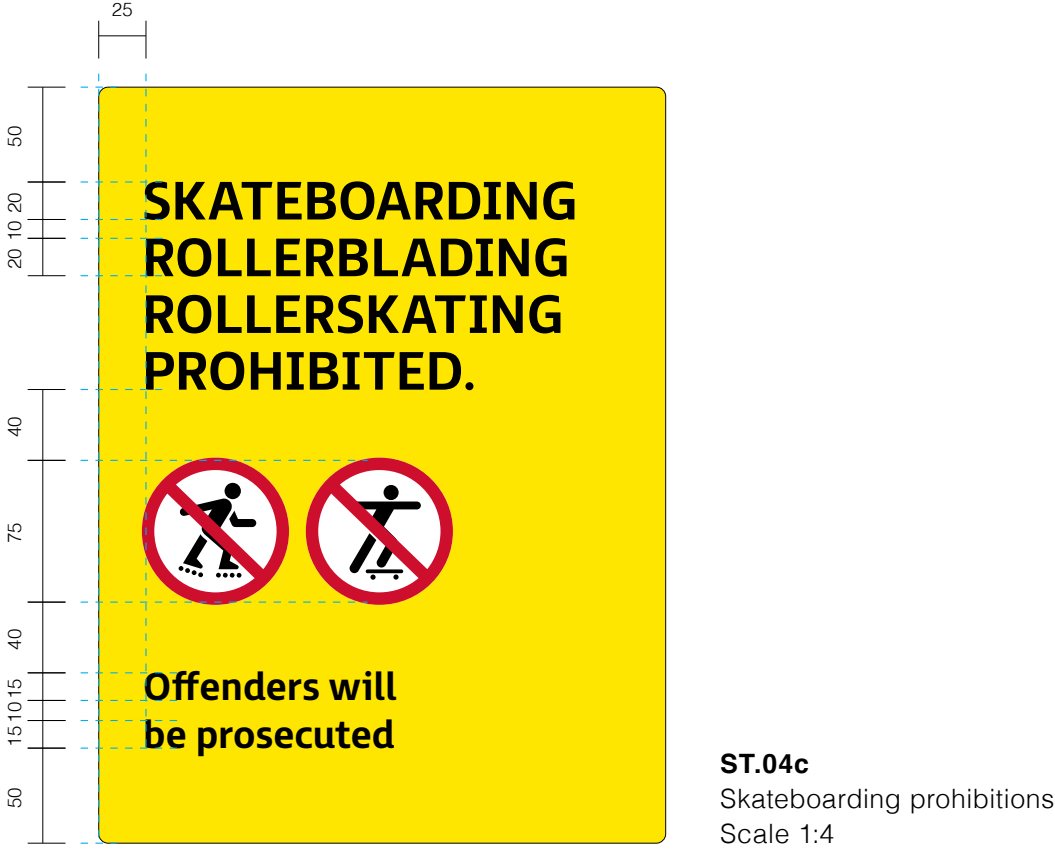


Graphic Layout

- Messaging**
FS Millbank Bold
Alignment: Left
Tracking: 10+, Optical kerning
- Sizing/ Leading**
Sizing and leading varies per Regulations Family sign type.
- Pictogram**
Single pictogram: 150mm diameter
Double pictogram: 75mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |
- Fixing Details**
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

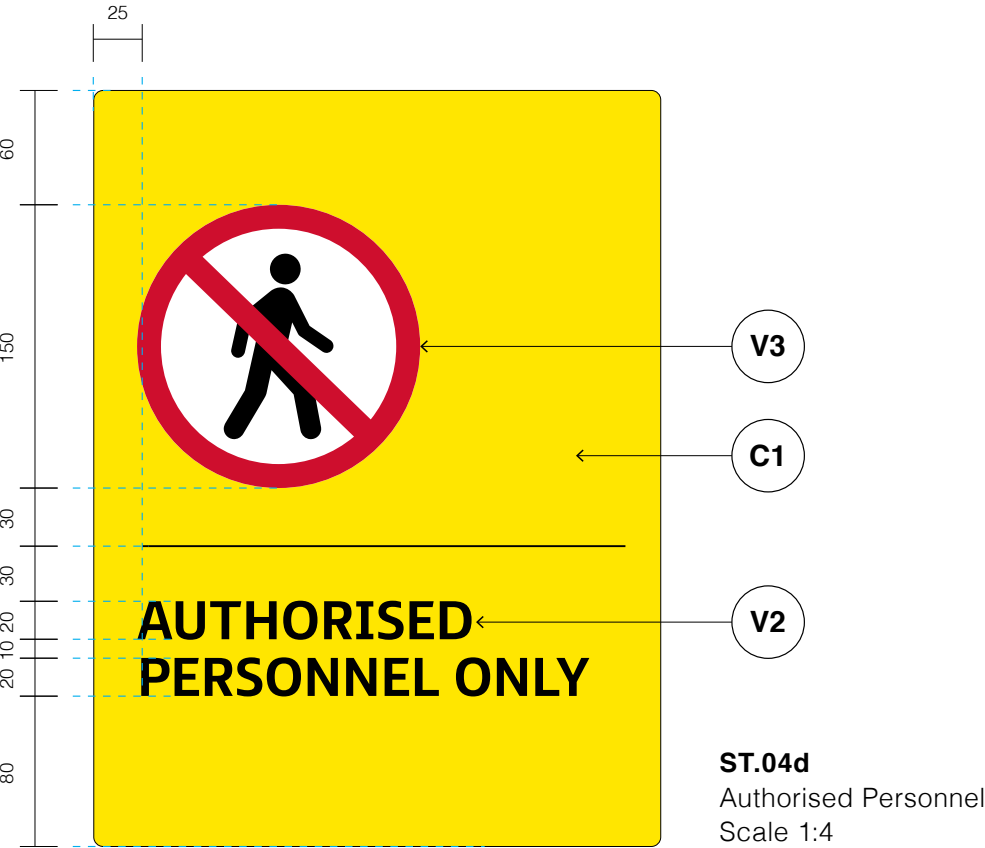

Graphic Layout

Pictogram
Single pictogram: 150mm diameter
Double pictogram: 75mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Dividing Line
Line weight: 1mm


Messaging
FS Millbank Bold
Alignment: Left
Tracking: 10+, Optical kerning

Sizing/ Leading
Sizing and leading varies per Regulations Family sign type.

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

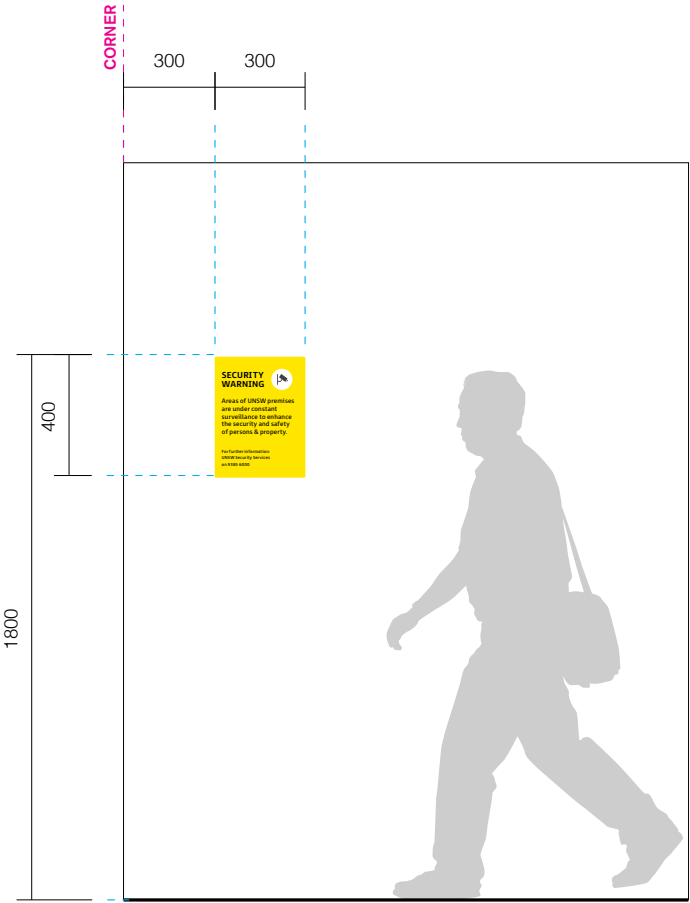


Typical Elevation
Scale: 1:25

Sign Location

Purpose
Identifies or provides statutory/ regulatory information specific to security.

Location
Applied to solid walls or glazing where appropriate.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

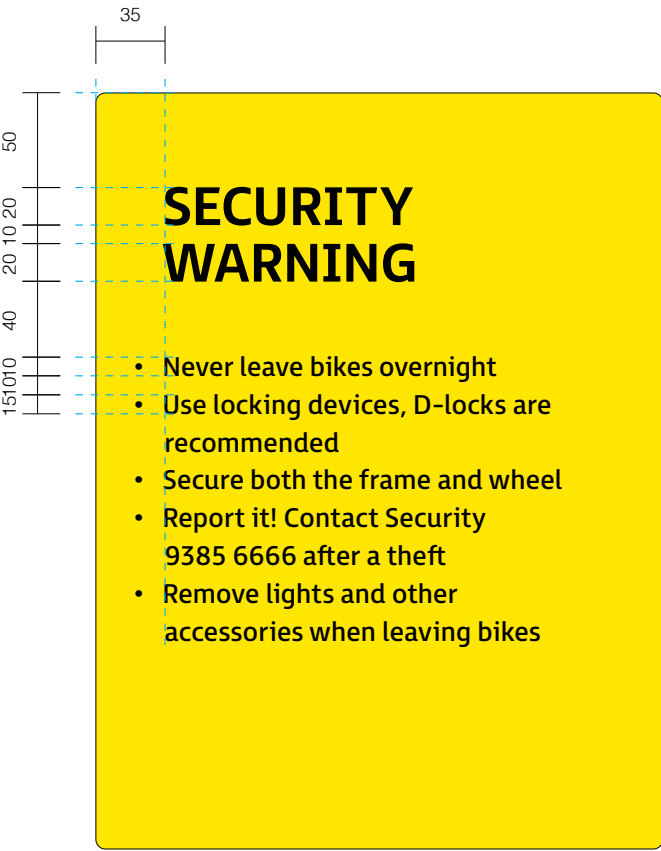


Graphic Layout


- Messaging**
FS Millbank Bold & Regular
Alignment: Left
Tracking: 10+, Optical kerning
- Sizing/ Leading**
Sizing and leading varies per Security Warning Family sign type.
- Pictogram**
Single pictogram: 150mm diameter
Double pictogram: 75mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |
- Fixing Details**
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

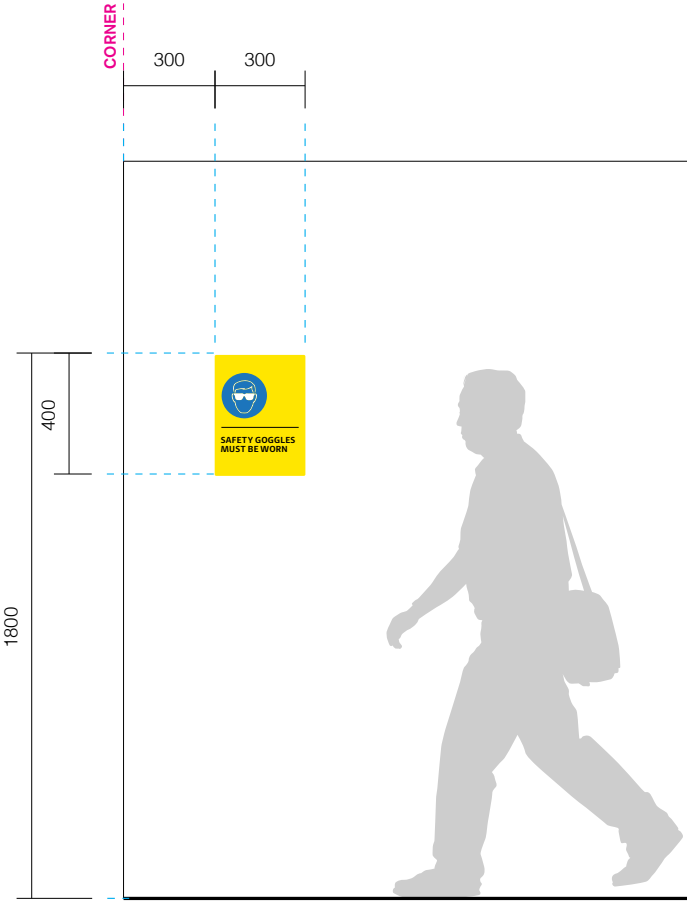

Typical Elevation - Single Sign
Scale: 1:25

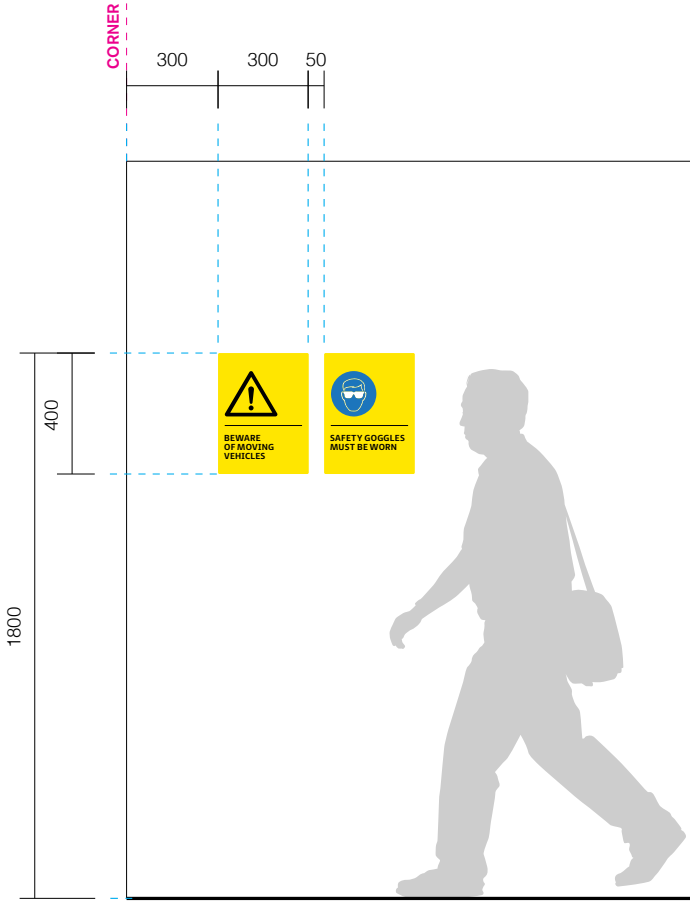

Typical Elevation - Double Sign
Scale: 1:25

Sign Location

Purpose



Identifies or provides statutory/ regulatory information for areas that contain hazardous substances or machinery that have immediate physical or chemical effects, such as fire, explosion, corrosion and poisoning, affecting property, the environment or people.

Location

Applied to solid walls or glazing as per statutory requirements.

Note

- For sign type selection, refer to: Section 7, The Process, Step 3
- For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
- For sign maintenance, refer to: Section 23, Maintenance

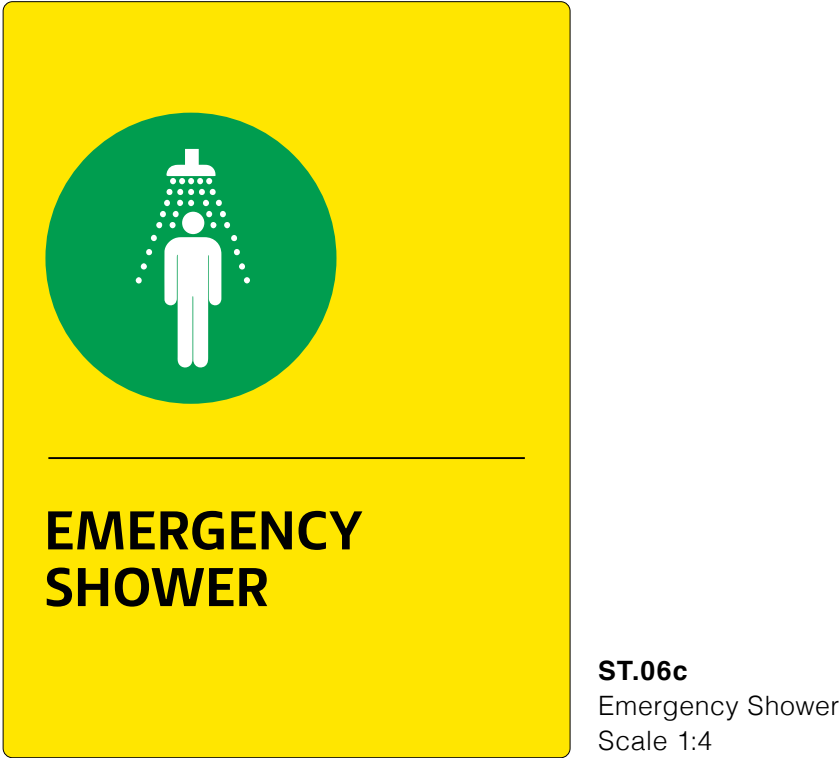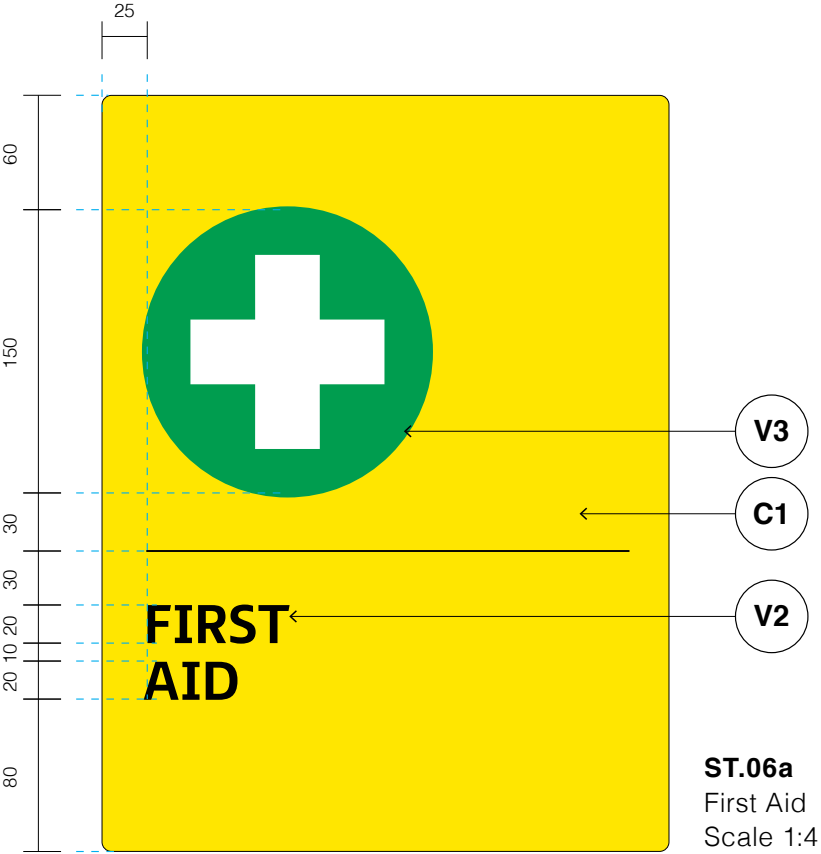

Graphic Layout

Pictogram
Single pictogram: 150mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Dividing Line
Line weight: 1mm


Messaging
FS Millbank Bold
Size/ Leading: 20mm, 10mm
Alignment: Left
Tracking: 10+, Optical kerning

Construction & Materials

Materiality Legend

- C1**
• C1 finish on 3mm aluminium
- V2**
• V2 applied on top of aluminium
- V3**
• V3 print applied on top of aluminium

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

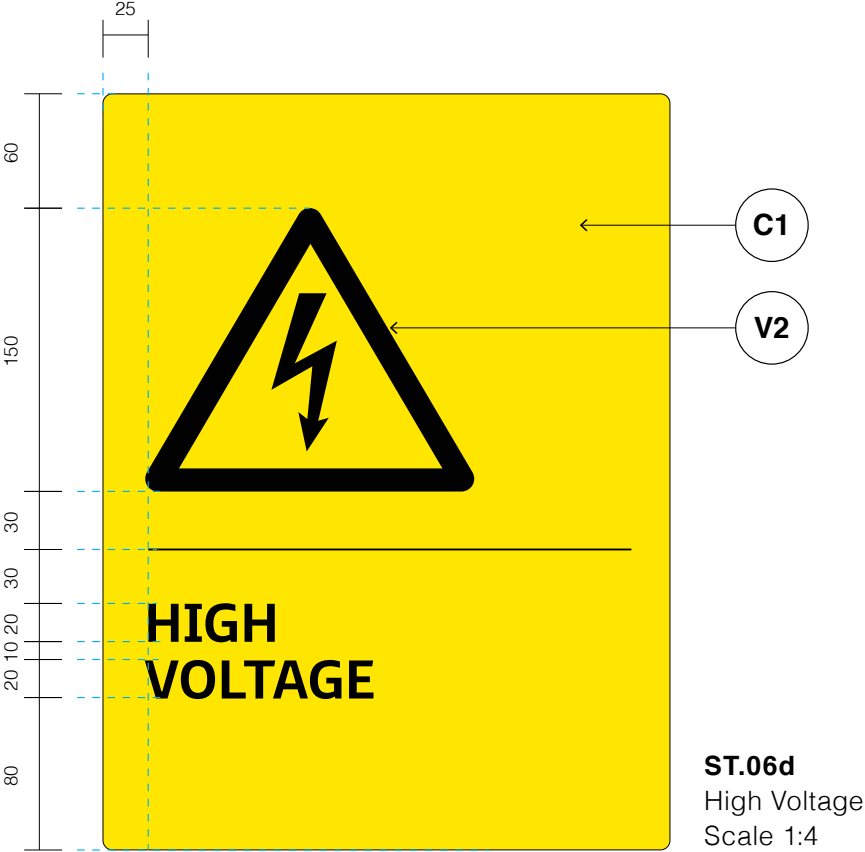

Graphic Layout

Pictogram
Single pictogram: 150mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Dividing Line
Line weight: 1mm

Messaging
FS Millbank Bold
Size/ Leading: 20mm, 10mm
Alignment: Left
Tracking: 10+, Optical kerning

Construction & Materials

- Materiality Legend**
- C1

 - C1 finish on 3mm aluminium
- V2

 - V2 applied on top of aluminium

Fixing Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms




Graphic Layout

- Pictogram**
Single pictogram: 150mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite
- Dividing Line**
Line weight: 1mm
- Messaging**
FS Millbank Bold
Size/ Leading: 20mm, 10mm
Alignment: Left
Tracking: 10+, Optical kerning

Construction & Materials


- Materiality Legend**
- | | |
|------------------------------|----------------------------------|
| C1 | V2 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium |

- Fixing Details**
- Refer to: Section 10, Construction Standards, Wall Mounted Signforms

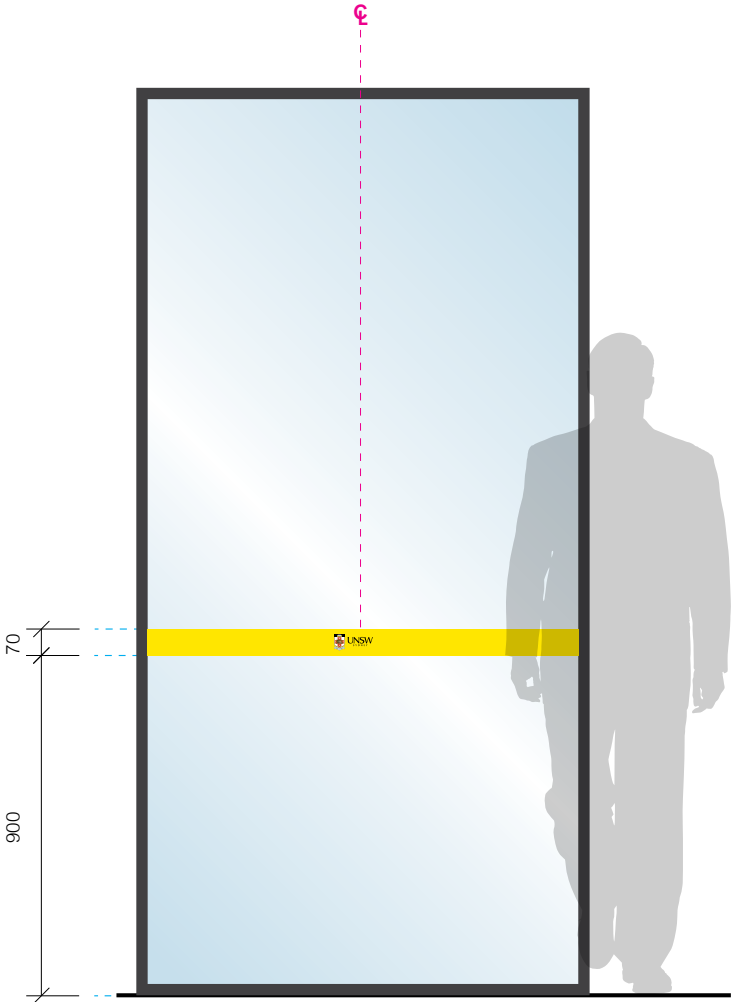

Elevation - Single full height fixed window or equal width fixed windows. UNSW logo centre aligned to safety decal.

Scale 1:20

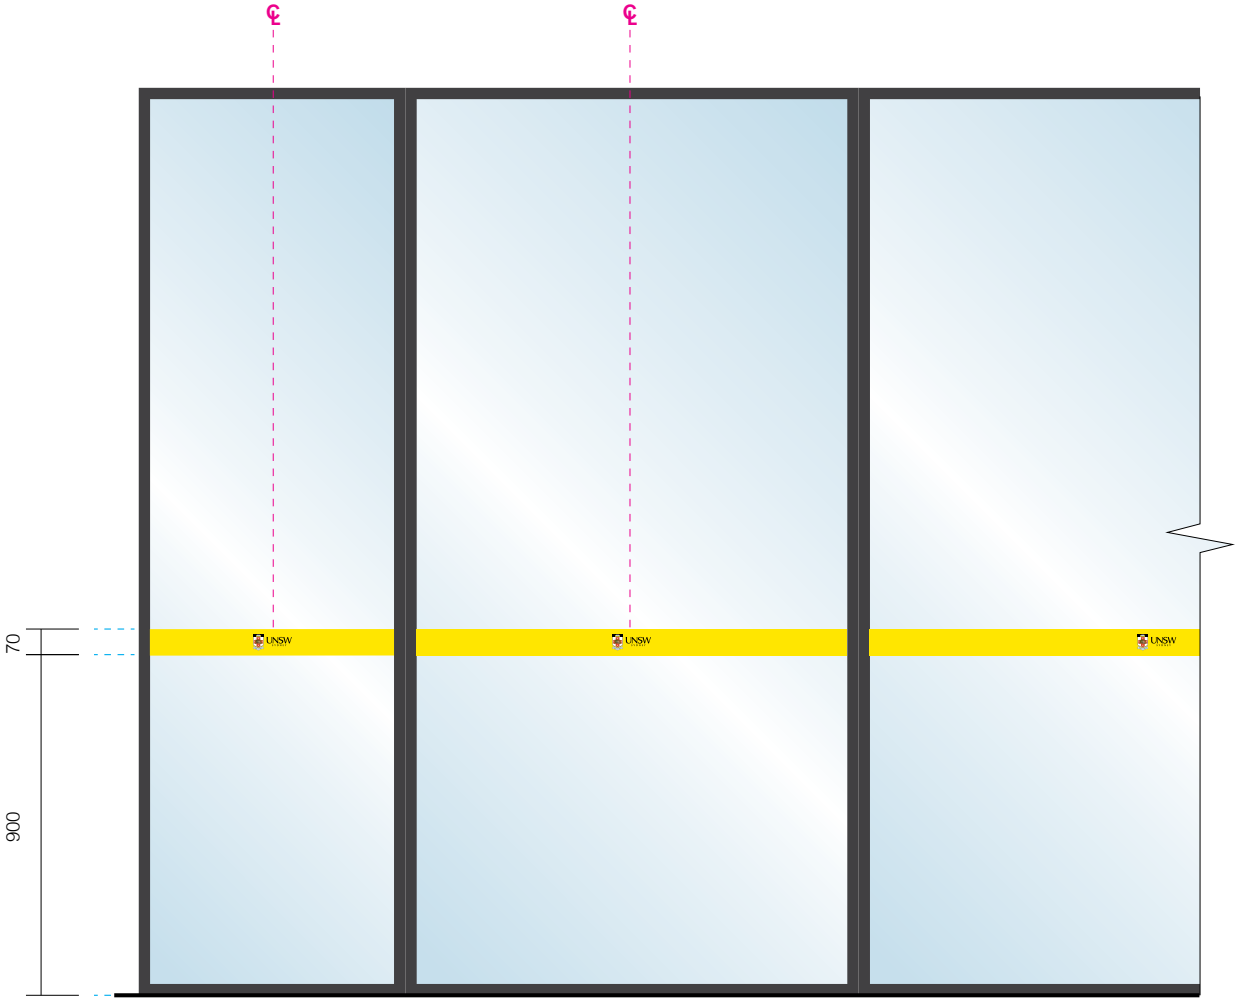

Elevation - Fixed windows with varying widths. UNSW logo placed at 1000mm intervals.


Scale 1:20

Sign Location

Purpose
Provide contrast for glazing as per statutory requirements.

Location
On glazed areas walls and doors, as per statutory requirements.

- Note**
- UNSW logo centred with glazing panel
 - For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

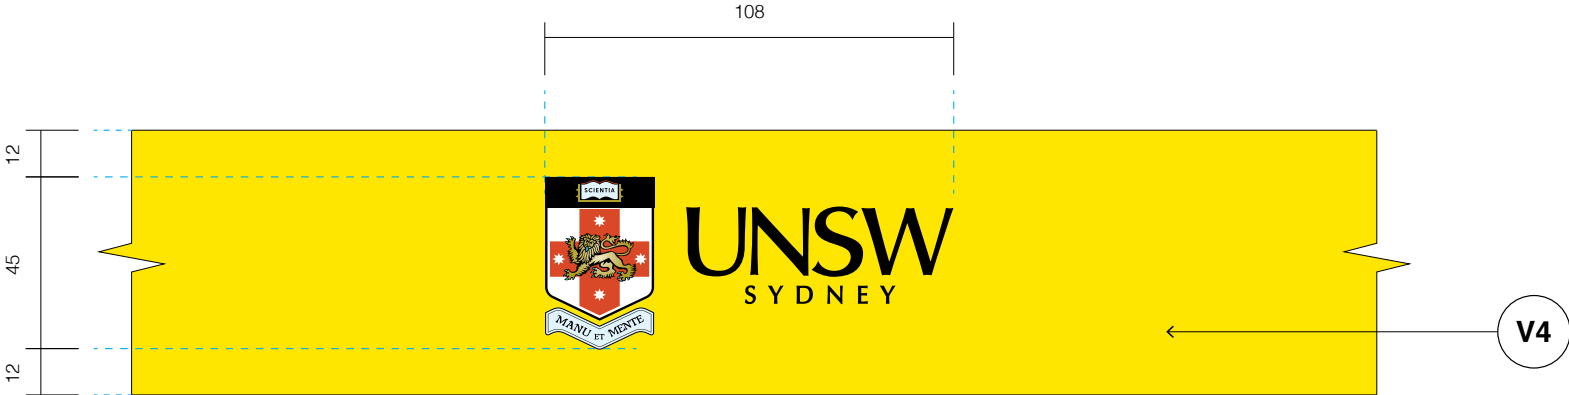

Detail
Scale 1:2

Graphic Layout

UNSW logo
50mm height

Construction & Materials


Materiality Legend

V4

- Logo and band
as digital print to
self-adhesive film
applied to glazing

Fixing Details

- Refer to: Section 10, Construction Standards, Direct
Applied Glazing

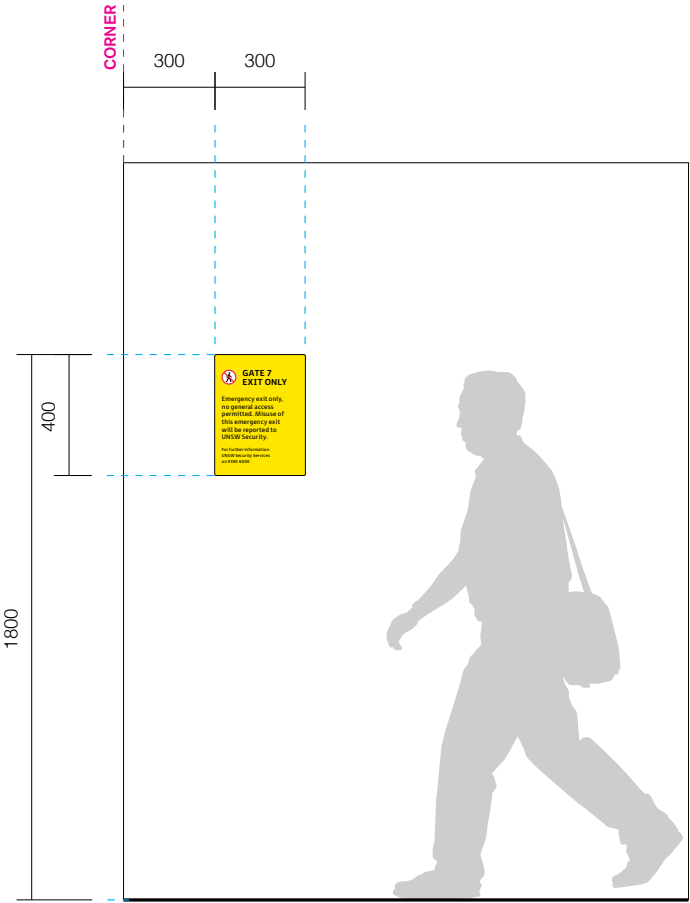



Typical Elevation
Scale: 1:25

Sign Location

Purpose
Identifies or provides statutory/ regulatory information specific to campus entries and exits

Location
Applied to solid walls, gates, or glazing where appropriate. Signform is to be mounted at the nominated position, or in the same position as existing signage if on a gate.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

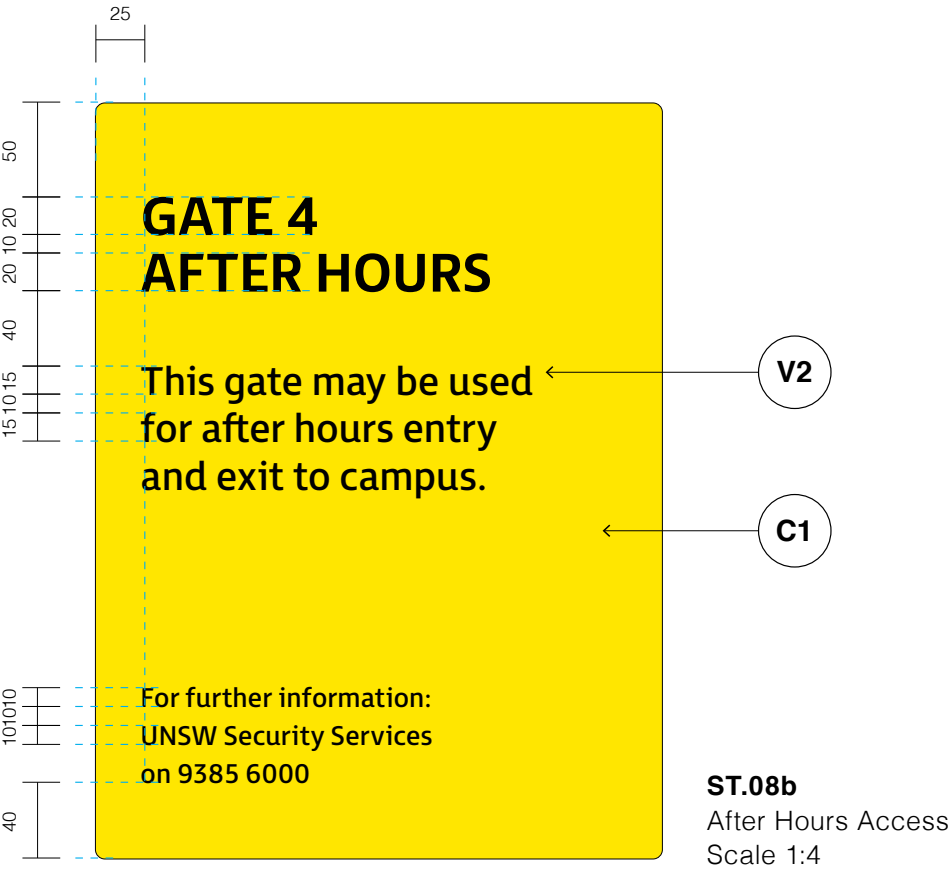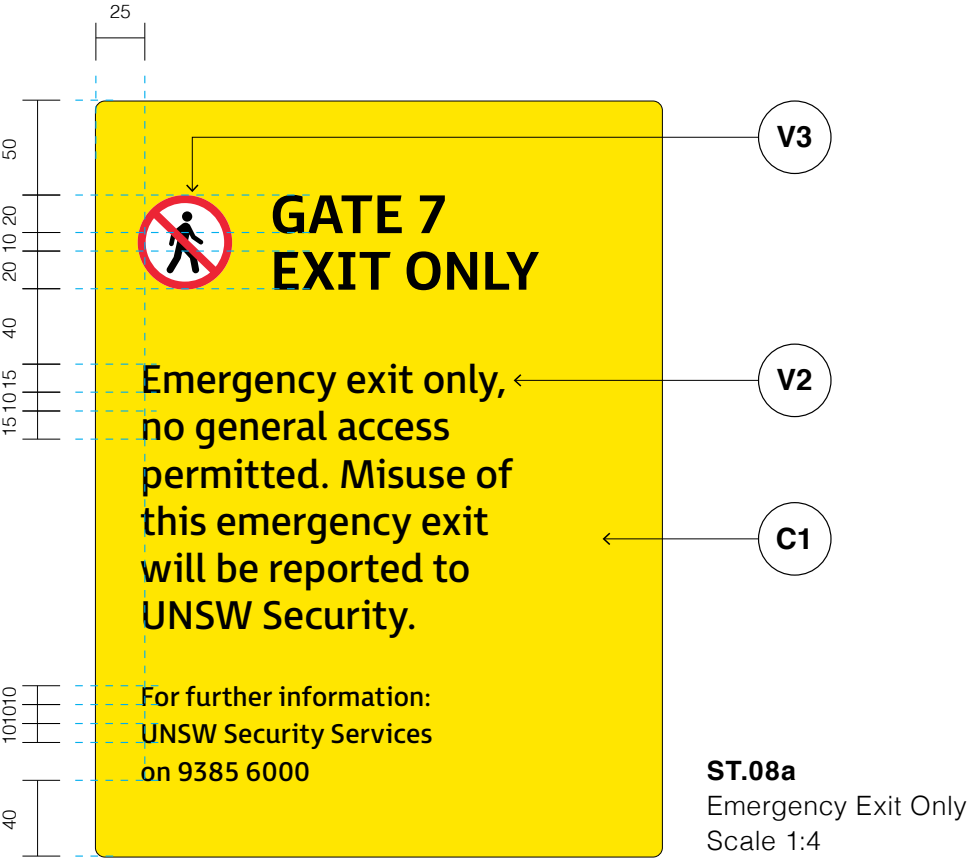

Graphic Layout

- Messaging**
FS Millbank Bold & Regular
Alignment: Left
Tracking: 10+, Optical kerning
- Sizing/ Leading**
Sizing and leading varies per Exit Signage Family sign type.
- Pictogram**
Single pictogram: 150mm diameter
Double pictogram: 75mm diameter
Refer to Section 9, Graphic Standards, Pictogram Suite

Construction & Materials

- Materiality Legend**
- | | | |
|------------------------------|----------------------------------|--|
| C1 | V2 | V3 |
| • C1 finish on 3mm aluminium | • V2 applied on top of aluminium | • V3 print applied on top of aluminium |
- Fixing Details**
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms


Section

17.0

Temporary & Display Series

This section documents all the temporary and displays signs of the system including specifications for both external and internal signs.

TD.01 Notice Boards: External Large	360
TD.02 Notice Boards: External Small	362
TD.03 Notice Boards: Internal Large	364
TD.04 Notice Boards: Internal Small	366
TD.05 Notice Boards: Digital	368
TD.06 A3 & A4 Display Family	370
TD.07 Temporary Sign	372
TD.08 Construction Hoarding	374

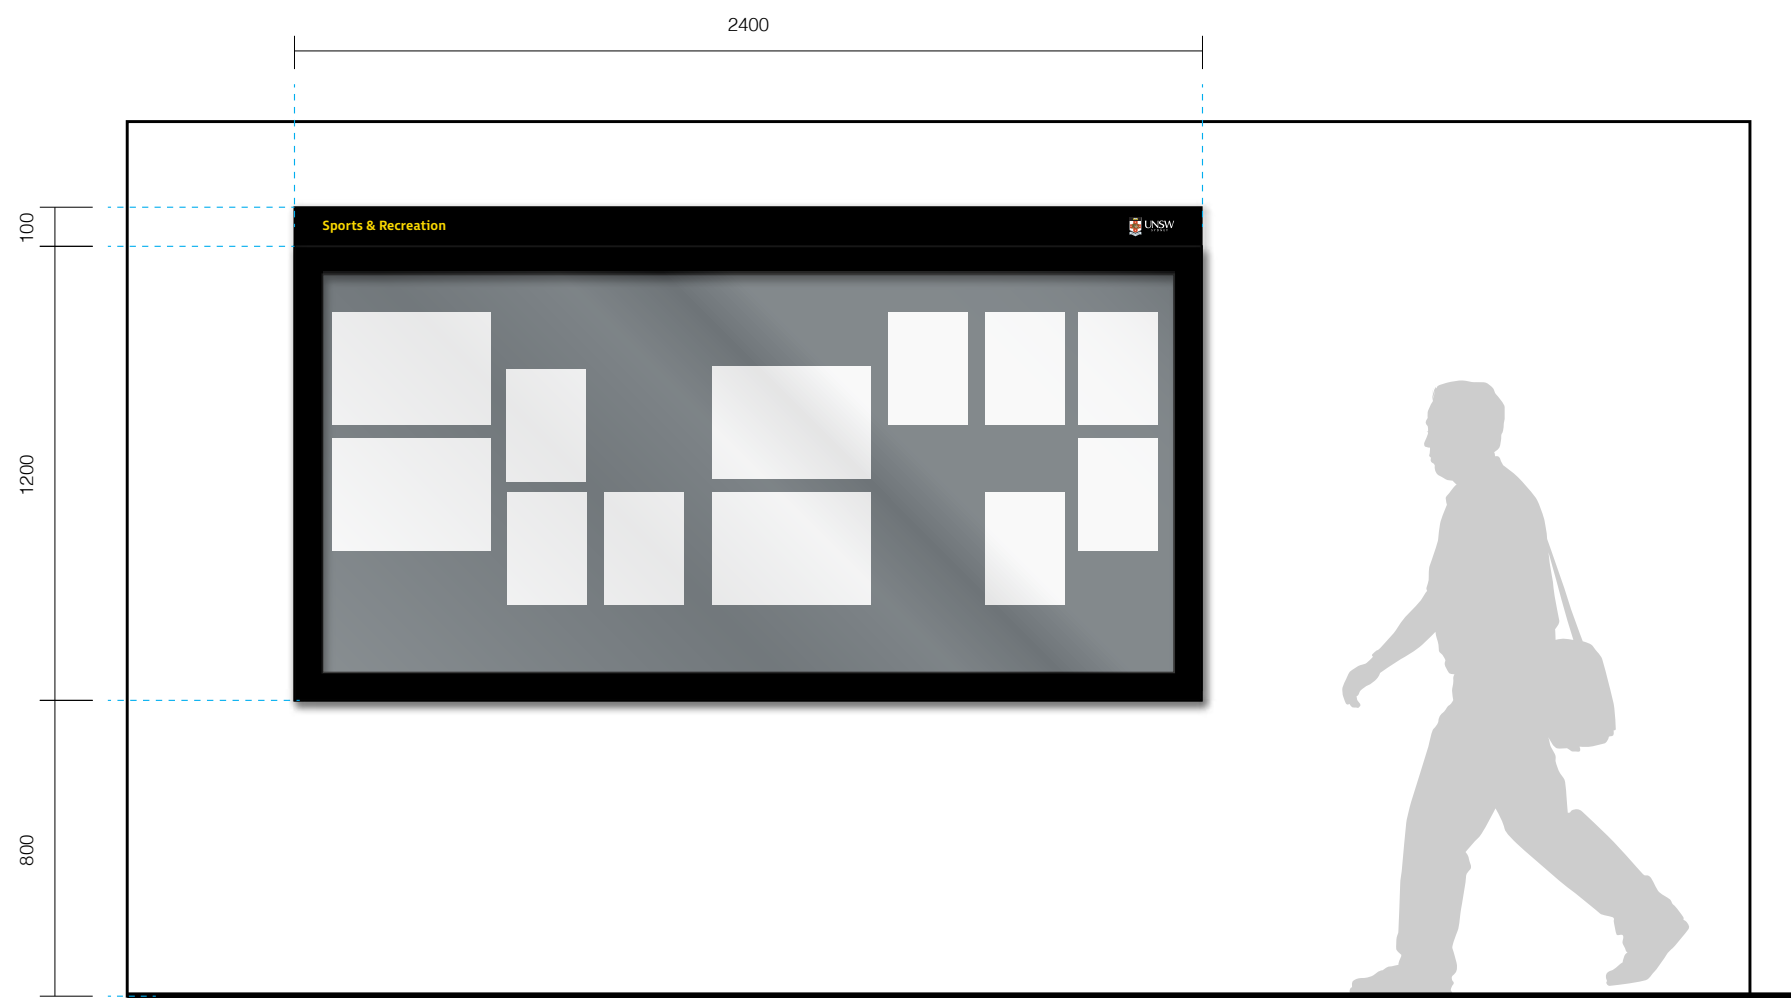


Elevation: Cliplok cabinet
Scale 1:20

Sign Location


Purpose
Provides system in an external environment to display information for students and visitors that is updated on a monthly basis.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

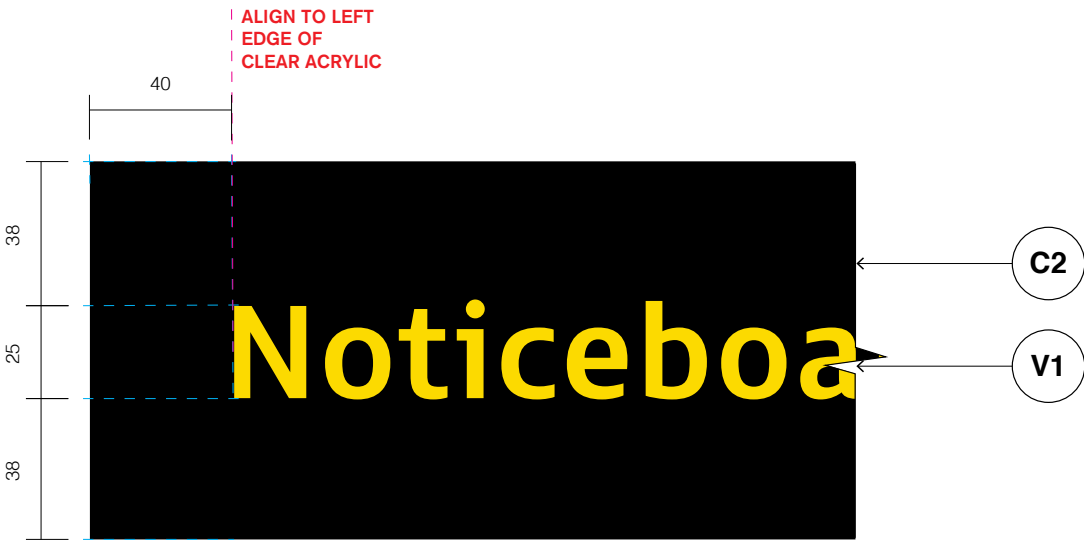

01 Detail: LHS
Scale 1:2

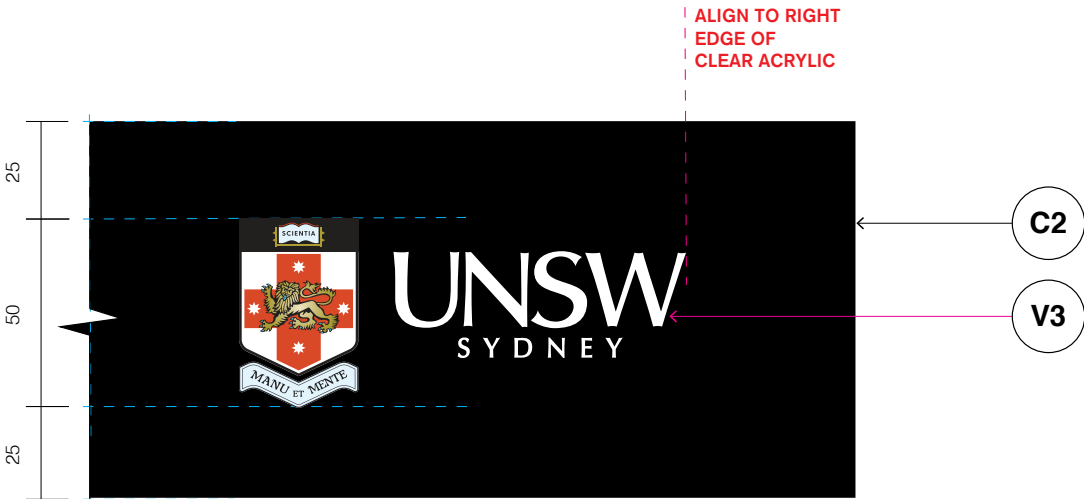

02 Detail: RHS
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning


UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V1 | V2 |
| • C1 finish on 3mm aluminium | • V1 applied on top of aluminium | • V2 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

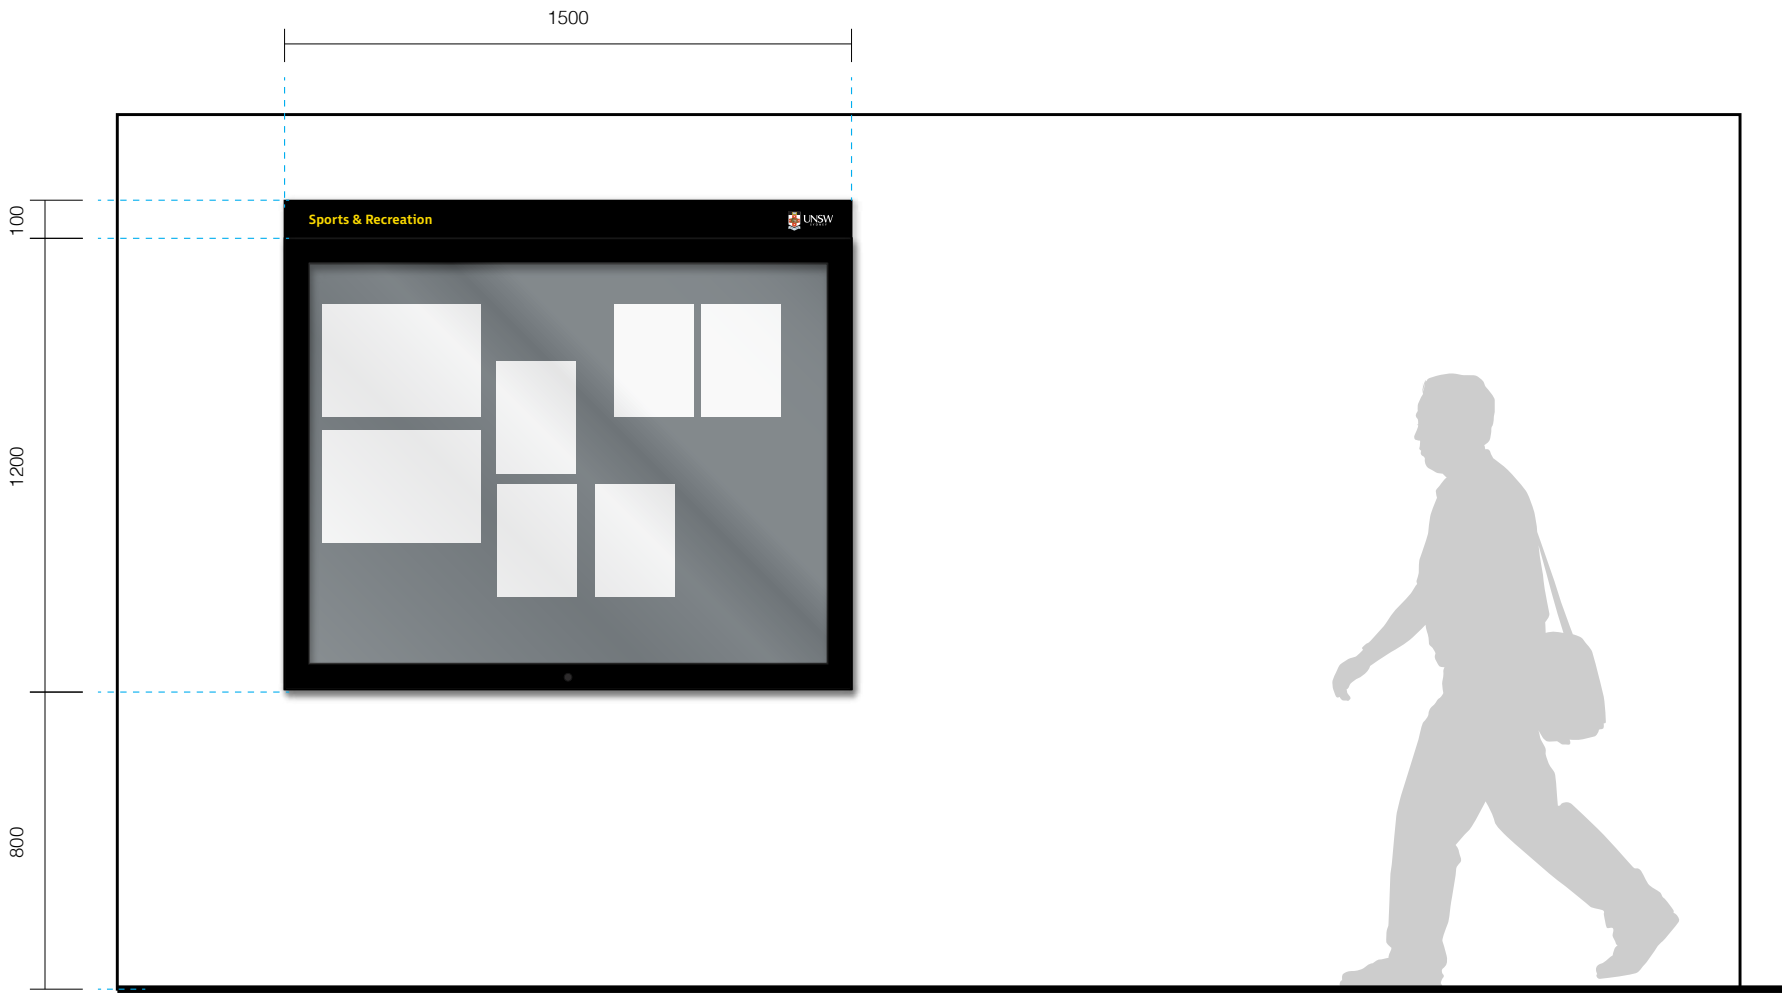


Elevation: Tufflok cabinet
Scale 1:20

Sign Location


Purpose
Provides system in an external environment to display information for students and visitors that is updated on a monthly basis.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

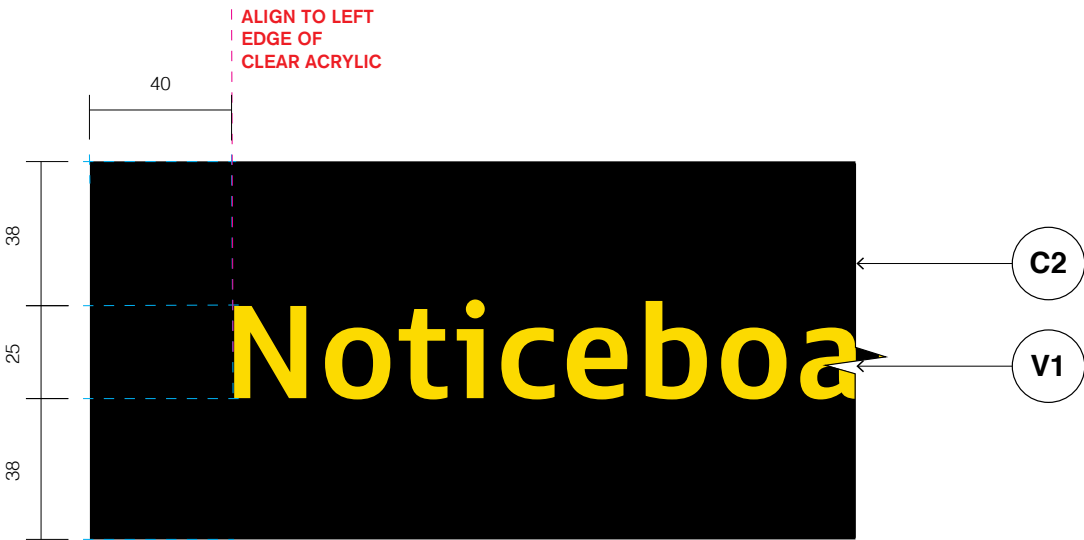

01 Detail: LHS
Scale 1:2

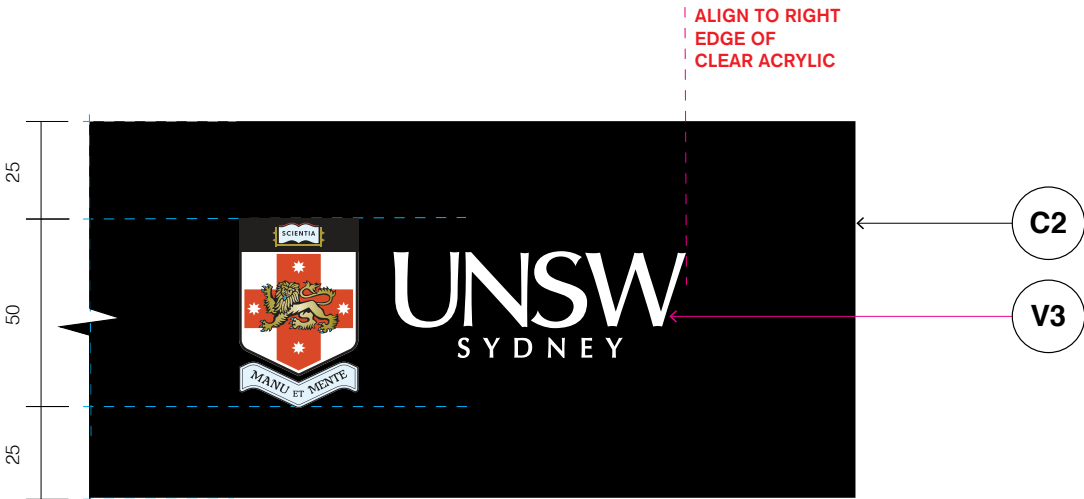

02 Detail: RHS
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning


UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V1 | V2 |
| • C1 finish on 3mm aluminium | • V1 applied on top of aluminium | • V2 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

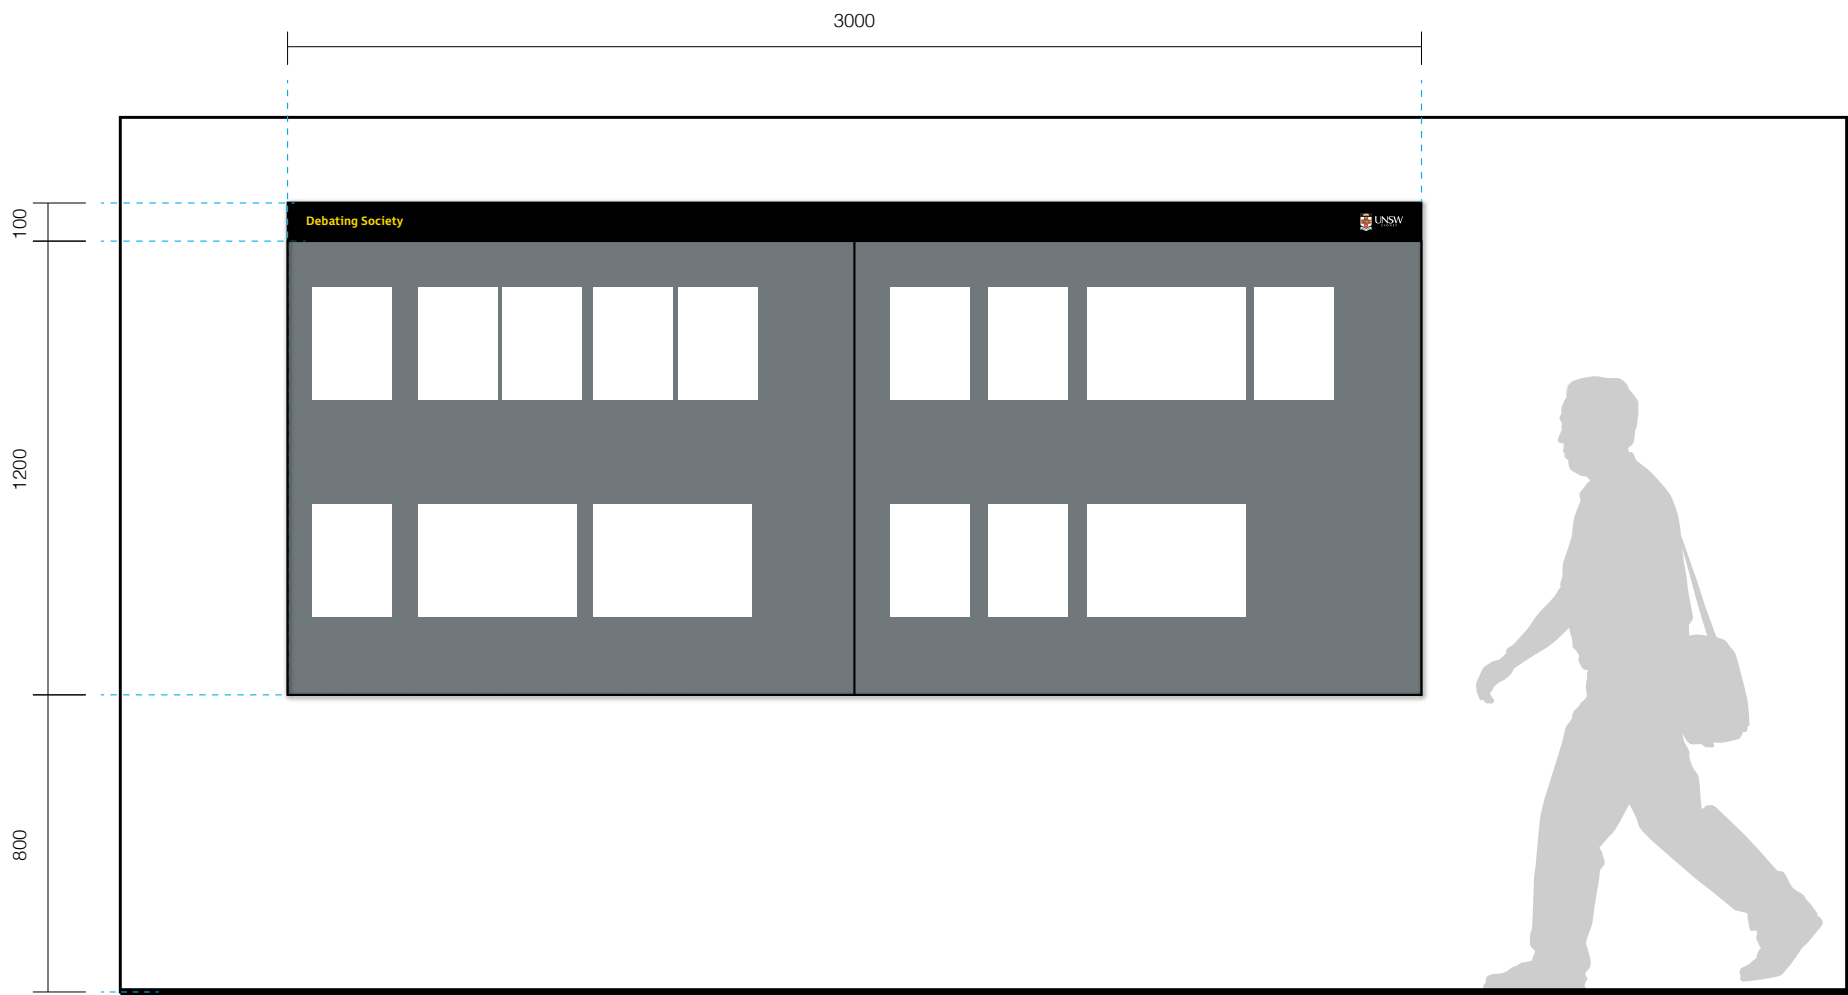

Elevation: Vispin noticeboard
Scale 1:20

Sign Location


Purpose
Provides system in an interior environment to display information for students and visitors that is updated on a monthly basis.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



01 Detail: LHS
Scale 1:2

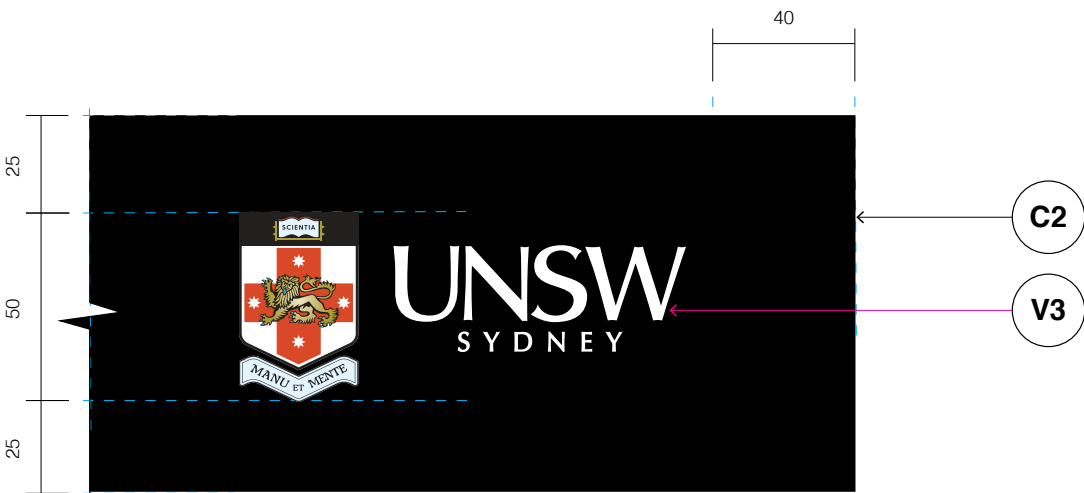

02 Detail: RHS
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning


UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V1 | V2 |
| • C1 finish on 3mm aluminium | • V1 applied on top of aluminium | • V2 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

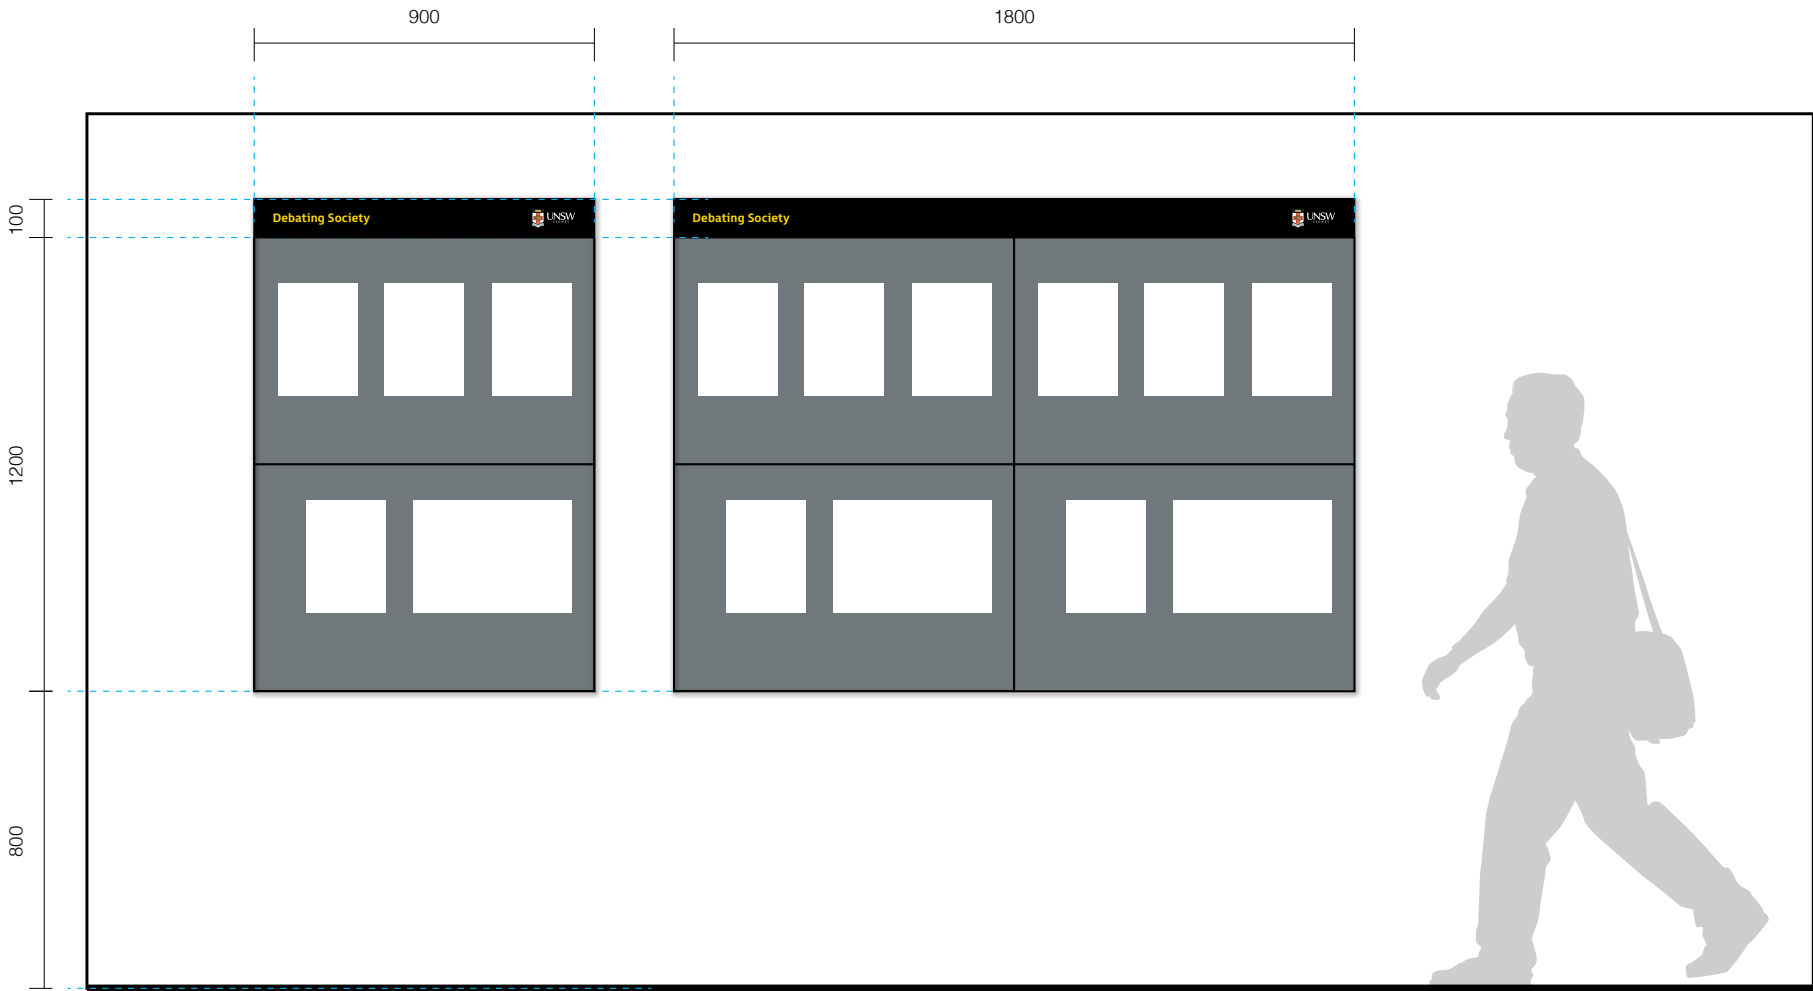

Elevation: Vispin noticeboard
Scale 1:20

Sign Location

Purpose
Provides system in an interior environment to display information for students and visitors that is updated on a monthly basis.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



01 Detail: LHS
Scale 1:2



02 Detail: RHS
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning


UNSW logo
50mm height

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V1 | V2 |
| • C1 finish on 3mm aluminium | • V1 applied on top of aluminium | • V2 print applied on top of aluminium |

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

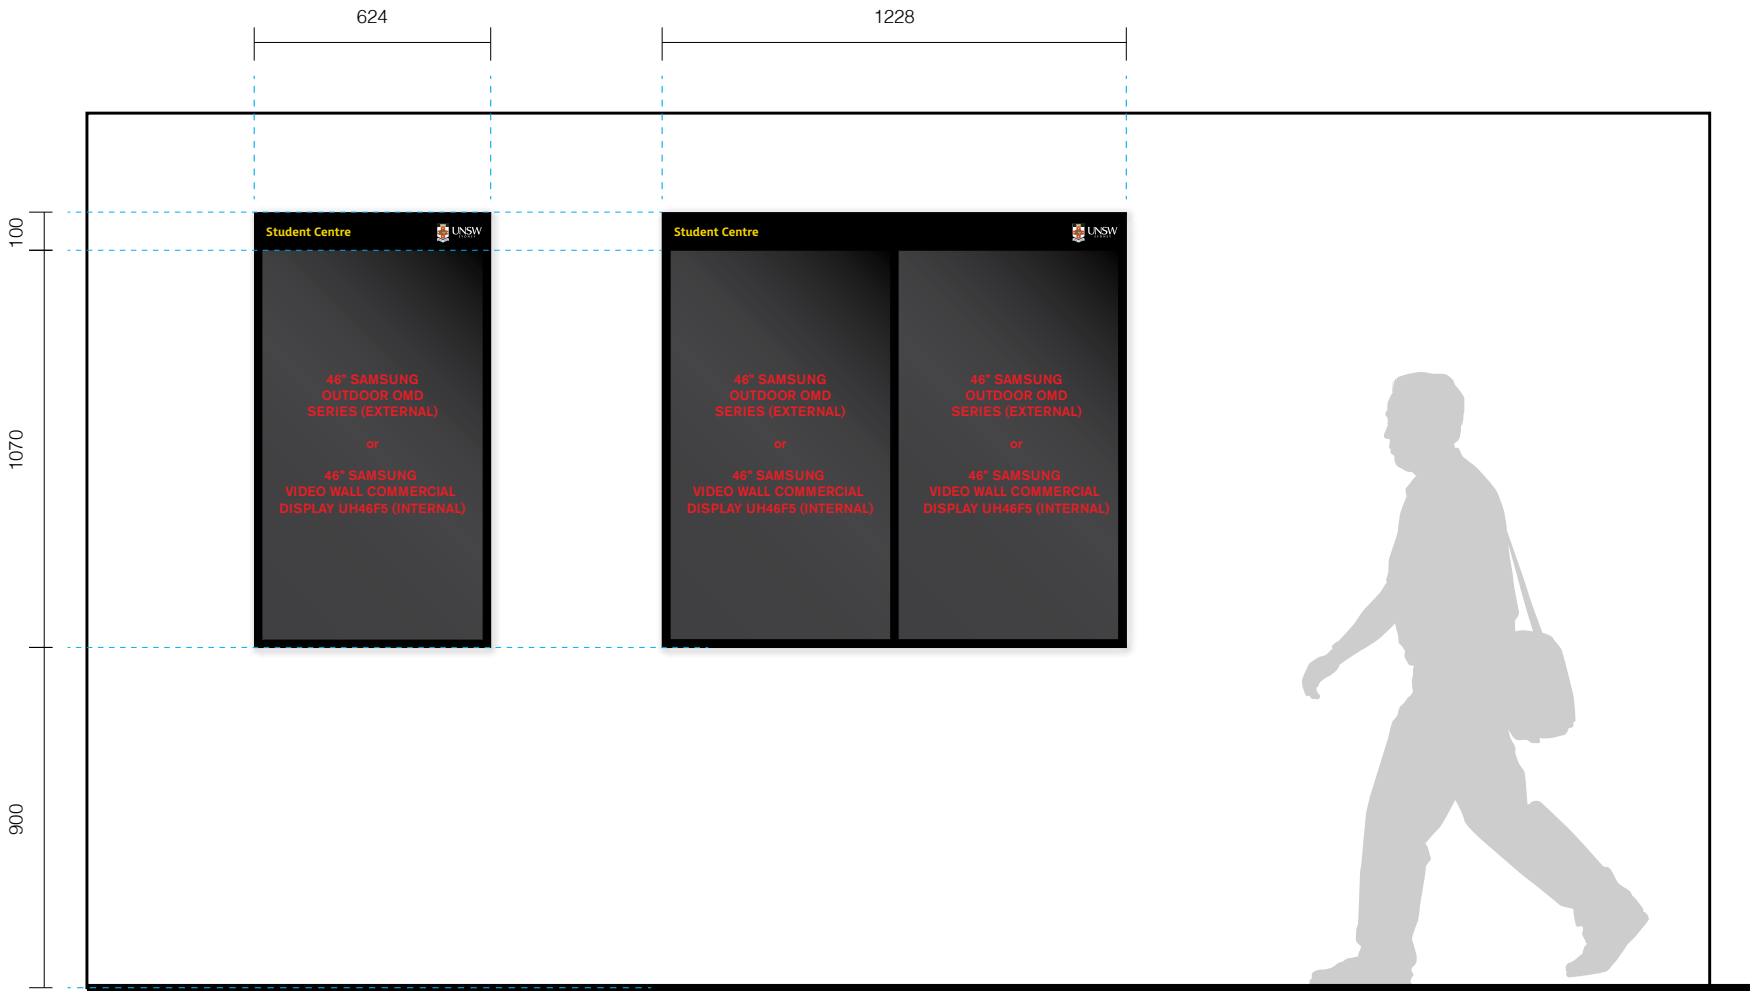

Elevation: Vispin noticeboard
Scale 1:20

Sign Location

Purpose
Provides digital system to display information for students and visitors that is updated on a monthly basis.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



01 Detail: LHS
Scale 1:2



02 Detail: RHS
Scale 1:2

Graphic Layout

Messaging
FS Millbank Bold
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning


UNSW logo
50mm height

Construction & Materials


Materiality Legend

- | | | |
|--|--|--|
| <div>C1</div> <ul style="list-style-type: none">C1 finish on 3mm aluminium | <div>V1</div> <ul style="list-style-type: none">V1 applied on top of aluminium | <div>V2</div> <ul style="list-style-type: none">V2 print applied on top of aluminium |
|--|--|--|

Construction Details
• Refer to: Section 10, Construction Standards, Wall Mounted Signforms

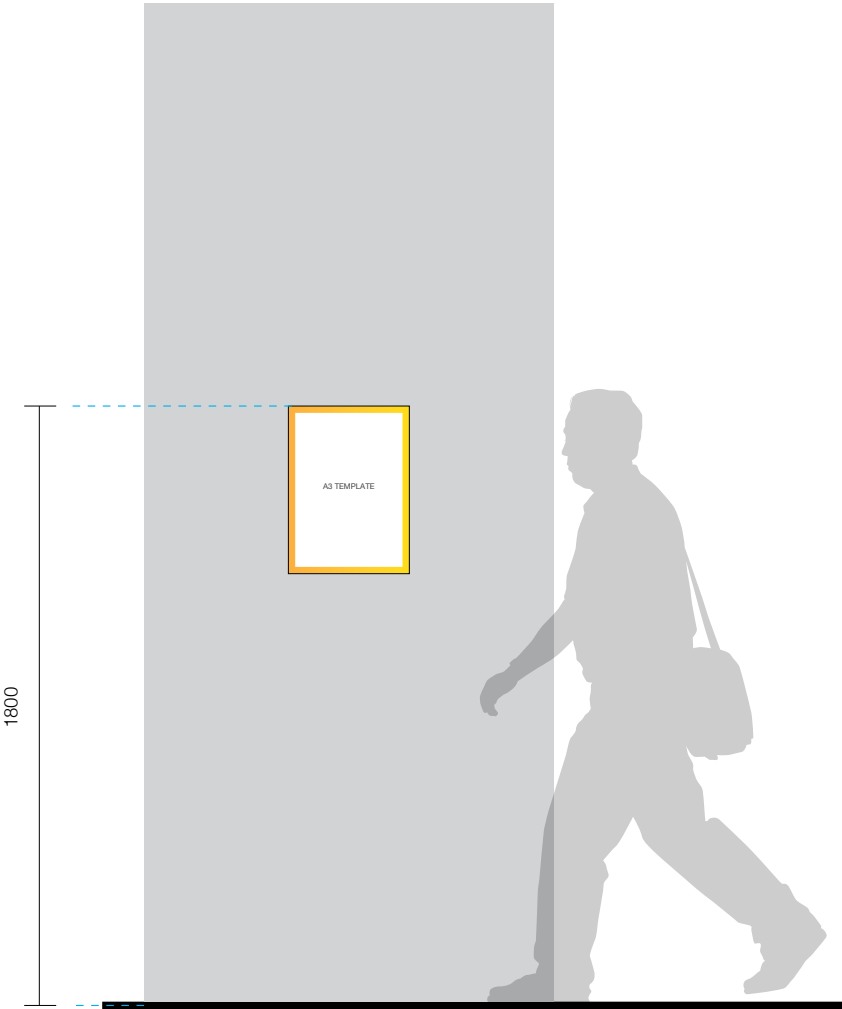

A3 - Elevation
Scale 1:20

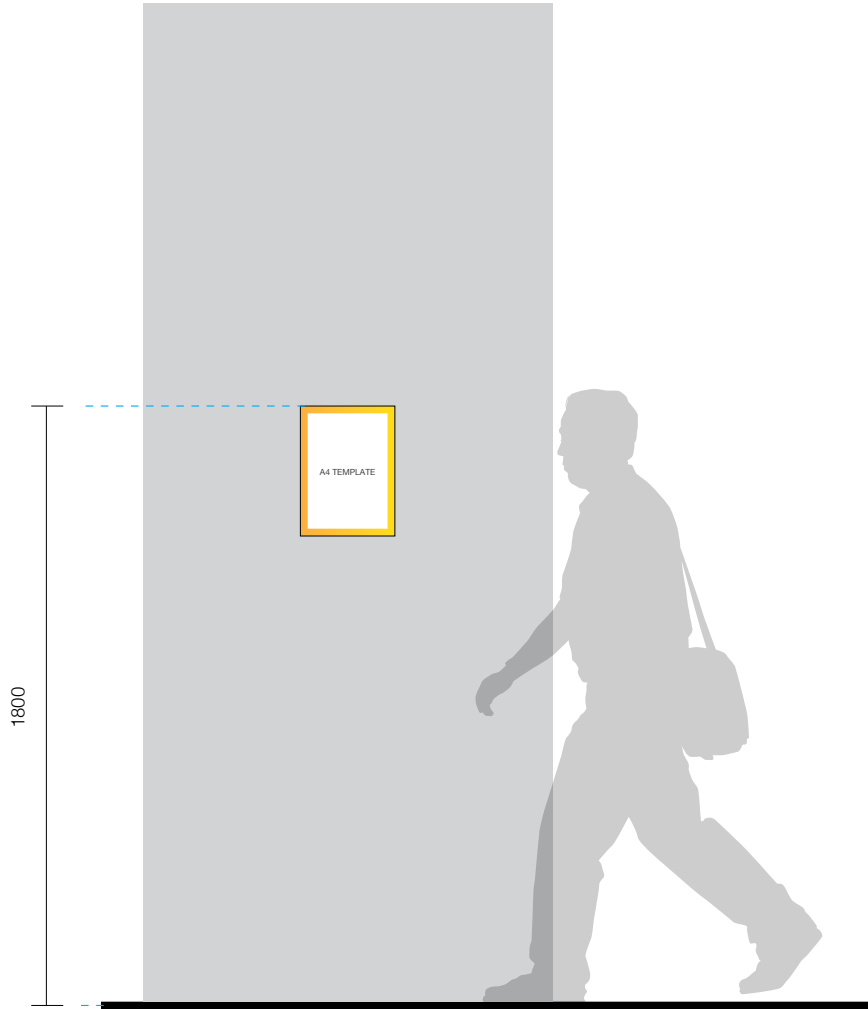


A4 - Elevation
Scale 1:20

Sign Location

Purpose
To display A3 and A4 print outs supplied by students and staff.

Location
Applied to solid wall outside teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

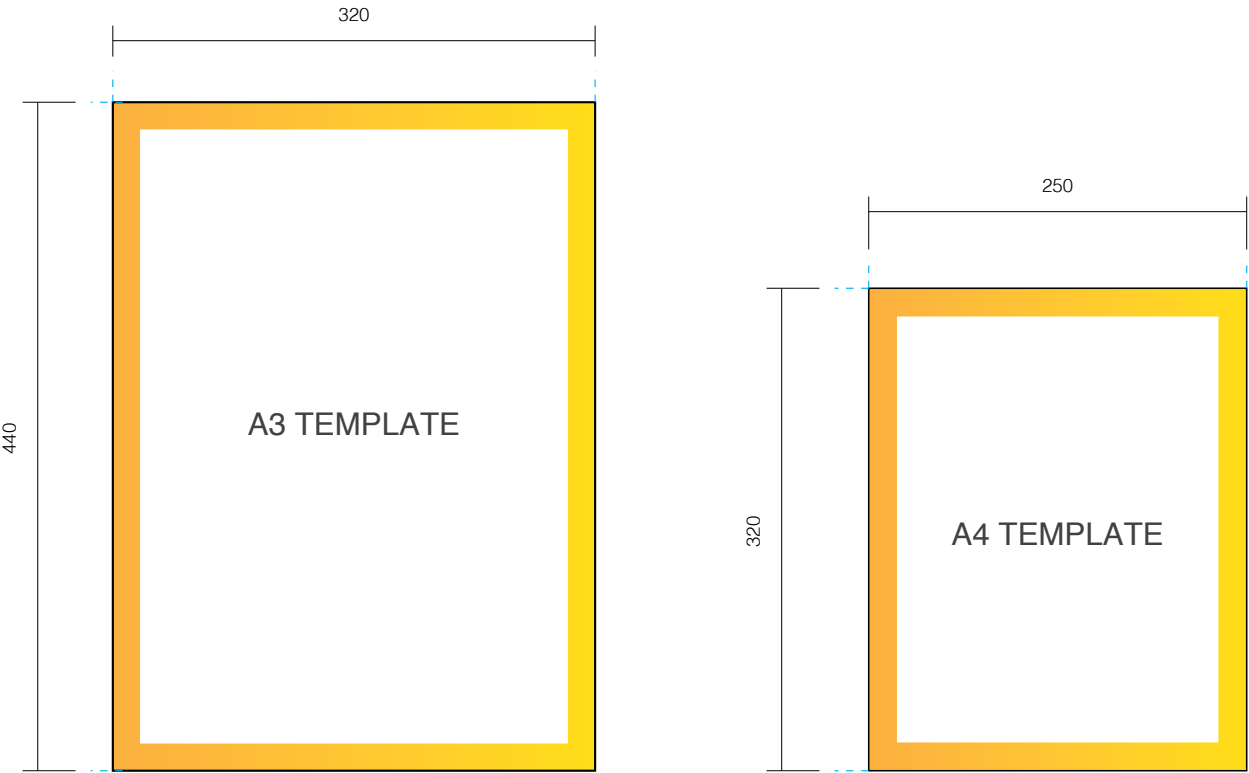

TD.04a - A3 Template Detail
Scale 1:5

Spec
Custom A4 and A3 frames from **Sheet Ezi**:
<http://www.sheetezi.com.au/customising-frames>

Refer to **Section 21: Templates** for further guidelines

TD.04b - A4 Template Detail
Scale 1:5

Construction & Materials


Materiality Legend

C1


- C1 finish on aluminium frame

Construction Details

- Refer to: Section 10, Construction Standards, Off-the-shelf

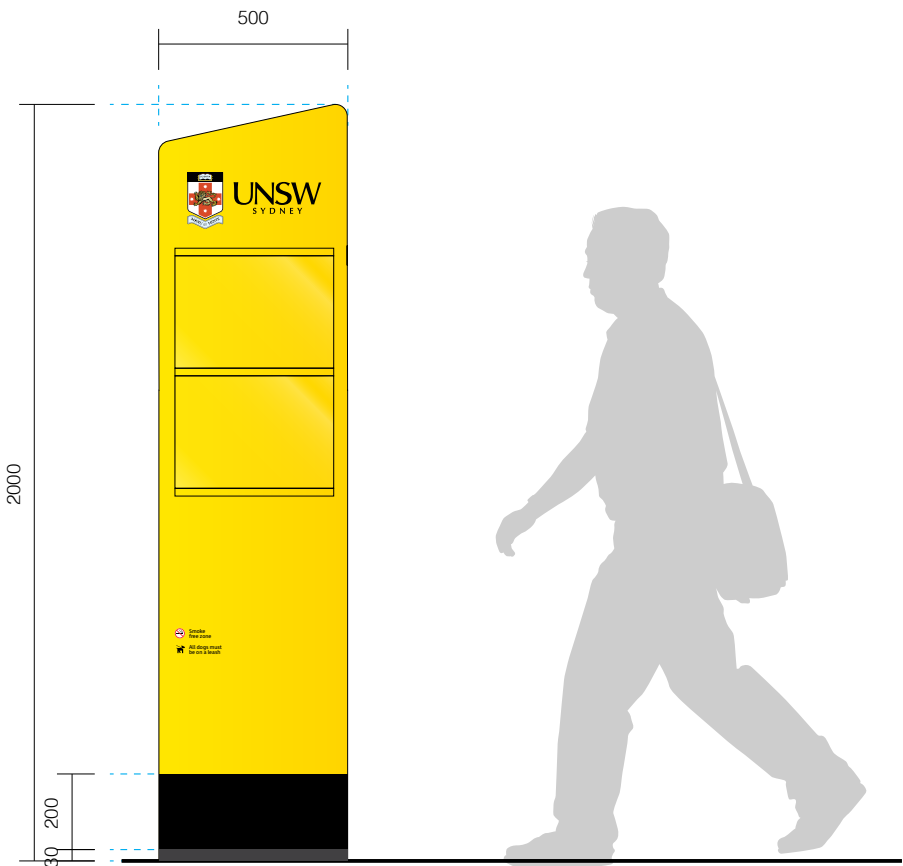

Front Elevation
Scale 1:20

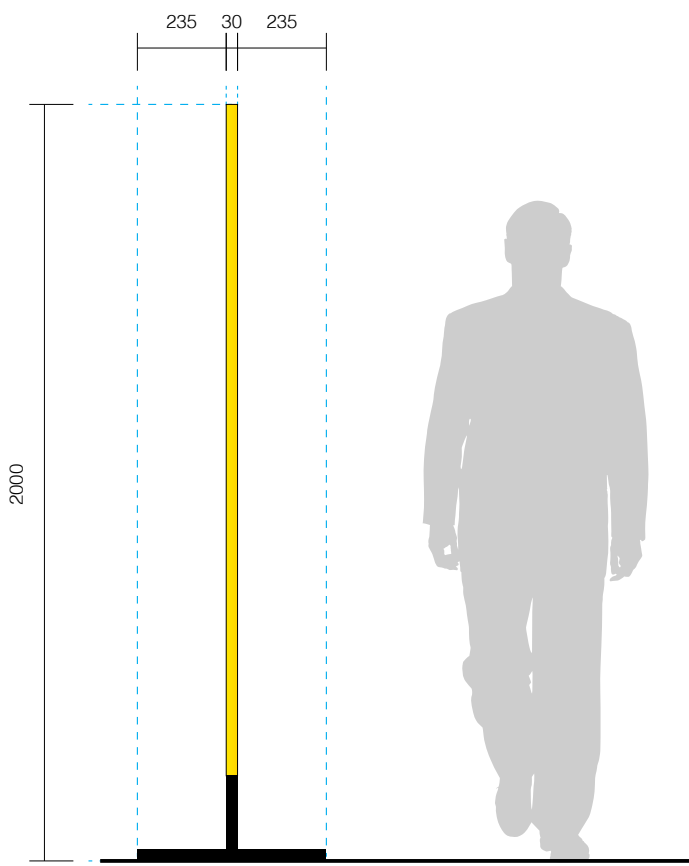


Side Elevation
Scale 1:20

Sign Location


Purpose
To display A3 prints out supplied by students or staff for special events.

Location
Freestanding outside buildings with events or at locations where required.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

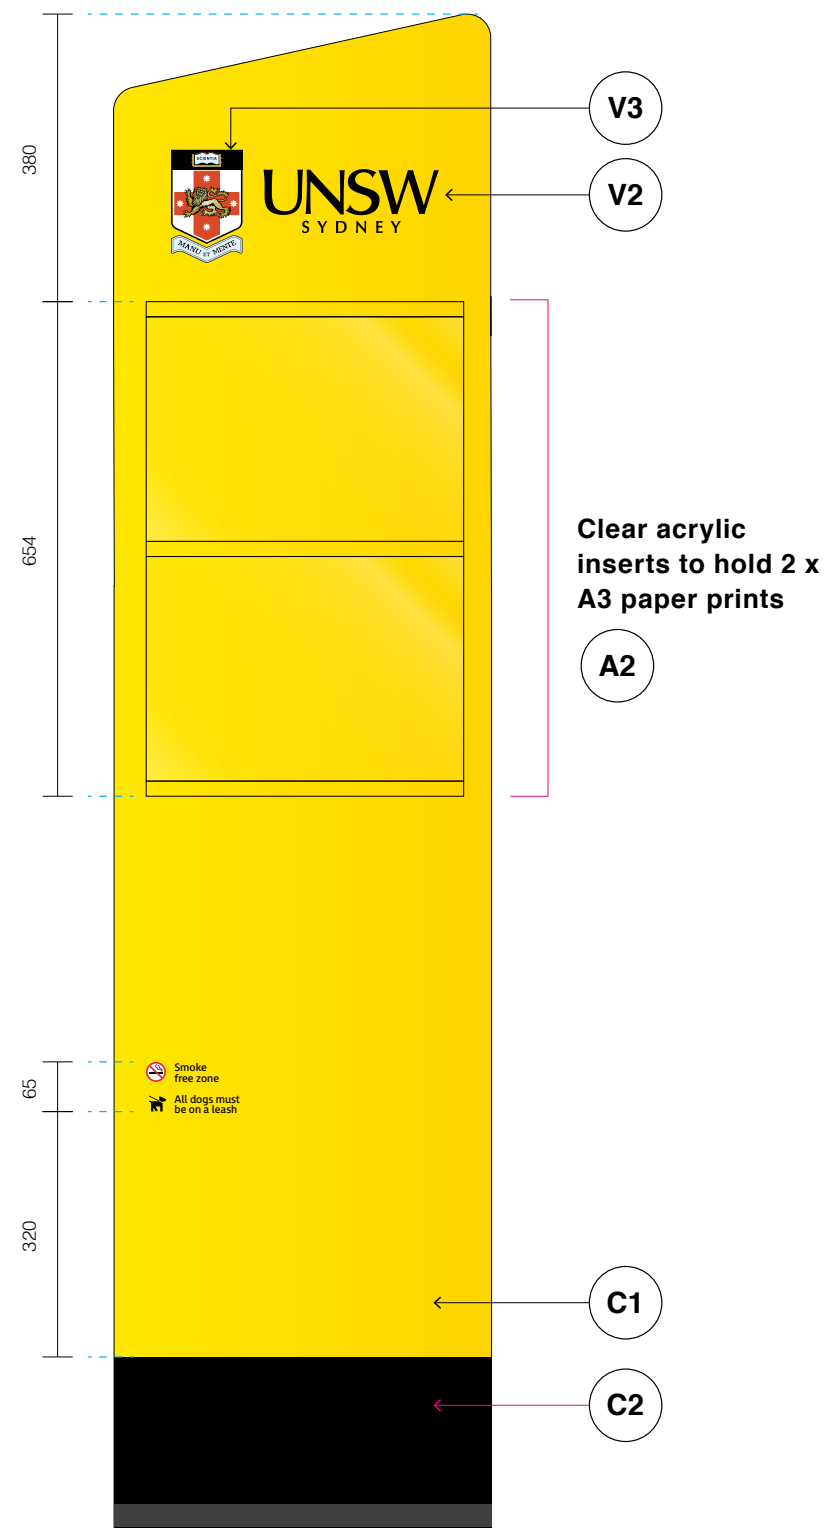

Detail
Scale 1:10

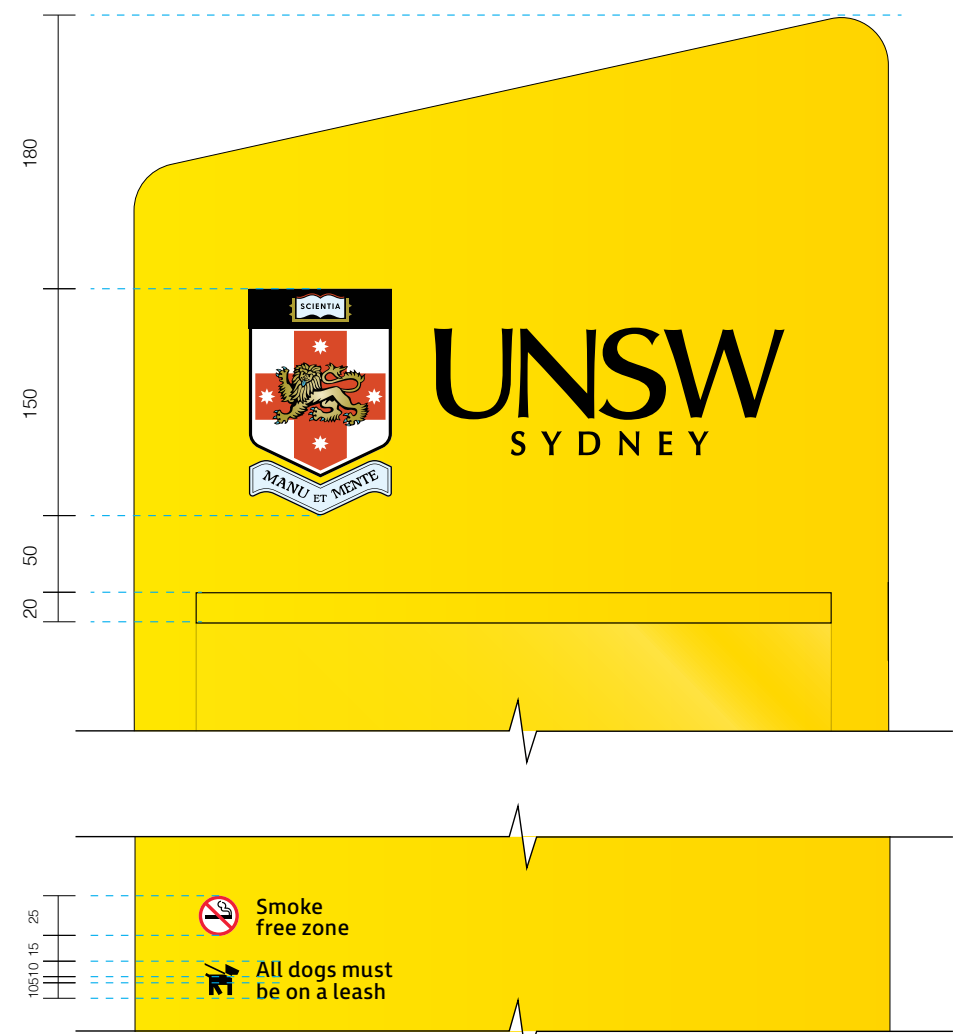

Detail
Scale 1:5

Graphic Layout

UNSW logo
150mm height

Statutory messaging
FS Millbank Regular
Size/Leading: 10mm, 5mm
Alignment: Left
Tracking: 10+, Optical kerning

Pictograms
No Smoking & Dogs on Leash: 25mm diameter

Construction & Materials

Materiality Legend

- | | | |
|------------------------------|----------------------------------|--|
| C1 | V1 | V2 |
| • C1 finish on 3mm aluminium | • V1 applied on top of aluminium | • V2 print applied on top of aluminium |

Construction Details

- Refer to: Section 22, Shop Drawings




Elevation - Typical Class A Hoarding
Directional panels to only appear at corner junctions of hoarding
Scale 1:50

Sign Location


Purpose
To display temporary directional messaging and visual content.

Location
Freestanding outside buildings with events or at locations where required.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance

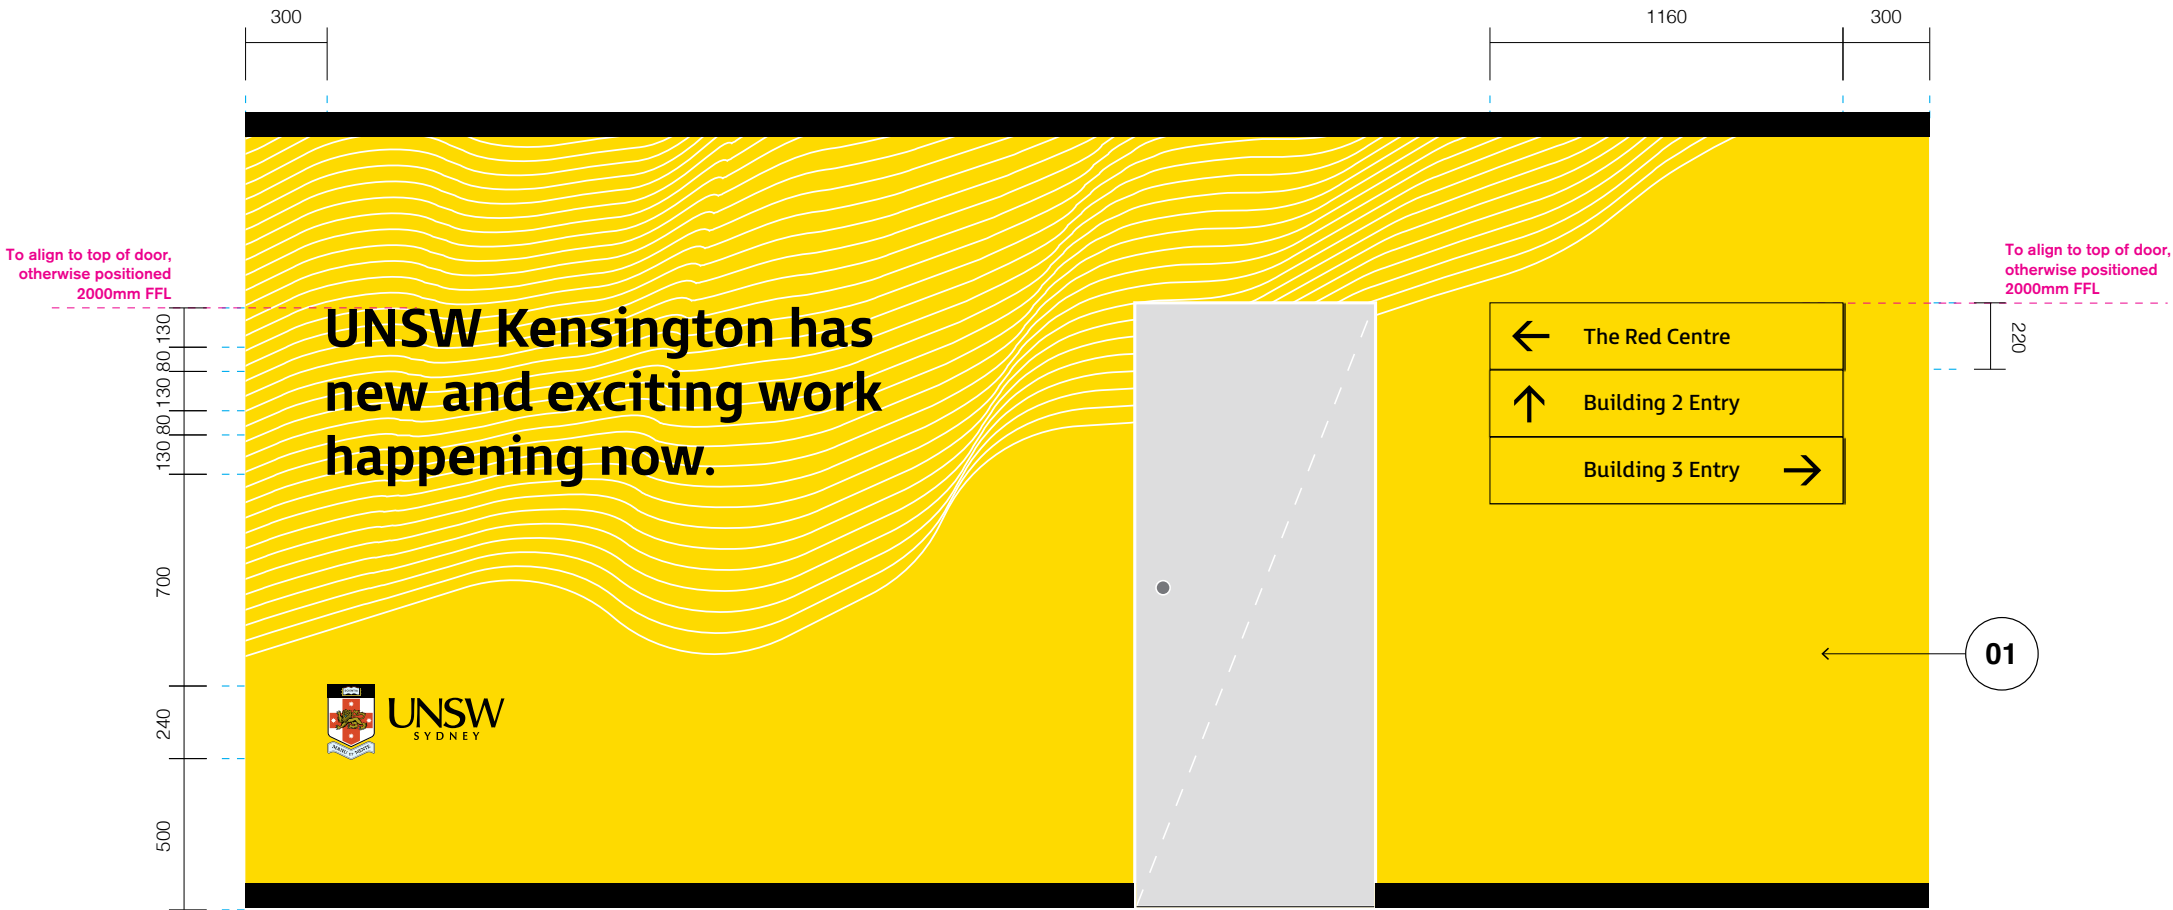

TD.08a - Elevation Hoarding Print
Scale 1:25

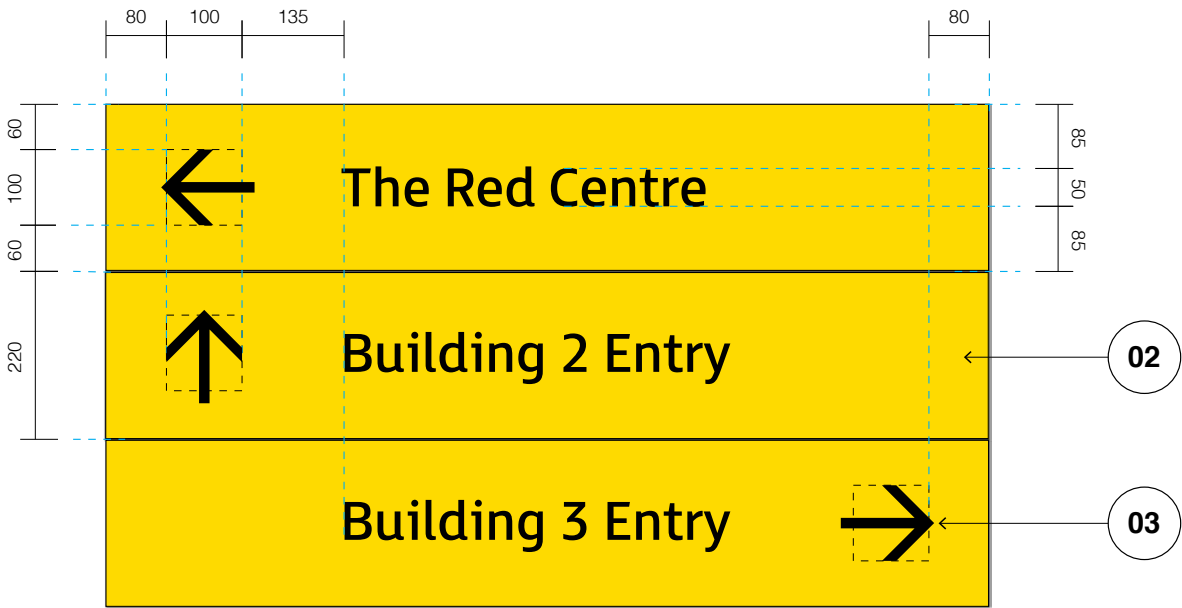

TD.08b -Panel Detail
Scale 1:10

Graphic Layout

Tagline - TD.08a

FS Millbank Bold
Size/ Leading: 125mm, 85mm
Alignment: Left
Tracking: 10+, Optical kerning

Directional Messaging - TD.08b

FS Millbank Regular
Size: 20mm
Alignment: Left
Tracking: 10+, Optical kerning

UNSW logo

50mm height

Construction & Materials

Materiality Legend

- | | | |
|---|--|---|
| 01
• Digital print on canvas mesh | 02
• Coloured coreflute to match UNSW yellow | V2
• Black digital print on coreflute |
|---|--|---|

Construction Details

- Refer to: Section 22, Shop Drawings

Section

18.0

Environmental Graphics Series

This section documents all the environmental graphics of the system.

EG.01 Privacy Graphic: Low	377
EG.02 Privacy Graphic: High	379



Sign Location

Purpose
Provides low visual privacy from outside pedestrian traffic.

Location
Applied to internal face of glazing to teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



Detail
Scale 1:4

Construction & Materials


Materiality Legend



- V4 print applied onto glazing

Application Details

- Refer to: Section 10, Construction Standards, Direct Applied Graphics

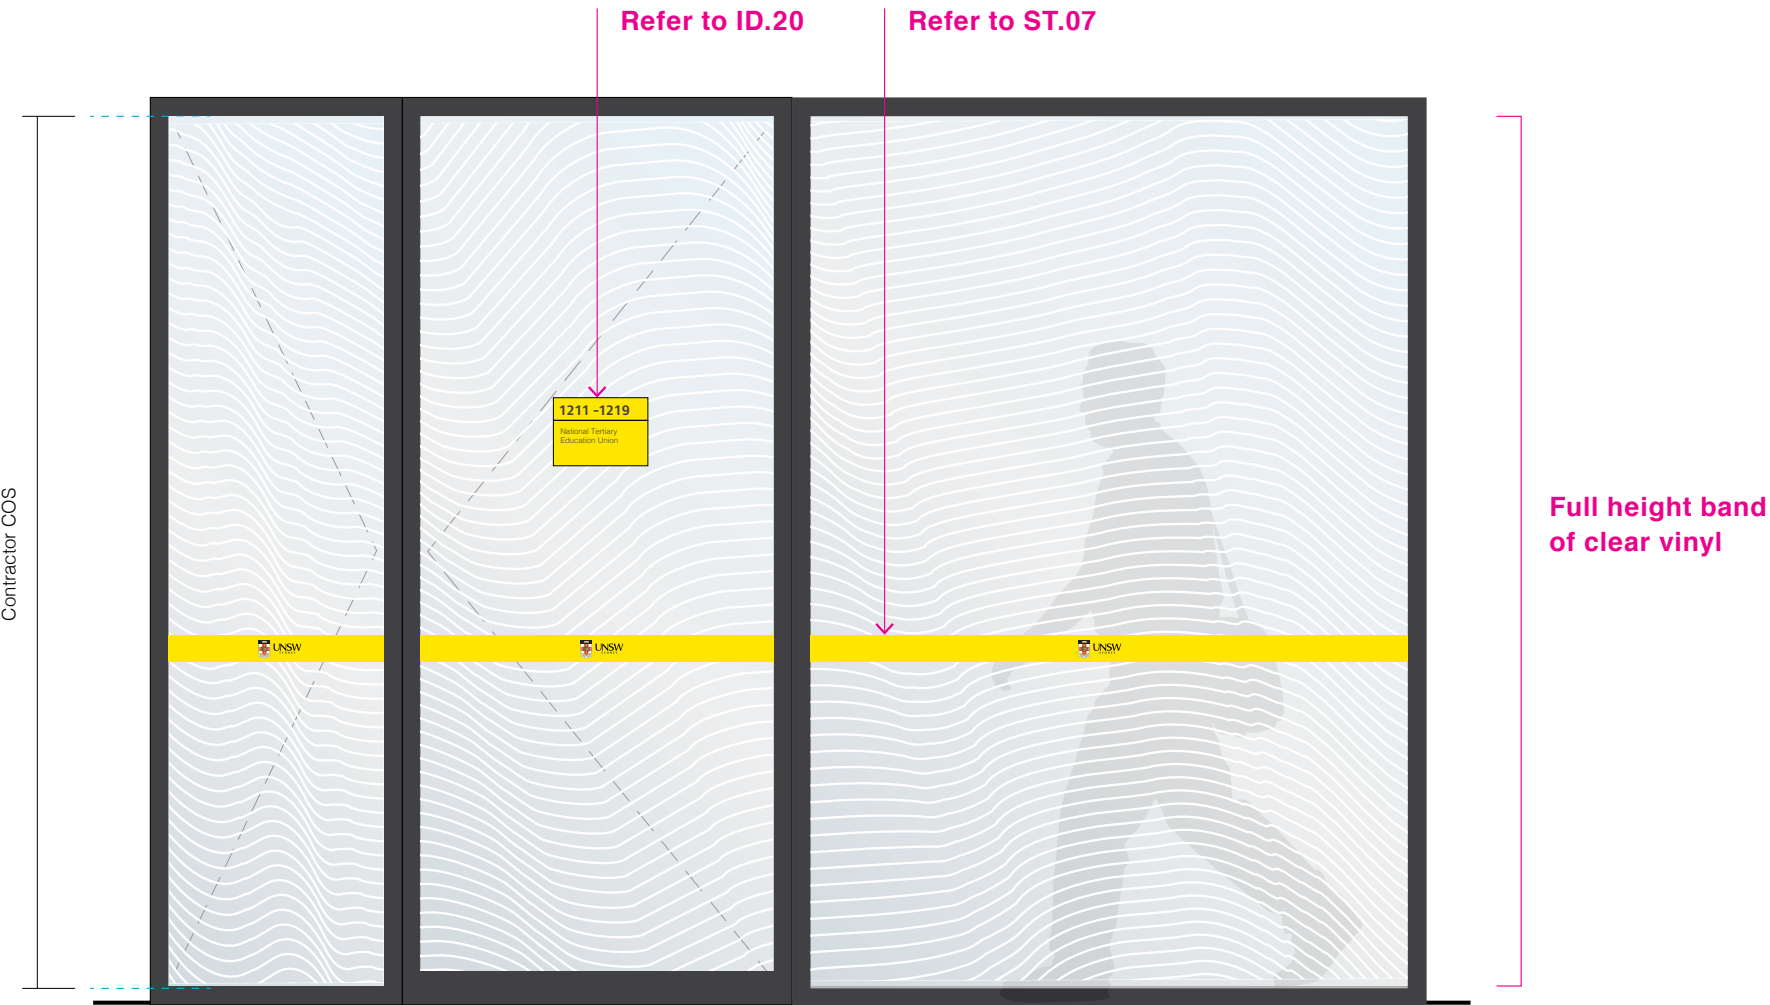

Elevation
Scale 1:20

Sign Location

Purpose
Provides high visual privacy from outside pedestrian traffic.

Location
Applied to internal face of glazing to teaching rooms and other places as needed.

- Note**
- For sign type selection, refer to: Section 7, The Process, Step 3
 - For content guidelines, refer to: Section 3, Addressing & Terminology
 - For material finishes, refer to: Section 10, Construction Standards, Finishes Schedule
 - For sign maintenance, refer to: Section 23, Maintenance



Detail
Scale 1:4

Construction & Materials

Materiality Legend

01

- White print on Avery
Dusted glass film

Application Details

- Refer to: Section 10, Construction Standards,
Direct Applied Graphics

For sections 01-10, refer to chapter G.1
For sections 20-24, refer to chapter G.3

